

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07	~	LJC 04/20/07
B	整理图面	YCH 05/14/07	~	LJC 05/14/07
C	整理图面	YCH 10/17/07	~	



NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.



4. Product Number Code

DS1057 - X X X X X

- X: Edge mark
- R: Red mark
- F: Flower mark
- Wire diameter
 - 1: $\phi 0.100$ (30AWG)
 - 2: $\phi 0.127$ (28AWG)
- Wire AWG
 - 28: 28AWG
 - 30: 30AWG
- Cable color
 - A: Gray
- No. Of positions
 - 06: 6pin
 - 64: 64pin

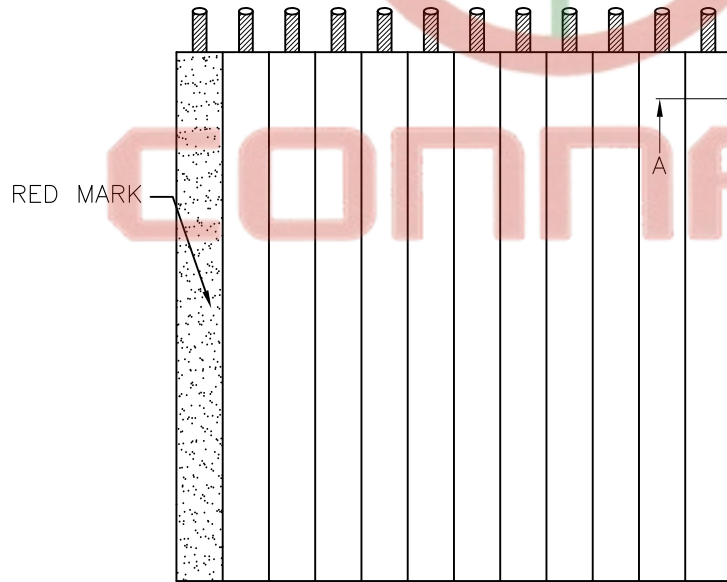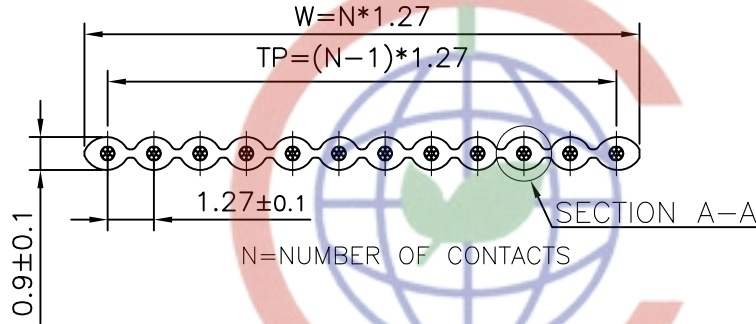

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m
	TP(mm)	W(mm)	Tolerance	
10	11.43	12.70	±0.30	
14	16.51	17.78	±0.30	
16	19.05	20.32	±0.30	
20	24.13	25.40	±0.30	
24	29.21	30.48	±0.30	$\phi 0.100 < 0.397$
26	31.75	33.02	±0.30	
30	36.83	38.10	±0.30	$\phi 0.127 < 0.237$
34	41.91	43.18	±0.40	
40	49.53	50.80	±0.40	
50	62.23	63.50	±0.40	
60	74.93	76.20	±0.40	
64	80.01	81.28	±0.40	

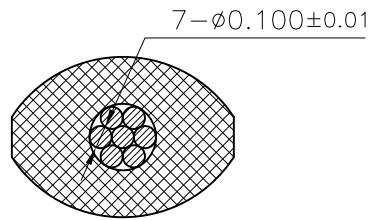

SECTION A-A (4:1)

SECTION A-A (4:1)

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	TITLE	2651 GRAY FLAT CABLE			
X.	±0.60	X.	±5°	mm		SHEET SIZE	A4	SERIES	DS1057
.X	±0.38	.X	±3°						
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER		晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD					
SCALE		1:1	SHEET						1 OF 1
DRAWING NO.		C-DS1057-XXXXX-C							