


# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

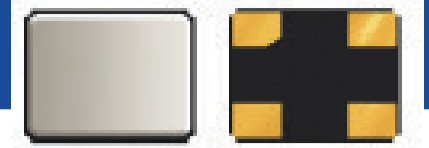

3.2 x 2.5 x 0.75mm

 RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM8W SERIES

### FEATURES

- Optimized for energy saving wearables and IoT applications
- Plated at exceptionally low plating capacitance, as low as 4pF, with optimized ESR
- 0.75 mm max height ideally suited for height constrained designs
- Seam sealed for longterm reliability


### APPLICATIONS

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU
- Near Field Communication (NFC)
- ISM Band

### STANDARD SPECIFICATIONS

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10.0000		54.0000	MHz	
Operation Mode	Fundamental				
Operating Temperature Range	-40		+125	°C	See options
Storage Temperature	-55		+125	°C	
Frequency Tolerance @ +25°C	-10		+10	ppm	See options
Frequency Stability over the Operating Temperature ( ref. to +25°C)	-10		+10	ppm	See options
Equivalent series resistance (R1) (over -40°C to +125°C)		< 100	200	Ω	10.0000 – 11.9999MHz
		< 60	100		12.0000 – 15.9999MHz
		< 40	70		16.0000 – 19.9999MHz
		< 25	50		20.0000 – 29.9999MHz
		< 20	40		30.0000 – 39.9999MHz
		< 18	30		40.0000 – 54.0000MHz
Shunt capacitance (C0)		< 1.2	2.0	pF	
Load capacitance (CL)		4.0		pF	See options
Drive Level		10	100	μW	
Aging (1 year)	-2		+2	ppm	@ 25°C±3°C
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

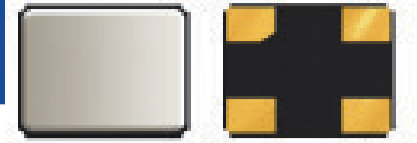

3.2 x 2.5 x 0.75mm




RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

ABM8W SERIES

## OPTIONS AND PART IDENTIFICATION (NOTE 1)

Note 1: Contact Abracon for part number requests with carrier frequency callouts up to 5&6 digit accuracy after the decimal.

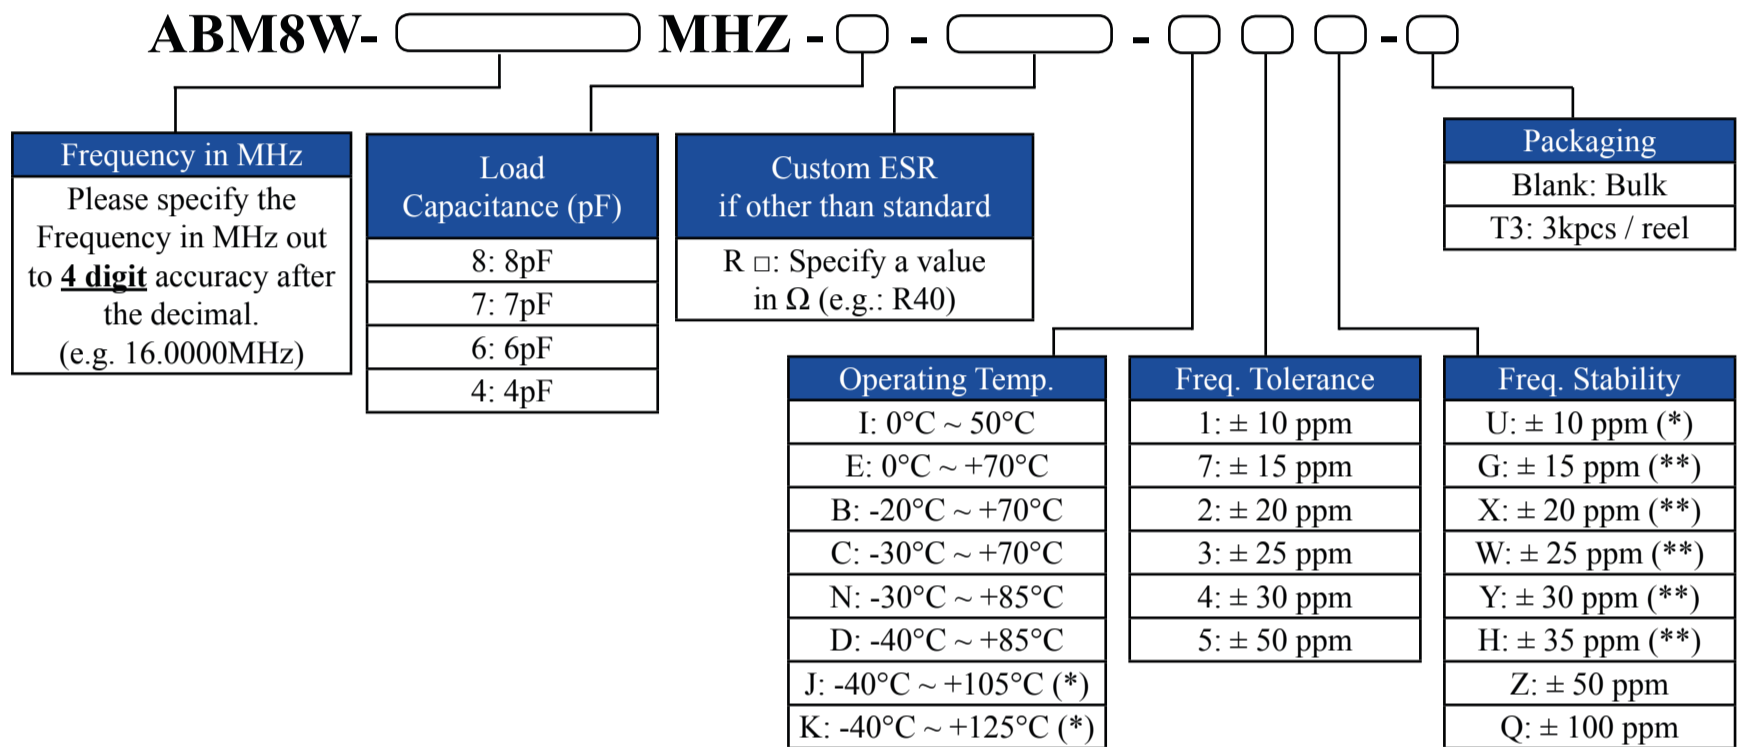

(\*) Only offered @ Freq. Stability options: Z & Q.

Contact ABRACON for tighter Frequency Stability.

(\*) Only offered @ Operating Temp. Range options: I, E, & B

(\*\*) Only offered @ Operating Temp. Range options: I, E, B, C, N, & D

Contact ABRACON for wider Operating Temp. Range.

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL





3.2 x 2.5 x 0.75mm

RoHS/RoHS II Compliant



MSL = N/A: NOT APPLICABLE

## ABM8W SERIES

### TYPICAL ESR (EQUIVALENT SERIES RESISTANCE) Vs. TEMPERATURE CHARACTERISTICS

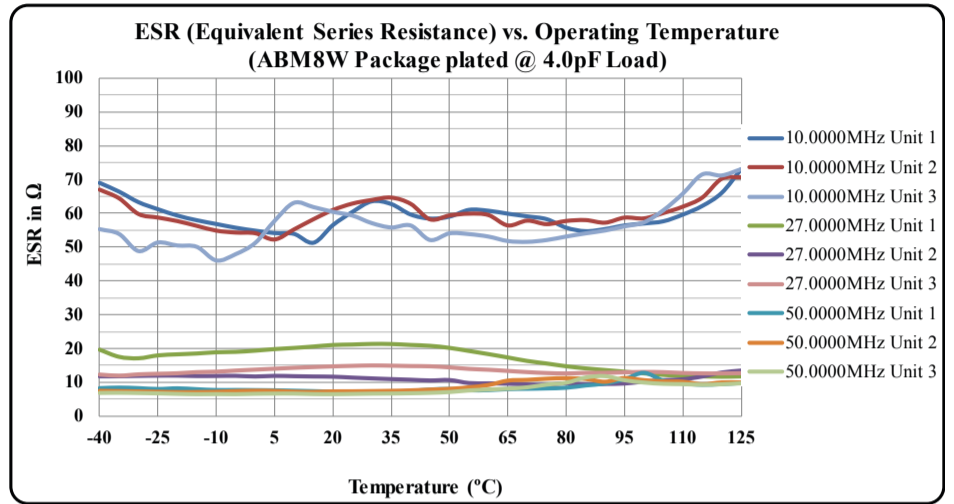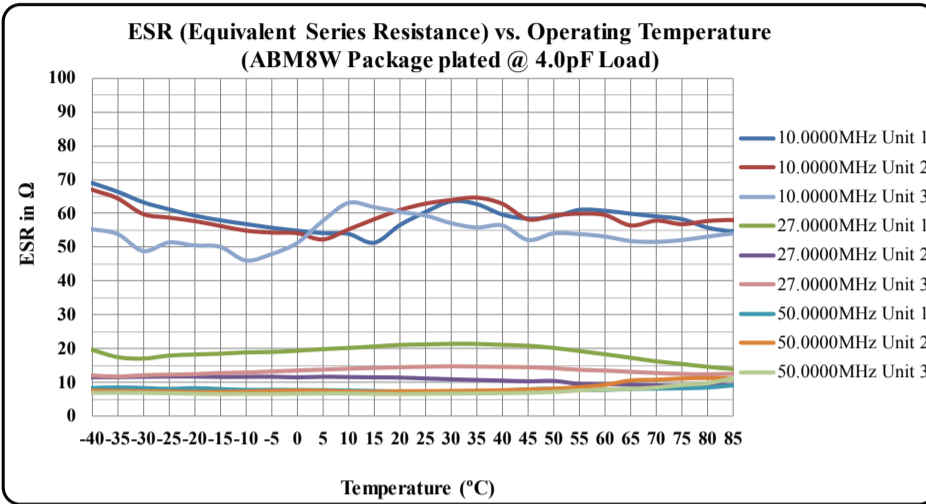

### TYPICAL FREQUENCY Vs. TEMPERATURE CHARACTERISTICS

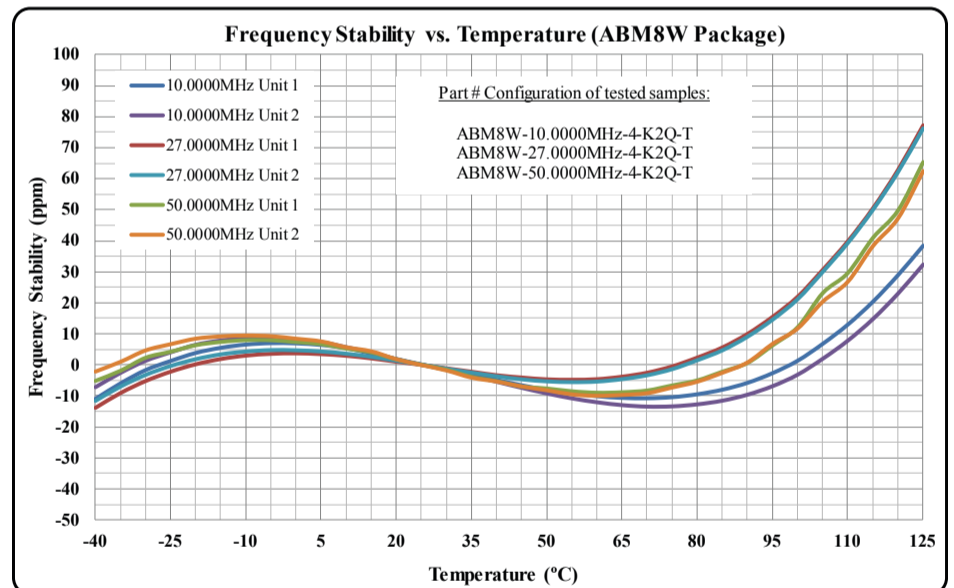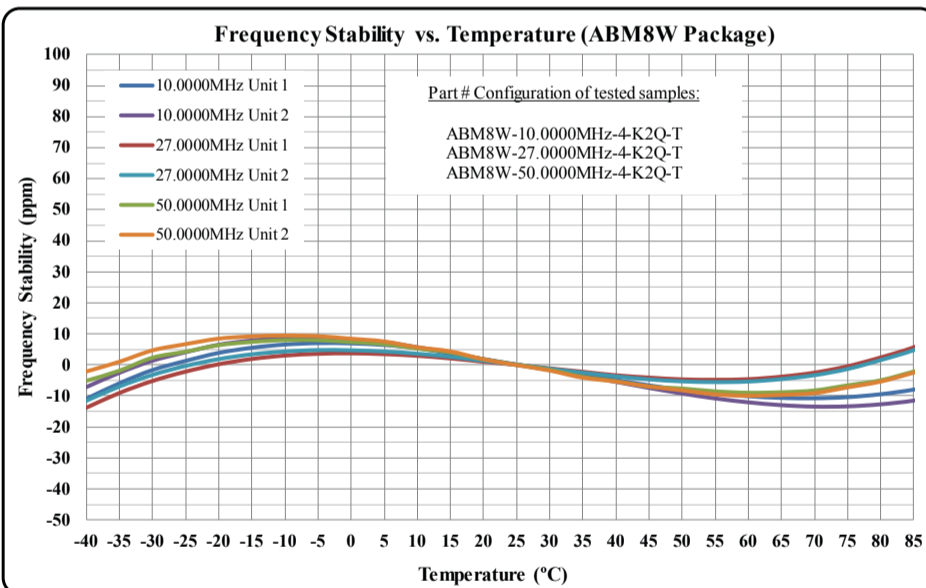

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL



ABM8W SERIES


3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## TYPICAL FREQUENCY TOLERANCE DISTRIBUTION (AT 25°C ± 3°C)

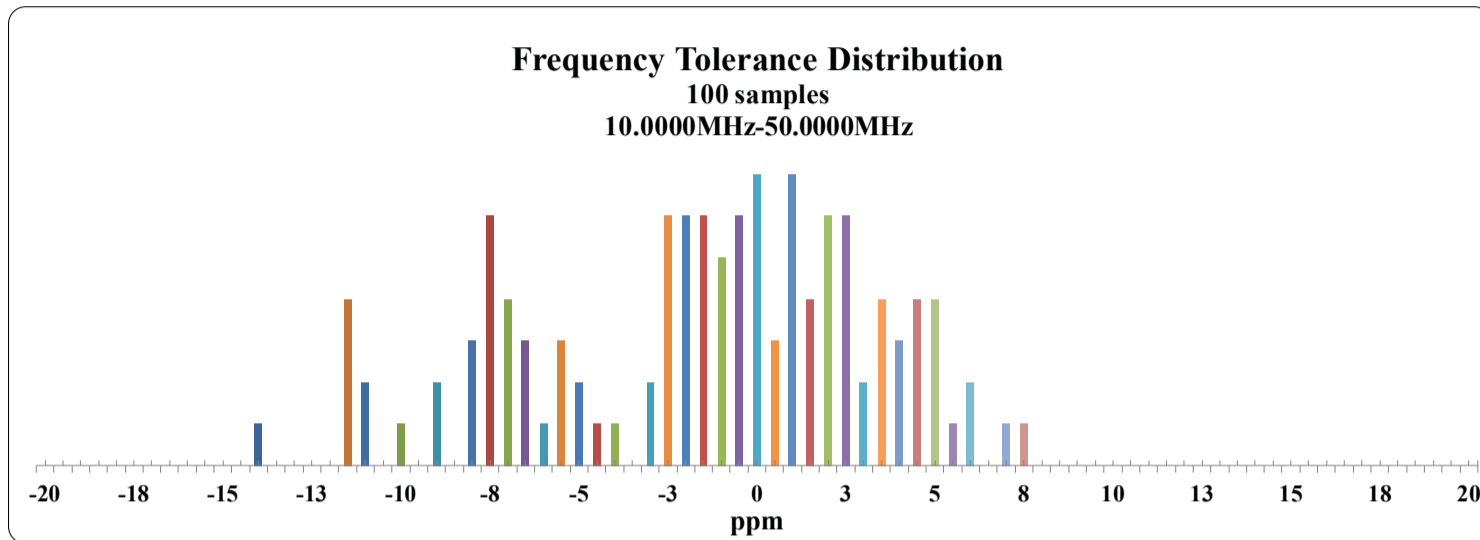

## TYPICAL ESR DISTRIBUTION (AT 25°C ± 3°C)


### ESR Distribution @ 10.0000MHz

100 samples  
MAX ESR = 77.7 Ω

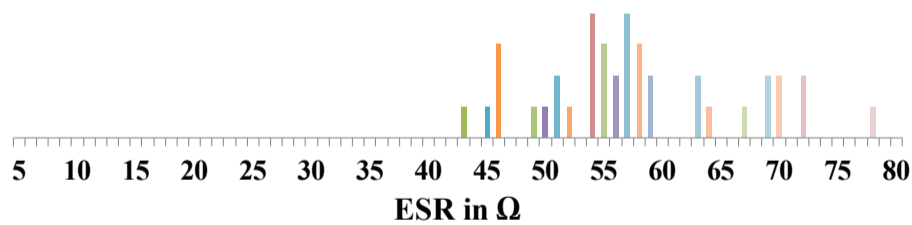


### ESR Distribution @ 27.0000MHz

100 samples  
MAX ESR = 21.6 Ω

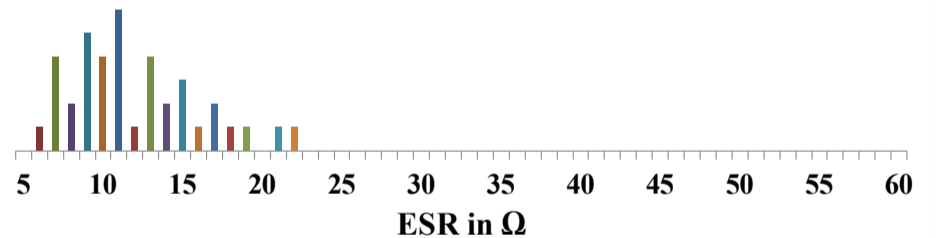

### ESR Distribution @ 50.0000MHz

100 samples  
MAX ESR = 10.23 Ω

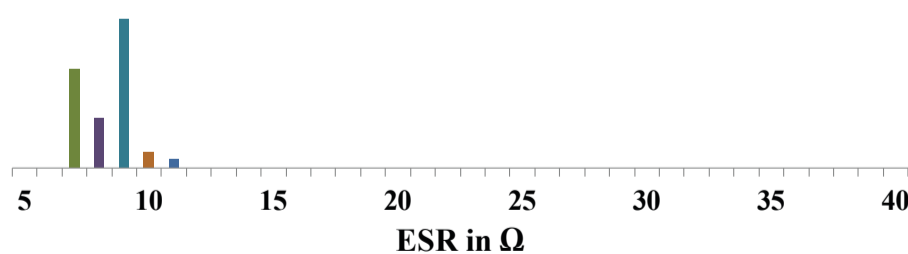

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL



ABM8W SERIES


3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant


MSL = N/A: NOT APPLICABLE

## SPICE MODELS (BASED ON TYPICAL VALUES AT 25°C ± 3°C)

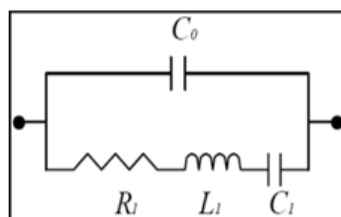

<b>Frequency: 10.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 10.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.88 pF	C0	=	0.86 pF
R1	=	53.82 Ω	R1	=	60.62 Ω
L1	=	162.02 mH	L1	=	164.96 mH
C1	=	1.56 fF	C1	=	1.54 fF
<b>Frequency: 27.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 27.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	1.16 pF	C0	=	1.16 pF
R1	=	11.83 Ω	R1	=	11.06 Ω
L1	=	9.16 mH	L1	=	9.10 mH
C1	=	3.80 fF	C1	=	3.82 fF
<b>Frequency: 50.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 50.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	1.16 pF	C0	=	1.15 pF
R1	=	7.61 Ω	R1	=	8.06 Ω
L1	=	2.45 mH	L1	=	2.49 mH
C1	=	4.14 fF	C1	=	4.07 fF

## MECHANICAL DIMENSIONS

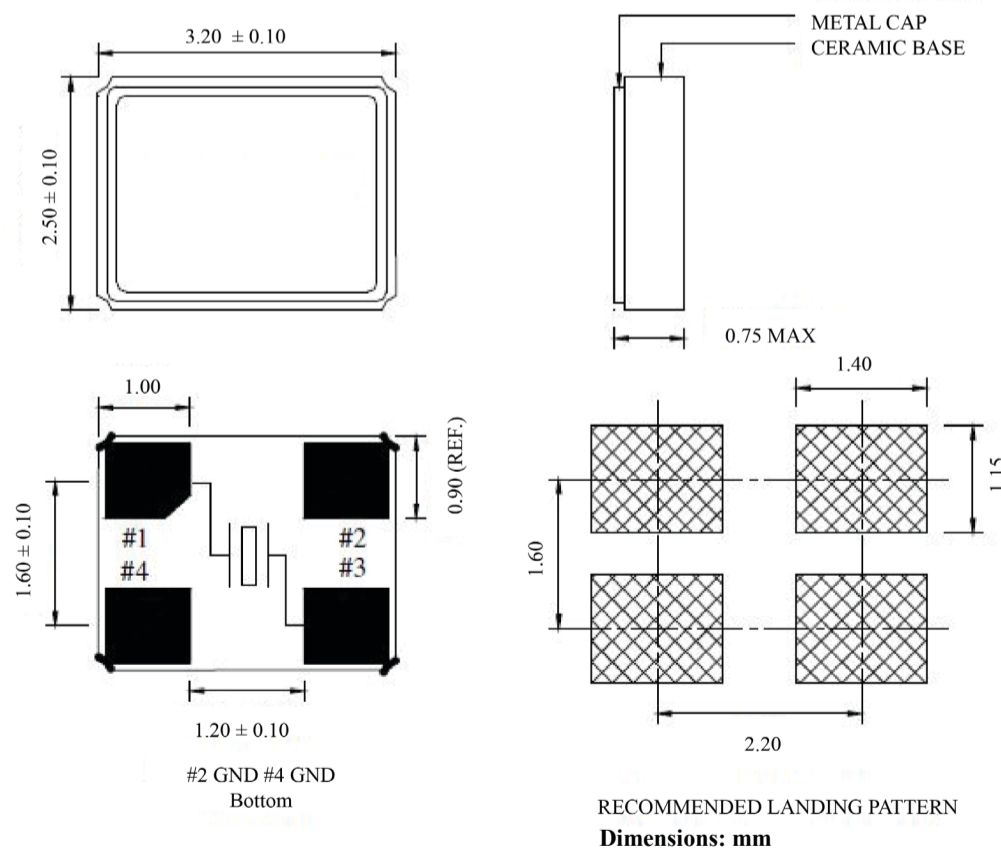


**Note:**

Due to material availability the Chamfer could be located on pin #1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

ABM8W SERIES

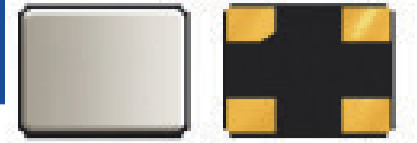


3.2 x 2.5 x 0.75mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## REFLOW PROFILE

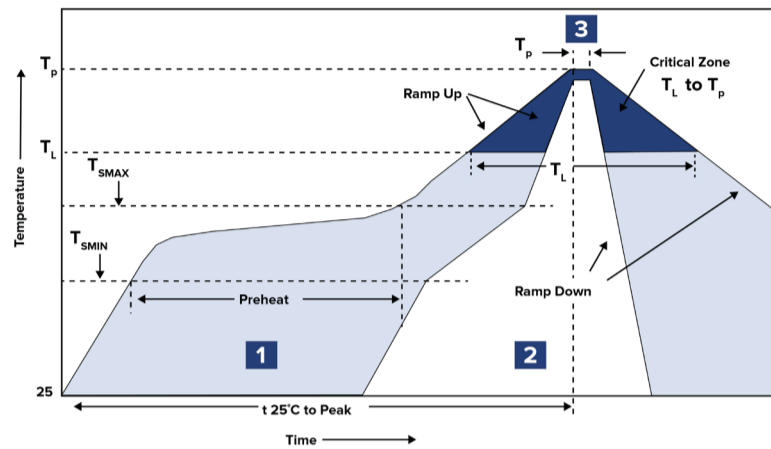

Zone	Description	Temperature	Time
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	$T_L$ 217°C	45 ~ 90 sec.
3	Peak Heat	$T_P$ 260°C MAX	10 sec.

## PACKAGING

T3: Tape and reel (3,000 pcs/reel)

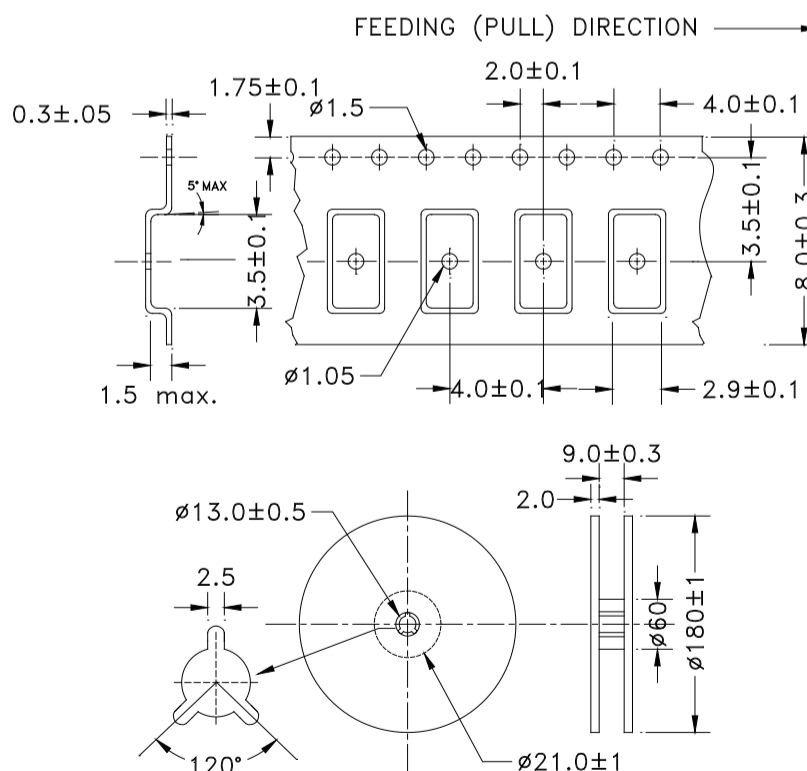

DIMENSIONS: mm

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ABRACON:

[ABM8W-13.4000MHZ-8-J2Z-T3](#) [ABM8W-13.5305MHZ-6-J2Z-T3](#) [ABM8W-35.4160MHZ-8-J2Z-T3](#) [ABM8W-16.6667MHZ-6-K2Z-T3](#) [ABM8W-13.5288MHZ-6-J2Z-T3](#) [ABM8W-33.8688MHZ-7-J1Z-T3](#) [ABM8W-30.0000MHZ-8-K2Z-T3](#) [ABM8W-13.5600MHZ-8-K1Z-T3](#) [ABM8W-18.0896MHZ-6-J2Z-T3](#) [ABM8W-40.9600MHZ-8-J1Z-T3](#) [ABM8W-44.0000MHZ-8-K1Z-T3](#) [ABM8W-22.1184MHZ-8-J1Z-T3](#) [ABM8W-16.0000MHZ-8-K2Z-T3](#) [ABM8W-19.6608MHZ-8-J1Z-T3](#) [ABM8W-50.0000MHZ-7-K2Z-T3](#) [ABM8W-45.0000MHZ-8-J1Z-T3](#) [ABM8W-48.0000MHZ-7-J1Z-T3](#) [ABM8W-13.5531MHZ-8-K1Z-T3](#) [ABM8W-26.0000MHZ-4-K2Z-T3](#) [ABM8W-33.3300MHZ-6-J2Z-T3](#) [ABM8W-19.7079MHZ-7-K2Z-T3](#) [ABM8W-14.3182MHZ-8-J1Z-T3](#) [ABM8W-16.8000MHZ-8-K2Z-T3](#) [ABM8W-26.0000MHZ-6-K1Z-T3](#) [ABM8W-38.4000MHZ-6-K2Z-T3](#) [ABM8W-33.3300MHZ-8-K2Z-T3](#) [ABM8W-13.0000MHZ-7-K1Z-T3](#) [ABM8W-38.4000MHZ-6-J1Z-T3](#) [ABM8W-36.0000MHZ-8-J1Z-T3](#) [ABM8W-13.5000MHZ-8-J2Z-T3](#) [ABM8W-30.7200MHZ-8-J1Z-T3](#) [ABM8W-28.6364MHZ-6-J2Z-T3](#) [ABM8W-37.4000MHZ-8-J1Z-T3](#) [ABM8W-27.1200MHZ-7-J1Z-T3](#) [ABM8W-13.5672MHZ-8-K2Z-T3](#) [ABM8W-12.8000MHZ-4-K2Z-T3](#) [ABM8W-19.9680MHZ-4-K1Z-T3](#) [ABM8W-18.0896MHZ-7-J1Z-T3](#) [ABM8W-13.5305MHZ-8-K2Z-T3](#) [ABM8W-16.0132MHZ-6-K2Z-T3](#) [ABM8W-28.3220MHZ-4-K1Z-T3](#) [ABM8W-22.0000MHZ-6-K2Z-T3](#) [ABM8W-28.2240MHZ-8-J2Z-T3](#) [ABM8W-22.0000MHZ-6-J2Z-T3](#) [ABM8W-14.7457MHZ-8-J2Z-T3](#) [ABM8W-14.4000MHZ-4-J2Z-T3](#) [ABM8W-19.4400MHZ-7-K1Z-T3](#) [ABM8W-13.5672MHZ-6-K1Z-T3](#) [ABM8W-16.3840MHZ-8-K1Z-T3](#) [ABM8W-13.8240MHZ-6-K2Z-T3](#) [ABM8W-38.8800MHZ-8-J2Z-T3](#) [ABM8W-32.0000MHZ-8-K1Z-T3](#) [ABM8W-38.0000MHZ-6-K2Z-T3](#) [ABM8W-13.5305MHZ-6-K1Z-T3](#) [ABM8W-19.0625MHZ-7-J1Z-T3](#) [ABM8W-24.5727MHZ-7-J1Z-T3](#) [ABM8W-22.0000MHZ-4-K1Z-T3](#) [ABM8W-12.8000MHZ-7-K1Z-T3](#) [ABM8W-24.5535MHZ-4-K2Z-T3](#) [ABM8W-19.2800MHZ-7-K1Z-T3](#) [ABM8W-13.5600MHZ-4-J2Z-T3](#) [ABM8W-19.2000MHZ-8-K1Z-T3](#) [ABM8W-18.0896MHZ-4-K2Z-T3](#) [ABM8W-24.5727MHZ-8-J1Z-T3](#) [ABM8W-13.5000MHZ-8-J1Z-T3](#) [ABM8W-13.5288MHZ-7-K1Z-T3](#) [ABM8W-18.4320MHZ-4-K1Z-T3](#) [ABM8W-12.8000MHZ-7-K2Z-T3](#) [ABM8W-18.0800MHZ-6-J1Z-T3](#) [ABM8W-19.7079MHZ-7-J1Z-T3](#) [ABM8W-27.1200MHZ-6-K2Z-T3](#) [ABM8W-31.2500MHZ-6-K1Z-T3](#) [ABM8W-13.8240MHZ-8-J1Z-T3](#) [ABM8W-32.0000MHZ-8-J1Z-T3](#) [ABM8W-13.5305MHZ-8-J1Z-T3](#) [ABM8W-24.5760MHZ-8-J1Z-T3](#) [ABM8W-15.0000MHZ-6-J1Z-T3](#) [ABM8W-22.0000MHZ-4-J2Z-T3](#) [ABM8W-37.0000MHZ-7-K2Z-T3](#) [ABM8W-40.9600MHZ-7-J2Z-T3](#) [ABM8W-44.0000MHZ-8-J1Z-T3](#) [ABM8W-44.0000MHZ-8-K2Z-T3](#) [ABM8W-49.1520MHZ-7-K2Z-T3](#) [ABM8W-24.5454MHZ-4-J1Z-T3](#) [ABM8W-16.3676MHZ-4-J1Z-T3](#) [ABM8W-20.7360MHZ-7-J2Z-T3](#) [ABM8W-13.5288MHZ-7-K2Z-T3](#) [ABM8W-12.5000MHZ-4-K1Z-T3](#) [ABM8W-30.4000MHZ-8-K1Z-T3](#) [ABM8W-22.1184MHZ-8-K1Z-T3](#) [ABM8W-19.6875MHZ-8-J2Z-T3](#) [ABM8W-50.0000MHZ-6-J2Z-T3](#) [ABM8W-54.0000MHZ-7-K1Z-T3](#) [ABM8W-40.9600MHZ-6-J1Z-T3](#) [ABM8W-16.3676MHZ-6-J2Z-T3](#) [ABM8W-14.7456MHZ-7-K2Z-T3](#) [ABM8W-19.8000MHZ-7-J2Z-T3](#) [ABM8W-31.2500MHZ-7-J1Z-T3](#) [ABM8W-19.6800MHZ-8-K2Z-T3](#) [ABM8W-18.0896MHZ-6-K1Z-T3](#)