HSF RoHS

SPECIFICATIONS
PERFORMANCE
Electical Rating: AC/DC 50V 0.5A
Contact Resistance:80mΩ Max
Insulation Resistance: 500MΩ Min
Withstand Volt: 500V AC/minute
Opratng Temperature: -40°C to +105°C

Material
Contact: Phosphor Bronze Gold-Plated
Housing: LCP UL94V0
Max.Processing Temp:230°C for 30~60 seconds
(260°C for 10 seconds)











Ordering Information

3724 M XXX 043 XX F X 01

- M: F=Female, M=Male
- XXX: No.of pins, 20P~100P
- 043: Plastic Hight, 043=4.28mm
- XX: Contact Plating Flash — G0:Gold Flash; G1:3U" Gold; G2:5U" Gold; G3:10U" Gold; G4:15U" Gold; S0:1.5U" Gold/Tin; S1:3U" Gold/Tin
- F: Insulator Material Option — D=BK-PA46; E=BK-PA9T; F=BK-LCP
- X: Packing — T:Tube; R:Reel
- 01

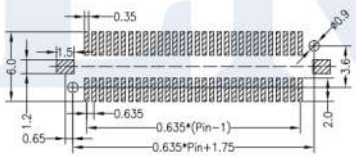

P.C.B Layout

Mating Draw (Ref)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2020.09.03	NEW DRAWING	

OPERATION		DRAW	yiyusheng	20.09.03
X.X	±0.30			
X.XX	±0.20	CHECK		
X.XXX	±0.10			
Angle	±3'	APPROVE		
DIM	TOL			

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

JILN® 深圳市锦凌电子有限公司
SHENZHEN JINLING ELECTRONIC CO.,LTD
Tel: 86-755-2997-5806/5802 Fax: 86-755-2997-5992

PART NO.	3724MXXX043XXFX01
TITLE:	0.635mm 浮动式BTB NPin H4.28 Male