


Pin 位	A	B	C	Pin 位	A	B	C
4	3	5.06	11	23	22	24.06	30
5	4	6.06	12	24	23	25.06	31
6	5	7.06	13	25	24	26.06	32
7	6	8.06	14	26	25	27.06	33
8	7	9.06	15	27	26	28.06	34
9	8	10.06	16	28	27	29.06	35
10	9	11.06	17	29	28	30.06	36
11	10	12.06	18	30	29	31.06	37
12	11	13.06	19	31	30	32.06	38
13	12	14.06	20	32	31	33.06	39
14	13	15.06	21	33	32	34.06	40
15	14	16.06	22	34	33	35.06	41
16	15	17.06	23	35	34	36.06	42
17	16	18.06	24	36	35	37.06	43
18	17	19.06	25	37	36	38.06	44
19	18	20.06	26	38	37	39.06	45
20	19	21.06	27	39	38	40.06	46
21	20	22.06	28	40	39	41.06	47
22	21	23.06	29				

**SPECIFICATION**

1. Material:  
 Housing: HIGH-TEMP Plastic, UL94V-0, color: Natural.  
 Lock: HIGH-TEMP Plastic, UL94V-0, color: black.  
 Contacts: Copper alloy.  
 Solder tab: Copper alloy.

2. Electrical Characteristics:  
 Current rating: 0.5A(max).  
 Voltage rating: 50V(max).  
 Operating Temperature: -25°C~+85°C.  
 Insulation resistance: 500M ohms min. at 500V DC  
 Dielectric withstanding voltage: 500V AC/minute.  
 Contact resistance: 30m ohms max.

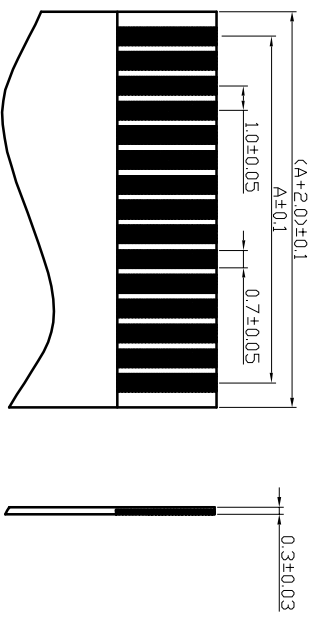

APPLICABLE FPC

UNITS: mm		<b>CSCONN</b>		CSCONN PRECISE ELECTRONICS CO., LTD	
GENERAL TOLERANCE					
X. ° ±5°	0. X ±0.25	PART NO. (INTENDED USE)		TITLE:	
X.1 ±2°	0. XX ±0.2	CFP-10XXS/X-T		FPC 1.0MM XP H=2.5MM SMT贴片带锁	
XX. ±1°	0. XXX ±0.1	APPD:		DWG NO. FPC	
		CHKD: Skila		SCALE SHEET	
		DR: Kitty		1:1 1 OF 1	
				REV	
				A	