Contact Resistance	30 mΩ ,max. at DC 100mA
Insulator Resistance	1000 mΩ ,min. at DC 500V
Current Rating	1AMP
Withstanding voltage	AC1000V/1Min
Operating temperature	-55°C~+105°C
Contact	Brass
Housing	PBT & 30% Glass Fiber(UL94V-0)

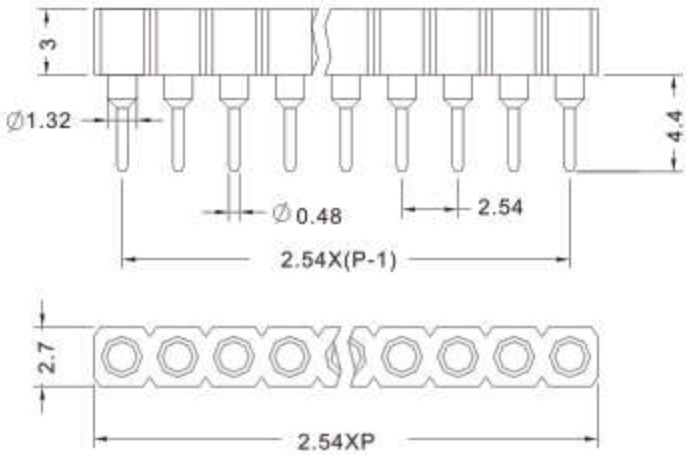

How to Order:

SIP	–	1x40	–	
Series No.		Poles 1x40 1xN (N = 1 --40)		Customer Request