

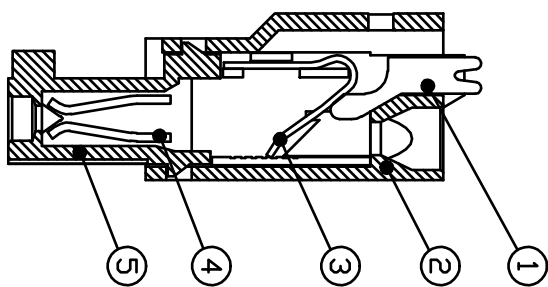
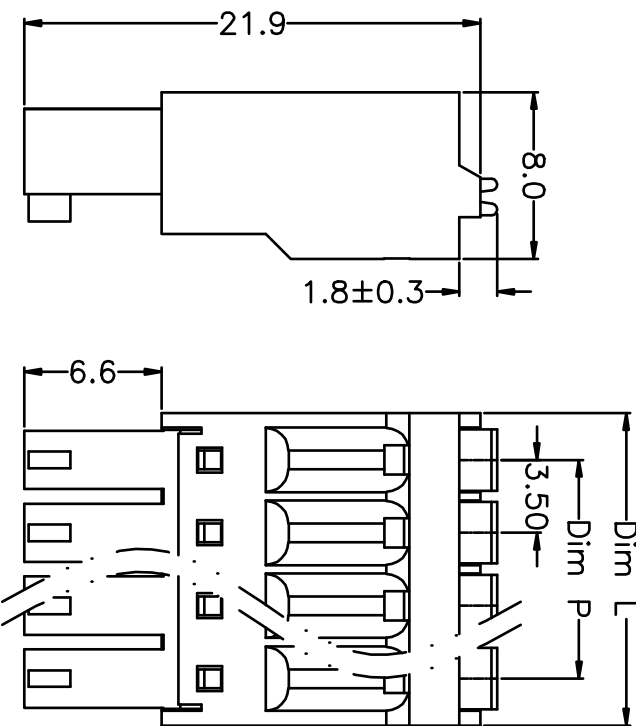


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG



N=Number of Poles  
Dim P=(N-1)x3.50  
Dim L=Nx3.50+1

Number of Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

- Material
  - ⊙Button : PA66, UL94V-0
  - ⊙Housing : PA66, UL94V-0
  - ⊙Reed : Stainless steel
  - ⊙Contact : Phosphor bronze, Ni plated
  - ⊙Cover : PA66, UL94V-0

- Electrical
 

UL	IEC
Rated voltage : 300V	250V
Rated current : 8A	7A


Insulation resistance: 500MΩ/DC500V  
Withstanding Voltage : AC1500V/1min  
Wire range: 28-16AWG 0.5-1.5mm<sup>2</sup>

- Mechanical
 

Operating temperature: -40°C to +105°C  
Soldering temperature: 250°C ±5/5sec  
Strip length: 8-9mm

### HOW TO ORDER

KF12EKN-3.5-XXP-1 X-XXXXX

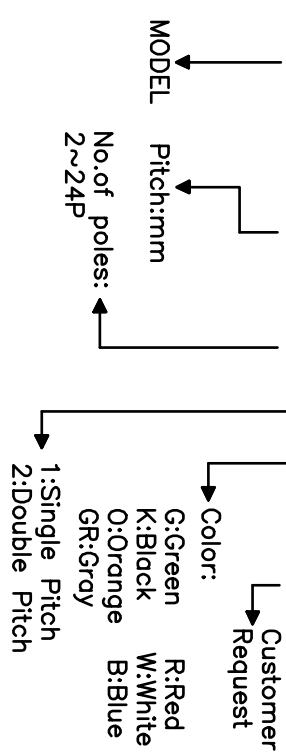

### GENERAL TOLERANCE ANGLE TOLERANCE

X.	±0.5	X.	±5'
.X	±0.3	.X'	±3'
.XX	±0.1	.XX'	±1'

DRAWING TYPE CUSTOMER

SCALE 1:1 SHEET 1 OF 1

DRAWING NO. XP0012016-xxxx

PROJECTION	TITLE
UNITS mm	KF12EKN-3.5-XXP
SHEET SIZE A4	SERIES KF12EKN

**凯峰** 慈溪市凯峰电子有限公司  
KAIFENG ELECTRONIC CO.,LTD  
CIXI KAIFENG ELECTRONIC CO.,LTD