


Connector >> D-sub Series >> DR




Contact Resistance	30 mΩ ,max. at DC 100mA
Insulator Resistance	1000 mΩ ,min. at DC 500V
Current Rating	5AMP
Withstanding voltage	AC1000V/1Min
Operating temperature	-55°C~+105°C
Contact	Brass or Phosphor Bronze
Housing	PBT & 30% Glass Fiber(UL94V-0)


[Male Type]

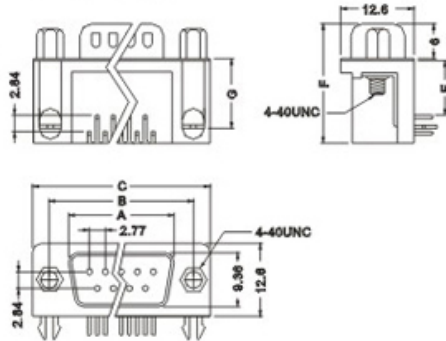

[Female Type]

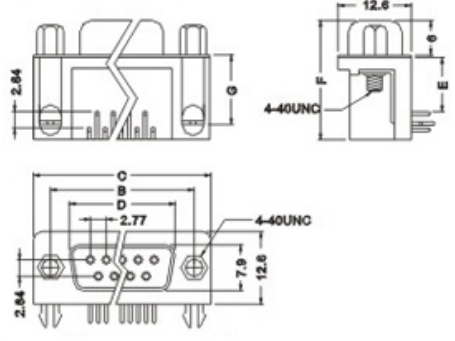

[Screw Mounting Options]

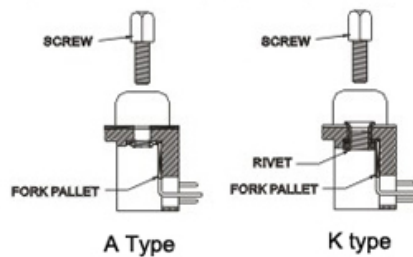

Position	A	B	C	D
9	17.78	24.99	31.04	16.33
15	26.15	33.32	39.24	24.66
25	39.94	47.04	53.04	38.66
37	56.56	63.50	69.62	54.84

Footprint	E	F	G
B	7.2	18.4	9.62
D	9.4	20.64	12.06
C	13.84	25.3	16.5

How to Order:

DR	-	15	-	F	-	D	-	B	-	A	-	
Series No.		No.of Poles		Item Option		Foot Print		Color		Screw Type		Customer Request
				F: Female M: Male		B: 7.2mm D: 9.4mm C: 13.84		B. Blue K. Black W. White		A. A type K. K type		