


MAX490 RS422 Bidirectional Full Duplex Two-Way TTL Signal Conversion Module

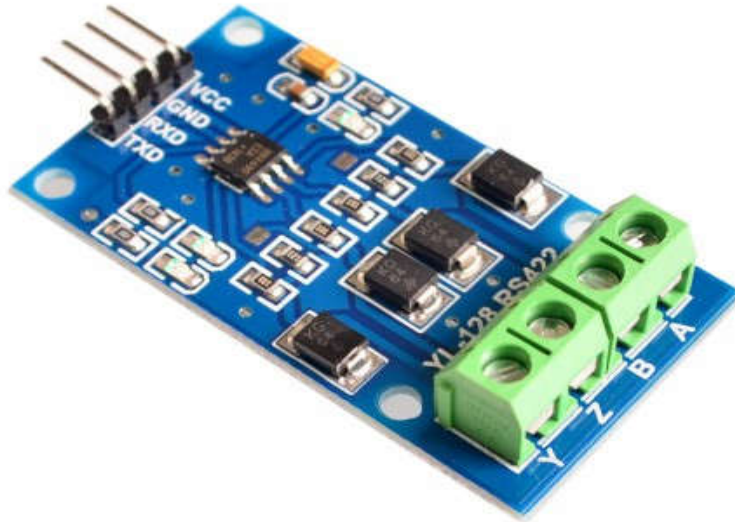

Module Description:

- RS422 interface, two-way communication. B Y Z A ultra far transmission 1000 meters
- Module has ESD 15KV protection.
- On board to increase the limit of 10 ohm current limiting current protection.
- Module with TVS diode. Anti lightning, peak voltage.
- Module has 120 ohm termination resistors, which can effectively reduce the interference of long range communication.
- Have the power indicator light and the data receiving and sending indicator light.
Panoramic view of state data.
- Module TTL side using 5V DC power supply TXD RXD compatible with 5V logic signal.
- Module uses the original imported MAX490 chips, stability and communication speed is far more than domestic products, up to 2.5MBPS.
- Module size: 5.0cm x 2.7cm