

EMI Suppression Filters (for DC)/ Chip Inductors for Automotive



Explanation of category in this catalog

Infotainment

Info-tainment

The product for entertainment equipment like car navigations, car audios, and body control equipment like wipers, power windows.

Powertrain, Safety

Power-train

The product for high reliability applications like powertrain and safety, in addition to infotainment applications.

EU RoHS Compliant

- All the products in this catalog comply with EU RoHS.
- EU RoHS is "the European Directive 2011/65/EU on the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment."
- For more details, please refer to our web page, "Murata's Approach for EU RoHS" (<https://www.murata.com/en-eu/support/compliance/rohs>).

Because of the difference of measurement condition, electrical characteristics plots on this catalog may have some difference to official specification value.

Contents

Product specifications are as of November 2017.


Application Examples p2

EMI Suppression Filters (for DC)

Contents p7

EMI Suppression Filters (for DC) Product Guide p8

 **Chip Ferrite Bead** p11

 **Chip EMIFIL®** p116

 **Chip Common Mode Choke Coil** p140

 **Block Type EMIFIL®** p176

 **EMI Suppression Filters (Lead Type)** · p182

 **Microchip Transformer (Balun)** p202


Chip Inductors

Contents p209

Chip Inductors Product Guide p210

 **Inductors for Power Lines** p212

 **Inductors for General Circuits** p317


 **RF Inductors** p337

Part Number Quick Reference p392

Please check the MURATA website (<https://www.murata.com/>) if you cannot find a part number in this catalog.


Application Examples

Car Navigation System

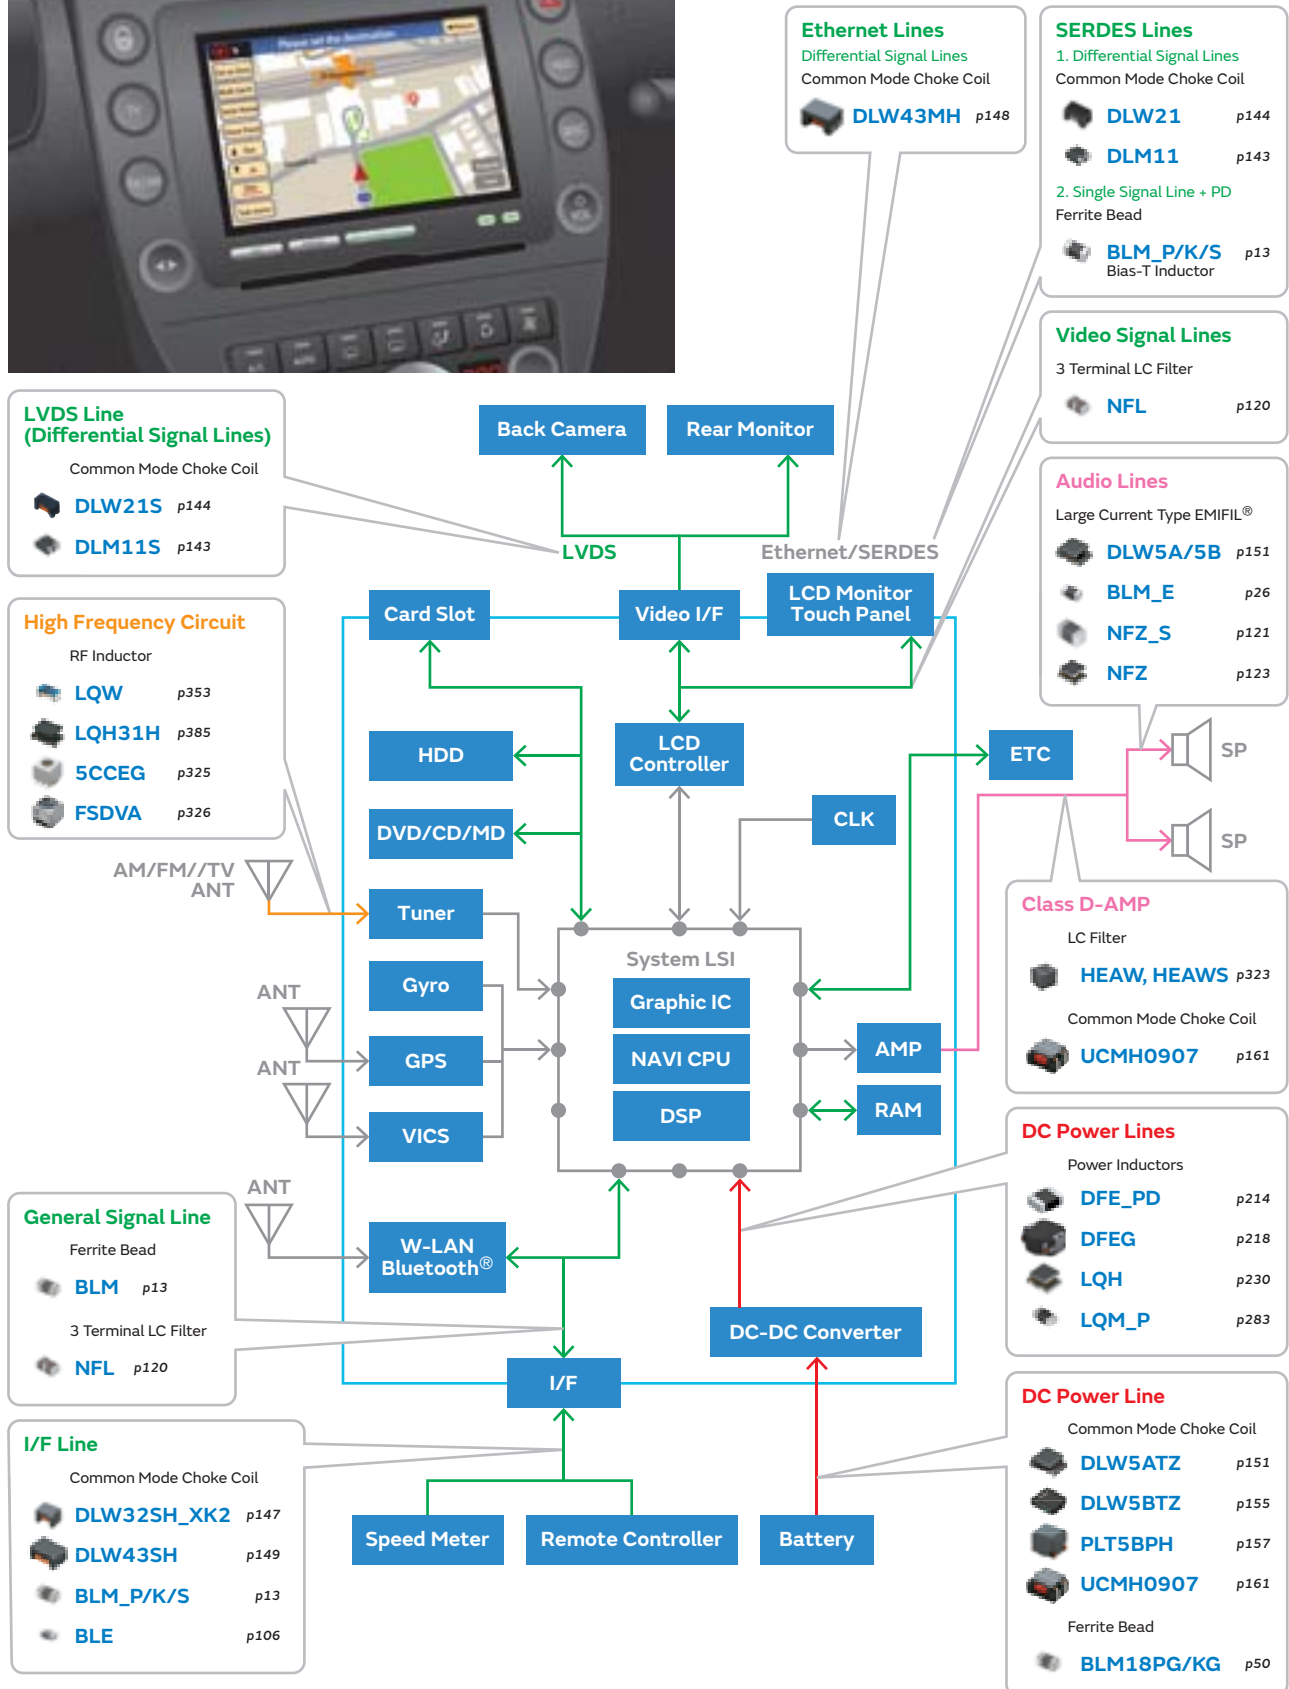


Application Examples

Car Camera System

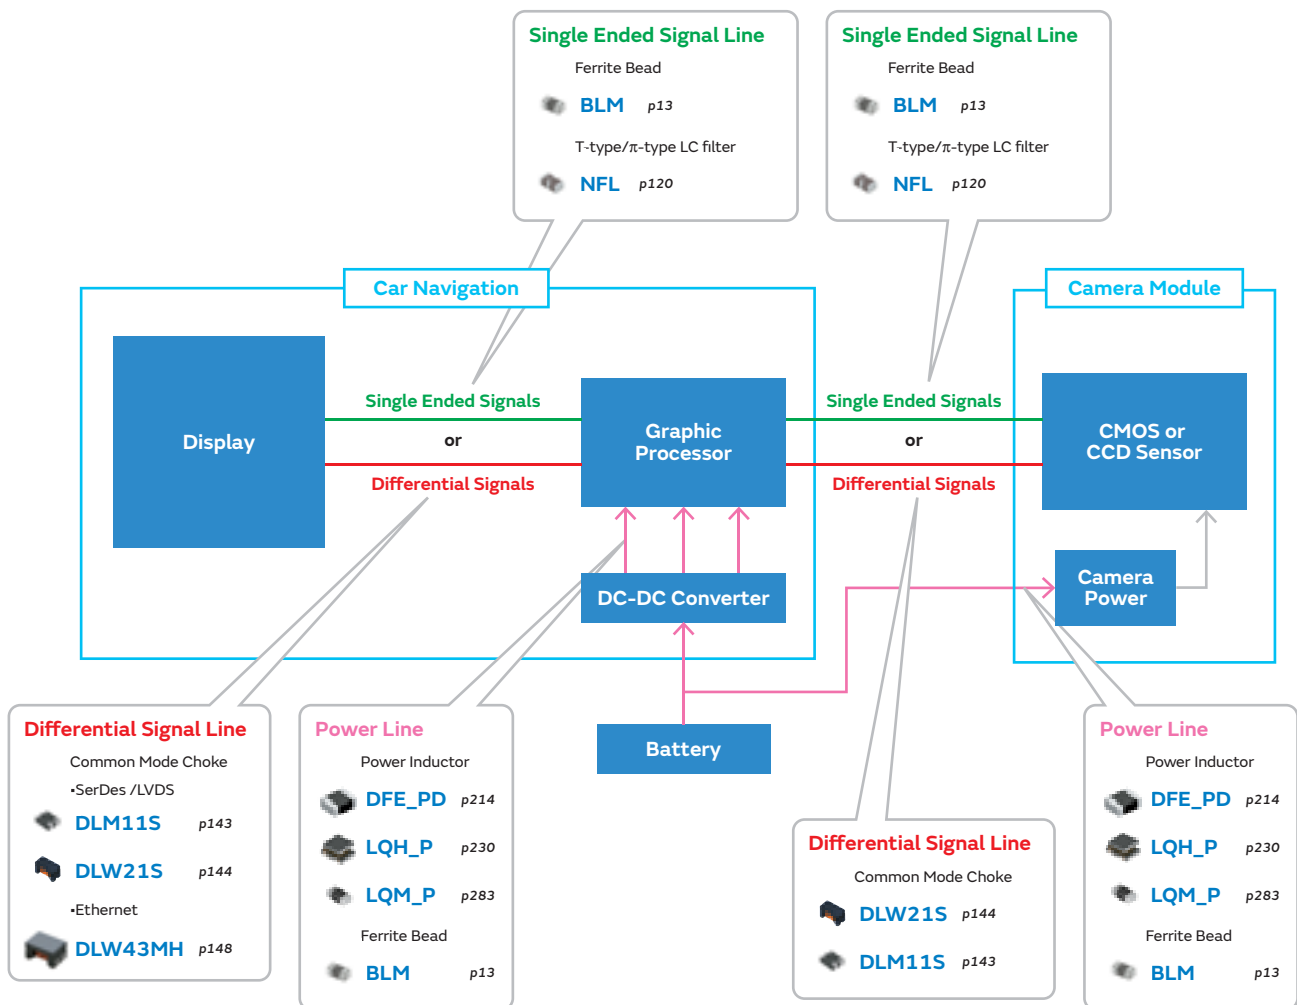


Application Examples

Electronic Control Unit

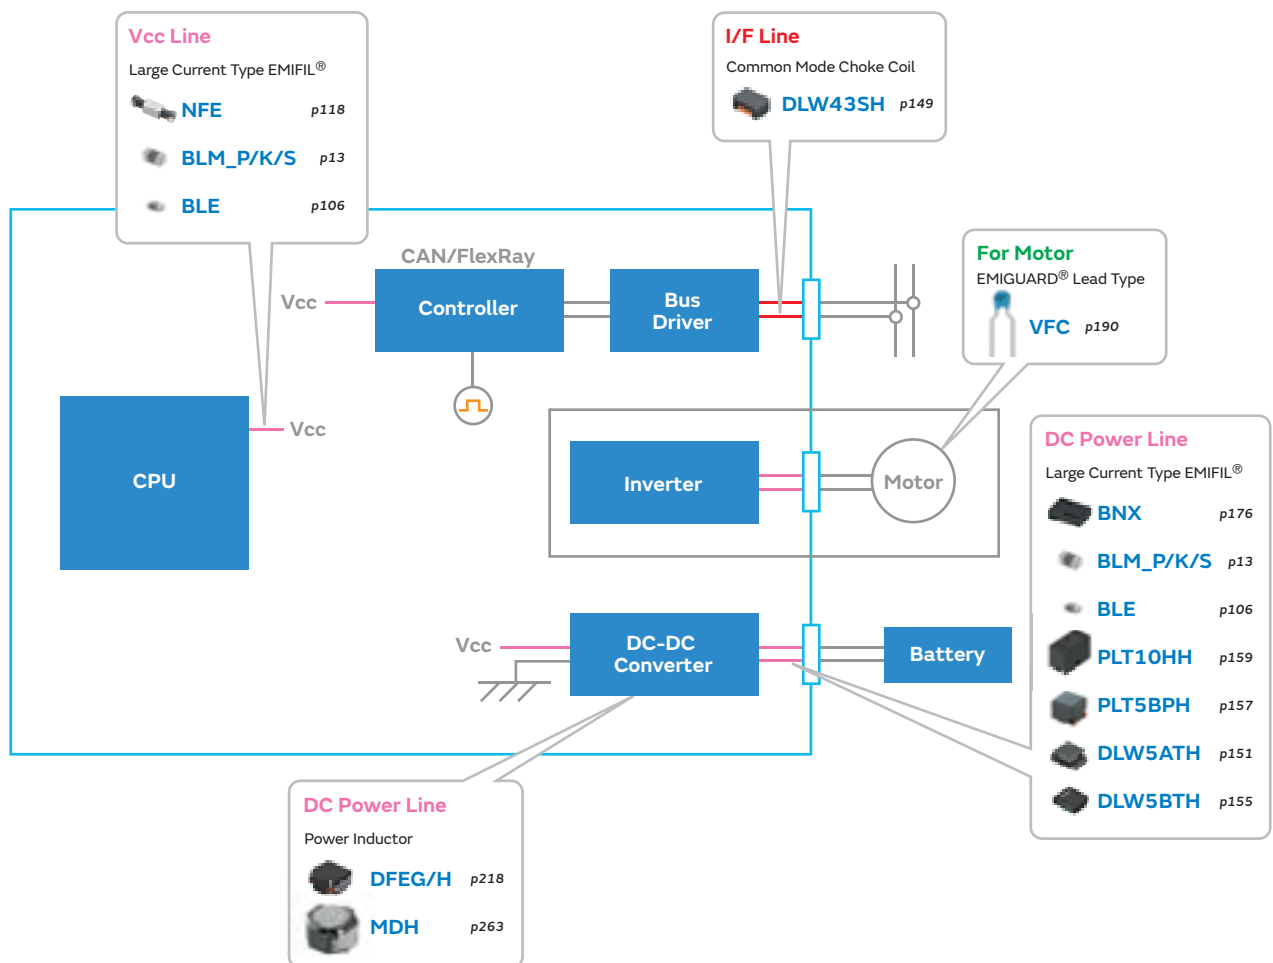


Application Examples

Smart Keyless Entry

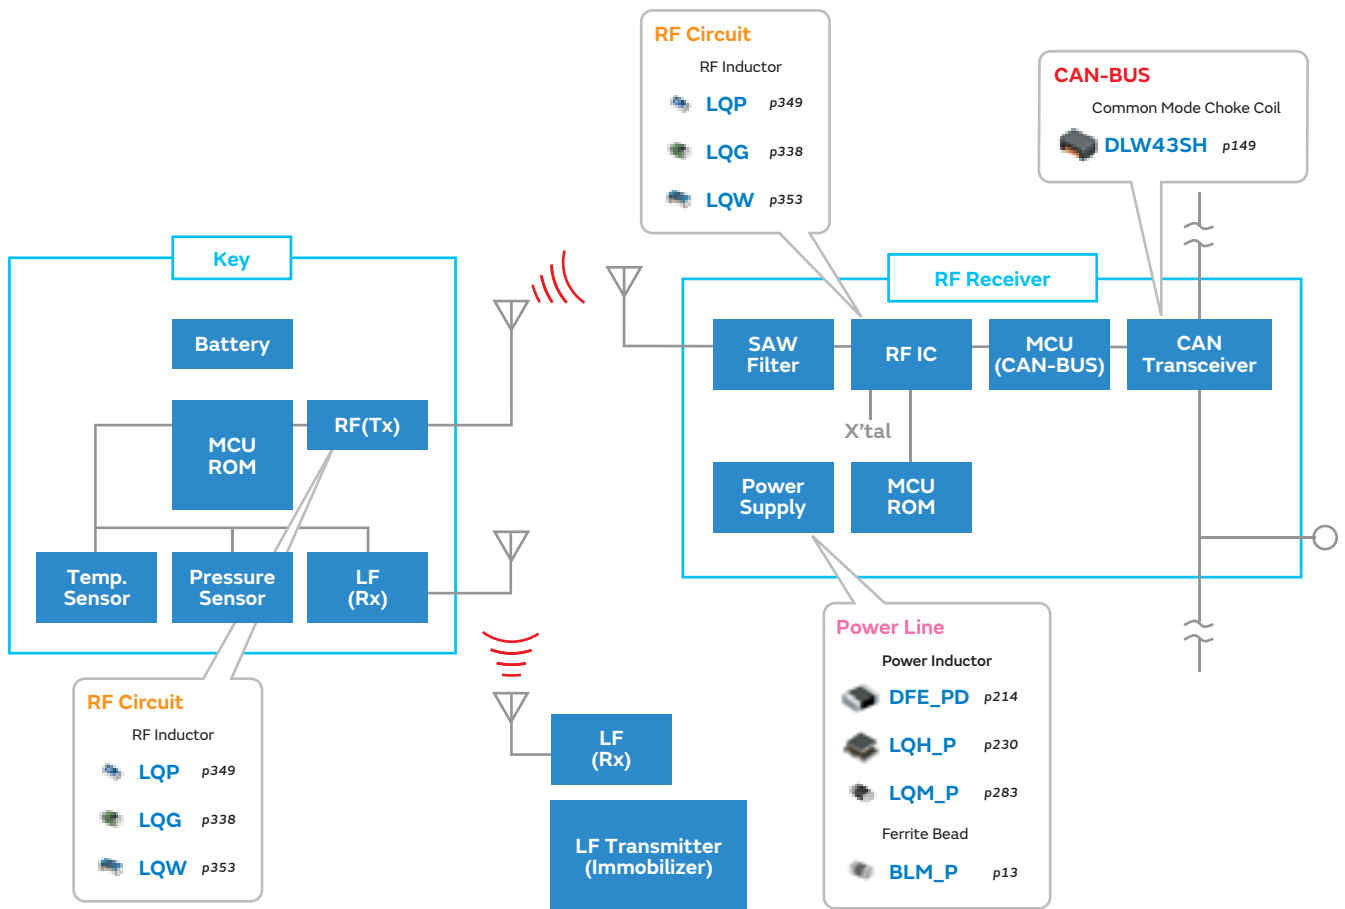

Application Examples

Telematics Circuit

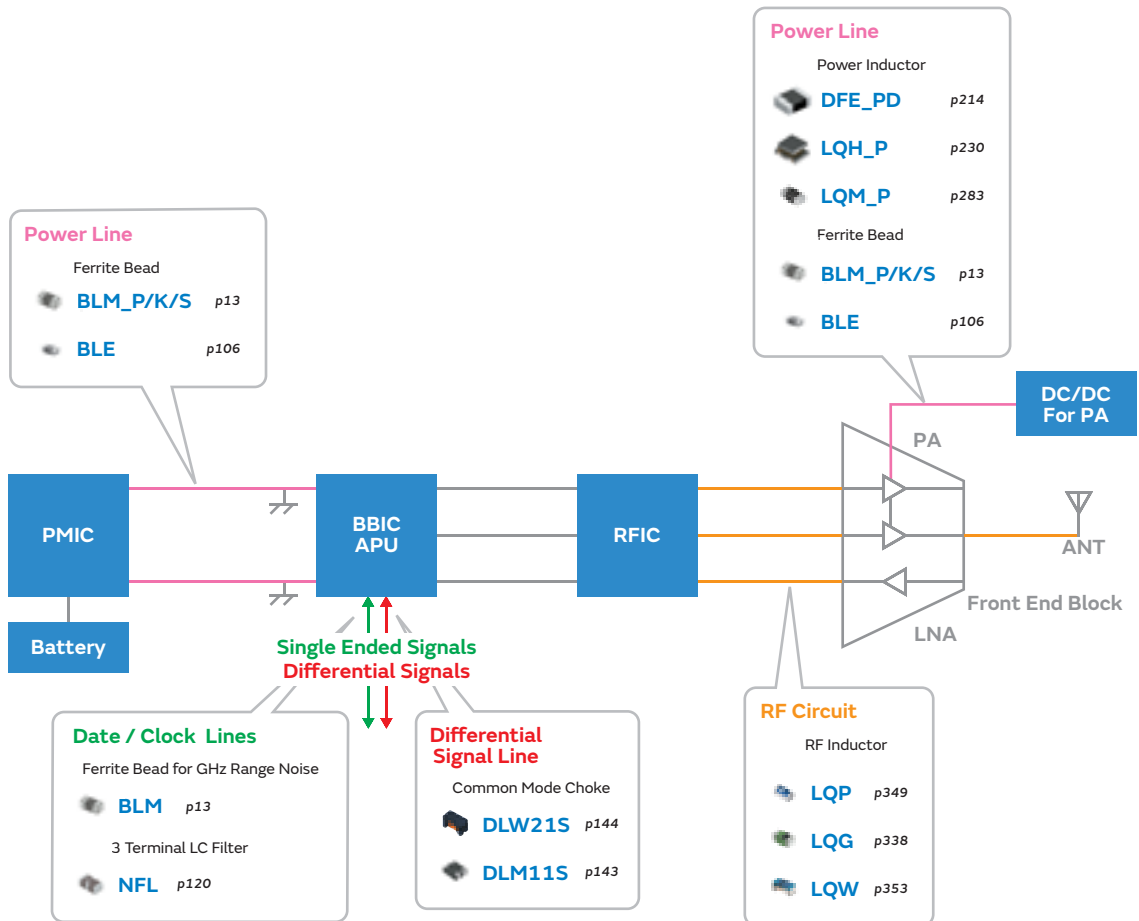

Product Guide p8

Chip Ferrite Bead

Part Numbering p11
 Product Detail p13
 ⚠Caution/Notice p109
 Soldering and Mounting p111
 Packaging p115

Chip EMIFIL®

Part Numbering p116
 Product Detail p118
 ⚠Caution/Notice p132
 Soldering and Mounting p134
 Packaging p139

Chip Common Mode Choke Coil

Part Numbering p140
 Product Detail p143
 ⚠Caution/Notice p162
 Soldering and Mounting p166
 Packaging p173

Block Type EMIFIL®

Product Detail p176
 ⚠Caution/Notice p178
 Soldering and Mounting p179
 Packaging p181

EMI Suppression Filters (Lead Type)

Part Numbering p182
 Product Detail p185
 ⚠Caution/Notice p193
 Soldering and Mounting p196
 Packaging p200

Microchip Transformer (Balun)

Part Numbering p202
 Product Detail p203
 ⚠Caution/Notice p204
 Soldering and Mounting p205
 Packaging p207

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Product Guide

BL Inductor Type

| | | Series | Applications | Size Code in inch (in mm) | Impedance at 100MHz | | |
|------------------------|--|--|--------------------------------|------------------------------|---------------------|---------------|--------------|
| For General Band Noise | Universal Type [Power Lines / Signal Lines] | BLM03AX p16 | Info-tainment | 0201 (0603) | 10Ω to 1000Ω | | |
| | | BLM15AX p32 | Info-tainment | 0402 (1005) | 10Ω to 1000Ω | | |
| | Signal Lines Type | For General Signal Lines | BLM03AG p18 | Info-tainment | 0201 (0603) | 10Ω to 1000Ω | |
| | | | BLM15AG p34 | Info-tainment Power-train | 0402 (1005) | 10Ω to 1000Ω | |
| | | | BLM18AG p61 | Info-tainment Power-train | 0603 (1608) | 120Ω to 1000Ω | |
| | | | BLM18AG* (150°C available) p65 | Power-train | 0603 (1608) | 120Ω to 1000Ω | |
| | | | BLM18AG* (Conductive glue) p63 | Power-train | 0603 (1608) | 470Ω to 1000Ω | |
| | | BLM21AG p88 | Info-tainment Power-train | 0805 (2012) | 120Ω to 1000Ω | | |
| | | BLM21AG* (150°C available) p90 | Power-train | 0805 (2012) | 120Ω to 1000Ω | | |
| | | BLM31AJ p103 | Power-train | 1206 (3216) | 600Ω | | |
| | | For High Speed Signal Lines | BLM03B p20 | Info-tainment | 0201 (0603) | 10Ω to 600Ω | |
| | | | BLM15B p36 | Info-tainment Power-train | 0402 (1005) | 5Ω to 1800Ω | |
| | BLM18B p67 | | Info-tainment Power-train | 0603 (1608) | 5Ω to 2500Ω | | |
| | BLM18B* (150°C available) p72 | | Power-train | 0603 (1608) | 47Ω to 2500Ω | | |
| | BLM21B p92 | | Info-tainment Power-train | 0805 (2012) | 5Ω to 2700Ω | | |
| | Power Lines Type | BLM03PX* p13 | Info-tainment | 0201 (0603) | 22Ω to 80Ω | | |
| | | BLM03PG p15 | Info-tainment | 0201 (0603) | 22Ω to 33Ω | | |
| | | BLM15PX* p28 | Info-tainment | 0402 (1005) | 33Ω to 600Ω | | |
| | | BLM15PG/PD* p30 | Info-tainment | 0402 (1005) | 10Ω to 120Ω | | |
| | | BLM18PG* p50 | Info-tainment Power-train | 0603 (1608) | 30Ω to 470Ω | | |
| | | BLM21PG* p83 | Info-tainment Power-train | 0805 (2012) | 22Ω to 330Ω | | |
| | | BLM21PG* (150°C available) p85 | Power-train | 0805 (2012) | 22Ω to 330Ω | | |
| | | BLM31PG* p96 | Info-tainment Power-train | 1206 (3216) | 33Ω to 600Ω | | |
| | | BLM41PG* p104 | Info-tainment Power-train | 1806 (4516) | 60Ω to 1000Ω | | |
| | | BLM18KG* (Low DC Resistance Type) p55 | Info-tainment Power-train | 0603 (1608) | 26Ω to 1000Ω | | |
| | | BLM18KG* (150°C available) p58 | Power-train | 0603 (1608) | 26Ω to 1000Ω | | |
| | | BLM31KN* p98 | Info-tainment Power-train | 1206 (3216) | 120Ω to 1000Ω | | |
| | | BLM31KN* (150°C available) p100 | Power-train | 1206 (3216) | 120Ω to 1000Ω | | |
| | | BLM18SG* (Low DC Resistance Type) p52 | Info-tainment | 0603 (1608) | 26Ω to 330Ω | | |
| | | BLM18SN* p54 | Info-tainment Power-train | 0603 (1608) | 22Ω | | |
| | | BLM21SN* p87 | Info-tainment Power-train | 0805 (2012) | 30Ω | | |
| | | BLM31SN* p102 | Info-tainment Power-train | 1206 (3216) | 50Ω | | |
| | | BLE18PS* p106 | Info-tainment | 0603 (1608) | 8.5Ω | | |
| BLE32PN p107 | | Info-tainment Power-train | 1210 (3225) | 26Ω to 30Ω | | | |
| For GHz Band Noise | | Universal Type [Power Lines / Signal Lines] | BLM03EB* p26 | Info-tainment | 0201 (0603) | 25Ω to 50Ω | |
| | BLM15EG* p47 | | Info-tainment Power-train | 0402 (1005) | 120Ω to 220Ω | | |
| | BLM18EG* p79 | | Info-tainment Power-train | 0603 (1608) | 100Ω to 600Ω | | |
| | BLM18HE* p75 | | Info-tainment Power-train | 0603 (1608) | 600Ω to 1500Ω | | |
| | Signal Lines Type | BLM03HG p23 | Info-tainment Power-train | 0201 (0603) | 600Ω to 1200Ω | | |
| | | BLM03HD p23 | Info-tainment | 0201 (0603) | 330Ω to 1800Ω | | |
| | | BLM03HB p23 | Info-tainment | 0201 (0603) | 190Ω to 400Ω | | |
| | | BLM15HG p42 | Info-tainment Power-train | 0402 (1005) | 600Ω to 1000Ω | | |
| | | BLM15HG* (150°C available) p45 | Power-train | 0402 (1005) | 600Ω to 1000Ω | | |
| | | BLM15HD p42 | Info-tainment Power-train | 0402 (1005) | 600Ω to 1800Ω | | |
| | | BLM15HB p42 | Info-tainment Power-train | 0402 (1005) | 120Ω to 220Ω | | |
| | | BLM18HG p75 | Info-tainment Power-train | 0603 (1608) | 470Ω to 1000Ω | | |
| | | BLM18HD p75 | Info-tainment Power-train | 0603 (1608) | 470Ω to 1000Ω | | |
| | | BLM18HB p75 | Info-tainment | 0603 (1608) | 120Ω to 330Ω | | |
| | | For High-GHz Band Noise | Signal Lines Type | BLM15GG p49 | Info-tainment | 0402 (1005) | 220Ω to 470Ω |
| | | | | BLM15GA p49 | Info-tainment | 0402 (1005) | 75Ω |
| | | | | BLM18GG p82 | Info-tainment | 0603 (1608) | 470Ω |

* The derating of rated current is required for some items according to the operating temperature on each product page.

NF □

Combined Type

| | Series | Applications | Size Code in inch (in mm) | Cut-off Frequency |
|-------------------|---------------------|--------------|------------------------------|-------------------|
| Signal Lines Type | NFL18ZT p120 | | 0603 (1608) | 50MHz to 500MHz |

Combined Type

| | Series | Applications | Size Code in inch (in mm) | Capacitance |
|--|---------------------|--------------|------------------------------|----------------|
| Universal Type [Power Lines / Signal Lines] | NFE31ZT p118 | | 1206 (3216) | 22pF to 2200pF |
| | NFE61HT p119 | | 2706 (6816) | 33pF to 3300pF |

Inductor Type

| | Series | Applications | Size Code in inch (in mm) | Impedance at 1MHz |
|---------------|----------------------|--------------|------------------------------|-------------------|
| For LED Lines | NFZ32BW* p123 | | 1210 (3225) | 3.3Ω to 880Ω |
| | NFZ5BBW* p129 | | 2020 (5050) | 2.9Ω to 140Ω |

* The derating of rated current is required for some items according to the operating temperature on each product page.

Inductor Type

| | Series | Applications | Size Code in inch (in mm) | Impedance at 100MHz |
|-----------------|----------------------|--------------|------------------------------|---------------------|
| For Audio Lines | NFZ18SM* p121 | | 0603 (1608) | 120Ω to 700Ω |

* The derating of rated current is required for some items according to the operating temperature on each product page.

DL □

Common Mode Choke Coils

| | Series | Applications | Size Code in inch (in mm) | Common Mode Impedance at 100MHz |
|---|-----------------------------|--------------|------------------------------|------------------------------------|
| Signal Lines Type For Differential Signal Lines | DLM11S p143 | | 0504 (1210) | 45Ω to 90Ω |
| | DLW21S p144 | | 0805 (2012) | 67Ω to 490Ω |
| | DLW31S p146 | | 1206 (3216) | 2200Ω |
| Universal Type [Power Lines / Signal Lines] | DLW5BS p154 | | 2020 (5050) | 500Ω to 800Ω |
| | DLW5AT*/DLW5BT* p151 | | 2014 (5036)/2020 (5050) | 45Ω to 1400Ω |
| Power Lines Type | UCMH0907 p161 | | 3527 (9070) | 700Ω |

* The derating of rated current is required for some items according to the operating temperature on each product page.

Common Mode Choke Coils

| | Series | Applications | Size Code in inch (in mm) | Common Mode Inductance at 0.1MHz |
|------------------------|---------------------|--------------|------------------------------|-------------------------------------|
| For CAN/CAN FD/FlexRay | DLW32SH p147 | | 1210 (3225) | 11μH to 100μH |
| | DLW43MH p148 | | 1812 (4532) | 200μH |

Common Mode Choke Coils

| | Series | Applications | Size Code in inch (in mm) | Common Mode Inductance at 0.1MHz |
|--|--------------------|--------------|------------------------------|-------------------------------------|
| Signal Lines Type For Differential Signal Lines | DLW43S p149 | | 1812 (4532) | 11μH to 100μH |

Common Mode Choke Coils

| | Series | Applications | Size Code in inch (in mm) | Common Mode Inductance at 1MHz |
|--|--------------------|--------------|------------------------------|-----------------------------------|
| Signal Lines Type For Differential Signal Lines | DLW43S p149 | | 1812 (4532) | 51μH to 100μH |

PL□

Large Current Common Mode
 Choke Coil for Automotive Available

| | Series | Applications | Size Code in inch (in mm) | Common Mode Impedance at 10MHz |
|------------------|---------------------|--------------|------------------------------|-----------------------------------|
| Power Lines Type | PLT10H* p159 | | - | 45Ω to 1000Ω |
| | PLT5BP* p157 | | 2020 (5050) | 100Ω to 500Ω |

* The derating of rated current is required for some items according to the operating temperature on each product page.

BNX

Block EMIFIL®

| | | Series | Applications | Height (mm) | Rated Voltage (Vdc) | Rated Current (A) |
|---------------------|-----------|------------------------|--------------|----------------|------------------------|----------------------|
| Power Lines Type | SMD Type | BNX024H01* p176 | | 3.5 | 50 | 20 |
| | | BNX025H01* p176 | | 3.5 | 25 | 20 |
| | | BNX026H01* p176 | | 3.5 | 50 | 20 |
| | | BNX027H01* p176 | | 3.5 | 16 | 20 |
| | Lead Type | BNX012H01* p191 | | 8.5 max. | 50 | 15 |

* The derating of rated current is required for some items according to the operating temperature on each product page.

BLL

Leaded Multilayer Ferrite Beads

| | Series | Applications | Height (mm) | Impedance at 100MHz |
|-------------------|---------------------|--------------|----------------|---------------------|
| Signal Lines Type | BLL18AG p185 | | 4.0 max. | 120Ω to 1000Ω |

DS□

3-Terminal Capacitor Lead Type

| | Series | Applications | Height (mm) | Capacitance |
|---|------------------|--------------|----------------|---------------|
| Universal Type [Power Lines / Signal Lines] | DSS1 p187 | | 7.5 max. | 22pF to 100nF |

VF□

Lead Type Capacitor
 with Varistor Function

| | Series | Applications | Height (mm) | Capacitance | Varistor Voltage |
|------------------|------------------|--------------|----------------|-------------|------------------|
| Power Lines Type | VFC2 p190 | | 6.0 max. | 1.0μF | 27V |

● Part Numbering

Chip Ferrite Bead for Automotive

(Part Number)

| | | | | | | | | |
|----|---|----|----|-----|---|---|---|---|
| BL | M | 18 | AG | 102 | S | Z | 1 | D |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ |

① Product ID

| Product ID | |
|------------|--------------------|
| BL | Chip Ferrite Beads |

② Type

| Code | Type |
|------|---------------------------------------|
| E | DC Bias Characteristics Improved Type |
| M | Ferrite Bead Single Type |

③ Dimensions (LxW)

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| 03 | 0.6x0.3mm | 0201 |
| 15 | 1.0x0.5mm | 0402 |
| 18 | 1.6x0.8mm | 0603 |
| 21 | 2.0x1.25mm | 0805 |
| 31 | 3.2x1.6mm | 1206 |
| 32 | 3.2x2.5mm | 1210 |
| 41 | 4.5x1.6mm | 1806 |

④ Characteristics/Applications

| Code *1 | Characteristics/Applications | Series | |
|---------|---|--|-------------|
| AG | For General Use | BLM03/15/18/21 | |
| AJ | | BLM31 | |
| AX | | BLM03/15 | |
| BA | For High-speed Signal Lines | BLM15/18 | |
| BB | | BLM03/15/18/21 | |
| BC | | BLM03/15 | |
| BD | | BLM03/15/18/21 | |
| BX | | BLM15 | |
| KG | | BLM18 | |
| KN | | BLM31 | |
| PD | For Power Lines | BLM15 | |
| PG | | BLM03/15/18/21/31/41 | |
| PN | | BLE32 | |
| PS | | BLE18 | |
| PX | | BLM03/15 | |
| SG | | BLM18 | |
| SN | | BLM18/21/31 | |
| HG | | For GHz Band General Use | BLM03/15/18 |
| EB | | For GHz Band High-speed Signal Lines (Low Direct Current Type) | BLM03 |
| EG | | For GHz Band General Use (Low DC Resistance Type) | BLM15/18 |
| HB | For GHz Band High-speed Signal Lines | BLM03/15/18 | |
| HD | | BLM03/15/18 | |
| HE | | BLM18 | |
| GA | For High-GHz Band High-speed Signal Lines | BLM15 | |
| GG | For High-GHz Band General Use | BLM15/18 | |

*1 Frequency characteristics vary with each code.

⑤ Impedance

Expressed by three figures. The unit is in ohm (Ω) at 100MHz. The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑥ Electrode

Expressed by a letter.

Ex.)

| Code | Electrode |
|-----------|------------|
| S/F/T/B/J | Sn Plating |
| A | Au Plating |
| W | Ag/Pd |

⑦ Category

| Code | Category | |
|------|----------------|--------------------|
| Z | For Automotive | Infotainment |
| H | | Powertrain, Safety |

⑧ Number of Circuits

| Code | Number of Circuits |
|------|--------------------|
| 1 | 1 Circuit |

Continued on the following page. ↗

Continued from the preceding page. ↘

⑨Packaging

| Code | Packaging | Series |
|----------|-------------------------------|--|
| K | Embossed Taping (ø330mm Reel) | BLE32, BLM21^{*1}/31A/31K/31P/41 |
| L | Embossed Taping (ø180mm Reel) | BLE32, BLM21^{*1}/31/41 |
| B | Bulk | All Series |
| J | Paper Taping (ø330mm Reel) | BLE18, BLM03/15/18^{*2}/21^{*3} |
| D | Paper Taping (ø180mm Reel) | BLE18, BLM03/15/18/21^{*3} |

*1 BLM21BD222S□1/BLM21BD272S□1 only.

*2 Except for BLM18KG_JH1/_BH1/BLM18BD_BH1/BLM18AG_BH1

*3 Except for BLM21BD222S□1/BLM21BD272S□1

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM03PX Series 0201/0603(inch/mm)

Appearance/Dimensions

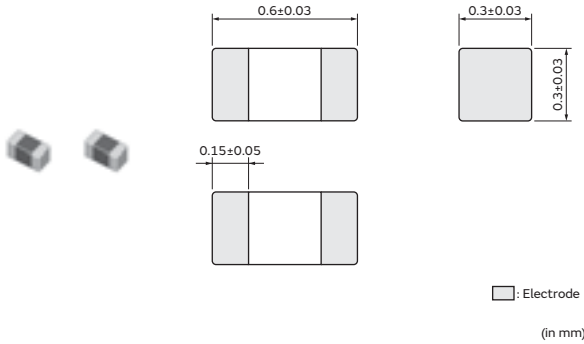

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit







(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM03PX220SZ1□ | — | 22Ω±25% | 1.8A | 1.45A | 0.04Ω |
| BLM03PX330SZ1□ | — | 33Ω±25% | 1.5A | 1.2A | 0.055Ω |
| BLM03PX800SZ1□ | — | 80Ω±25% | 1A | 800mA | 0.13Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM03PX_SZ1 series

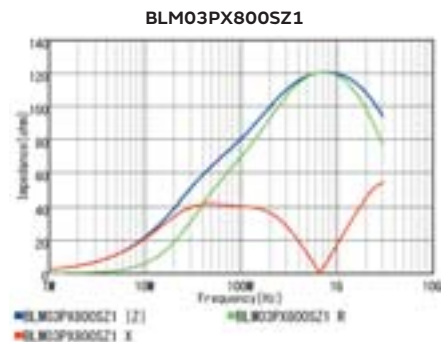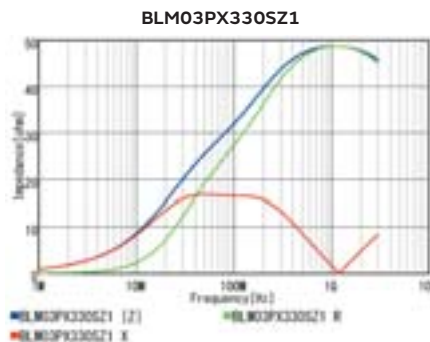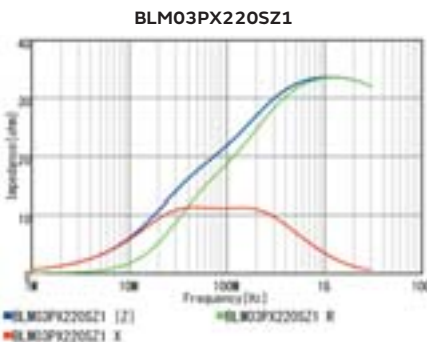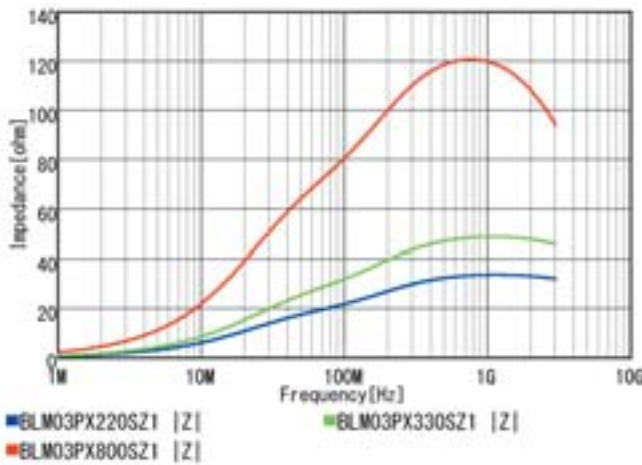


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM03PX_S□1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

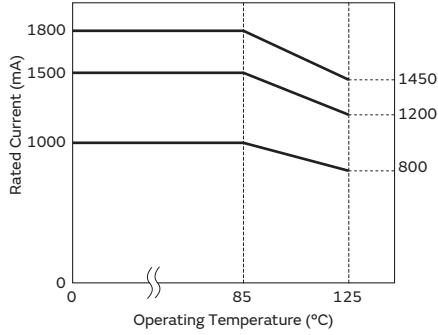

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM03PG Series 0201/0603(inch/mm)

Appearance/Dimensions

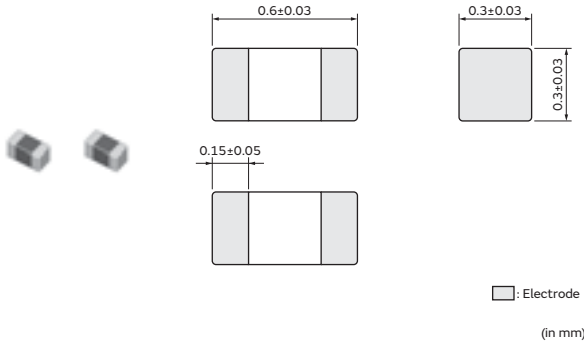

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit






(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM03PG220SZ1□ | — | 22Ω±25% | 900mA | 900mA | 0.065Ω |
| BLM03PG330SZ1□ | — | 33Ω±25% | 750mA | 750mA | 0.09Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM03PG_SZ1 series

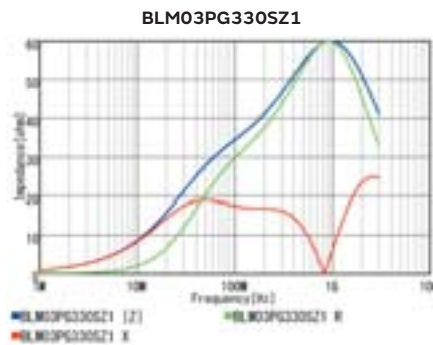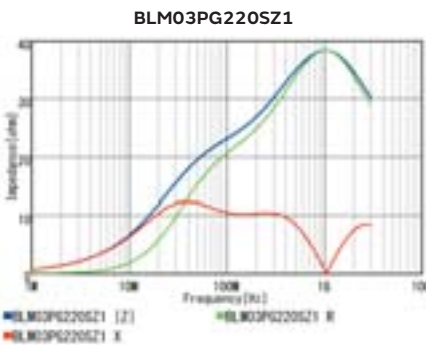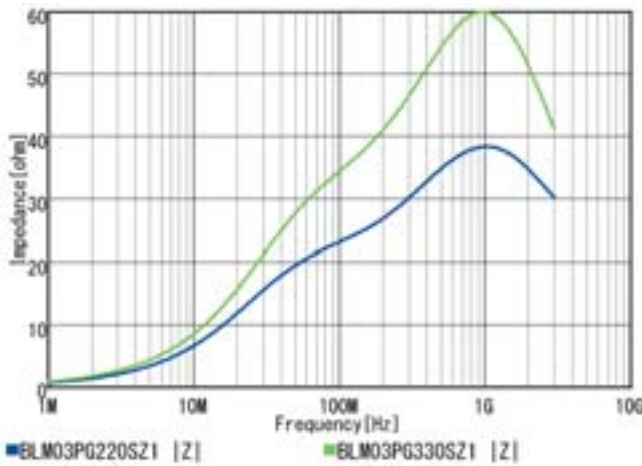

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM03AX Series 0201/0603(inch/mm)


Appearance/Dimensions

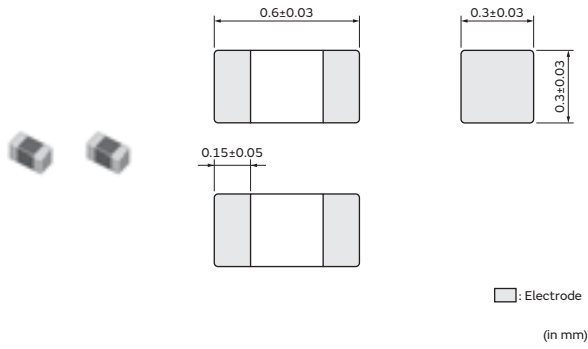

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit

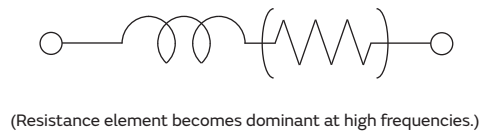


Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM03AX100SZ1□ | — | 10Ω(Typ.) | 1A | 1A | 0.05Ω |
| BLM03AX800SZ1□ | — | 80Ω±25% | 500mA | 500mA | 0.18Ω |
| BLM03AX121SZ1□ | — | 120Ω±25% | 450mA | 450mA | 0.23Ω |
| BLM03AX241SZ1□ | — | 240Ω±25% | 350mA | 350mA | 0.38Ω |
| BLM03AX601SZ1□ | — | 600Ω±25% | 250mA | 250mA | 0.85Ω |
| BLM03AX102SZ1□ | — | 1000Ω±25% | 200mA | 200mA | 1.25Ω |

Operating Temp. Range: -55°C to 125°C


Z-f characteristics: BLM03AX_SZ1 series

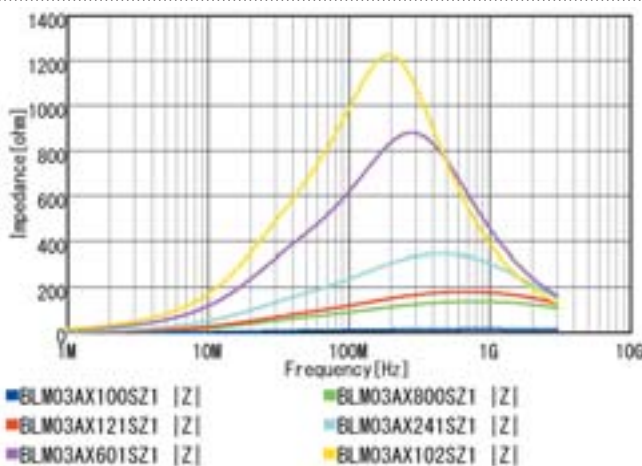

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

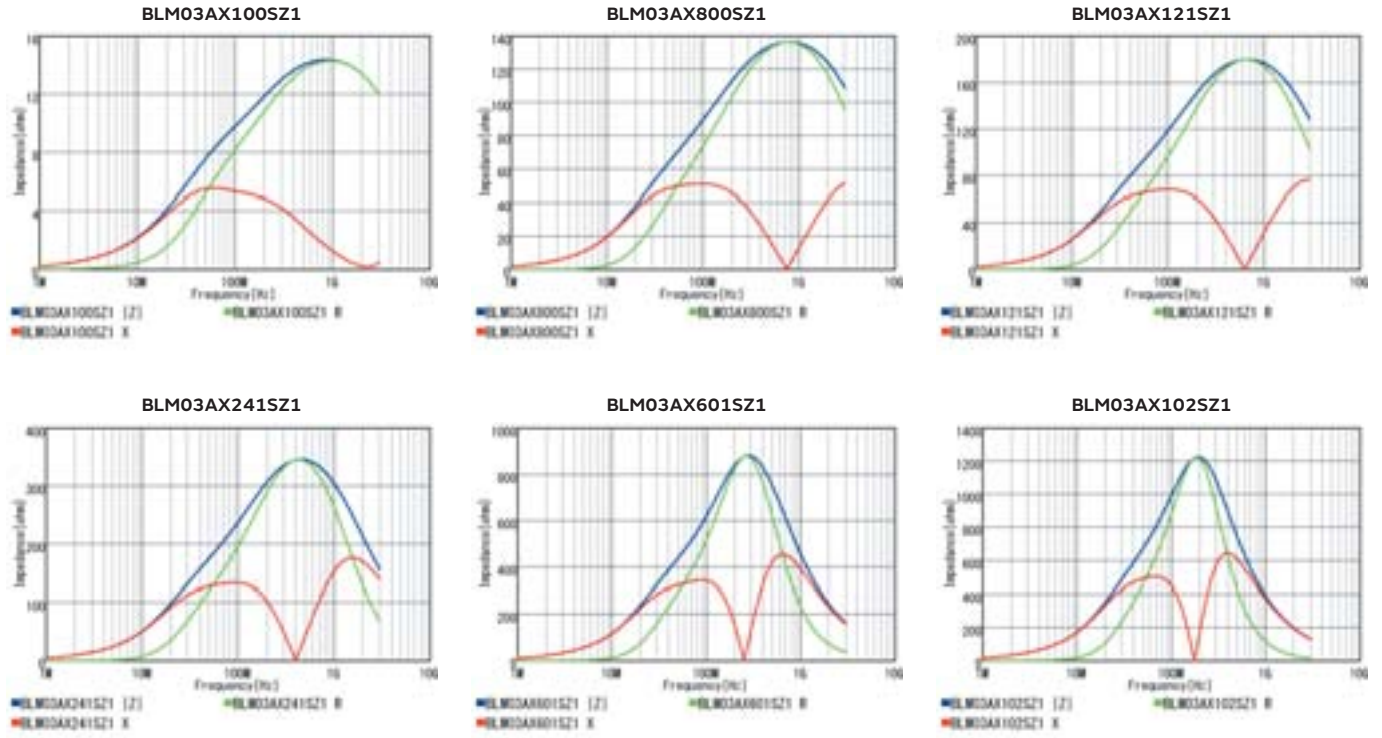

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI FIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM03AG Series 0201/0603(inch/mm)


Appearance/Dimensions

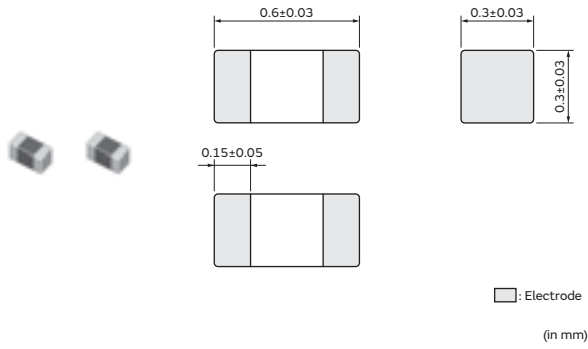

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit

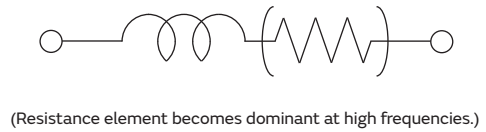


Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM03AG100SZ1□ | — | 10Ω(Typ.) | 500mA | 500mA | 0.1Ω |
| BLM03AG700SZ1□ | — | 70Ω(Typ.) | 200mA | 200mA | 0.4Ω |
| BLM03AG800SZ1□ | — | 80Ω±25% | 200mA | 200mA | 0.4Ω |
| BLM03AG121SZ1□ | — | 120Ω±25% | 200mA | 200mA | 0.5Ω |
| BLM03AG241SZ1□ | — | 240Ω±25% | 200mA | 200mA | 0.8Ω |
| BLM03AG601SZ1□ | — | 600Ω±25% | 100mA | 100mA | 1.5Ω |
| BLM03AG102SZ1□ | — | 1000Ω±25% | 100mA | 100mA | 2.5Ω |

Operating Temp. Range: -55°C to 125°C








Z-f characteristics: BLM03AG_SZ1 series

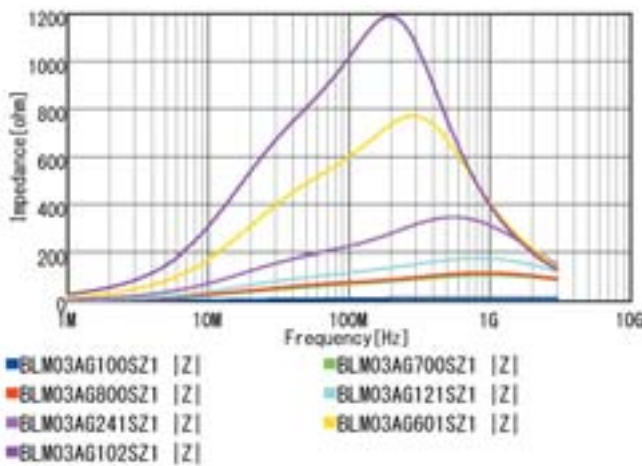

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

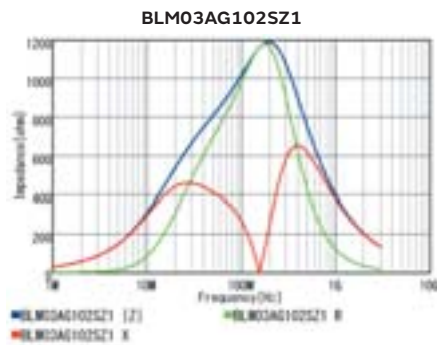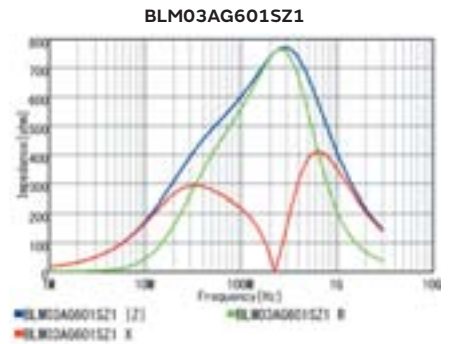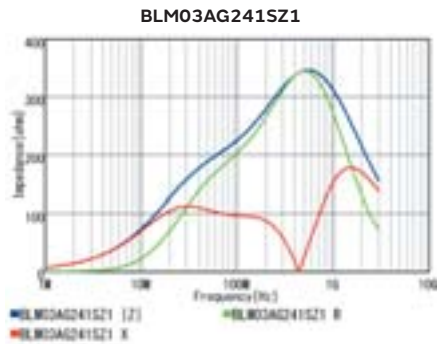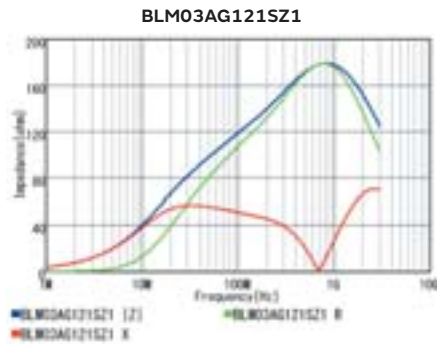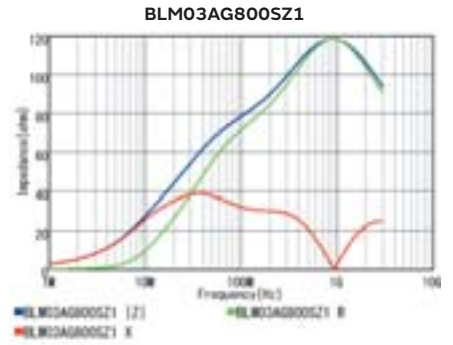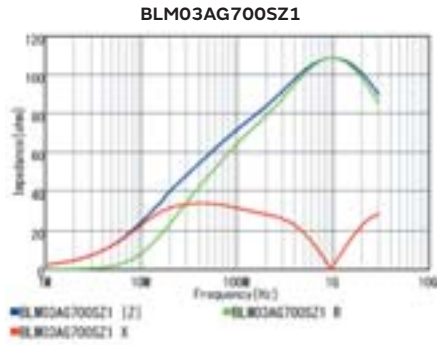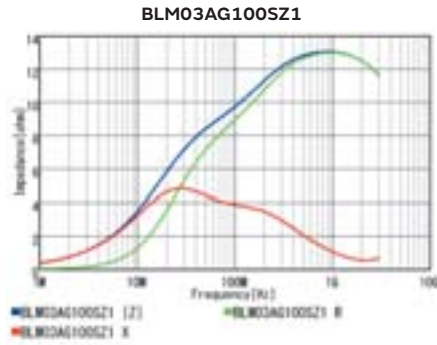

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM03BB/BC/BD Series 0201/0603(inch/mm)

Appearance/Dimensions

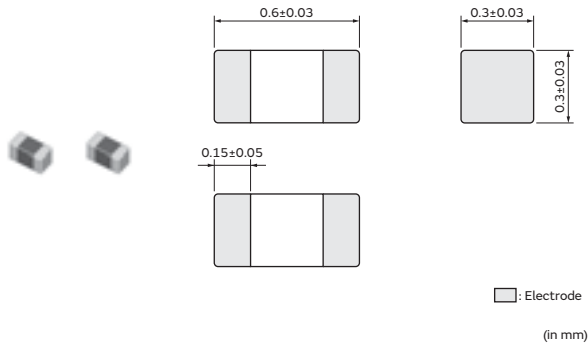

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM03BB100SZ1□ | — | 10Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM03BB220SZ1□ | — | 22Ω±25% | 200mA | 200mA | 0.5Ω |
| BLM03BB470SZ1□ | — | 47Ω±25% | 200mA | 200mA | 0.7Ω |
| BLM03BB750SZ1□ | — | 75Ω±25% | 200mA | 200mA | 1Ω |
| BLM03BB121SZ1□ | — | 120Ω±25% | 100mA | 100mA | 1.5Ω |
| BLM03BC330SZ1□ | — | 33Ω±25% | 150mA | 150mA | 0.85Ω |
| BLM03BC560SZ1□ | — | 56Ω±25% | 100mA | 100mA | 1.05Ω |
| BLM03BC800SZ1□ | — | 80Ω±25% | 100mA | 100mA | 1.4Ω |
| BLM03BD750SZ1□ | — | 75Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM03BD121SZ1□ | — | 120Ω±25% | 250mA | 250mA | 0.5Ω |
| BLM03BD241SZ1□ | — | 240Ω±25% | 200mA | 200mA | 0.8Ω |
| BLM03BD471SZ1□ | — | 470Ω±25% | 215mA | 215mA | 1.5Ω |
| BLM03BD601SZ1□ | — | 600Ω±25% | 200mA | 200mA | 1.7Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM03BB_SZ1 series

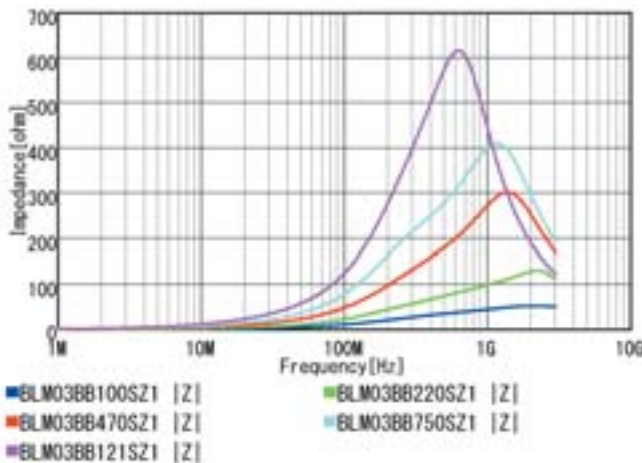











Z-f characteristics: BLM03BC_SZ1 series

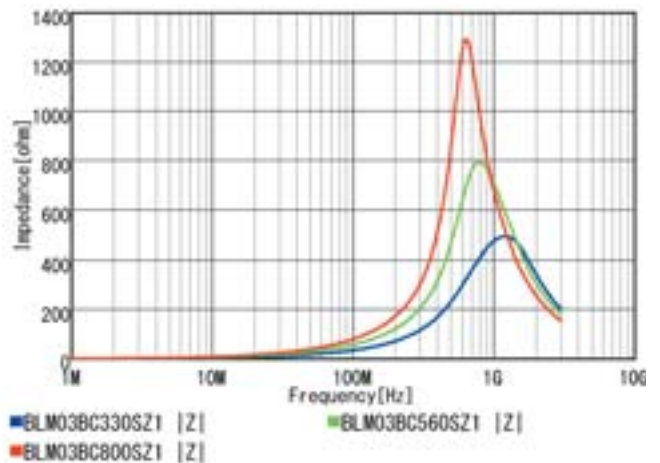

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics: BLM03BD_SZ1 series

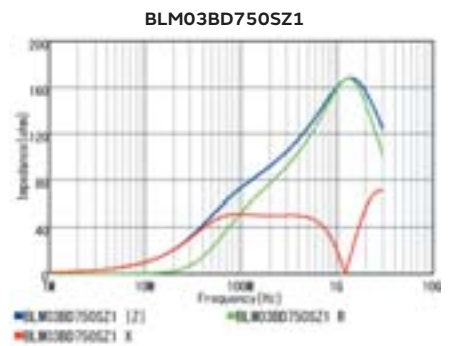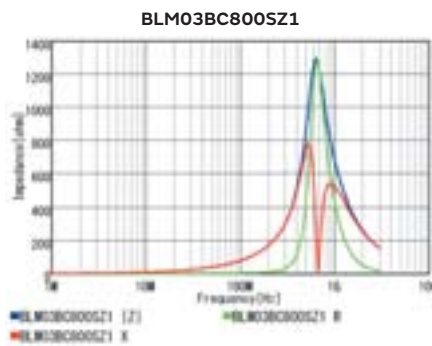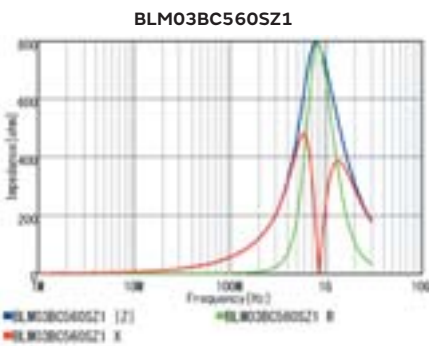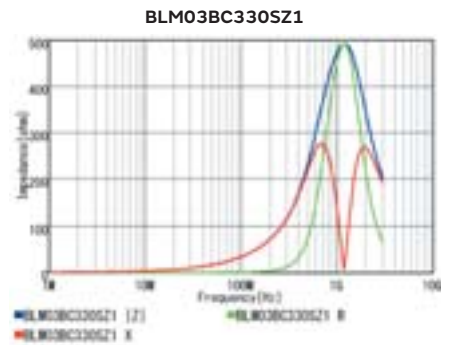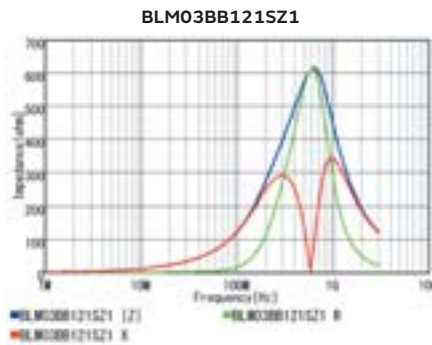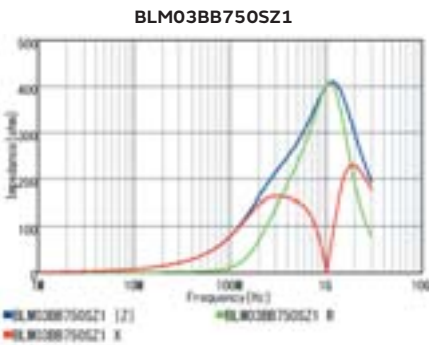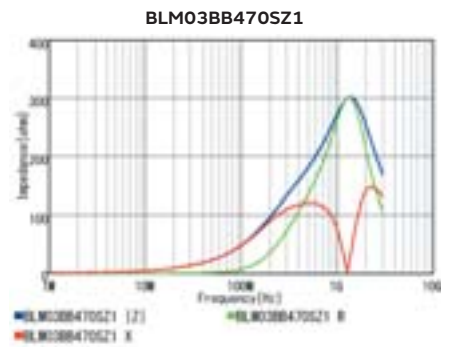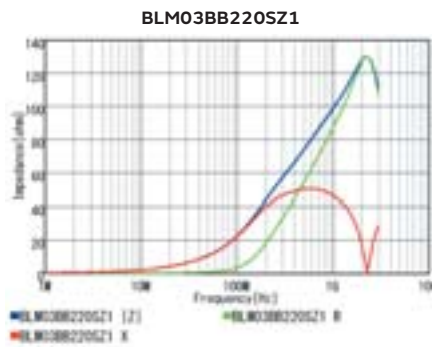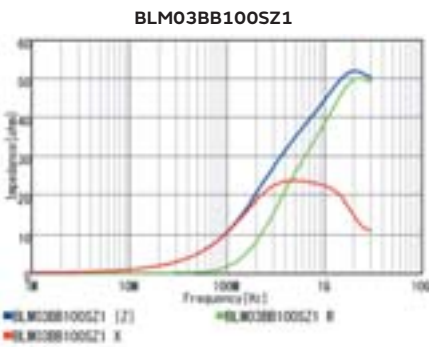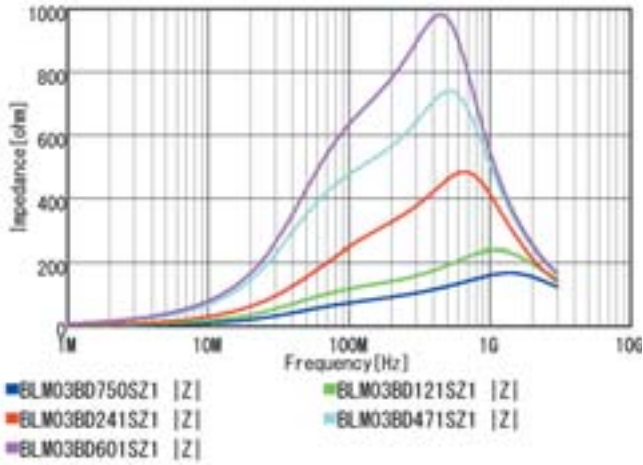

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)


Continued from the preceding page. ↘

Z-f characteristics


BLM03BD121SZ1

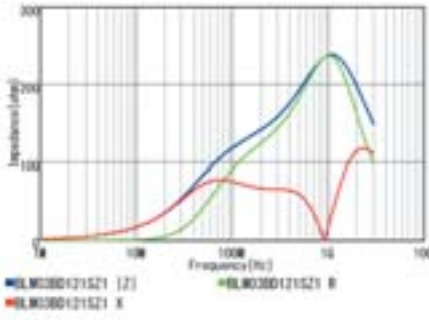


BLM03BD241SZ1

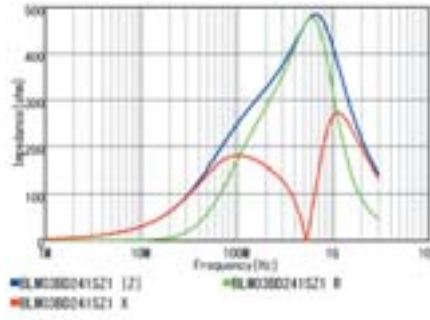

BLM03BD471SZ1

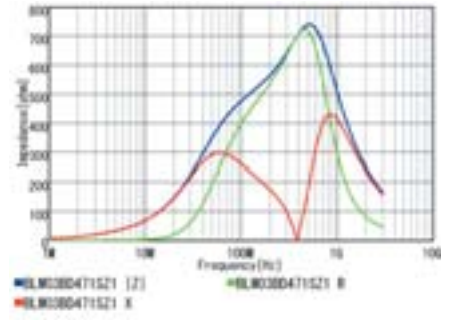

BLM03BD601SZ1

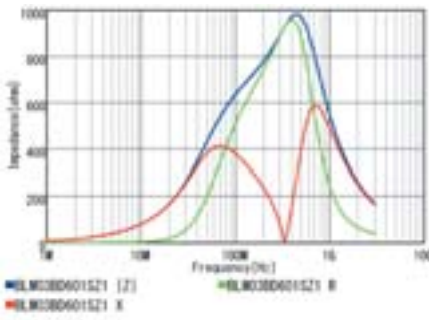

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM03HB/HD/HG Series 0201/0603(inch/mm)

Appearance/Dimensions

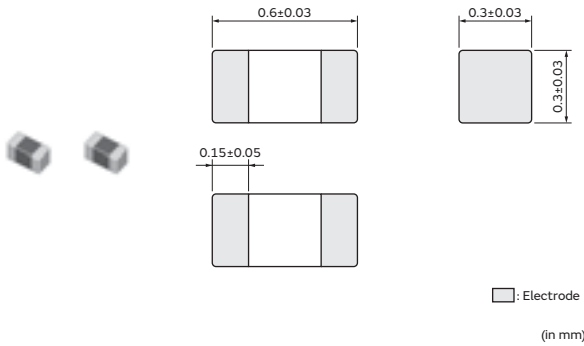

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM03HB191SZ1□ | — | 190Ω±25% | 1150Ω±40% | 150mA | 150mA | 2Ω |
| BLM03HB401SZ1□ | — | 400Ω±25% | 1850Ω±40% | 125mA | 125mA | 2.8Ω |
| BLM03HD331SZ1□ | — | 330Ω±25% | 750Ω±40% | 200mA | 200mA | 1Ω |
| BLM03HD471SZ1□ | — | 470Ω±25% | 1000Ω±40% | 175mA | 175mA | 1.3Ω |
| BLM03HD601SZ1□ | — | 600Ω±25% | 1500Ω±40% | 150mA | 150mA | 1.7Ω |
| BLM03HD102FZ1□ | — | 1000Ω±25% | 2300Ω±40% | 135mA | 135mA | 2.4Ω |
| BLM03HD102SZ1□ | — | 1000Ω±25% | 2300Ω±40% | 120mA | 120mA | 2.9Ω |
| BLM03HD152FZ1□ | — | 1500Ω±25% | 2700Ω±40% | 120mA | 120mA | 3.1Ω |
| BLM03HD182FZ1□ | — | 1800Ω±25% | 3000Ω±40% | 100mA | 100mA | 3.8Ω |
| BLM03HG601SZ1□ | BLM03HG601SH1□ | 600Ω±25% | 1000Ω±40% | 150mA | 150mA | 1.6Ω |
| BLM03HG102SZ1□ | BLM03HG102SH1□ | 1000Ω±25% | 1800Ω±40% | 125mA | 125mA | 2.6Ω |
| BLM03HG122SZ1□ | BLM03HG122SH1□ | 1200Ω±25% | 2000Ω±40% | 100mA | 100mA | 3.5Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM03HB_SZ1 series

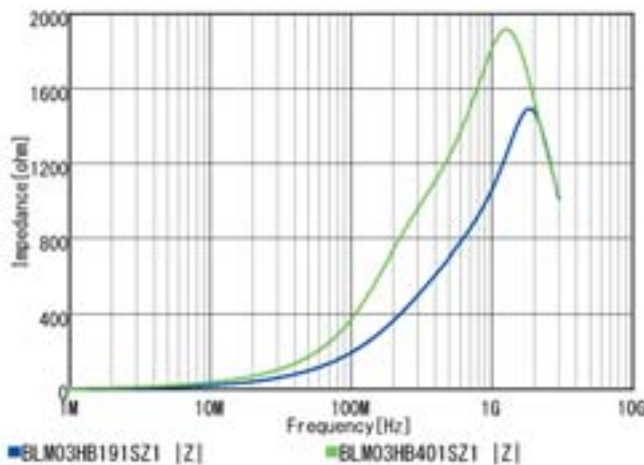


Z-f characteristics: BLM03HD_SZ1 series

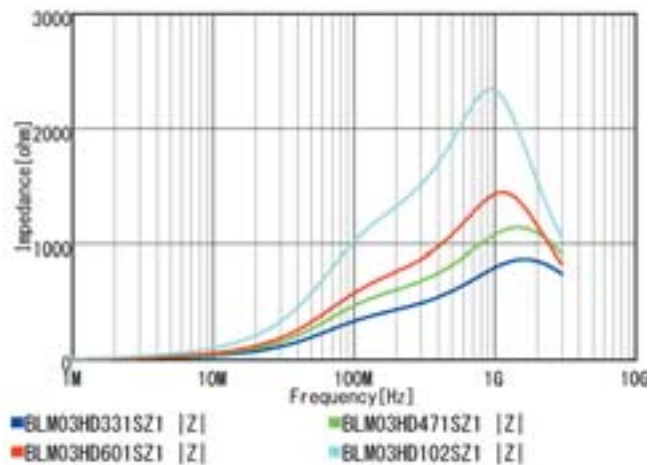


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLM03HD_FZ1 series

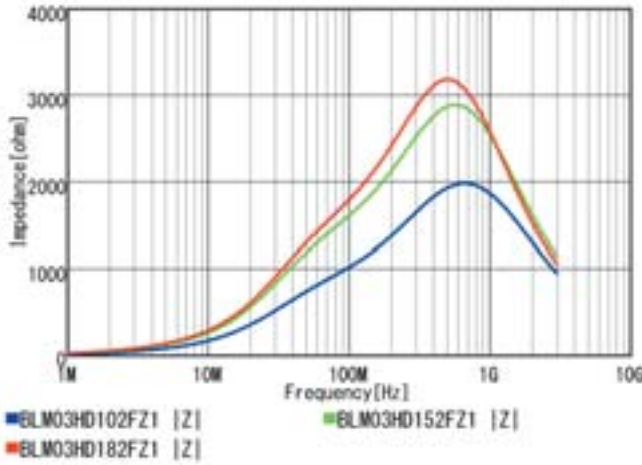


Z-f characteristics: BLM03HG_SZ1 series

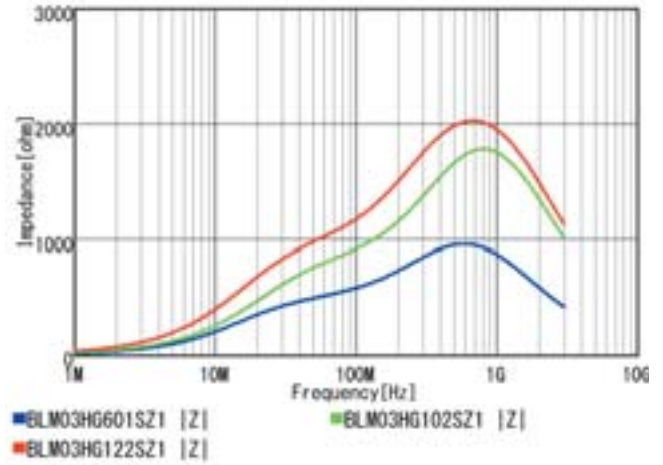


Z-f characteristics: BLM03HG_SH1 series

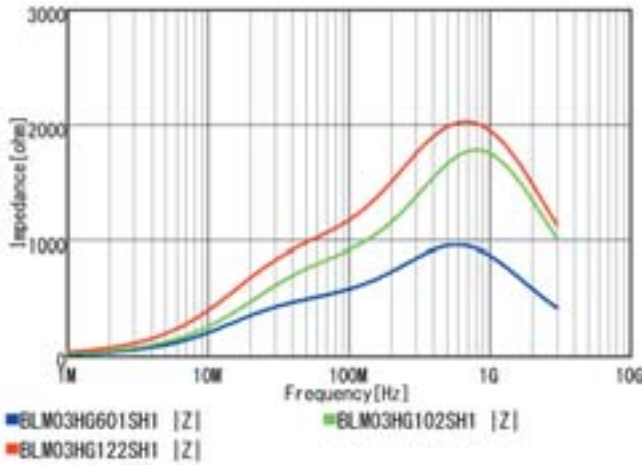


BLM03HB191SZ1

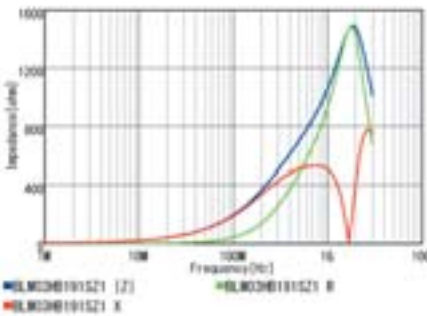


BLM03HB401SZ1

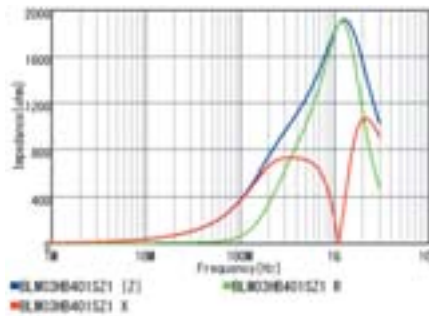


BLM03HD331SZ1

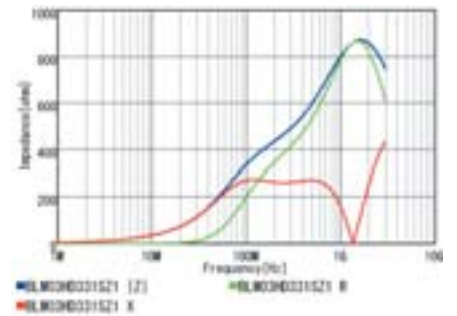


BLM03HD471SZ1

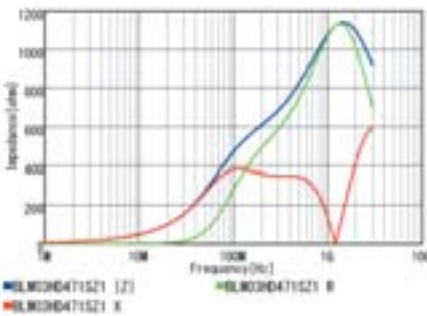

BLM03HD601SZ1

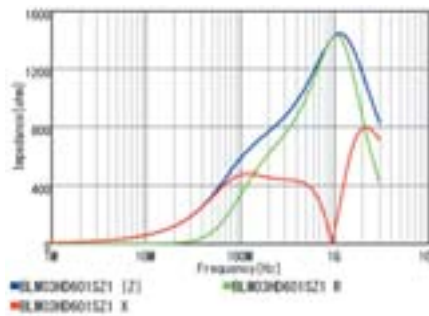

BLM03HD102FZ1






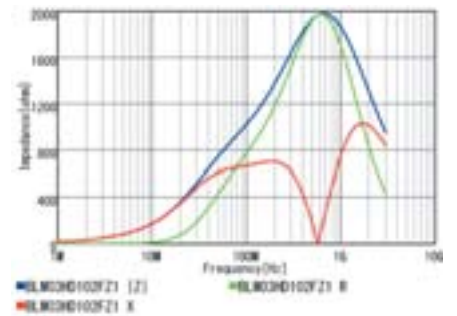


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics

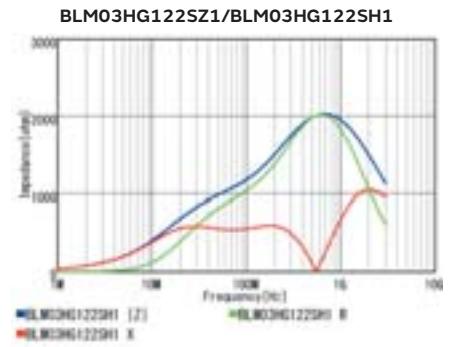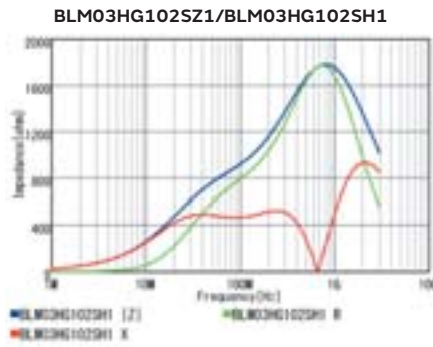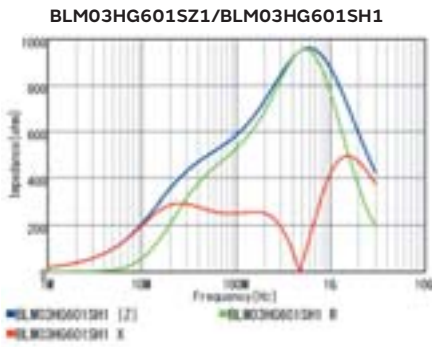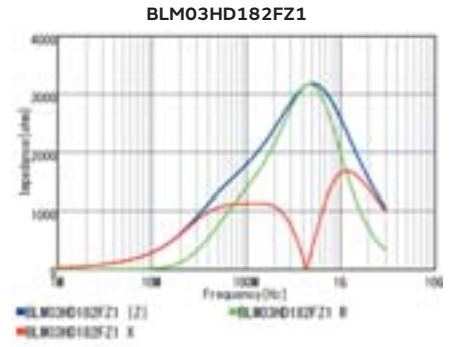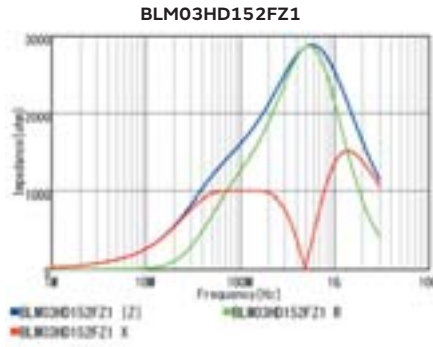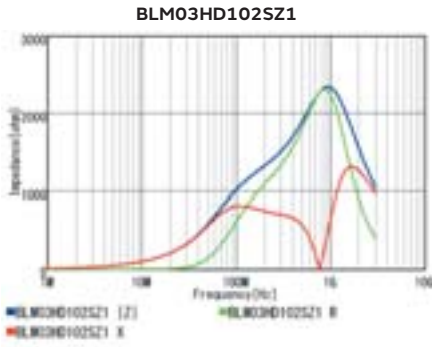

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM03EB Series 0201/0603(inch/mm)

Appearance/Dimensions

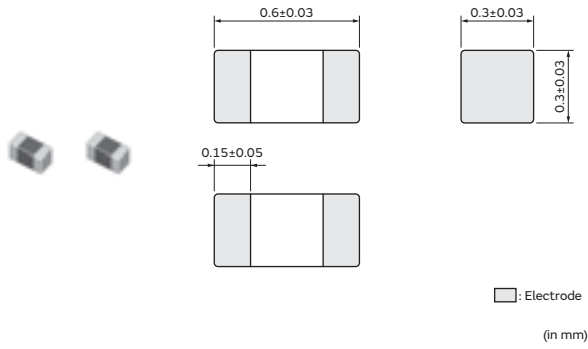

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 15000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit






(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM03EB250SZ1□ | — | 25Ω±25% | 105Ω±40% | 600mA | 450mA | 0.26Ω |
| BLM03EB500SZ1□ | — | 50Ω±25% | 255Ω±40% | 400mA | 300mA | 0.58Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM03EB_SZ1 series

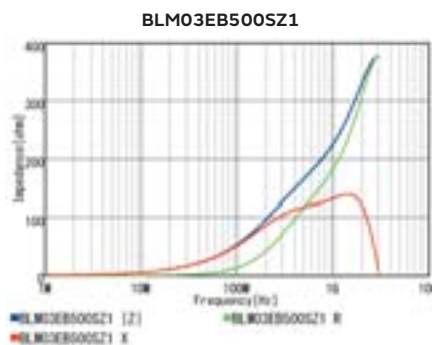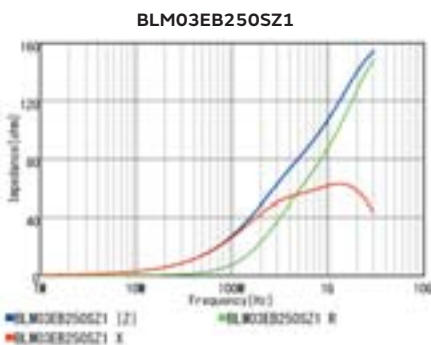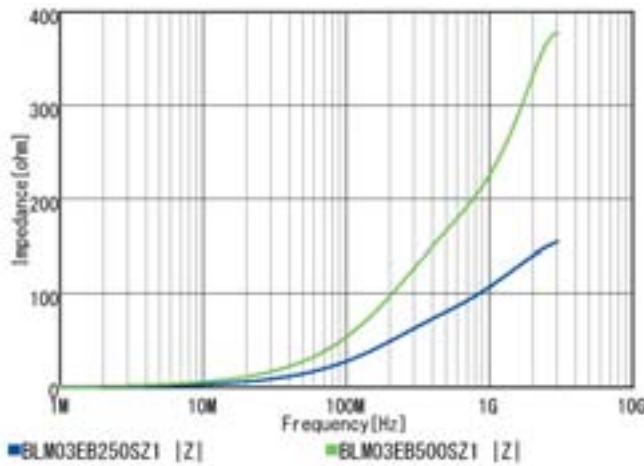


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM03E series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

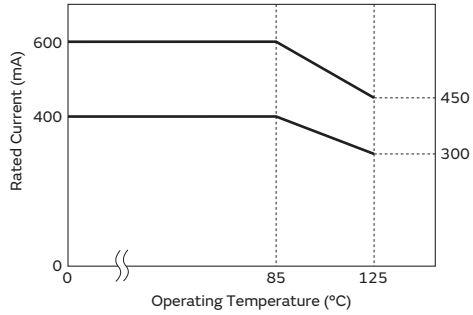

Chip Ferrite Bead SMD Type

BLM15PX Series 0402/1005(inch/mm)

Appearance/Dimensions

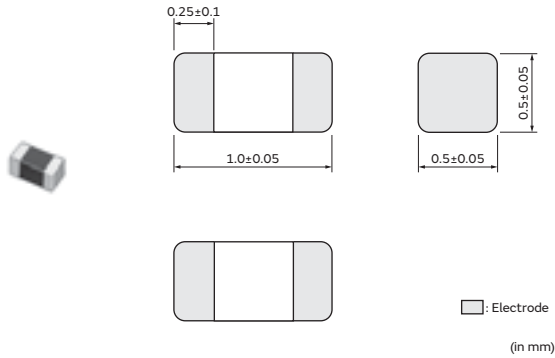

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM15PX330SZ1□ | — | 33Ω±25% | 3A | 1.7A | 0.022Ω |
| BLM15PX600SZ1□ | — | 60Ω±25% | 2.5A | 1.4A | 0.032Ω |
| BLM15PX800SZ1□ | — | 80Ω±25% | 2.3A | 1.3A | 0.038Ω |
| BLM15PX121SZ1□ | — | 120Ω±25% | 2A | 1.1A | 0.055Ω |
| BLM15PX181SZ1□ | — | 180Ω±25% | 1.5A | 800mA | 0.09Ω |
| BLM15PX221SZ1□ | — | 220Ω±25% | 1.4A | 800mA | 0.1Ω |
| BLM15PX331SZ1□ | — | 330Ω±25% | 1.2A | 700mA | 0.15Ω |
| BLM15PX471SZ1□ | — | 470Ω±25% | 1A | 600mA | 0.2Ω |
| BLM15PX601SZ1□ | — | 600Ω±25% | 900mA | 500mA | 0.23Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM15PX_SZ1 series

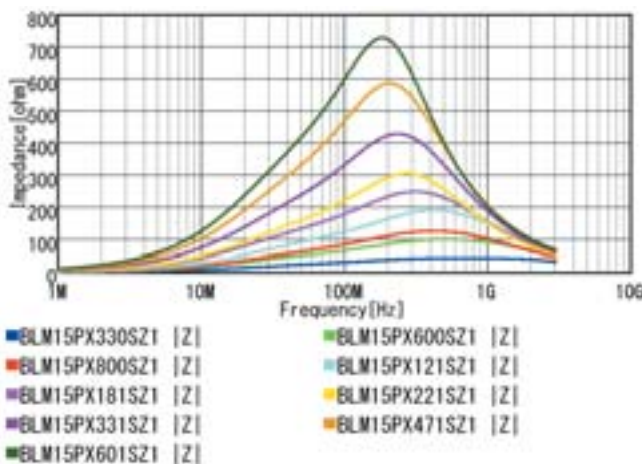


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip EMIFIL® SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘


Z-f characteristics

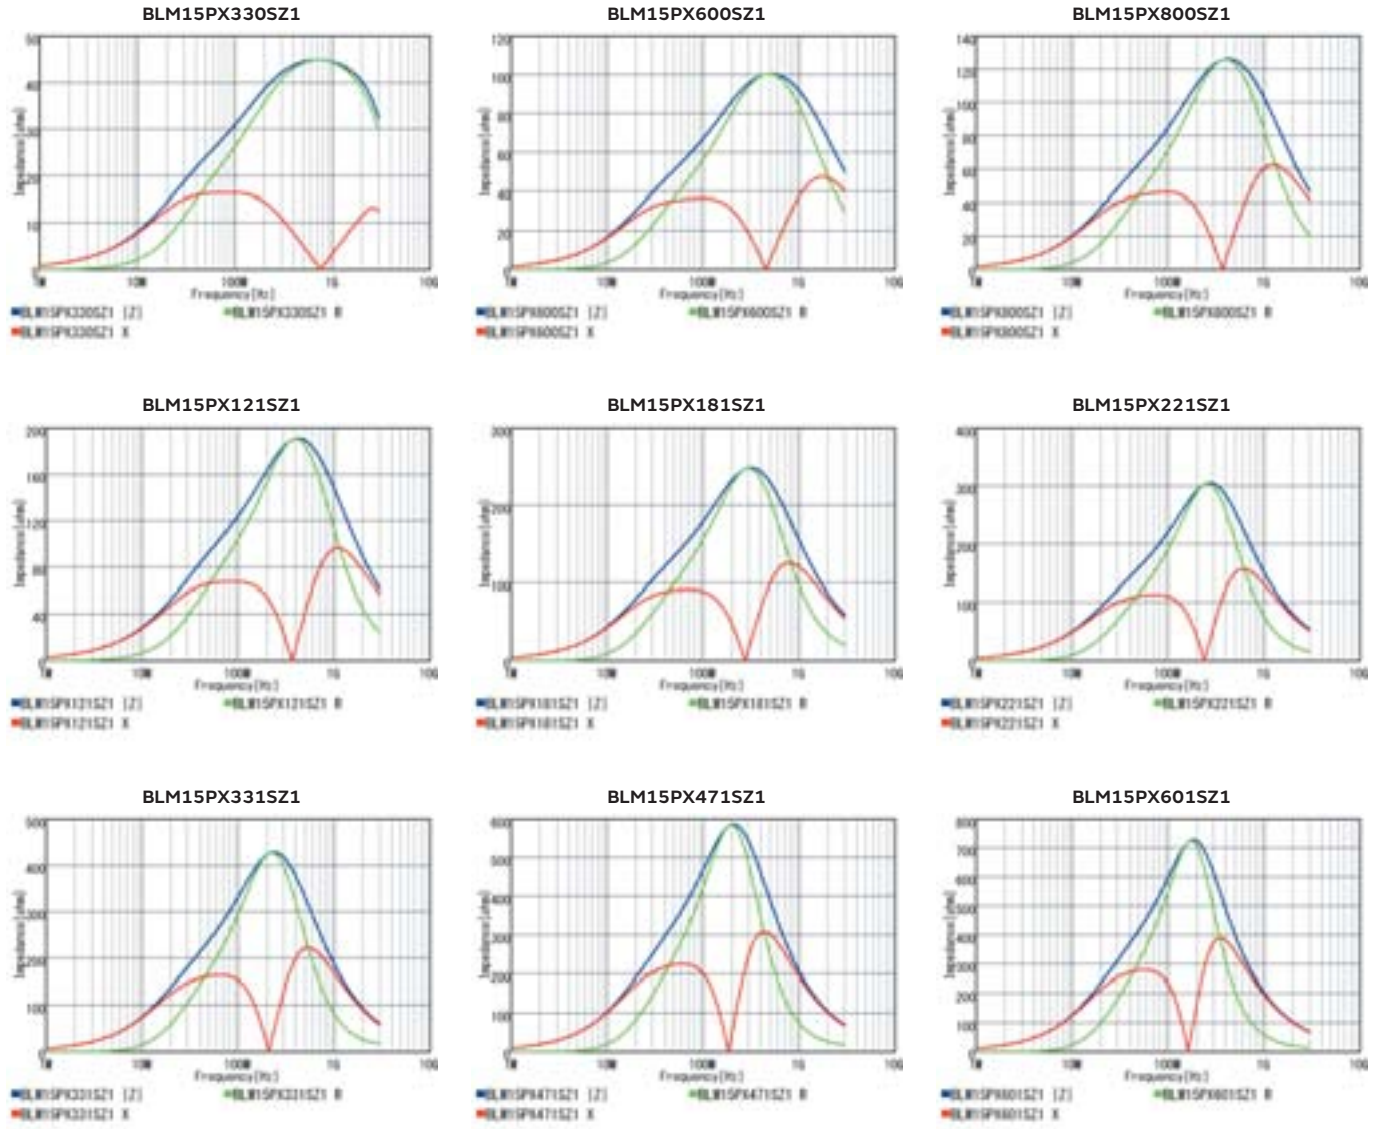

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM15PX series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

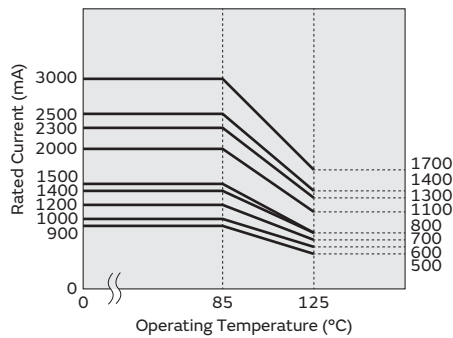

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM15PG/PD Series 0402/1005(inch/mm)


Appearance/Dimensions

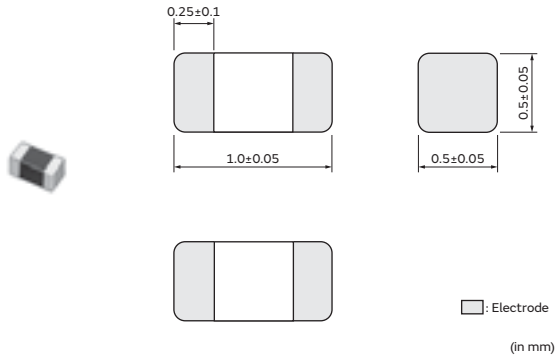

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM15PG100SZ1□ | — | 10Ω(Typ.) | 1A | 1A | 0.025Ω |
| BLM15PD300SZ1□ | — | 30Ω±25% | 2.2A | 1.4A | 0.035Ω |
| BLM15PD600SZ1□ | — | 60Ω±25% | 1.7A | 1.1A | 0.06Ω |
| BLM15PD800SZ1□ | — | 80Ω±25% | 1.5A | 1A | 0.07Ω |
| BLM15PD121SZ1□ | — | 120Ω±25% | 1.3A | 900mA | 0.09Ω |

Operating Temp. Range: -55°C to 125°C


Z-f characteristics: BLM15PG/PD_SZ1 series

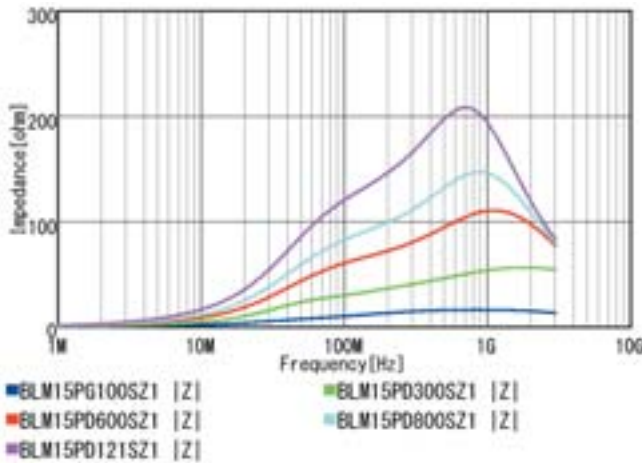

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

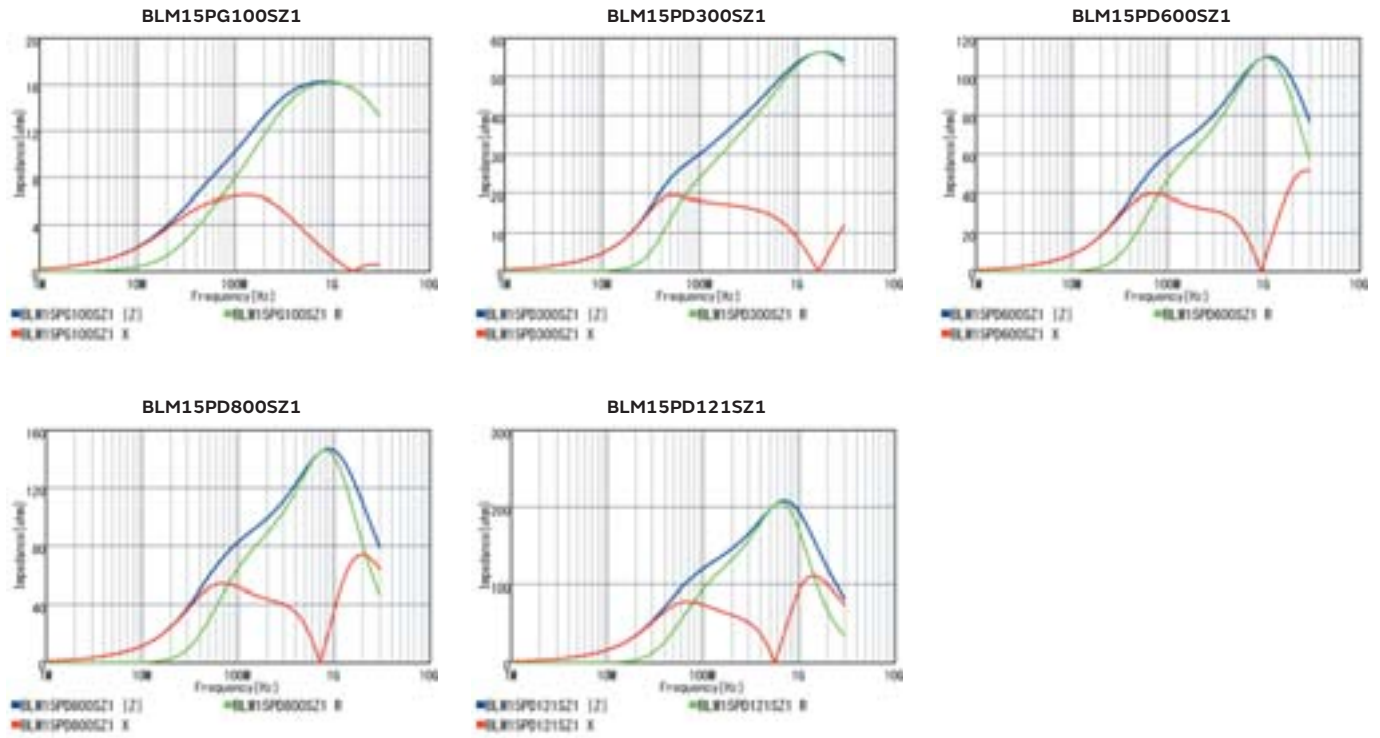

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM15PD series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

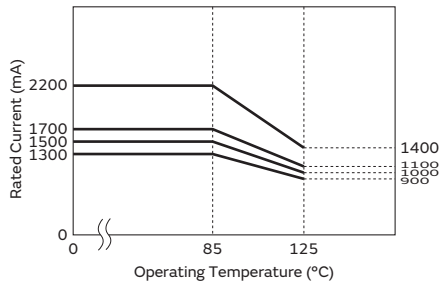

Chip Ferrite Bead SMD Type

BLM15AX Series 0402/1005(inch/mm)


Appearance/Dimensions

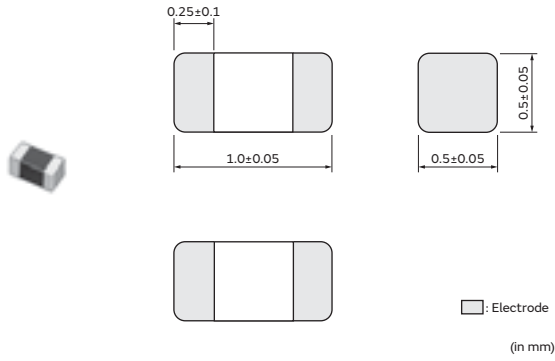

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM15AX100SZ1□ | — | 10Ω±5Ω | 1.74A | 1.74A | 0.015Ω |
| BLM15AX300SZ1□ | — | 30Ω±25% | 1.1A | 1.1A | 0.06Ω |
| BLM15AX700SZ1□ | — | 70Ω±25% | 780mA | 780mA | 0.1Ω |
| BLM15AX121SZ1□ | — | 120Ω±25% | 700mA | 700mA | 0.13Ω |
| BLM15AX221SZ1□ | — | 220Ω±25% | 600mA | 600mA | 0.18Ω |
| BLM15AX601SZ1□ | — | 600Ω±25% | 500mA | 500mA | 0.34Ω |
| BLM15AX102SZ1□ | — | 1000Ω±25% | 350mA | 350mA | 0.49Ω |

Operating Temp. Range: -55°C to 125°C


Z-f characteristics: BLM15AX_SZ1 series

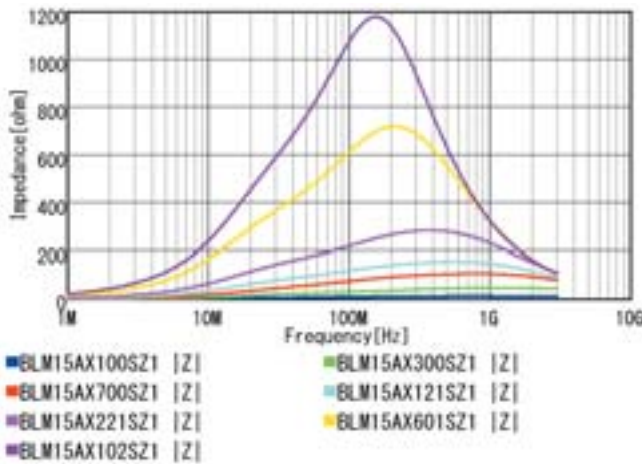

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

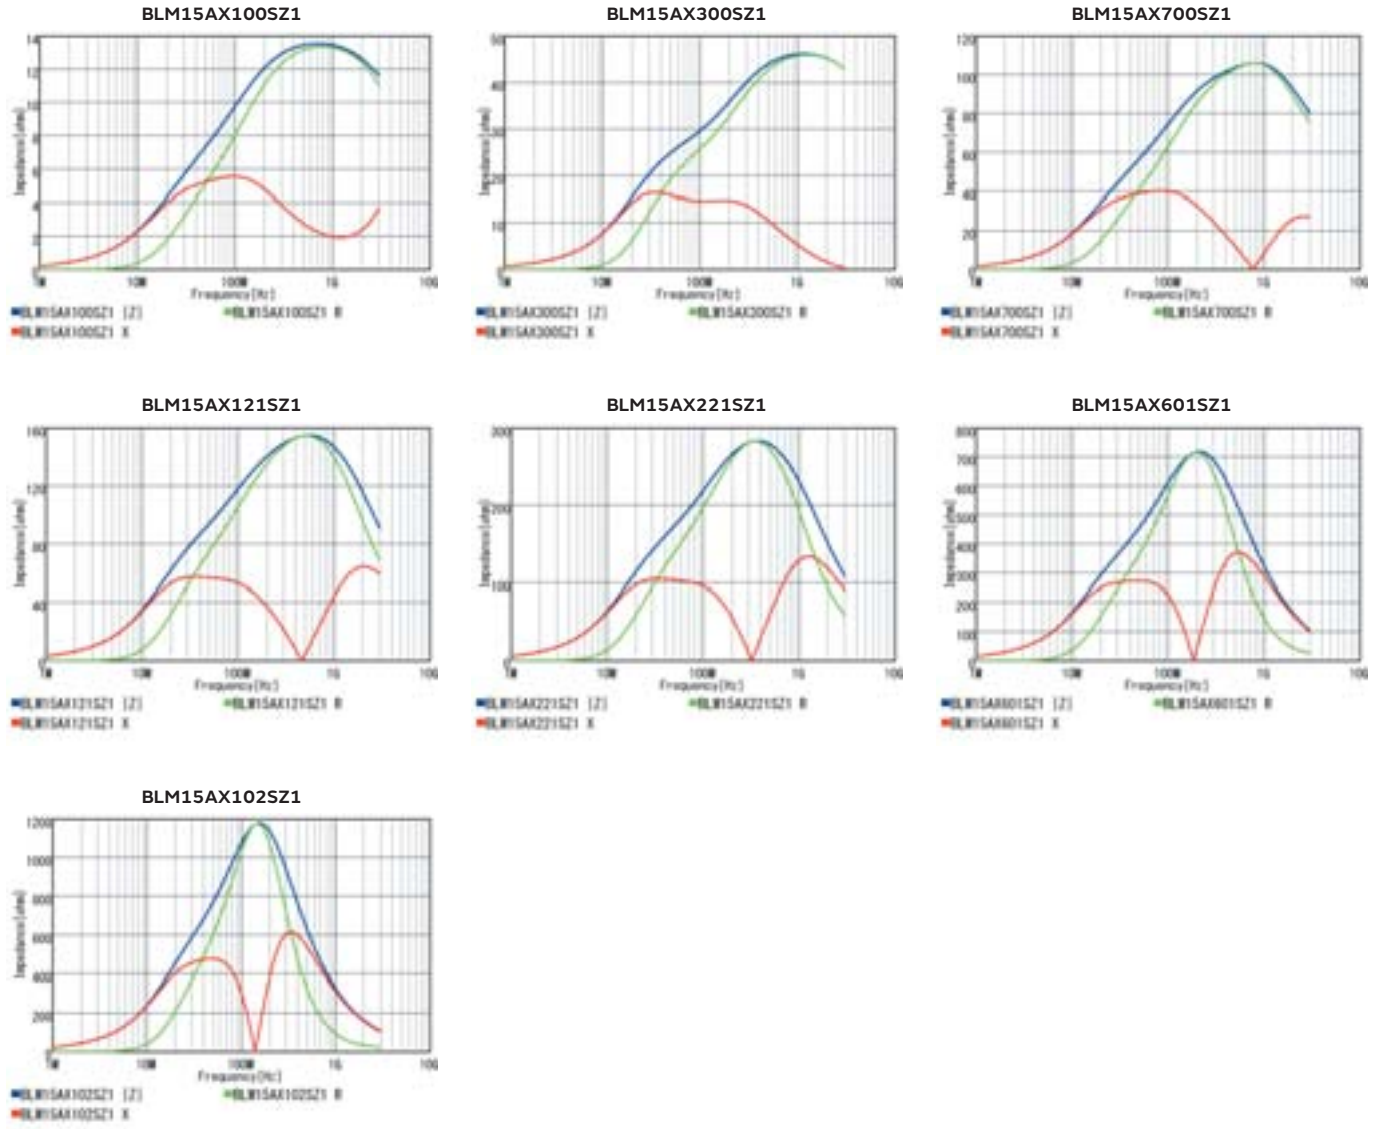

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM15AG Series 0402/1005(inch/mm)

Appearance/Dimensions

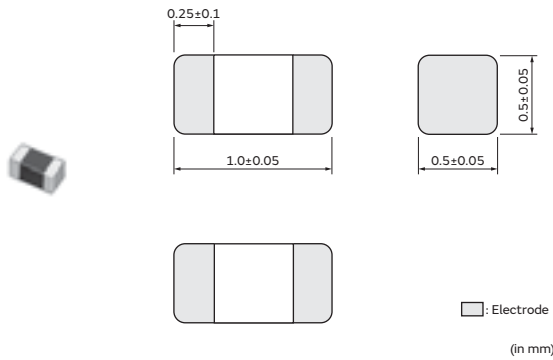

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM15AG100SZ1□ | BLM15AG100SH1□ | 10Ω(Typ.) | 1A | 1A | 0.025Ω/0.05Ω |
| BLM15AG700SZ1□ | BLM15AG700SH1□ | 70Ω(Typ.) | 600mA/500mA | 600mA/500mA | 0.15Ω |
| BLM15AG121SZ1□ | BLM15AG121SH1□ | 120Ω±25% | 550mA/500mA | 550mA/500mA | 0.19Ω/0.25Ω |
| BLM15AG221SZ1□ | BLM15AG221SH1□ | 220Ω±25% | 450mA/300mA | 450mA/300mA | 0.29Ω/0.35Ω |
| BLM15AG601SZ1□ | BLM15AG601SH1□ | 600Ω±25% | 300mA | 300mA | 0.52Ω/0.6Ω |
| BLM15AG102SZ1□ | BLM15AG102SH1□ | 1000Ω±25% | 300mA/200mA | 300mA/200mA | 0.65Ω/1Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM15AG_SZ1 series

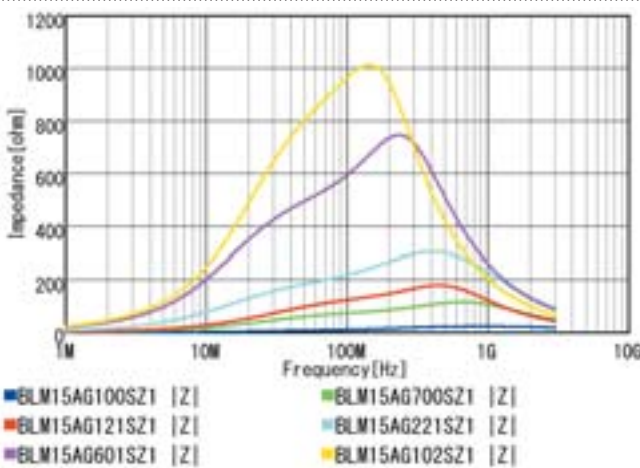


Z-f characteristics: BLM15AG_SH1 series

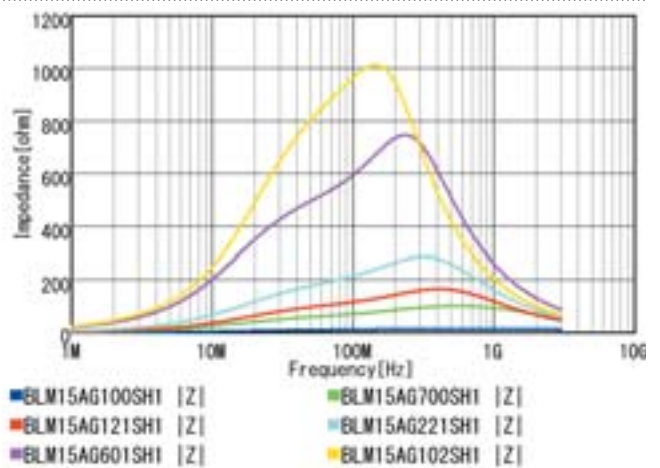

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

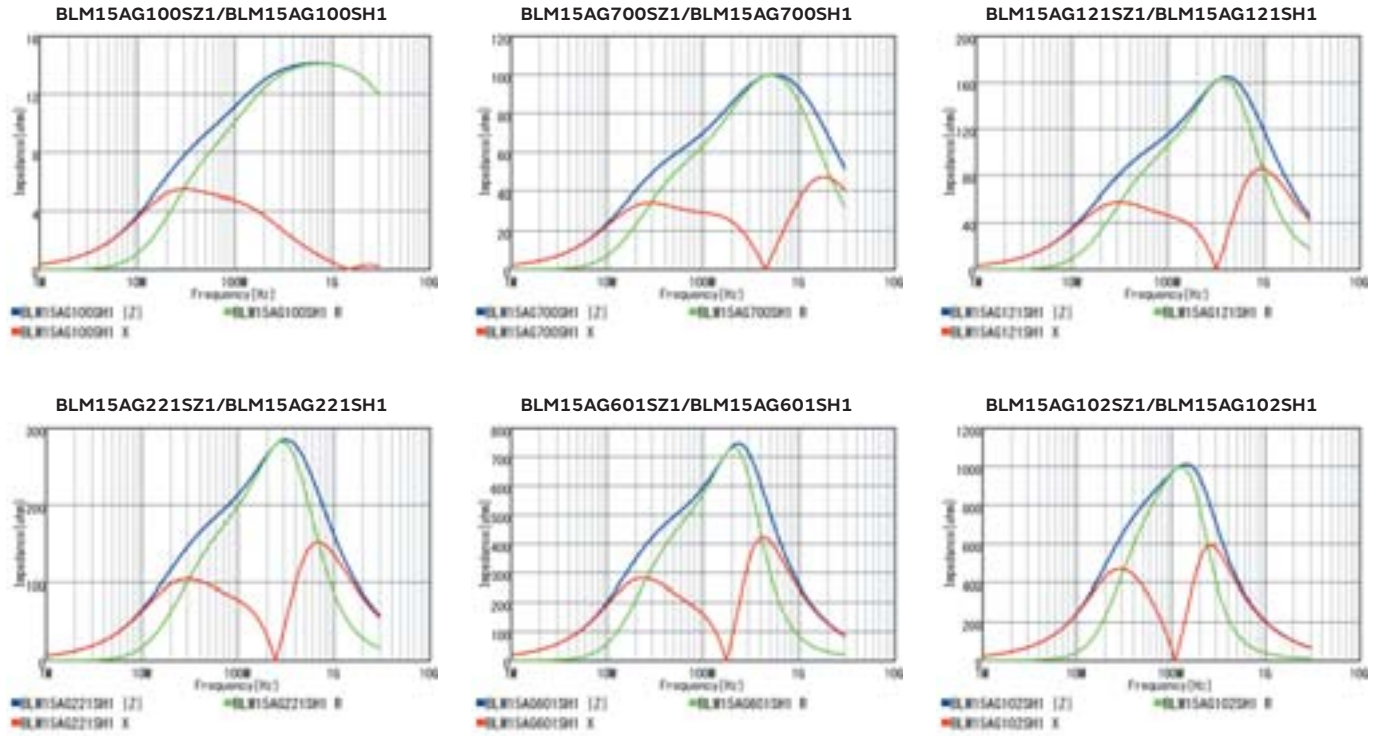

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM15BX Series 0402/1005(inch/mm)


Appearance/Dimensions

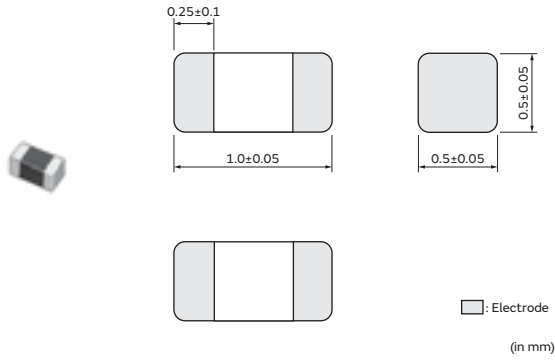

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM15BX750SZ1□ | — | 75Ω±25% | 600mA | 600mA | 0.15Ω |
| BLM15BX121SZ1□ | — | 120Ω±25% | 600mA | 600mA | 0.17Ω |
| BLM15BX221SZ1□ | — | 220Ω±25% | 450mA | 450mA | 0.27Ω |
| BLM15BX471SZ1□ | — | 470Ω±25% | 350mA | 350mA | 0.41Ω |
| BLM15BX601SZ1□ | — | 600Ω±25% | 350mA | 350mA | 0.46Ω |
| BLM15BX102SZ1□ | — | 1000Ω±25% | 300mA | 300mA | 0.65Ω |
| BLM15BX182SZ1□ | — | 1800Ω±25% | 250mA | 250mA | 0.9Ω |

Operating Temp. Range: -55°C to 125°C








Z-f characteristics: BLM15BX_SZ1 series

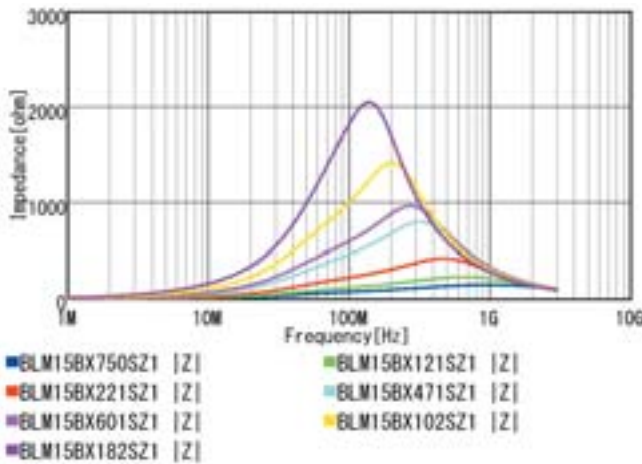

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

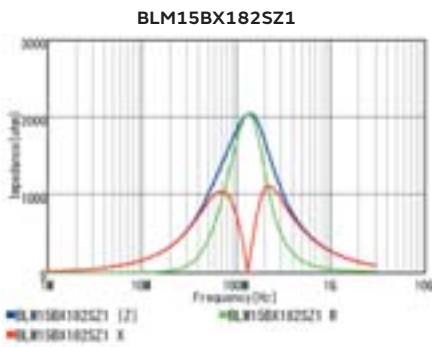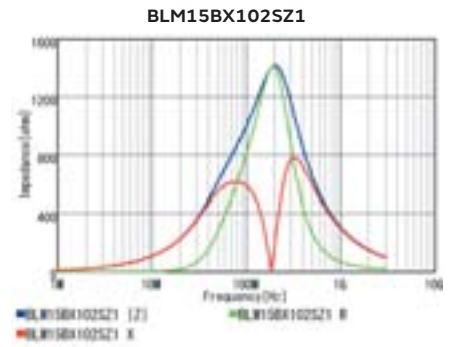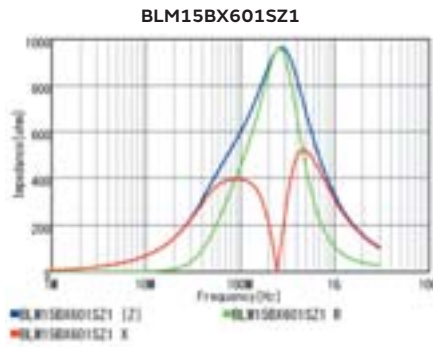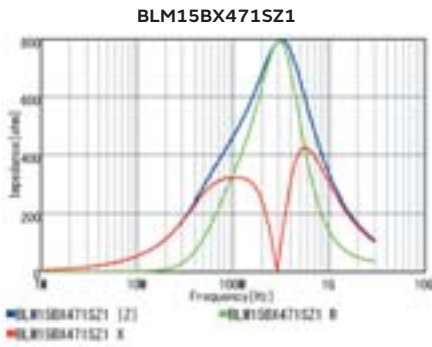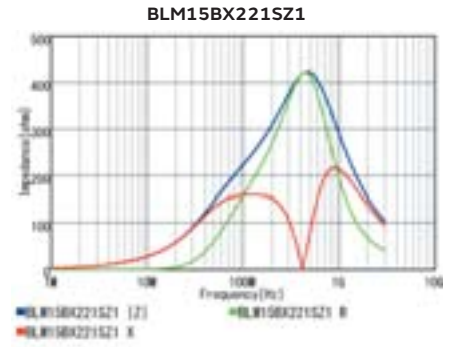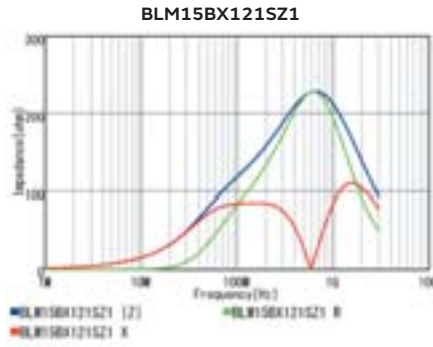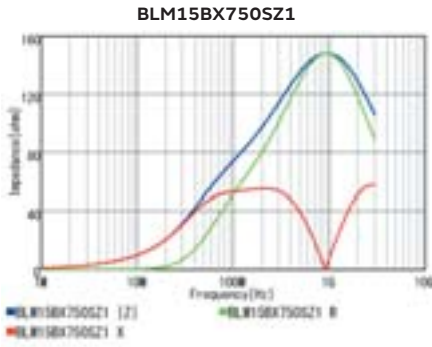

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM15BA/BB/BC/BD Series 0402/1005(inch/mm)

Appearance/Dimensions

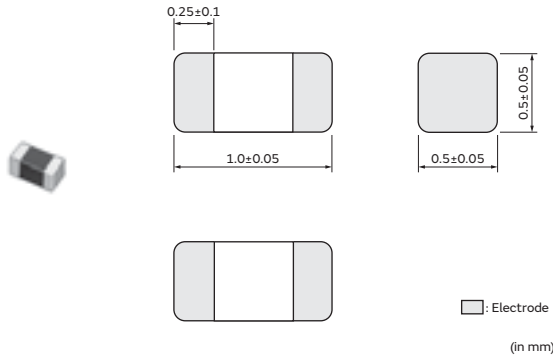

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit



(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM15BA050SZ1□ | — | 5Ω±25% | 300mA | 300mA | 0.1Ω |
| BLM15BA100SZ1□ | — | 10Ω±25% | 300mA | 300mA | 0.2Ω |
| BLM15BA220SZ1□ | — | 22Ω±25% | 300mA | 300mA | 0.3Ω |
| BLM15BA330SZ1□ | — | 33Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM15BA470SZ1□ | — | 47Ω±25% | 200mA | 200mA | 0.6Ω |
| BLM15BA750SZ1□ | — | 75Ω±25% | 200mA | 200mA | 0.8Ω |
| BLM15BB050SZ1□ | BLM15BB050SH1□ | 5Ω±25% | 500mA | 500mA | 0.08Ω |
| BLM15BB100SZ1□ | BLM15BB100SH1□ | 10Ω±25% | 300mA | 300mA | 0.1Ω |
| BLM15BB220SZ1□ | BLM15BB220SH1□ | 22Ω±25% | 300mA | 300mA | 0.2Ω |
| BLM15BB470SZ1□ | BLM15BB470SH1□ | 47Ω±25% | 300mA | 300mA | 0.35Ω |
| BLM15BB750SZ1□ | BLM15BB750SH1□ | 75Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM15BB121SZ1□ | BLM15BB121SH1□ | 120Ω±25% | 300mA | 300mA | 0.55Ω |
| BLM15BB221SZ1□ | BLM15BB221SH1□ | 220Ω±25% | 200mA | 200mA | 0.8Ω |
| BLM15BC121SZ1□ | — | 120Ω±25% | 350mA | 350mA | 0.45Ω |
| BLM15BC241SZ1□ | — | 240Ω±25% | 250mA | 250mA | 0.7Ω |
| BLM15BD750SZ1□ | — | 75Ω±25% | 300mA | 300mA | 0.2Ω |
| BLM15BD121SZ1□ | — | 120Ω±25% | 300mA | 300mA | 0.3Ω |
| BLM15BD221SZ1□ | — | 220Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM15BD471SZ1□ | BLM15BD471SH1□ | 470Ω±25% | 200mA | 200mA | 0.6Ω |
| BLM15BD601SZ1□ | BLM15BD601SH1□ | 600Ω±25% | 200mA | 200mA | 0.65Ω |
| BLM15BD102SZ1□ | BLM15BD102SH1□ | 1000Ω±25% | 200mA | 200mA | 0.9Ω |
| BLM15BD152SZ1□ | — | 1500Ω±25% | 190mA | 190mA | 1Ω |
| BLM15BD182SZ1□ | BLM15BD182SH1□ | 1800Ω±25% | 100mA/200mA | 100mA/200mA | 1.4Ω |

Operating Temp. Range: -55°C to 125°C


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLM15BA_SZ1 series

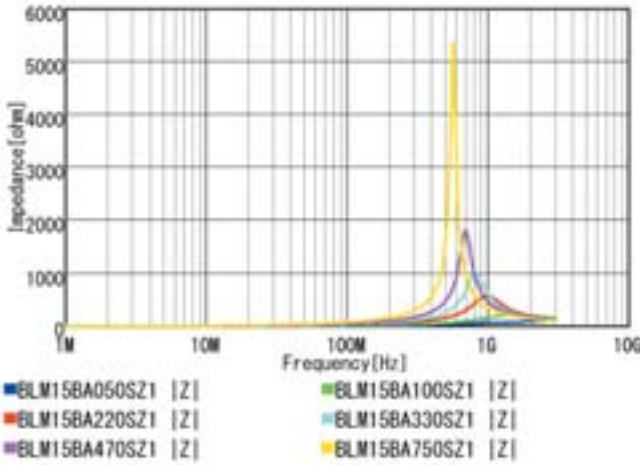


Z-f characteristics: BLM15BB_SZ1 series

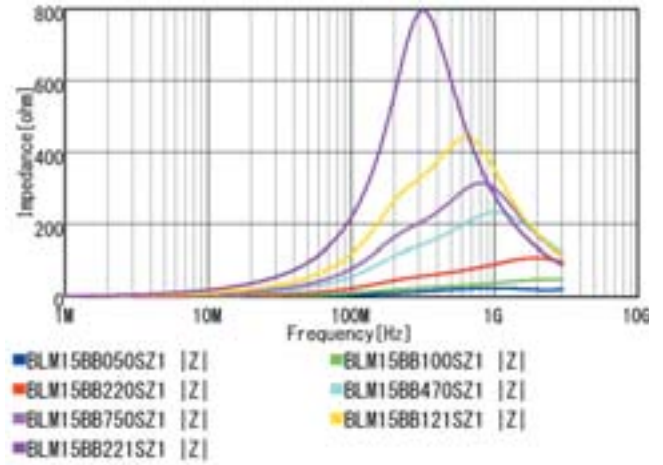


Z-f characteristics: BLM15BB_SH1 series

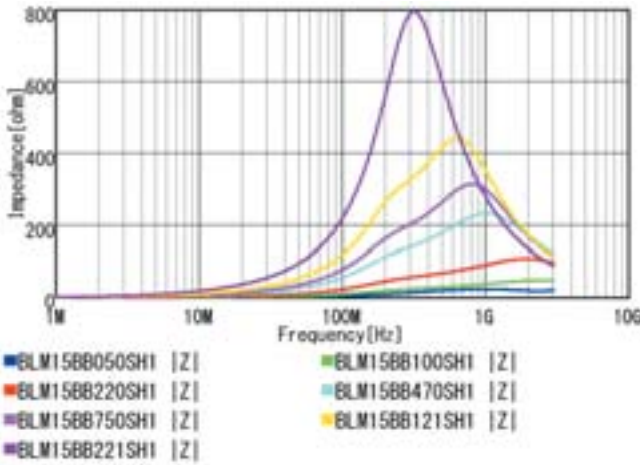


Z-f characteristics: BLM15BC_SZ1 series

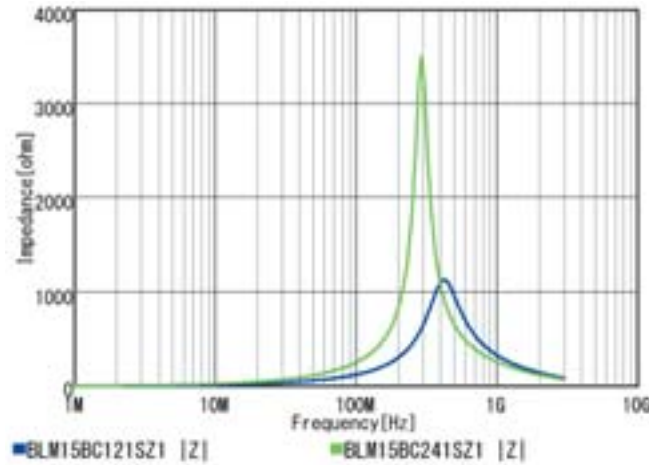

Z-f characteristics: BLM15BD_SZ1 series

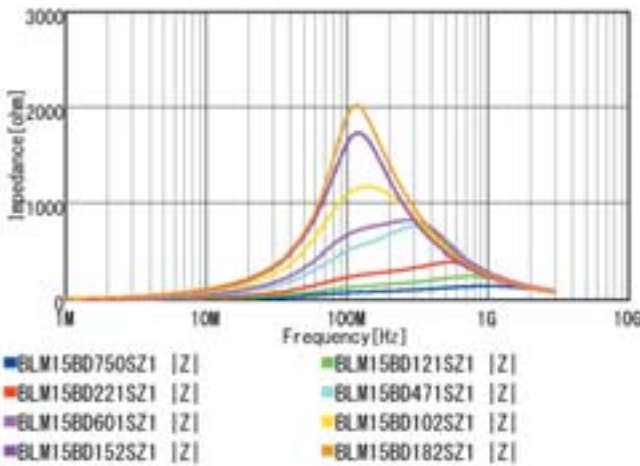

Z-f characteristics: BLM15BD_SH1 series

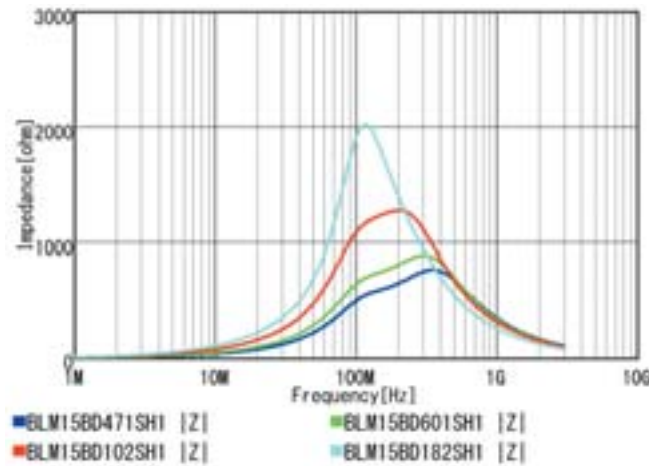


Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead
 SMD Type
 Chip EMIFIL®
 SMD Type
 Chip Common Mode Choke Coil
 SMD Type
 Block Type EMIFIL®
 Lead Type
 EMI Suppression Filters
 SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Z-f characteristics

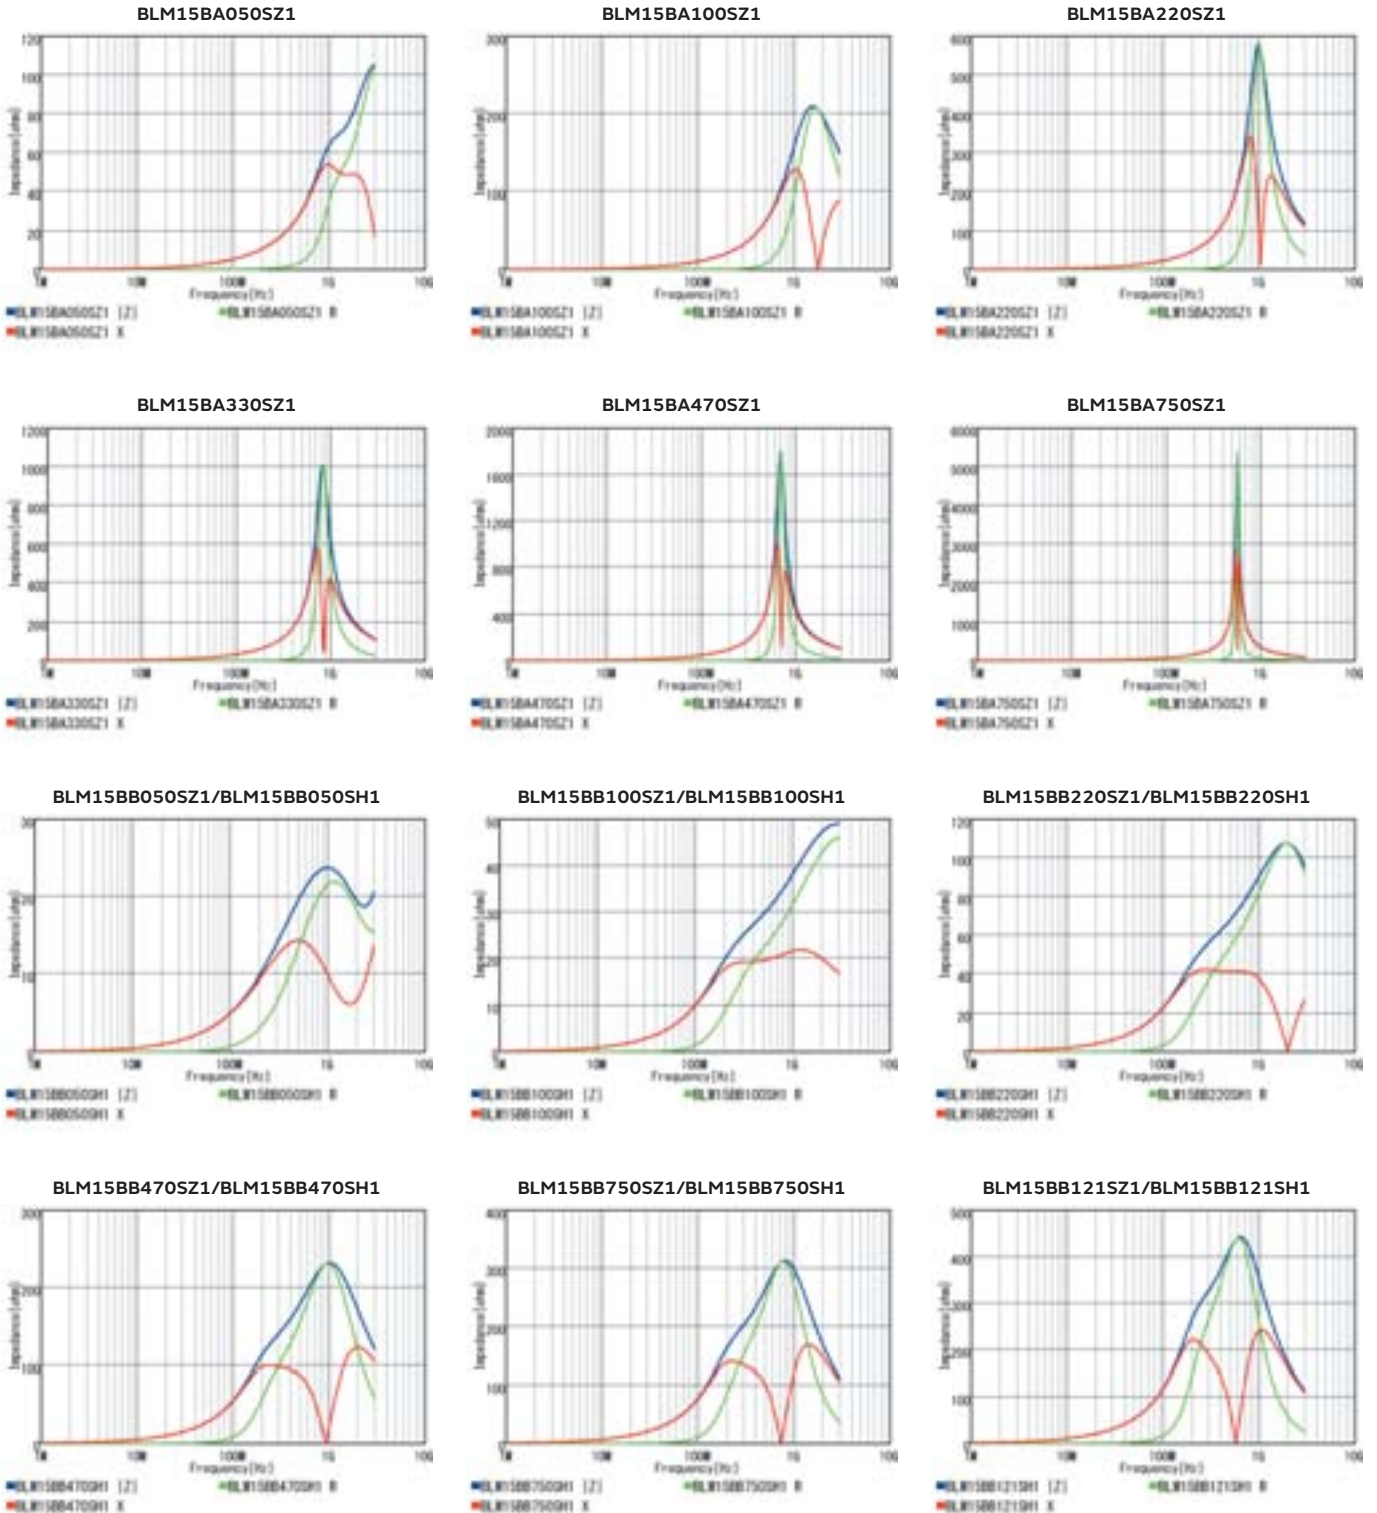


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics

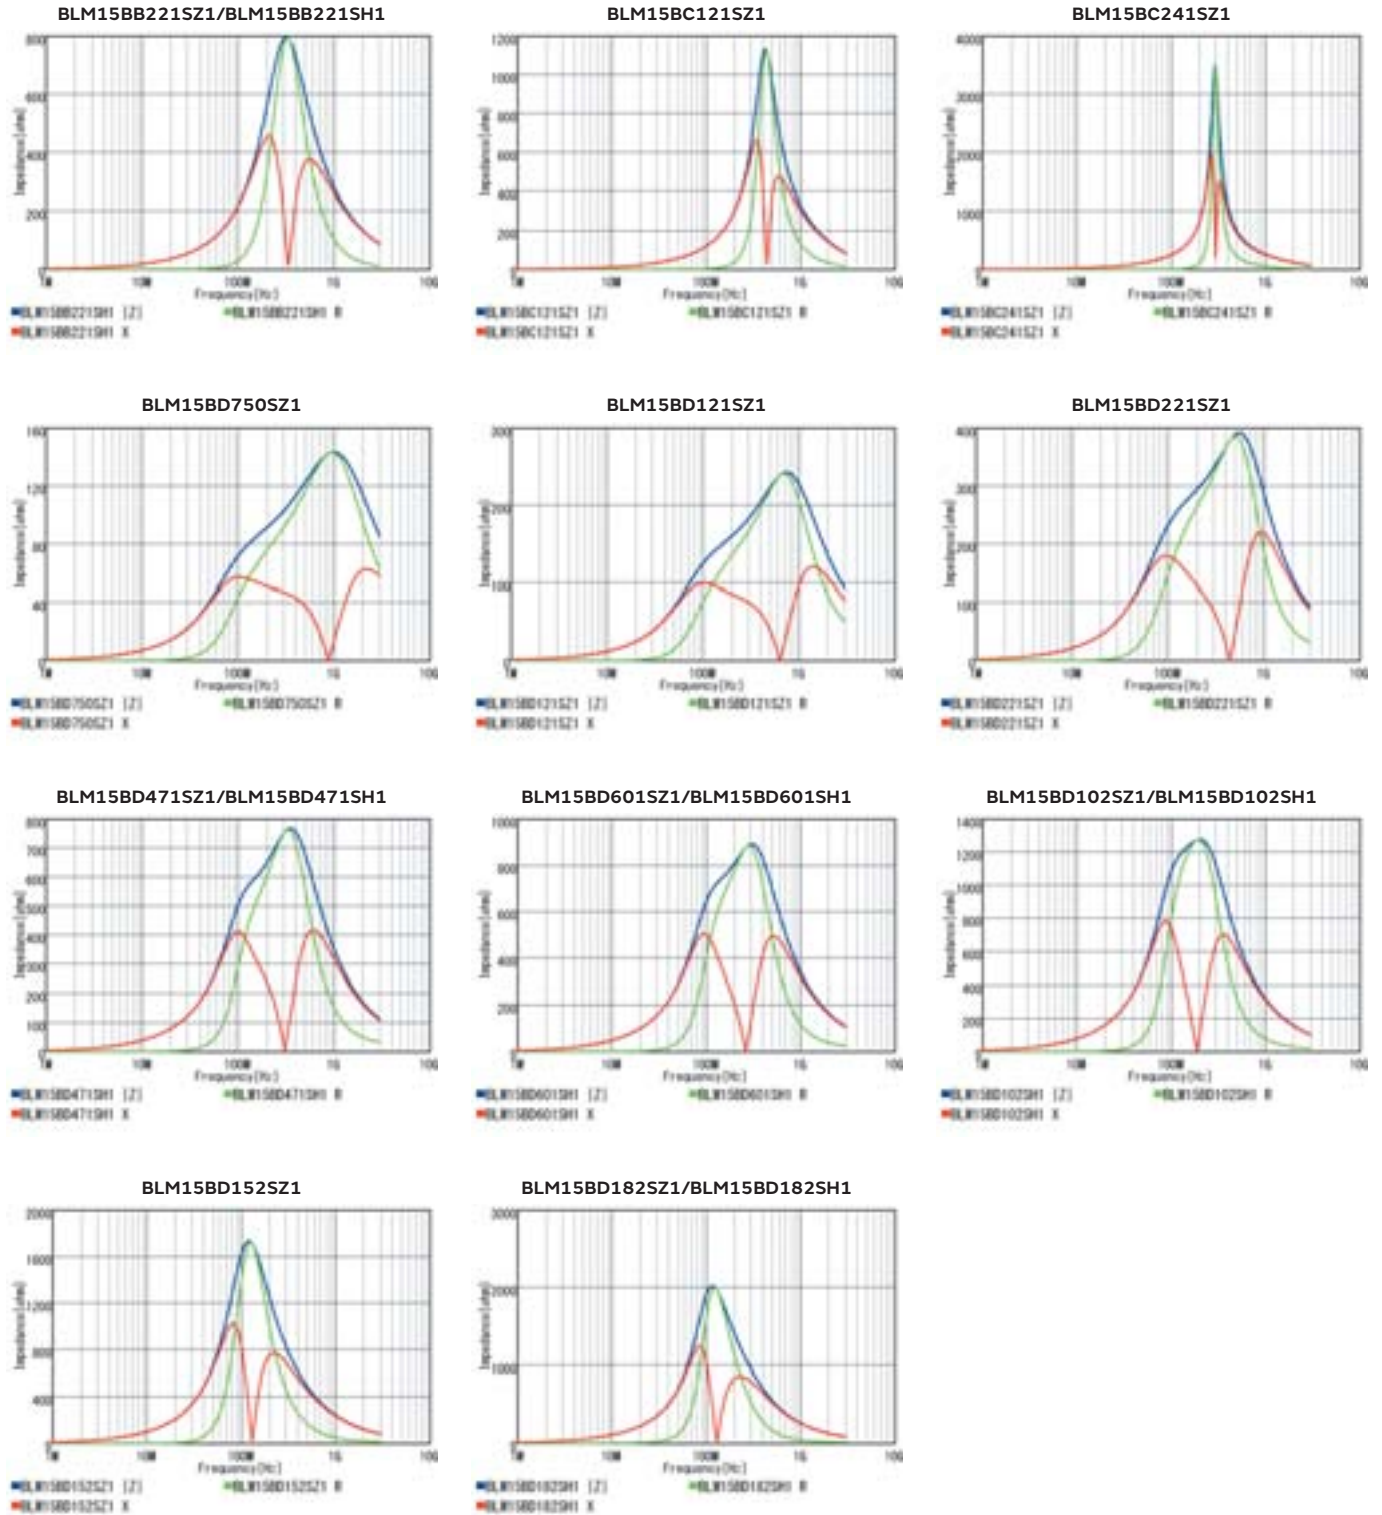

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM15HB/HD/HG Series 0402/1005(inch/mm)

Appearance/Dimensions

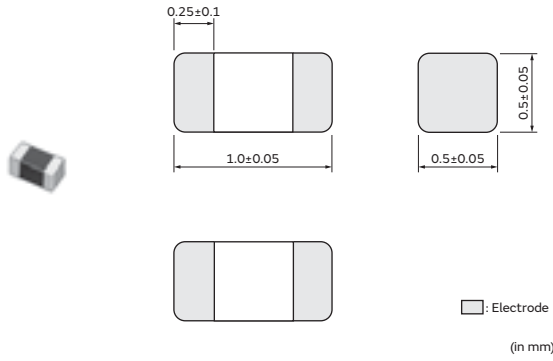

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM15HB121SZ1□ | BLM15HB121SH1□ | 120Ω±25% | 500Ω±40% | 300mA | 300mA | 0.7Ω |
| BLM15HB221SZ1□ | BLM15HB221SH1□ | 220Ω±25% | 900Ω±40% | 250mA | 250mA | 1Ω |
| BLM15HD601SZ1□ | BLM15HD601SH1□ | 600Ω±25% | 1400Ω±40% | 300mA | 300mA | 0.85Ω |
| BLM15HD102SZ1□ | BLM15HD102SH1□ | 1000Ω±25% | 2000Ω±40% | 250mA | 250mA | 1.25Ω |
| BLM15HD182SZ1□ | BLM15HD182SH1□ | 1800Ω±25% | 2700Ω±40% | 200mA | 200mA | 2.2Ω |
| BLM15HG601SZ1□ | BLM15HG601SH1□ | 600Ω±25% | 1000Ω±40% | 300mA | 300mA | 0.7Ω |
| BLM15HG102SZ1□ | BLM15HG102SH1□ | 1000Ω±25% | 1400Ω±40% | 250mA | 250mA | 1.1Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM15HB_SZ1 series

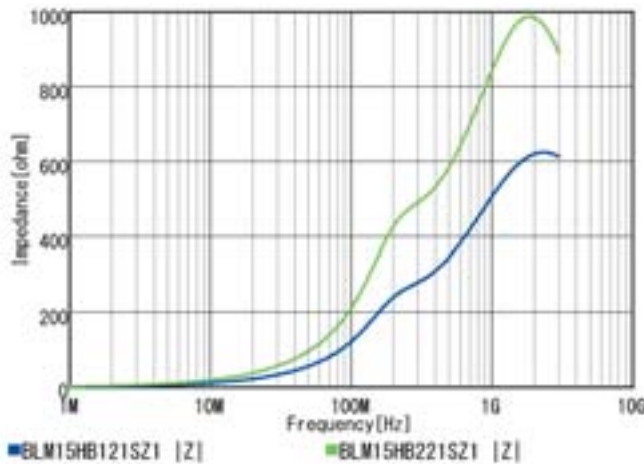


Z-f characteristics: BLM15HB_SH1 series

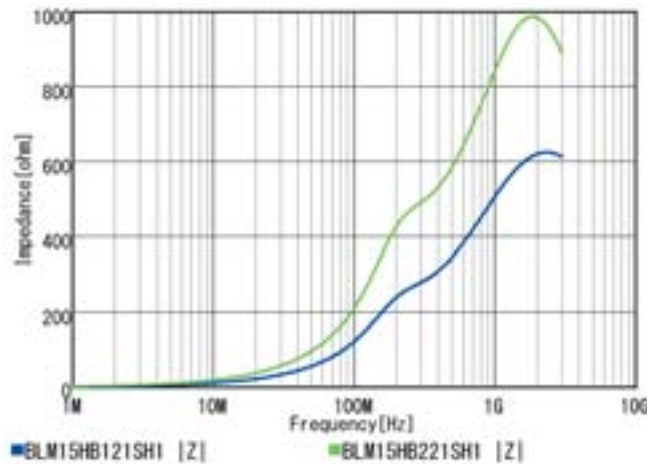


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLM15HD_SZ1 series

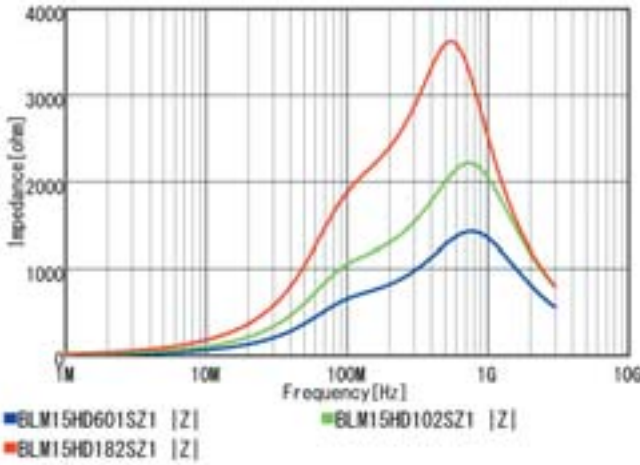


Z-f characteristics: BLM15HD_SH1 series

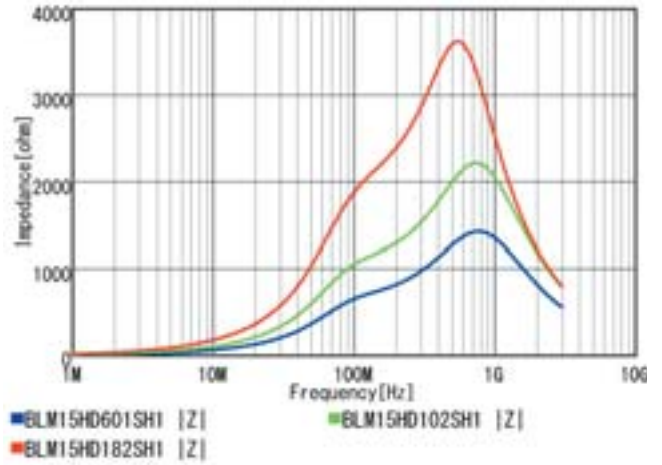


Z-f characteristics: BLM15HG_SZ1 series

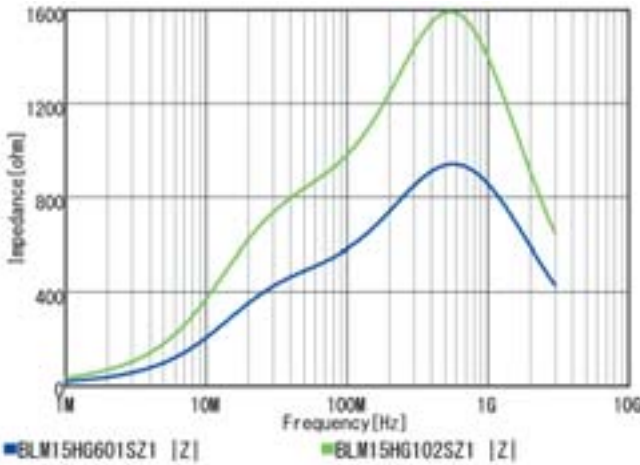


Z-f characteristics: BLM15HG_SH1 series

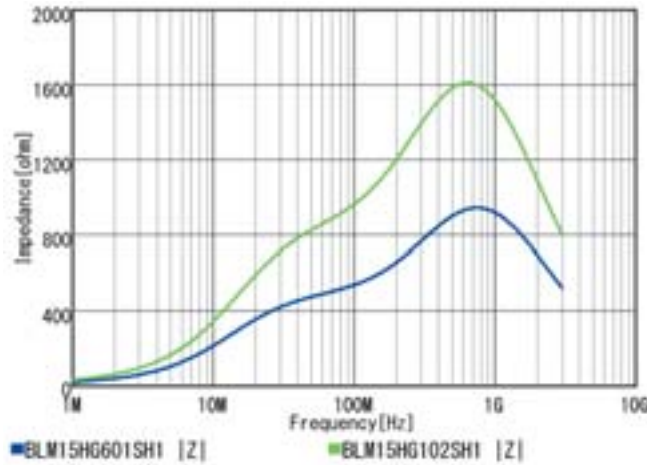


BLM15HB121SZ1/BLM15HB121SH1

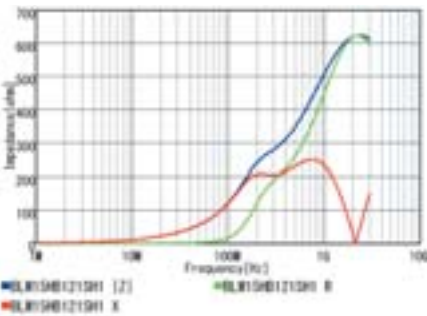


BLM15HB221SZ1/BLM15HB221SH1

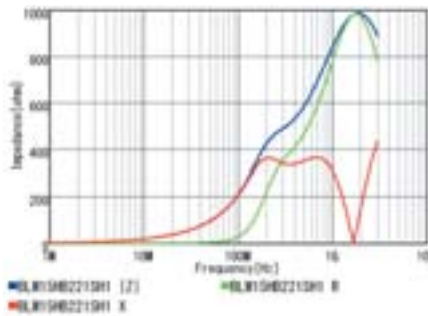


BLM15HD601SZ1/BLM15HD601SH1

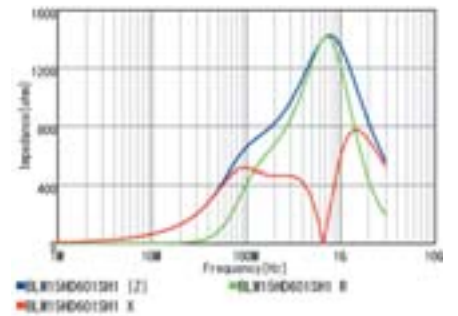


BLM15HD102SZ1/BLM15HD102SH1

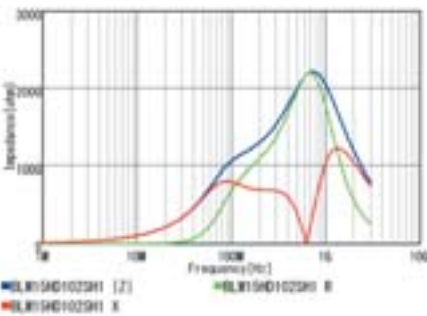

BLM15HD182SZ1/BLM15HD182SH1

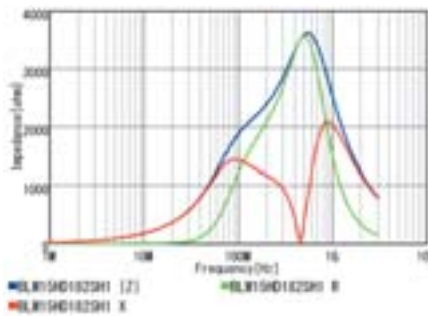

BLM15HG601SZ1/BLM15HG601SH1

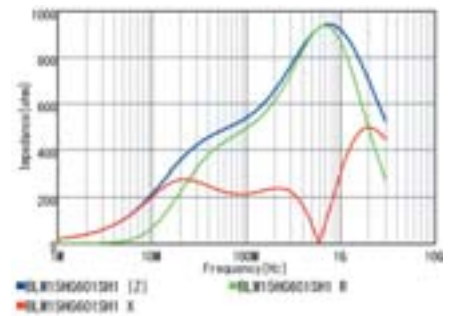


Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead
 SMD Type
 Chip EMIFIL®
 SMD Type
 Chip Common Mode Choke Coil
 SMD Type
 Block Type EMIFIL®
 Lead Type
 EMI Suppression Filters
 SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Z-f characteristics

BLM15HG102SZ1/BLM15HG102SH1

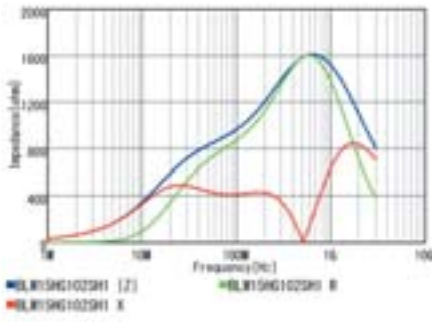

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM15HG(150°C available) Series 0402/1005(inch/mm)

Appearance/Dimensions

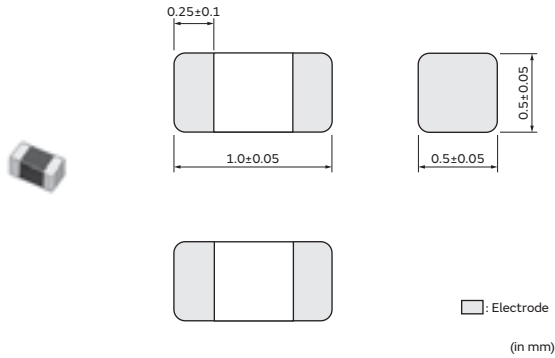

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit






(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | BLM15HG601BH1□ | 600Ω±25% | 1000Ω±40% | 300mA | 300mA | 0.7Ω |
| — | BLM15HG102BH1□ | 1000Ω±25% | 1400Ω±40% | 250mA | 250mA | 1.1Ω |

Rated Current at 150°C: 20mA
 Operating Temp. Range: -55°C to 150°C

Z-f characteristics: BLM15HG_BH1 series

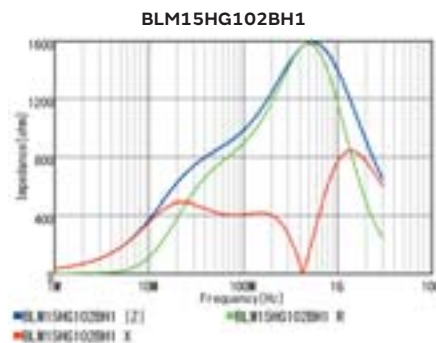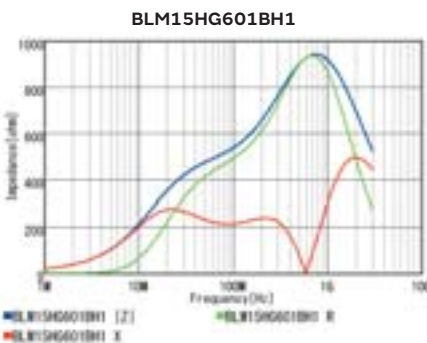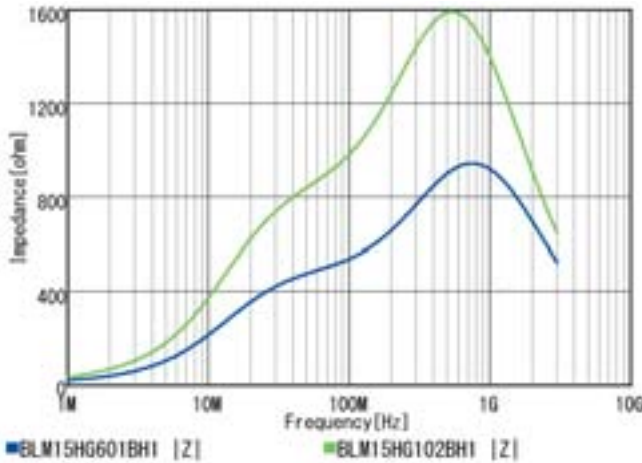


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM15HG series.
Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

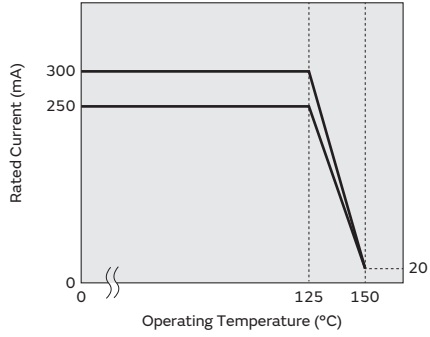

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM15EG Series 0402/1005(inch/mm)

Appearance/Dimensions

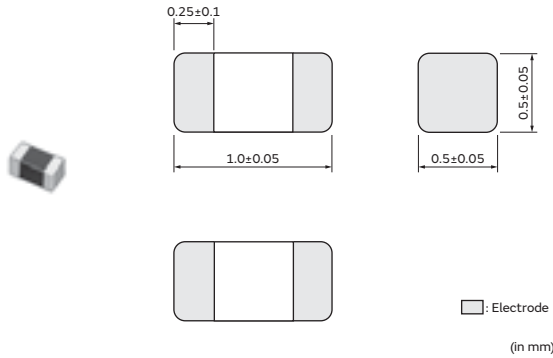

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM15EG121SZ1□ | BLM15EG121SH1□ | 120Ω±25% | 145Ω(Typ.) | 1.5A | 900mA | 0.095Ω |
| BLM15EG221SZ1□ | BLM15EG221SH1□ | 220Ω±25% | 270Ω(Typ.) | 700mA | 500mA | 0.28Ω |

Operating Temp. Range: -55°C to 125°C


Z-f characteristics: BLM15EG_SZ1 series

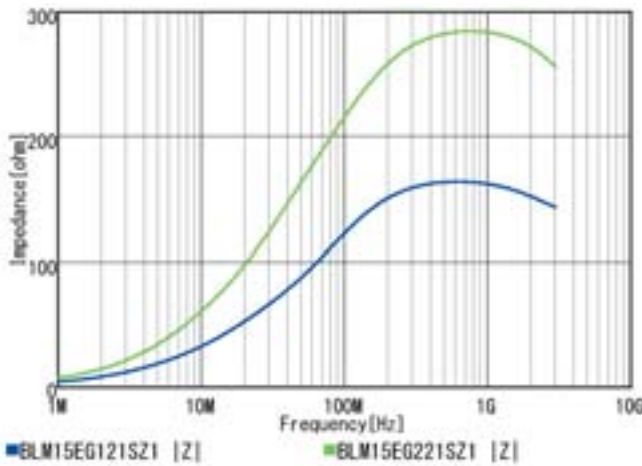


Z-f characteristics: BLM15EG_SH1 series

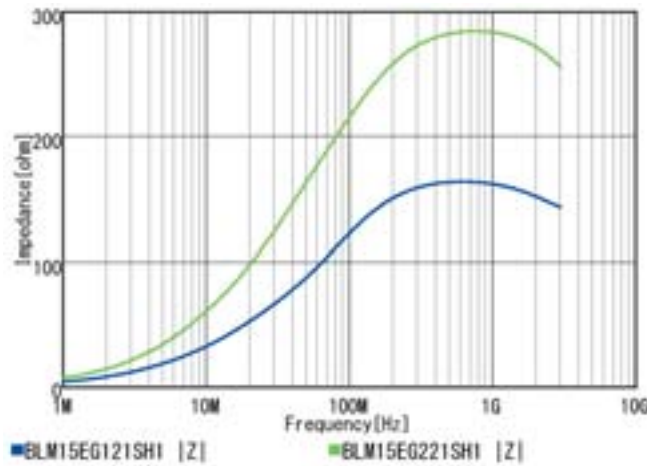

BLM15EG121SZ1/BLM15EG121SH1

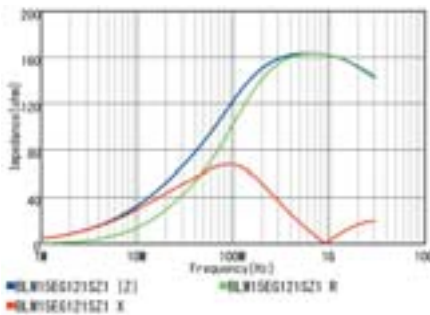

BLM15EG221SZ1/BLM15EG221SH1

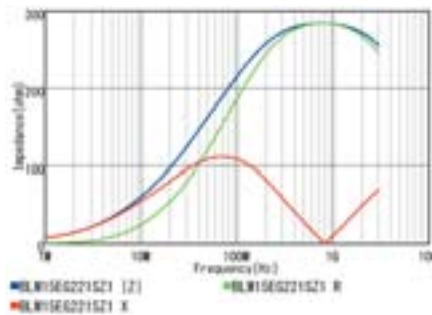


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM15E series.
Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

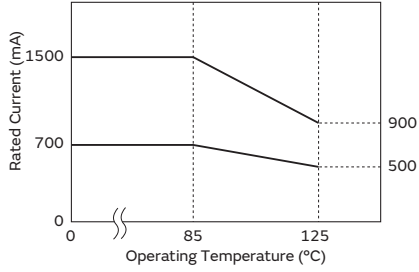

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM15GA/GG Series 0402/1005(inch/mm)

Appearance/Dimensions

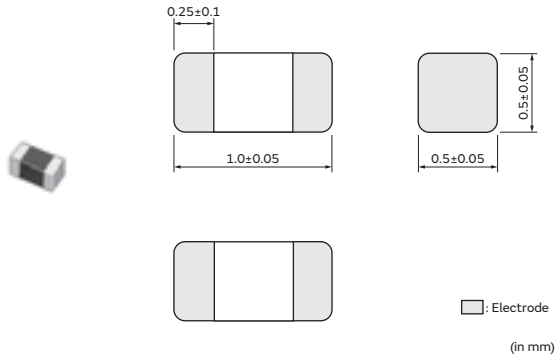

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 50000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit







(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM15GA750SZ1□ | — | 75Ω±25% | 1000Ω±40% | 200mA | 200mA | 1.3Ω |
| BLM15GG221SZ1□ | — | 220Ω±25% | 600Ω±40% | 300mA | 300mA | 0.7Ω |
| BLM15GG471SZ1□ | — | 470Ω±25% | 1200Ω±40% | 200mA | 200mA | 1.3Ω |

Operating Temp. Range: -55°C to 125°C


Z-f characteristics: BLM15GA/GG_SZ1 series

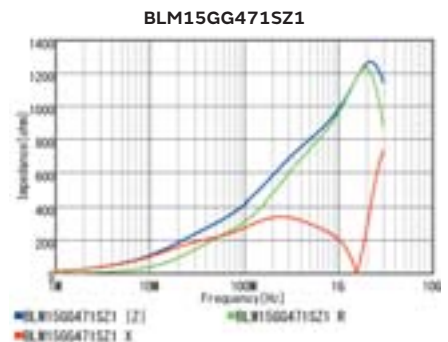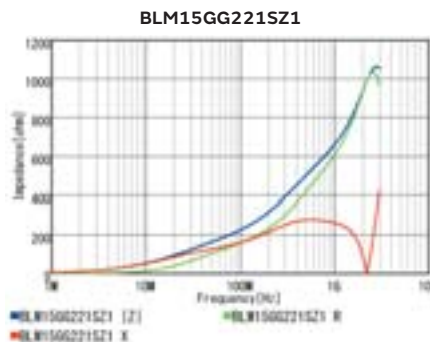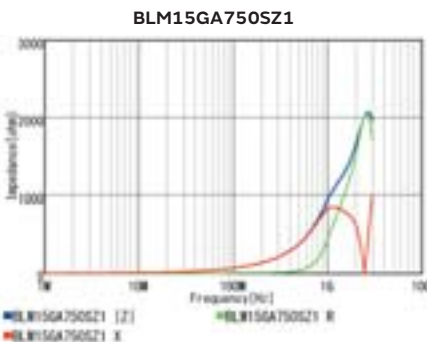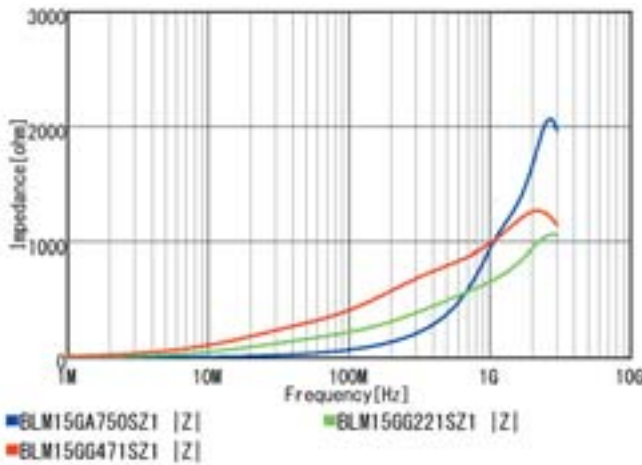

Chip Ferrite Bead SMD Type

BLM18PG Series 0603/1608(inch/mm)

Appearance/Dimensions

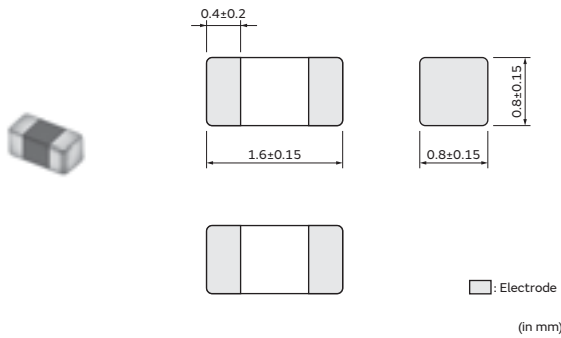

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|----------------------|
| Infotainment | Powertrain/Safety | | | |
| BLM18PG300SZ1□ | BLM18PG300SH1□ | 30Ω(Typ.) | 1A | 0.05Ω |
| BLM18PG330SZ1□ | BLM18PG330SH1□ | 33Ω±25% | 3A | 0.025Ω |
| BLM18PG600SZ1□ | BLM18PG600SH1□ | 60Ω(Typ.) | 1A | 0.1Ω |
| BLM18PG121SZ1□ | BLM18PG121SH1□ | 120Ω±25% | 2A | 0.05Ω |
| BLM18PG181SZ1□ | BLM18PG181SH1□ | 180Ω±25% | 1.5A | 0.09Ω |
| BLM18PG221SZ1□ | BLM18PG221SH1□ | 220Ω±25% | 1.4A | 0.1Ω |
| BLM18PG331SZ1□ | BLM18PG331SH1□ | 330Ω±25% | 1.2A | 0.15Ω |
| BLM18PG471SZ1□ | BLM18PG471SH1□ | 470Ω±25% | 1A | 0.2Ω |

Rated Current at 125°C: 1A
 Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM18PG_SZ1 series

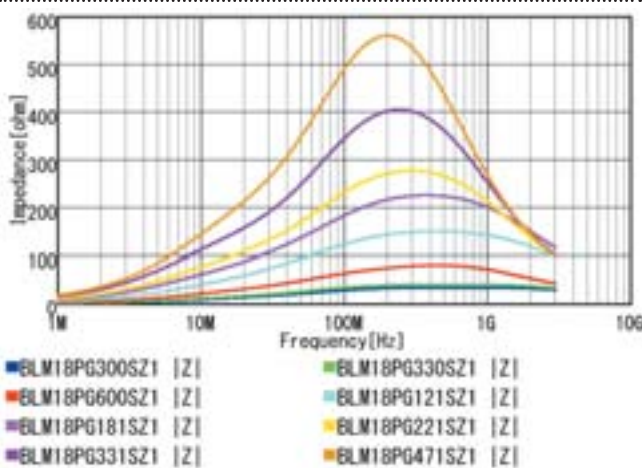


Z-f characteristics: BLM18PG_SH1 series

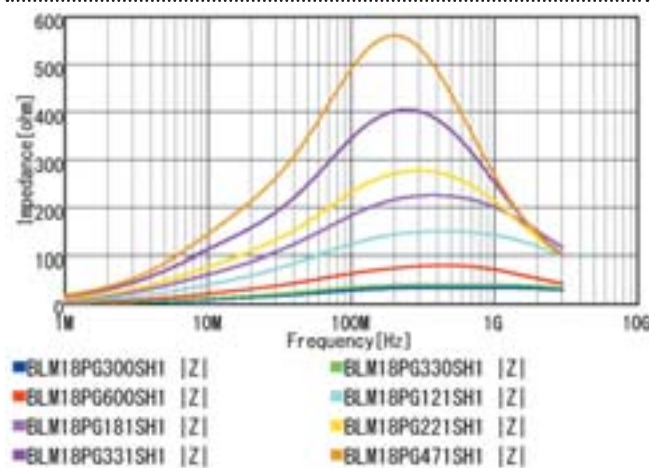

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

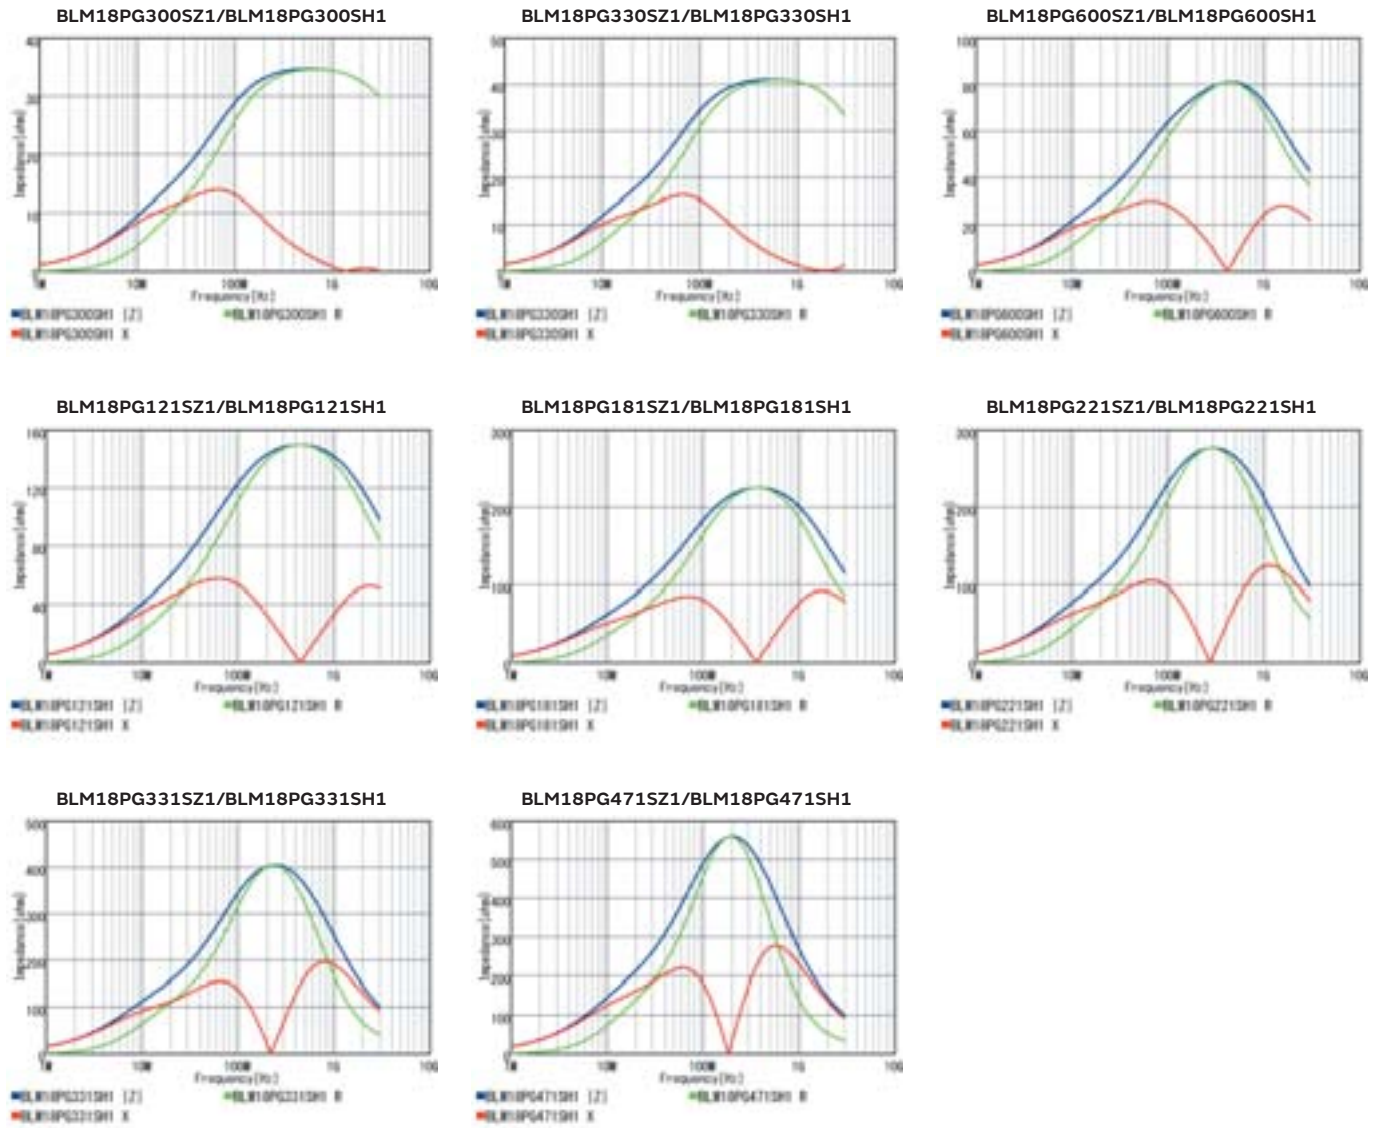

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM18PG series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

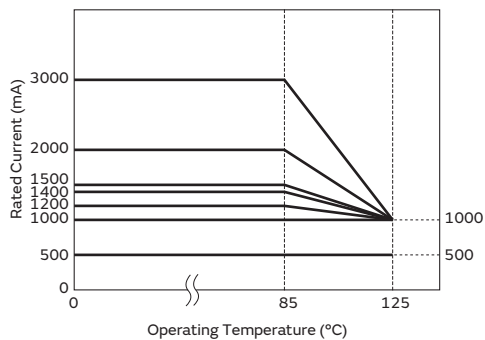

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM18SG Series 0603/1608(inch/mm)


Appearance/Dimensions

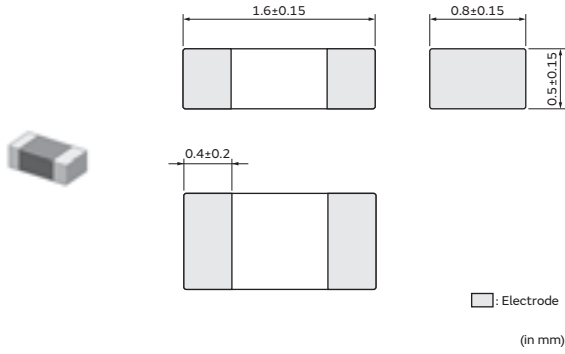

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 10000 |
| J | ø330mm Paper Tape | 30000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|----------------------|
| Infotainment | Powertrain/Safety | | | |
| BLM18SG260TZ1□ | — | 26Ω±25% | 6A | 0.007Ω |
| BLM18SG700TZ1□ | — | 70Ω±25% | 4A | 0.02Ω |
| BLM18SG121TZ1□ | — | 120Ω±25% | 3A | 0.025Ω |
| BLM18SG221TZ1□ | — | 220Ω±25% | 2.5A | 0.04Ω |
| BLM18SG331TZ1□ | — | 330Ω±25% | 1.5A | 0.07Ω |

Rated Current at 125°C: 1A
 Operating Temp. Range: -55°C to 125°C


Z-f characteristics: BLM18SG_TZ1 series

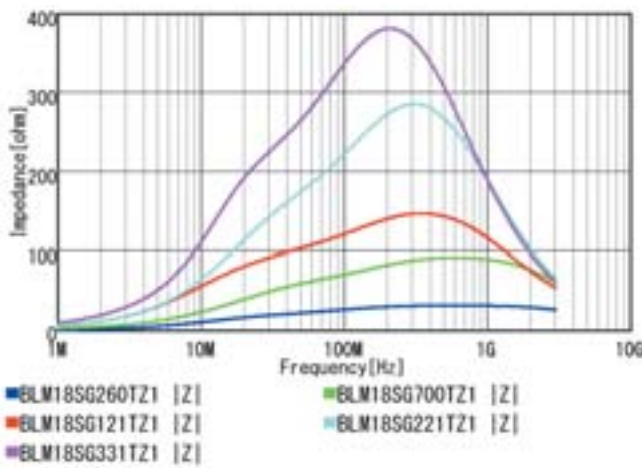

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

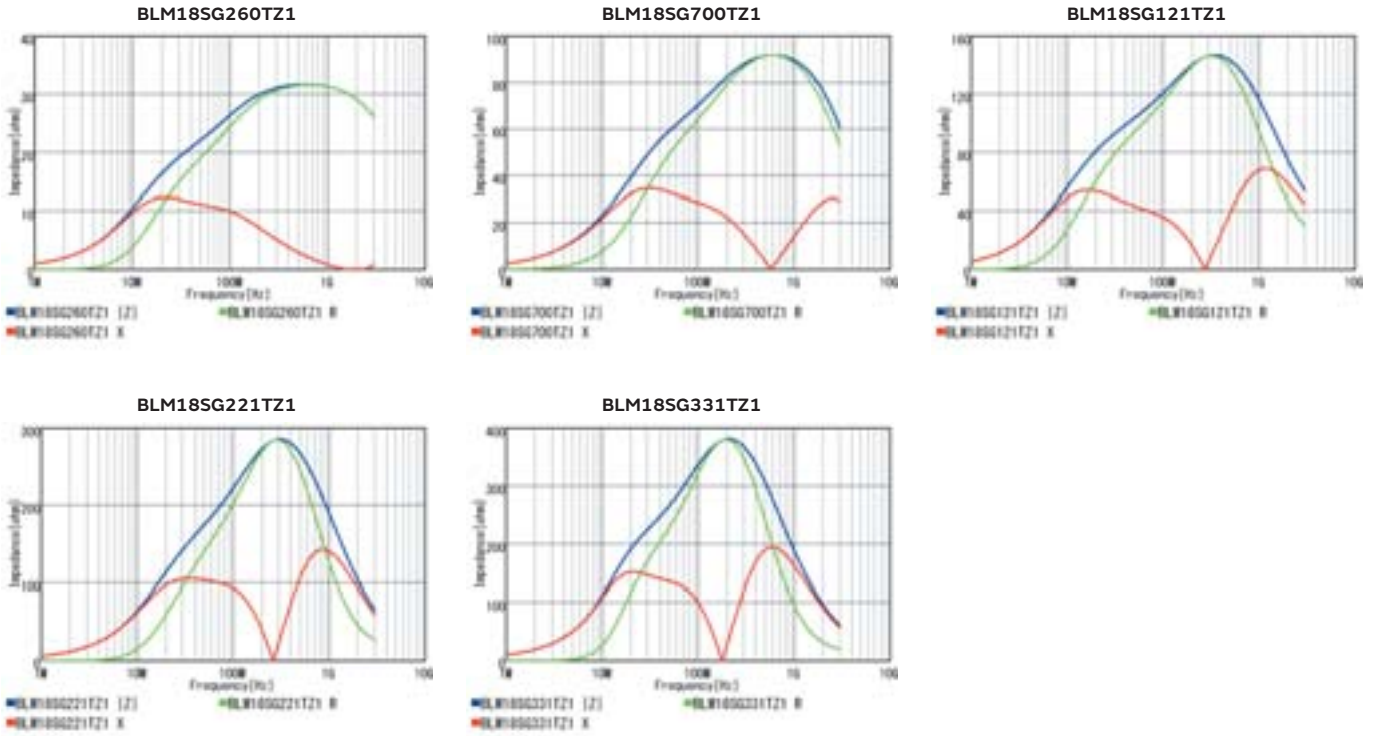

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM18SG_T□1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

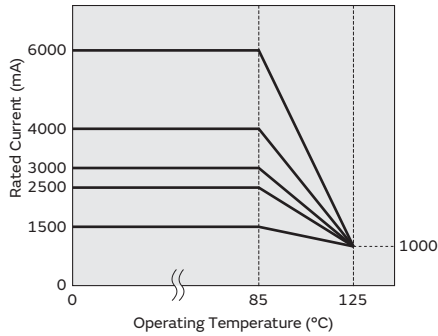

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM18SN Series 0603/1608(inch/mm)


Appearance/Dimensions

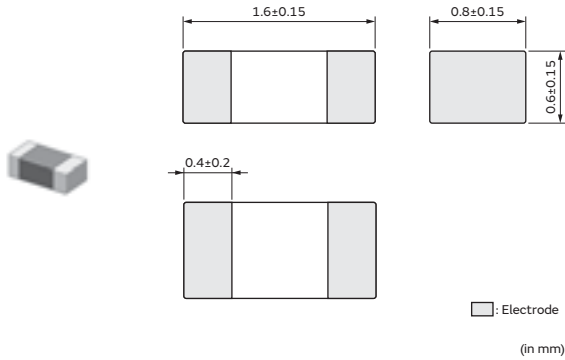

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| B | Bulk(Bag) | 1000 |


Equivalent Circuit

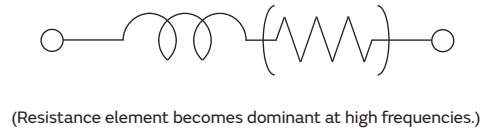

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) | Operating Temp. Range |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM18SN220TZ1□ | BLM18SN220TH1□ | 22Ω±7Ω | 8A | 5A | 0.004Ω | -55°C to 125°C |


Z-f characteristics

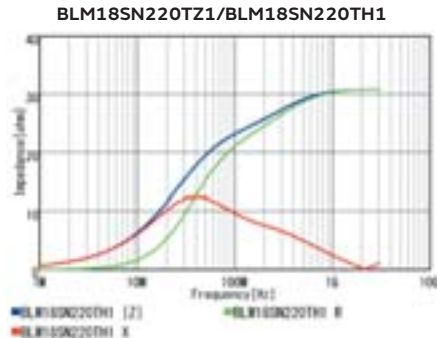

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM18SN series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

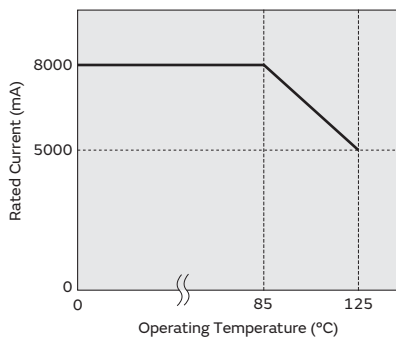

Chip Ferrite Bead SMD Type

BLM18KG Series 0603/1608(inch/mm)

Appearance/Dimensions

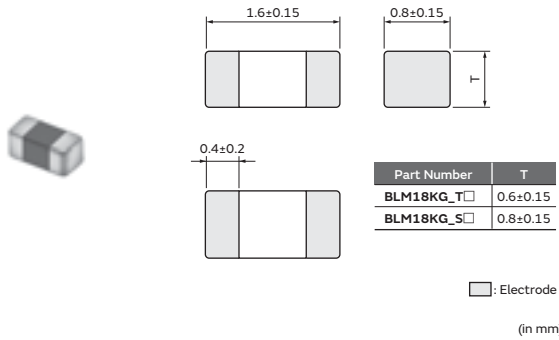

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM18KG260TZ1□ | BLM18KG260TH1□ | 26Ω±25% | 6A | 4A | 0.007Ω |
| BLM18KG300TZ1□ | BLM18KG300TH1□ | 30Ω±25% | 5A | 3.3A | 0.01Ω |
| BLM18KG700TZ1□ | BLM18KG700TH1□ | 70Ω±25% | 3.5A | 2.2A | 0.022Ω |
| BLM18KG101TZ1□ | BLM18KG101TH1□ | 100Ω±25% | 3A | 1.9A | 0.03Ω |
| BLM18KG121TZ1□ | BLM18KG121TH1□ | 120Ω±25% | 3A | 1.9A | 0.03Ω |
| BLM18KG221SZ1□ | BLM18KG221SH1□ | 220Ω±25% | 2.2A | 1.5A | 0.05Ω |
| BLM18KG331SZ1□ | BLM18KG331SH1□ | 330Ω±25% | 1.7A | 1.2A | 0.08Ω |
| BLM18KG471SZ1□ | BLM18KG471SH1□ | 470Ω±25% | 1.5A | 1A | 0.13Ω |
| BLM18KG601SZ1□ | BLM18KG601SH1□ | 600Ω±25% | 1.3A | 1A | 0.15Ω |
| BLM18KG102SZ1□ | BLM18KG102SH1□ | 1000Ω±25% | 1A | 800mA | 0.2Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM18KG_TZ1 series

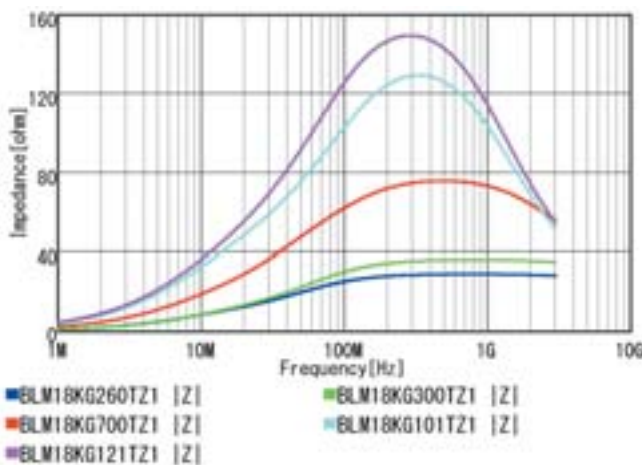


Z-f characteristics: BLM18KG_TH1 series

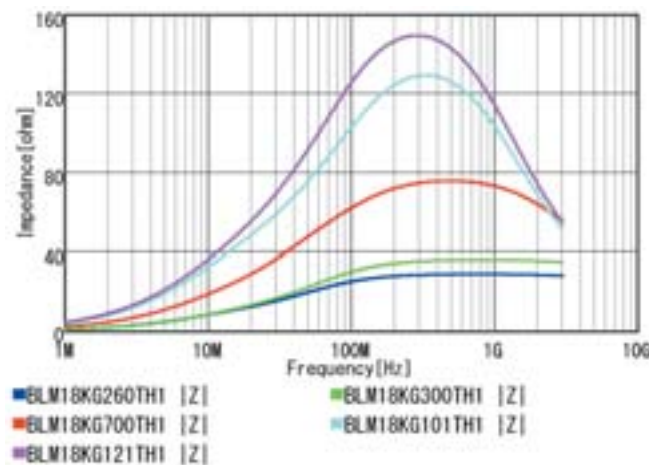

Continued on the following page. ↗


Continued from the preceding page. ↘

Z-f characteristics: BLM18KG_SZ1 series

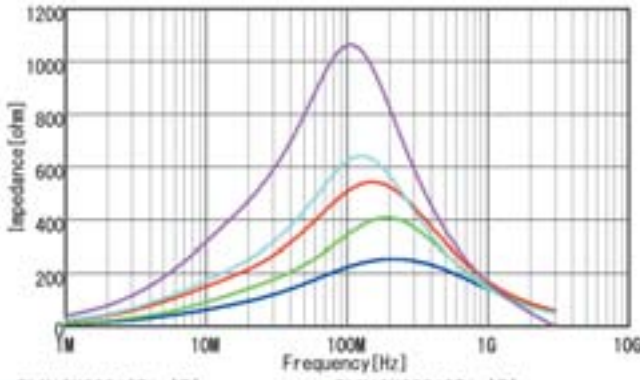


- BLM18KG221SZ1 [Z]
- BLM18KG331SZ1 [Z]
- BLM18KG471SZ1 [Z]
- BLM18KG601SZ1 [Z]
- BLM18KG102SZ1 [Z]

Z-f characteristics: BLM18KG_SH1 series

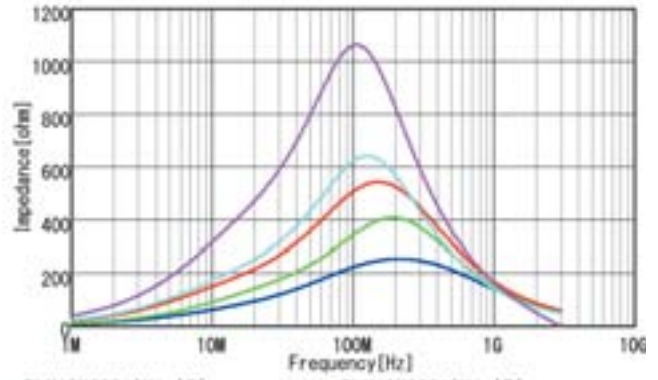


- BLM18KG221SH1 [Z]
- BLM18KG331SH1 [Z]
- BLM18KG471SH1 [Z]
- BLM18KG601SH1 [Z]
- BLM18KG102SH1 [Z]


BLM18KG260TZ1/BLM18KG260TH1

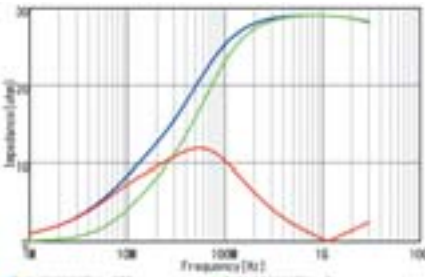


BLM18KG300TZ1/BLM18KG300TH1

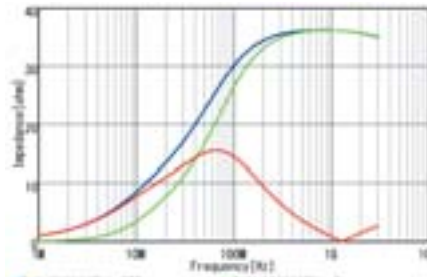


BLM18KG700TZ1/BLM18KG700TH1

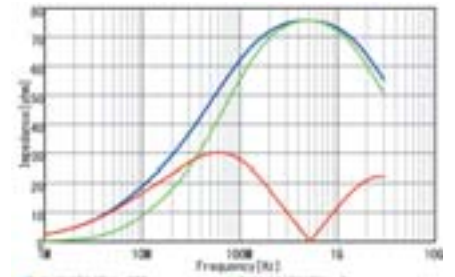


BLM18KG101TZ1/BLM18KG101TH1

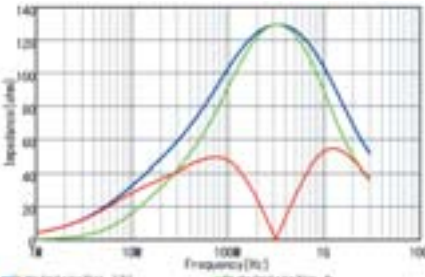


BLM18KG121TZ1/BLM18KG121TH1

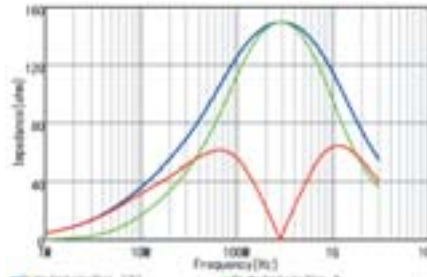


BLM18KG221SZ1/BLM18KG221SH1

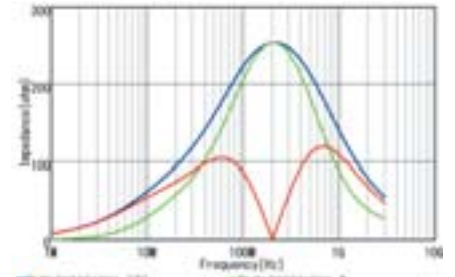


BLM18KG331SZ1/BLM18KG331SH1

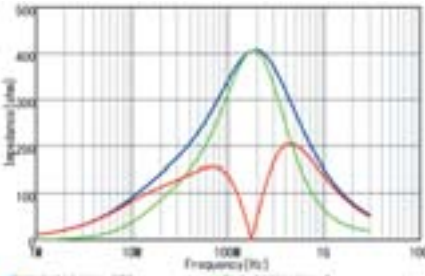

BLM18KG471SZ1/BLM18KG471SH1

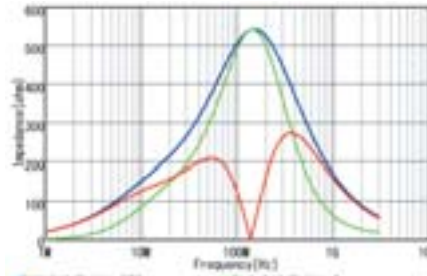

BLM18KG601SZ1/BLM18KG601SH1

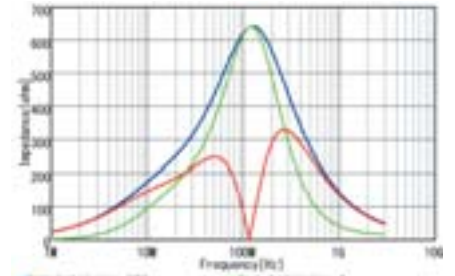


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘


Z-f characteristics

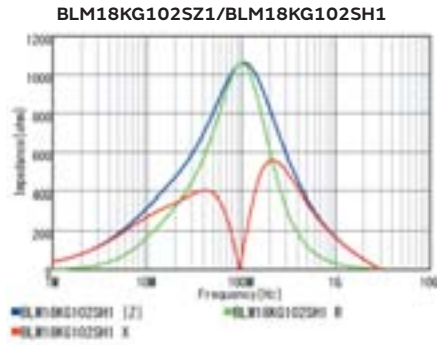

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM18KG series.
 Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

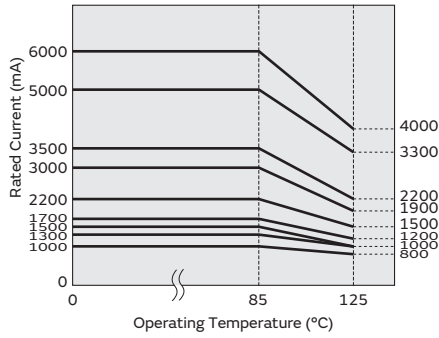

Chip Ferrite Bead SMD Type

BLM18KG(150°C available) Series 0603/1608(inch/mm)


Appearance/Dimensions

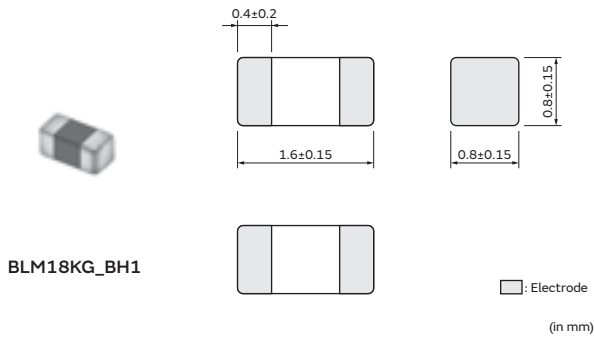


Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit

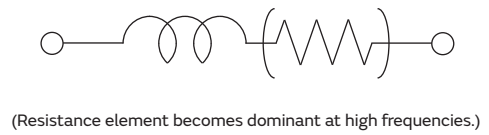

Appearance/Dimensions

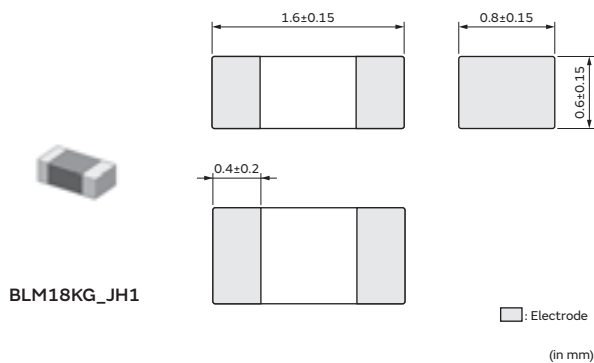

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| — | BLM18KG221BH1□ | 220Ω±25% | 1.5A | 1.5A | 0.05Ω |
| — | BLM18KG331BH1□ | 330Ω±25% | 1.2A | 1.2A | 0.08Ω |
| — | BLM18KG471BH1□ | 470Ω±25% | 1A | 1A | 0.13Ω |
| — | BLM18KG601BH1□ | 600Ω±25% | 1A | 1A | 0.15Ω |
| — | BLM18KG102BH1□ | 1000Ω±25% | 800mA | 800mA | 0.2Ω |
| — | BLM18KG260JH1□ | 26Ω±25% | 4A | 4A | 0.007Ω |
| — | BLM18KG300JH1□ | 30Ω±25% | 3.3A | 3.3A | 0.01Ω |
| — | BLM18KG700JH1□ | 70Ω±25% | 2.2A | 2.2A | 0.022Ω |
| — | BLM18KG101JH1□ | 100Ω±25% | 1.9A | 1.9A | 0.03Ω |
| — | BLM18KG121JH1□ | 120Ω±25% | 1.9A | 1.9A | 0.03Ω |

Rated Current at 150°C: 10mA
 Operating Temp. Range: -55°C to 150°C

Continued on the following page. ↗


Continued from the preceding page. ↘

Z-f characteristics: BLM18KG_BH1 series









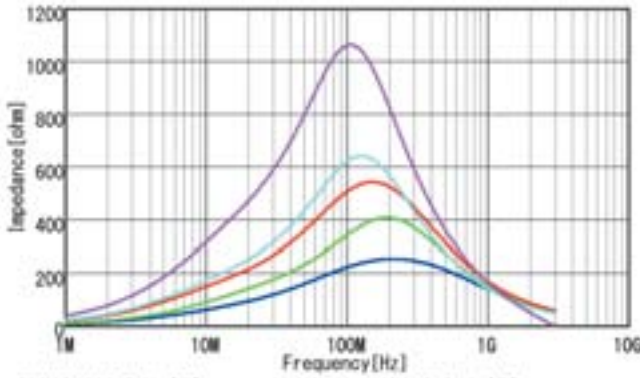


- BLM18KG221BH1 [Z] ■ BLM18KG331BH1 [Z]
- BLM18KG471BH1 [Z] ■ BLM18KG601BH1 [Z]
- BLM18KG102BH1 [Z]

Z-f characteristics: BLM18KG_JH1 series

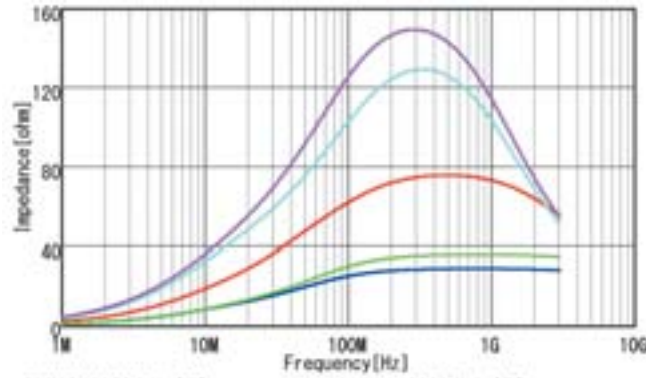

- BLM18KG260JH1 [Z] ■ BLM18KG300JH1 [Z]
- BLM18KG700JH1 [Z] ■ BLM18KG101JH1 [Z]
- BLM18KG121JH1 [Z]

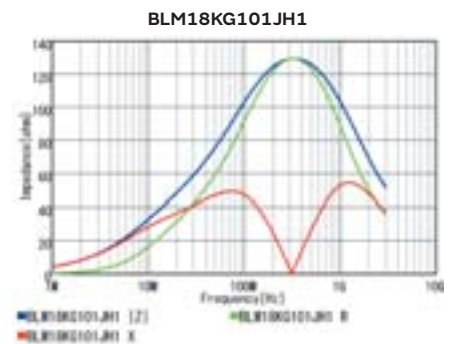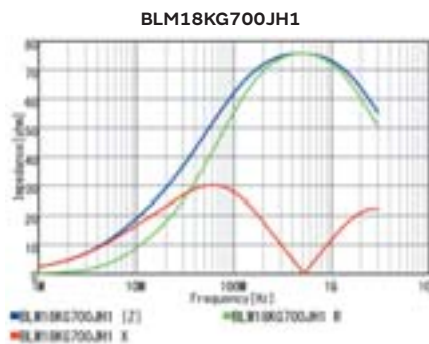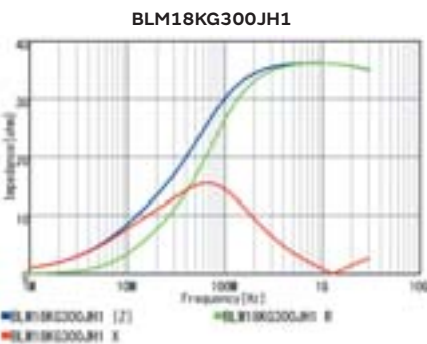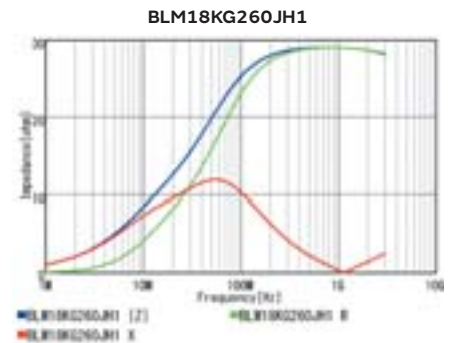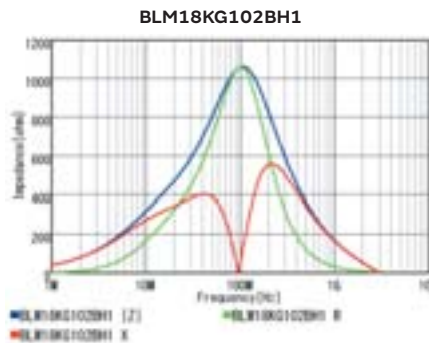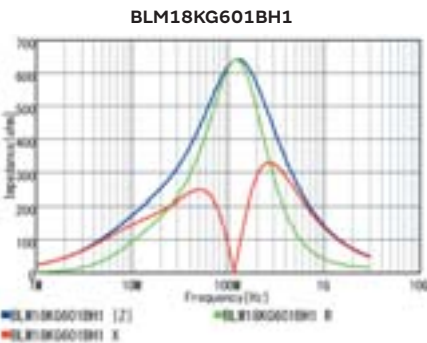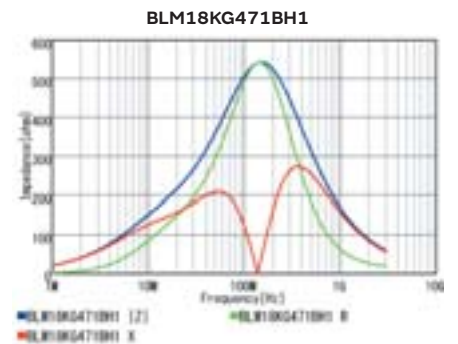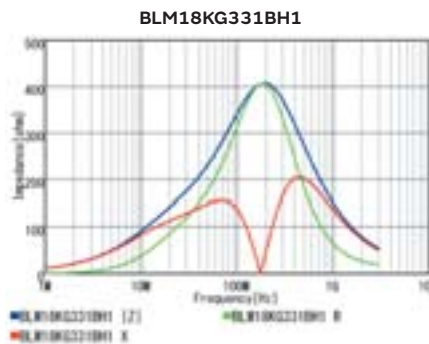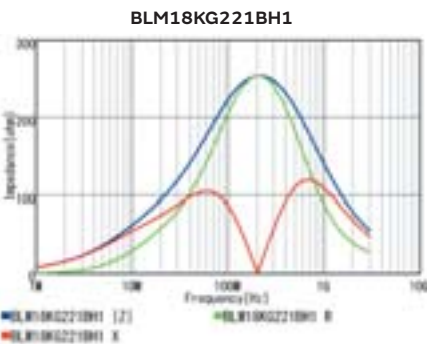

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI FIL®

SMD Type
 Chip Common Mode Choke Coil


SMD Type
 Block Type EMI FIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘


Z-f characteristics

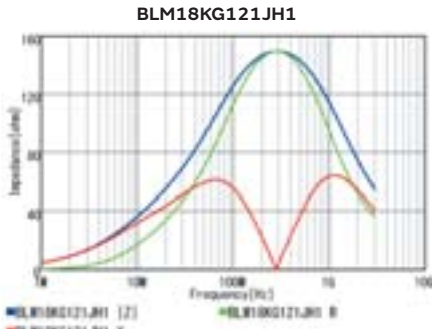

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM18KG_JH1/_BH1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

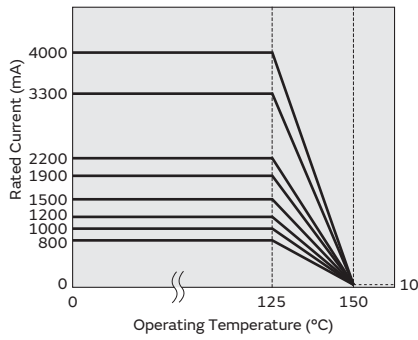

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM18AG Series 0603/1608(inch/mm)

Appearance/Dimensions

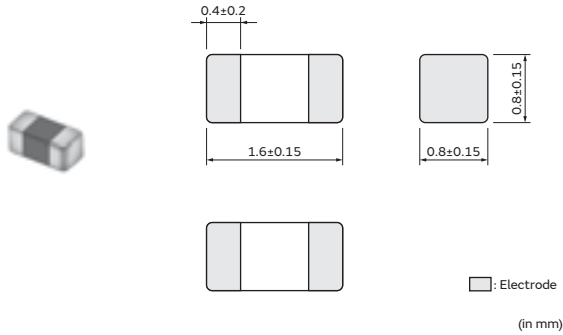

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM18AG121SZ1□ | BLM18AG121SH1□ | 120Ω±25% | 800mA | 800mA | 0.18Ω |
| BLM18AG151SZ1□ | BLM18AG151SH1□ | 150Ω±25% | 700mA | 700mA | 0.25Ω |
| BLM18AG221SZ1□ | BLM18AG221SH1□ | 220Ω±25% | 700mA | 700mA | 0.25Ω |
| BLM18AG331SZ1□ | BLM18AG331SH1□ | 330Ω±25% | 600mA | 600mA | 0.3Ω |
| BLM18AG471SZ1□ | BLM18AG471SH1□ | 470Ω±25% | 550mA | 550mA | 0.35Ω |
| BLM18AG601SZ1□ | BLM18AG601SH1□ | 600Ω±25% | 500mA | 500mA | 0.38Ω |
| BLM18AG102SZ1□ | BLM18AG102SH1□ | 1000Ω±25% | 450mA | 450mA | 0.5Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM18AG_SZ1 series

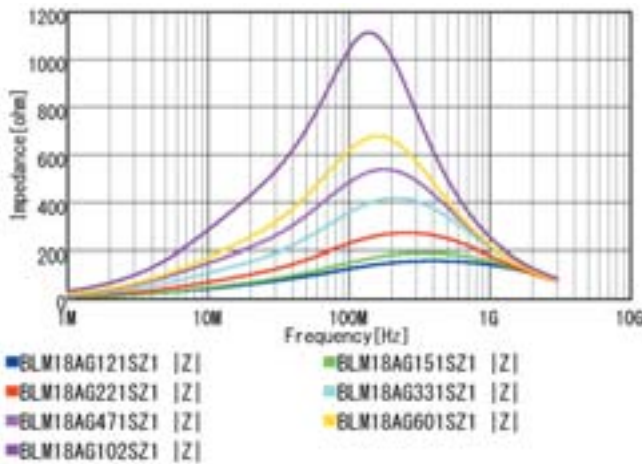








Z-f characteristics: BLM18AG_SH1 series

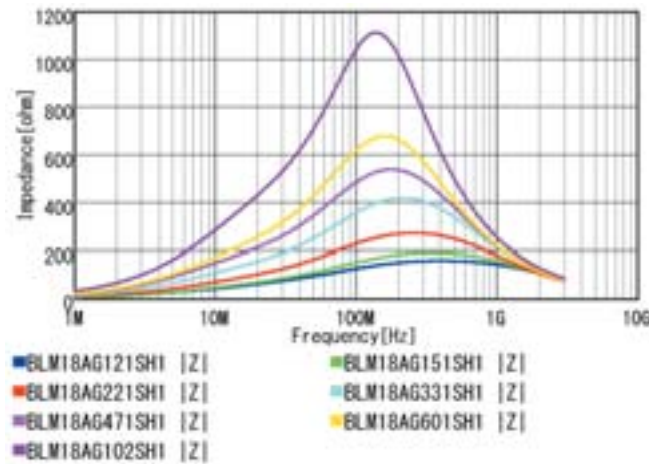

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

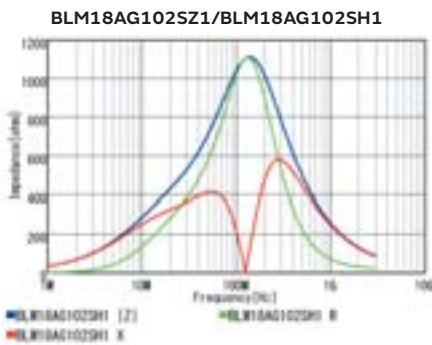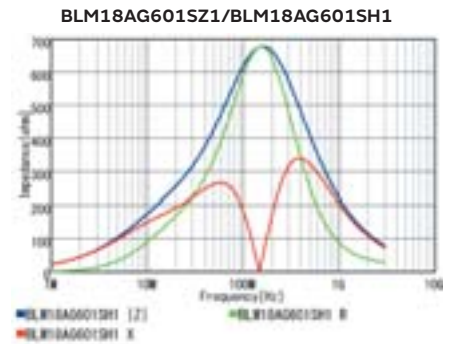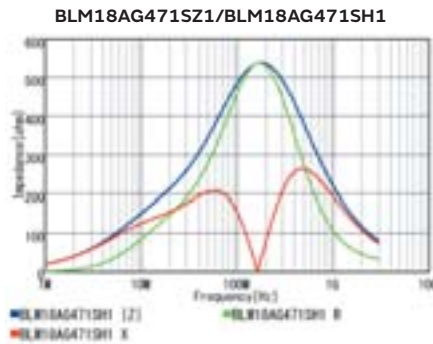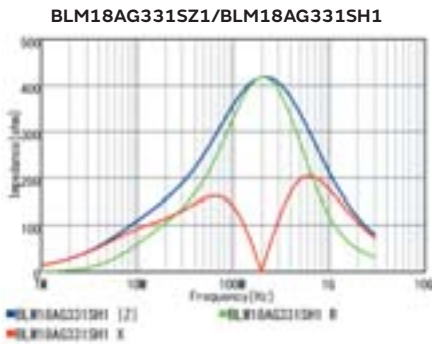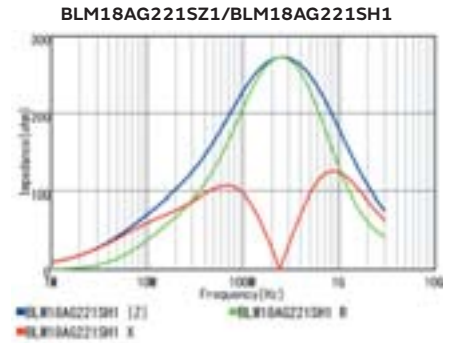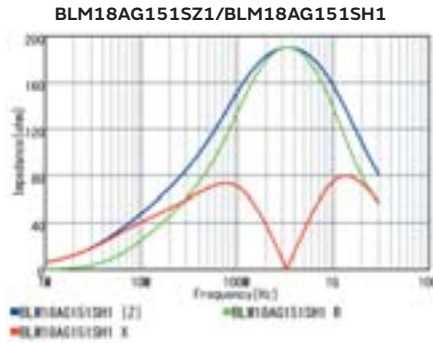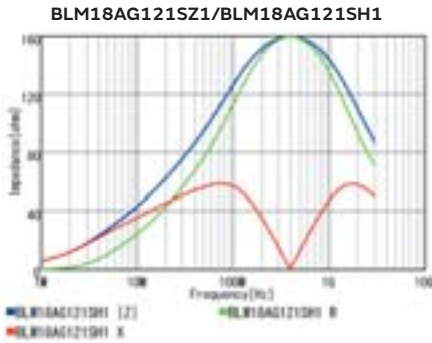

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM18AG(for conductive glue mounting) Series 0603/1608(inch/mm)

Appearance/Dimensions

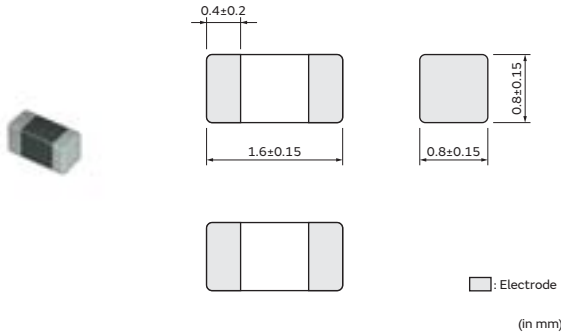

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit






(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | Rated Current at 150°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | BLM18AG471WH1□ | 470Ω±25% | 1A | 1A | 500mA | 0.2Ω |
| — | BLM18AG102WH1□ | 1000Ω±25% | 200mA | 200mA | 100mA | 0.7Ω |

Operating Temp. Range: -55°C to 150°C

Z-f characteristics: BLM18AG_WH1 series

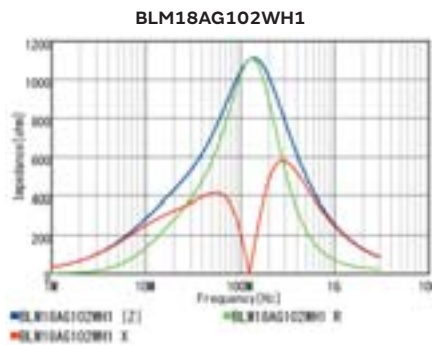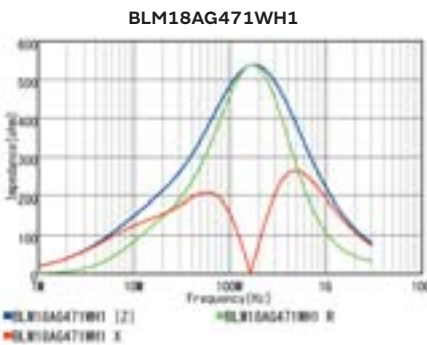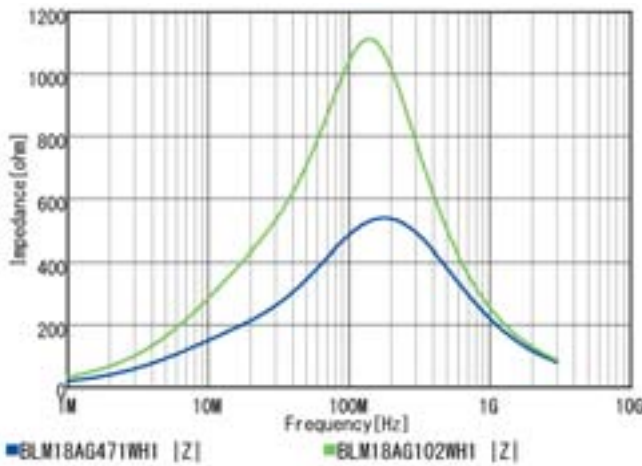


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM18AG_WH1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

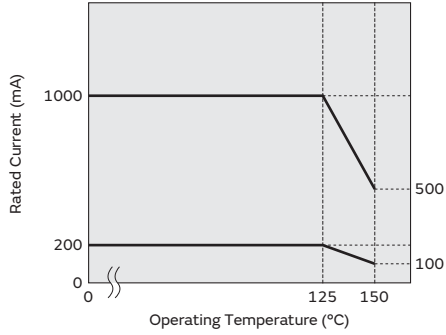

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM18AG(150°C available) Series 0603/1608(inch/mm)


Appearance/Dimensions

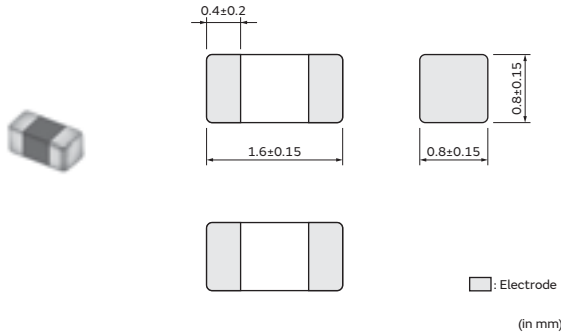

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| — | BLM18AG121BH1□ | 120Ω±25% | 800mA | 800mA | 0.18Ω |
| — | BLM18AG151BH1□ | 150Ω±25% | 700mA | 700mA | 0.25Ω |
| — | BLM18AG221BH1□ | 220Ω±25% | 700mA | 700mA | 0.25Ω |
| — | BLM18AG331BH1□ | 330Ω±25% | 600mA | 600mA | 0.3Ω |
| — | BLM18AG471BH1□ | 470Ω±25% | 550mA | 550mA | 0.35Ω |
| — | BLM18AG601BH1□ | 600Ω±25% | 500mA | 500mA | 0.38Ω |
| — | BLM18AG102BH1□ | 1000Ω±25% | 450mA | 450mA | 0.5Ω |

Rated Current at 150°C: 10mA
 Operating Temp. Range: -55°C to 150°C








Z-f characteristics: BLM18AG_BH1 series

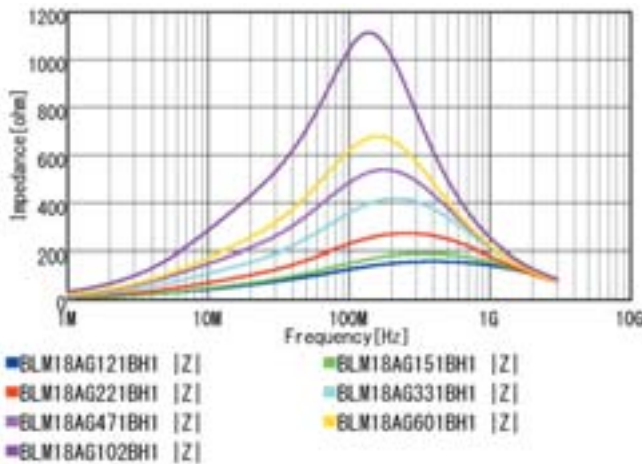

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

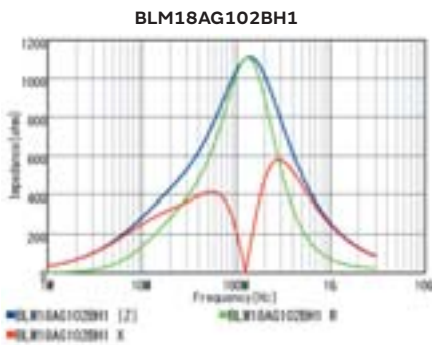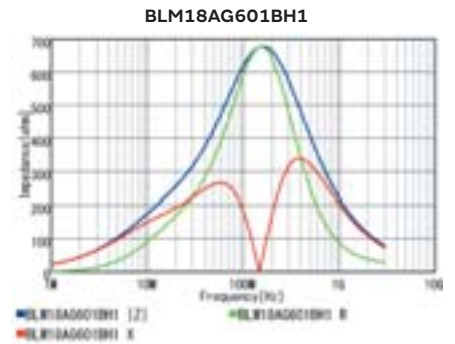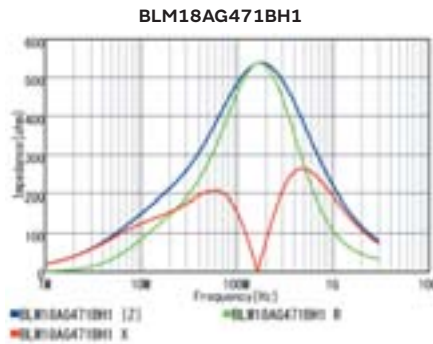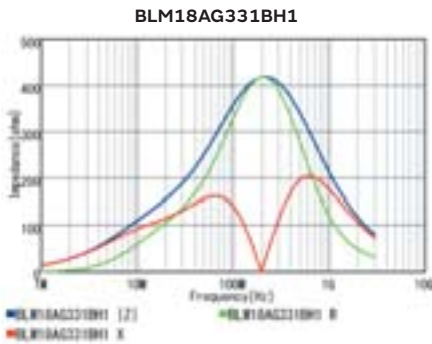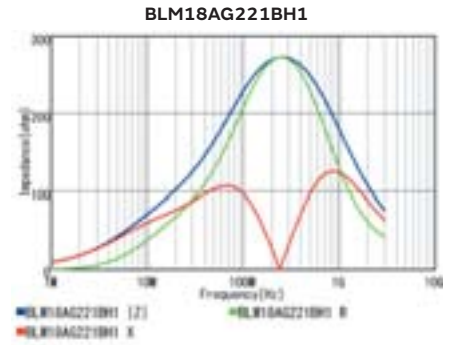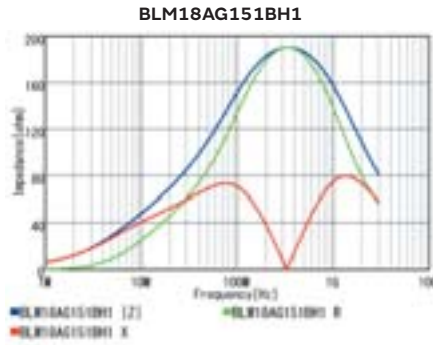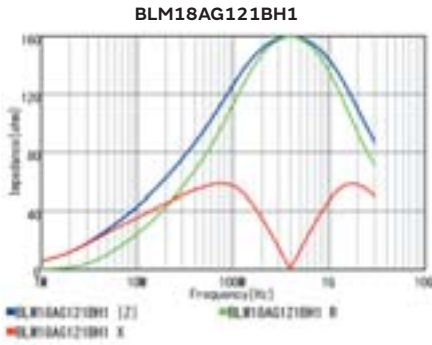

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM18AG_BH1 series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

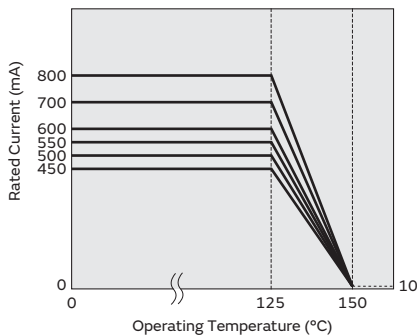

Chip Ferrite Bead SMD Type

BLM18BA/BB/BD Series 0603/1608(inch/mm)

Appearance/Dimensions

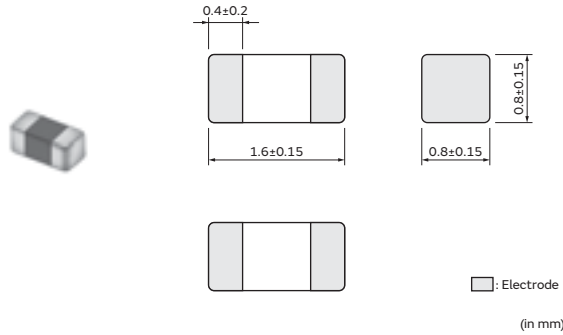

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit



(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM18BA050SZ1□ | BLM18BA050SH1□ | 5Ω±25% | 500mA | 500mA | 0.2Ω |
| BLM18BA100SZ1□ | BLM18BA100SH1□ | 10Ω±25% | 500mA | 500mA | 0.25Ω |
| BLM18BA220SZ1□ | BLM18BA220SH1□ | 22Ω±25% | 500mA | 500mA | 0.35Ω |
| BLM18BA470SZ1□ | BLM18BA470SH1□ | 47Ω±25% | 300mA | 300mA | 0.55Ω |
| BLM18BA750SZ1□ | BLM18BA750SH1□ | 75Ω±25% | 300mA | 300mA | 0.7Ω |
| BLM18BA121SZ1□ | BLM18BA121SH1□ | 120Ω±25% | 200mA | 200mA | 0.9Ω |
| BLM18BB050SZ1□ | BLM18BB050SH1□ | 5Ω±25% | 800mA | 800mA | 0.05Ω |
| BLM18BB100SZ1□ | BLM18BB100SH1□ | 10Ω±25% | 700mA | 700mA | 0.1Ω |
| BLM18BB220SZ1□ | BLM18BB220SH1□ | 22Ω±25% | 700mA | 700mA | 0.2Ω |
| BLM18BB470SZ1□ | BLM18BB470SH1□ | 47Ω±25% | 600mA | 600mA | 0.25Ω |
| BLM18BB600SZ1□ | BLM18BB600SH1□ | 60Ω±25% | 600mA | 600mA | 0.25Ω |
| BLM18BB750SZ1□ | BLM18BB750SH1□ | 75Ω±25% | 600mA | 600mA | 0.3Ω |
| BLM18BB121SZ1□ | BLM18BB121SH1□ | 120Ω±25% | 550mA | 550mA | 0.3Ω |
| BLM18BB141SZ1□ | BLM18BB141SH1□ | 140Ω±25% | 500mA | 500mA | 0.35Ω |
| BLM18BB151SZ1□ | BLM18BB151SH1□ | 150Ω±25% | 450mA | 450mA | 0.37Ω |
| BLM18BB221SZ1□ | BLM18BB221SH1□ | 220Ω±25% | 450mA | 450mA | 0.45Ω |
| BLM18BB331SZ1□ | BLM18BB331SH1□ | 330Ω±25% | 400mA | 400mA | 0.58Ω |
| BLM18BB471SZ1□ | BLM18BB471SH1□ | 470Ω±25% | 300mA | 300mA | 0.85Ω |
| BLM18BD470SZ1□ | BLM18BD470SH1□ | 47Ω±25% | 500mA | 500mA | 0.3Ω |
| BLM18BD121SZ1□ | BLM18BD121SH1□ | 120Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM18BD151SZ1□ | BLM18BD151SH1□ | 150Ω±25% | 300mA | 300mA | 0.4Ω |
| BLM18BD221SZ1□ | BLM18BD221SH1□ | 220Ω±25% | 250mA | 250mA | 0.45Ω |
| BLM18BD331SZ1□ | BLM18BD331SH1□ | 330Ω±25% | 250mA | 250mA | 0.5Ω |
| BLM18BD421SZ1□ | BLM18BD421SH1□ | 420Ω±25% | 250mA | 250mA | 0.55Ω |
| BLM18BD471SZ1□ | BLM18BD471SH1□ | 470Ω±25% | 250mA | 250mA | 0.55Ω |
| BLM18BD601SZ1□ | BLM18BD601SH1□ | 600Ω±25% | 200mA | 200mA | 0.65Ω |
| BLM18BD102SZ1□ | BLM18BD102SH1□ | 1000Ω±25% | 200mA | 200mA | 0.85Ω |
| BLM18BD152SZ1□ | BLM18BD152SH1□ | 1500Ω±25% | 150mA | 150mA | 1.2Ω |
| BLM18BD182SZ1□ | BLM18BD182SH1□ | 1800Ω±25% | 150mA | 150mA | 1.5Ω |
| BLM18BD222SZ1□ | BLM18BD222SH1□ | 2200Ω±25% | 150mA | 150mA | 1.5Ω |
| BLM18BD252SZ1□ | BLM18BD252SH1□ | 2500Ω±25% | 150mA | 150mA | 1.5Ω |

Operating Temp. Range: -55°C to 125°C

Continued on the following page. ↗


Continued from the preceding page. ↘

Z-f characteristics: BLM18BA_SZ1 series

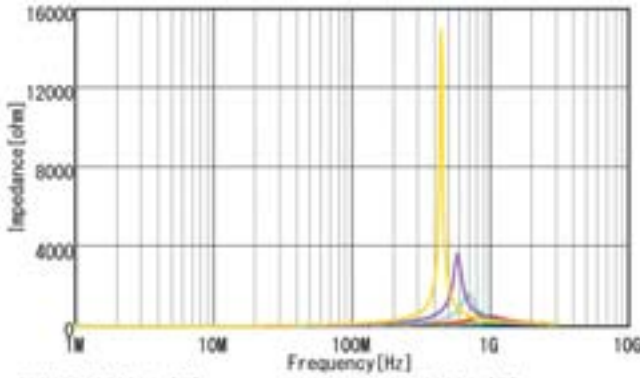


- ELM18BA050SZ1 [Z]
- ELM18BA220SZ1 [Z]
- ELM18BA750SZ1 [Z]
- ELM18BA100SZ1 [Z]
- ELM18BA470SZ1 [Z]
- ELM18BA121SZ1 [Z]

Z-f characteristics: BLM18BA_SH1 series

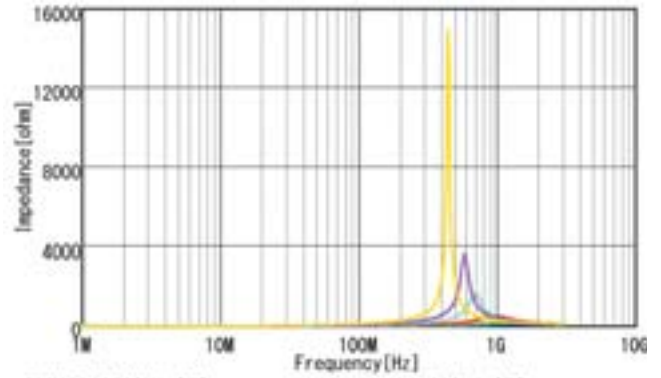


- ELM18BA050SH1 [Z]
- ELM18BA220SH1 [Z]
- ELM18BA750SH1 [Z]
- ELM18BA100SH1 [Z]
- ELM18BA470SH1 [Z]
- ELM18BA121SH1 [Z]

Z-f characteristics: BLM18BB_SZ1 series

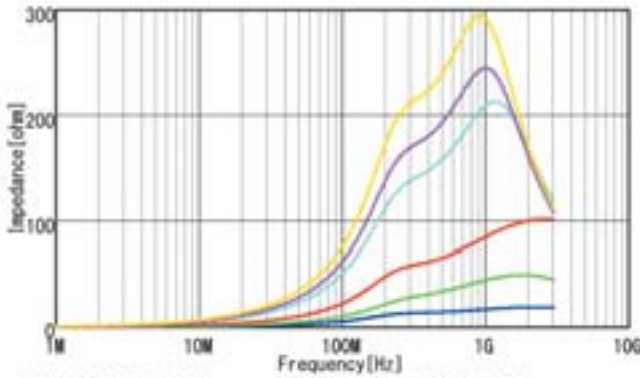


- ELM18BB050SZ1 [Z]
- ELM18BB220SZ1 [Z]
- ELM18BB600SZ1 [Z]
- ELM18BB100SZ1 [Z]
- ELM18BB470SZ1 [Z]
- ELM18BB750SZ1 [Z]

Z-f characteristics: BLM18BB_SH1 series

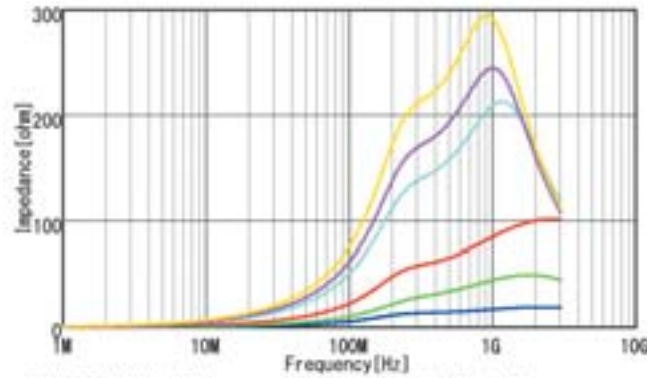


- ELM18BB050SH1 [Z]
- ELM18BB220SH1 [Z]
- ELM18BB600SH1 [Z]
- ELM18BB100SH1 [Z]
- ELM18BB470SH1 [Z]
- ELM18BB750SH1 [Z]

Z-f characteristics: BLM18BB_SZ1 series

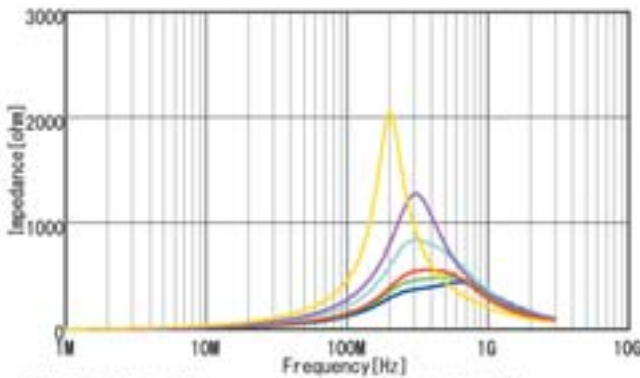

- ELM18BB121SZ1 [Z]
- ELM18BB151SZ1 [Z]
- ELM18BB331SZ1 [Z]
- ELM18BB141SZ1 [Z]
- ELM18BB221SZ1 [Z]
- ELM18BB471SZ1 [Z]

Z-f characteristics: BLM18BB_SH1 series

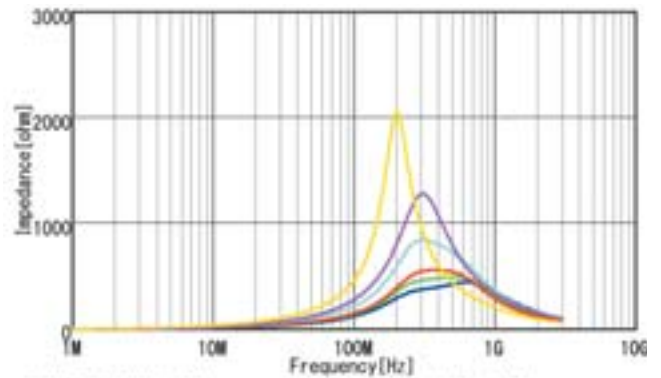


- ELM18BB121SH1 [Z]
- ELM18BB151SH1 [Z]
- ELM18BB331SH1 [Z]
- ELM18BB141SH1 [Z]
- ELM18BB221SH1 [Z]
- ELM18BB471SH1 [Z]

Continued on the following page. ↗


Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘


Z-f characteristics: BLM18BD_SZ1 series

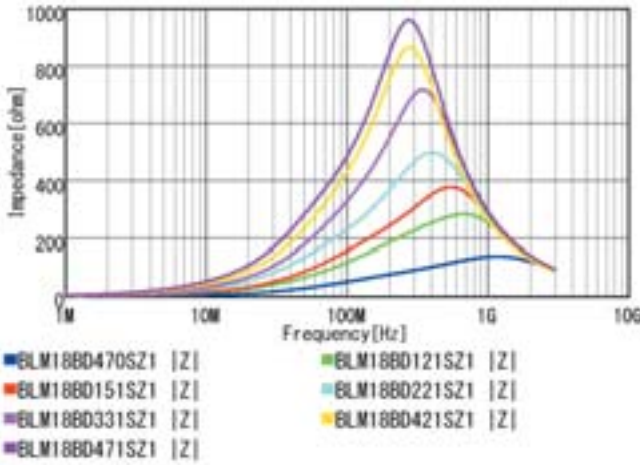


Z-f characteristics: BLM18BD_SH1 series

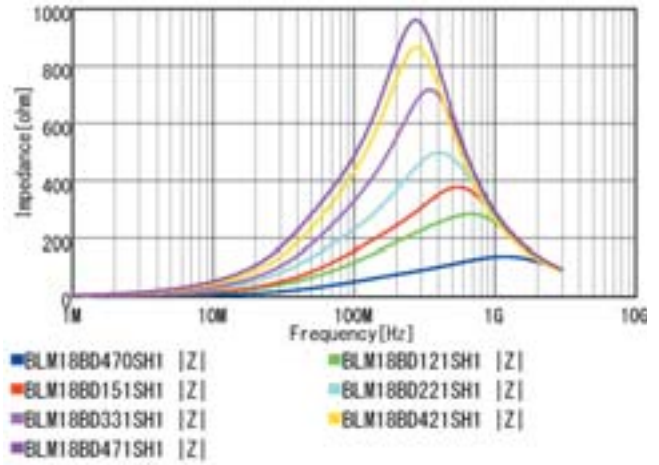


Z-f characteristics: BLM18BD_SZ1 series

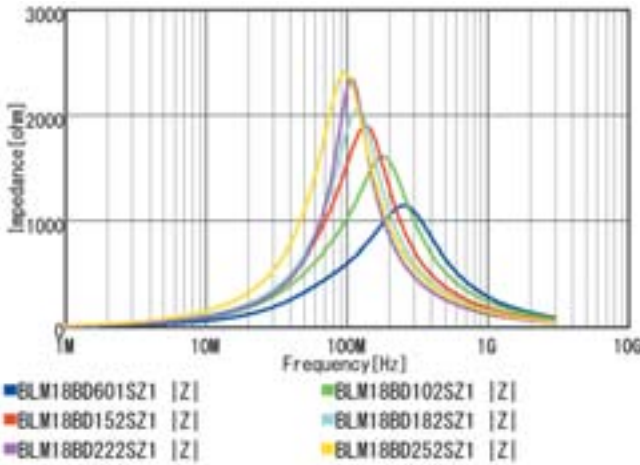


Z-f characteristics: BLM18BD_SH1 series

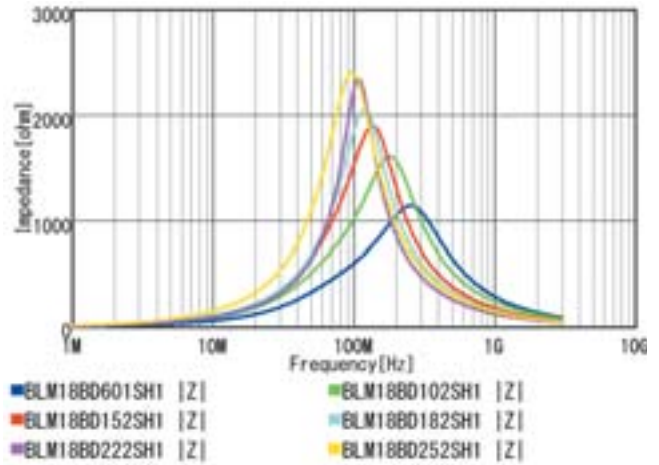


BLM18BA050SZ1/BLM18BA050SH1

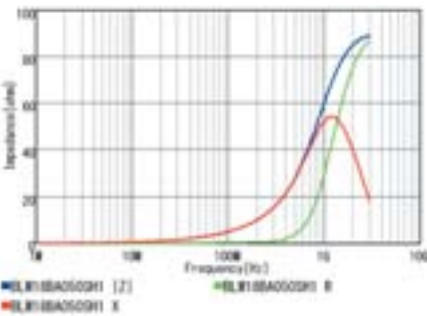


BLM18BA100SZ1/BLM18BA100SH1

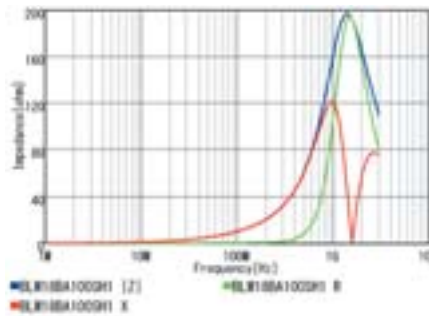


BLM18BA220SZ1/BLM18BA220SH1

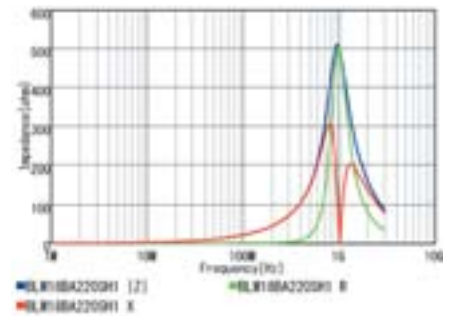


BLM18BA470SZ1/BLM18BA470SH1

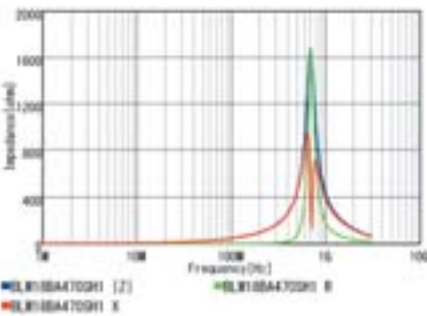

BLM18BA750SZ1/BLM18BA750SH1

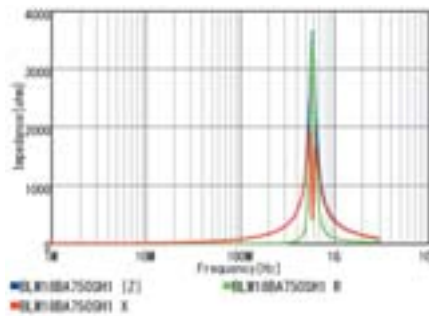
















BLM18BA121SZ1/BLM18BA121SH1

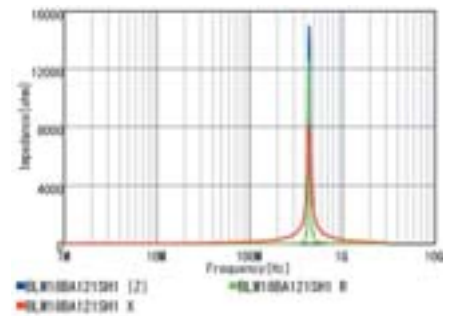

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

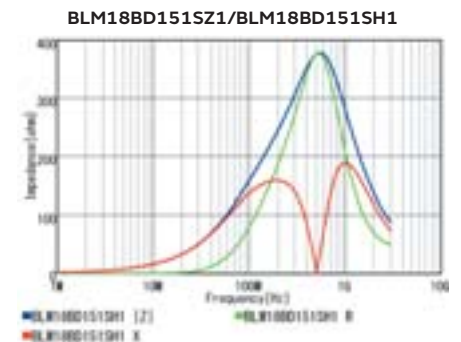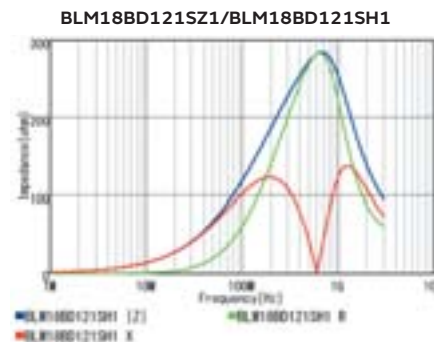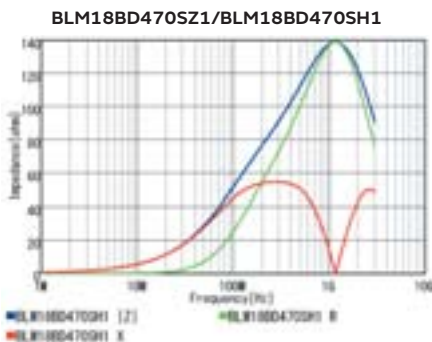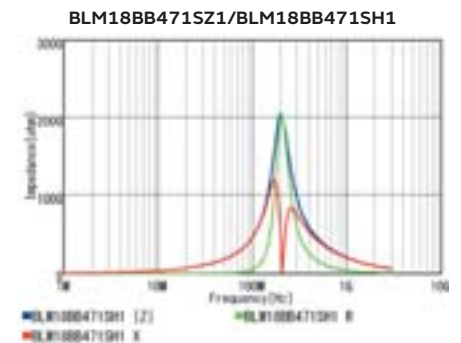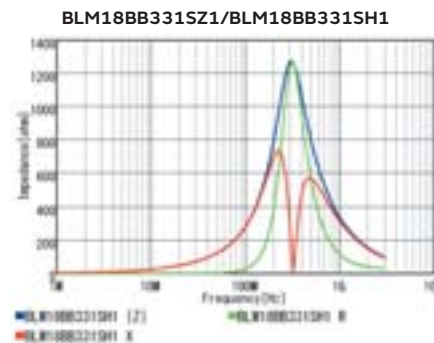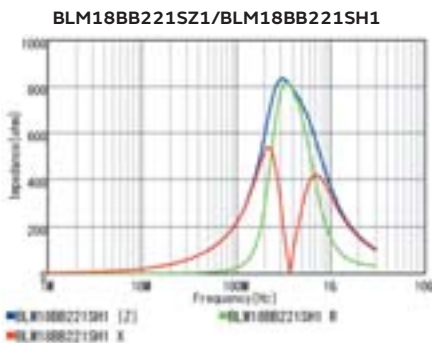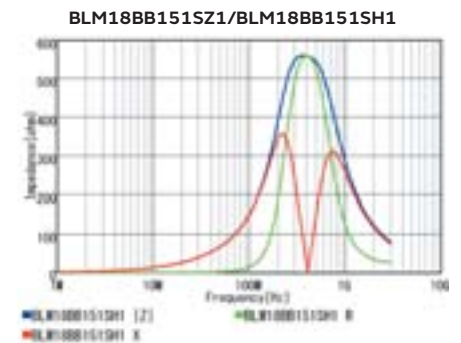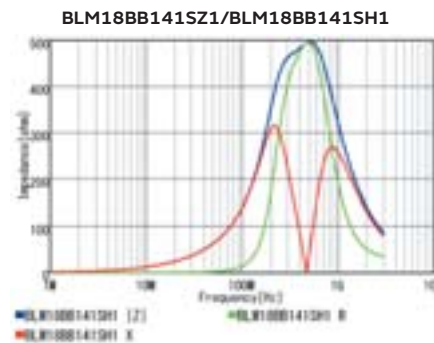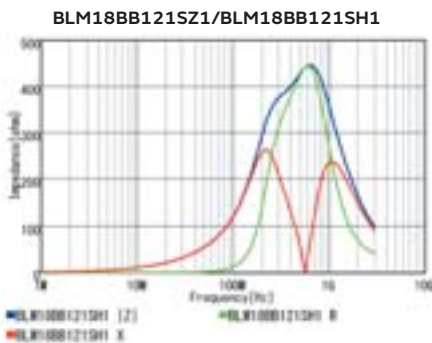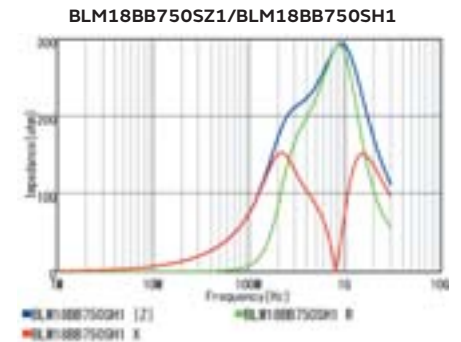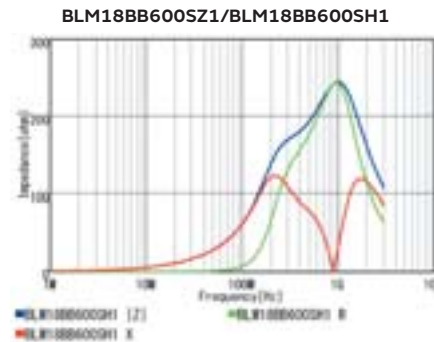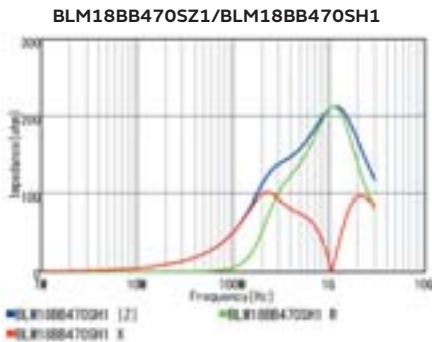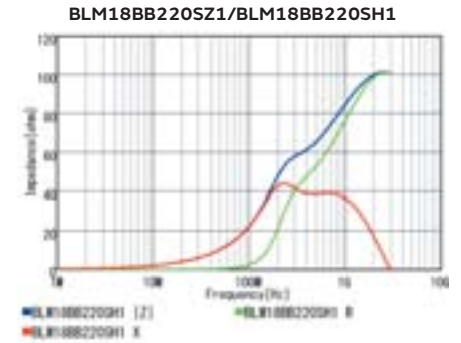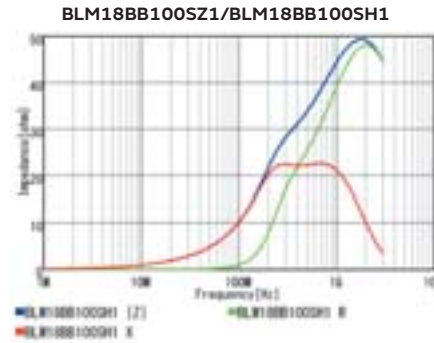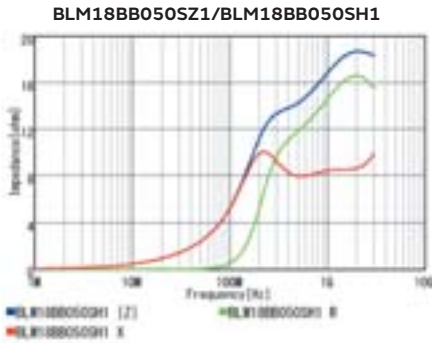

Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics

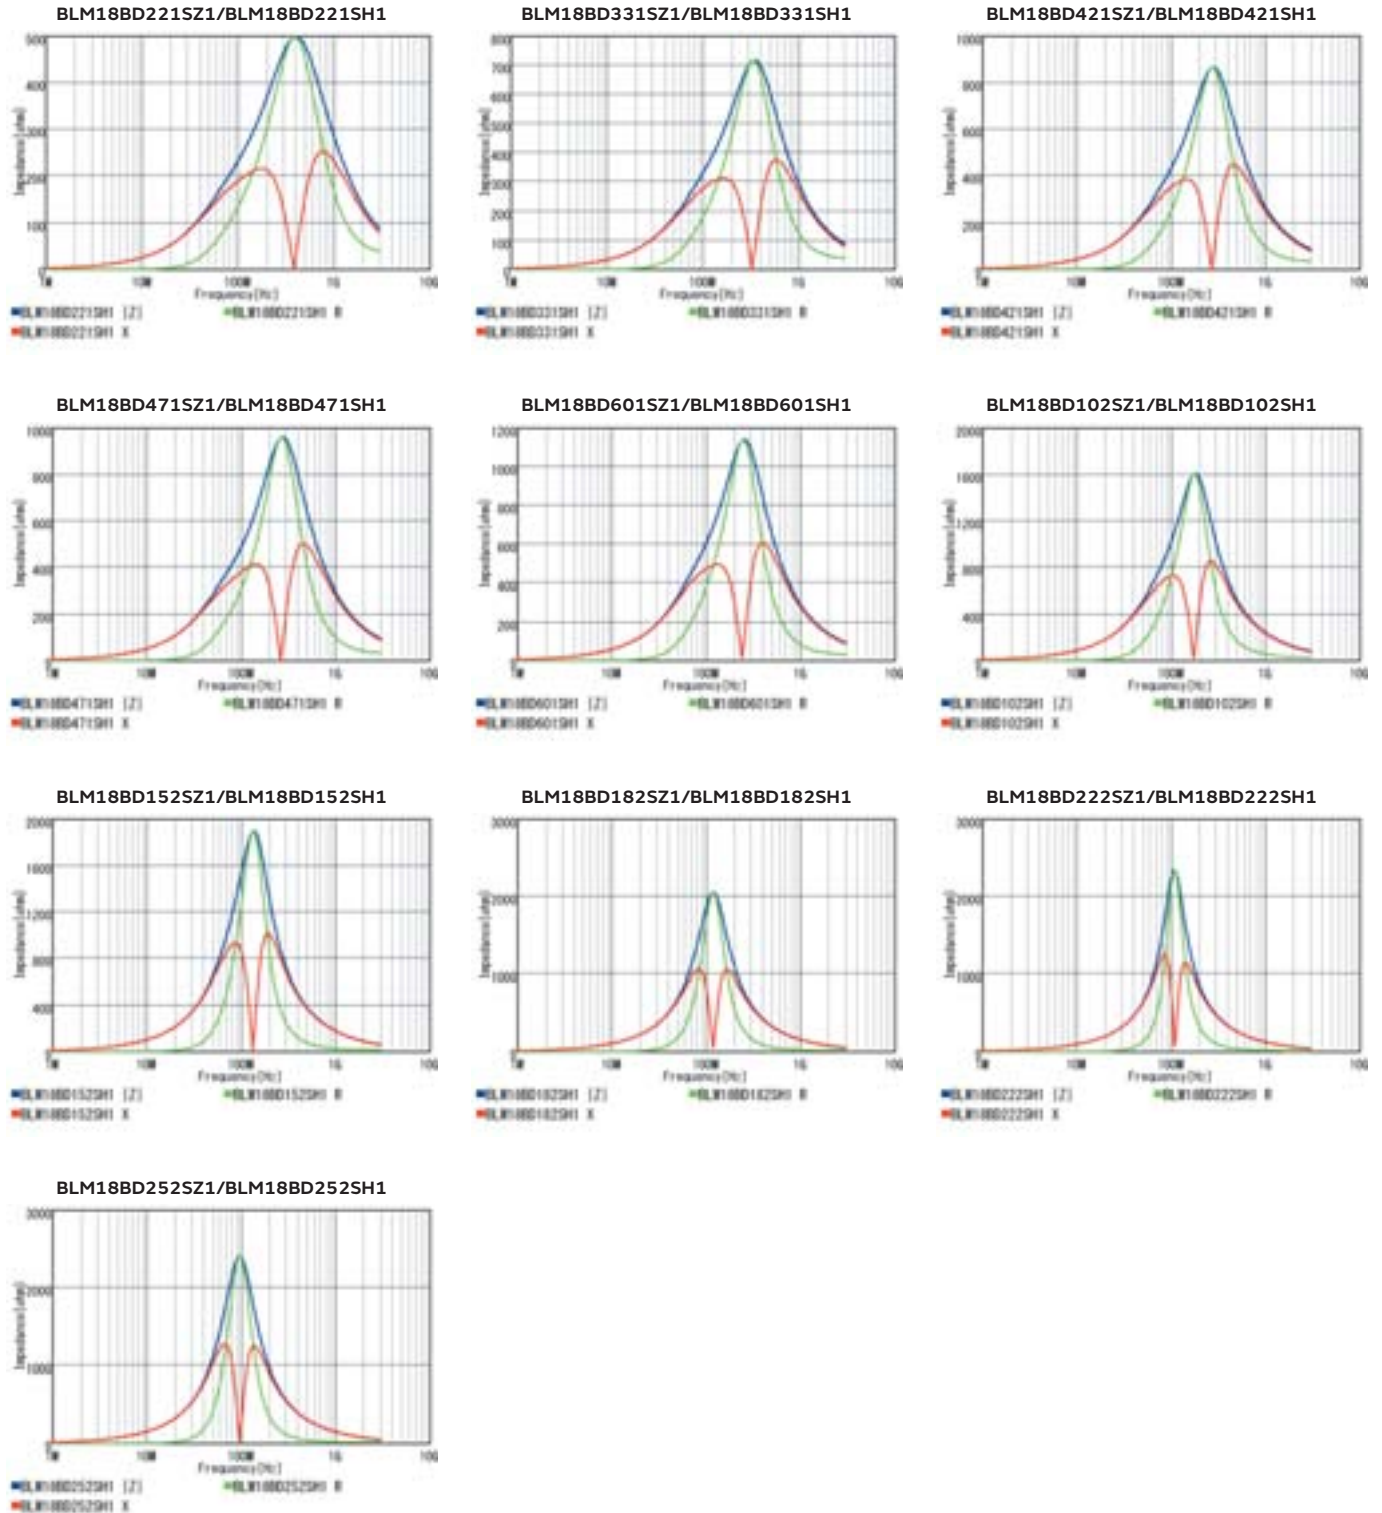

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI FIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM18BD(150°C available) Series 0603/1608(inch/mm)

Appearance/Dimensions

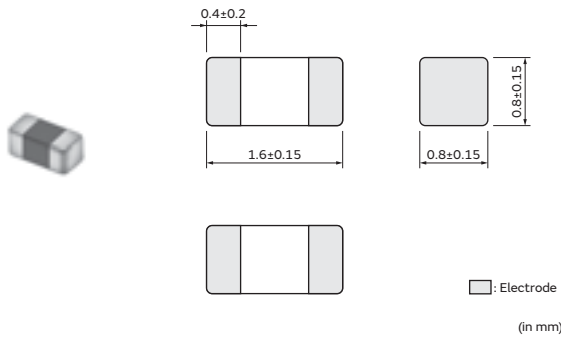

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| — | BLM18BD470BH1□ | 47Ω±25% | 500mA | 500mA | 0.3Ω |
| — | BLM18BD121BH1□ | 120Ω±25% | 300mA | 300mA | 0.4Ω |
| — | BLM18BD151BH1□ | 150Ω±25% | 300mA | 300mA | 0.4Ω |
| — | BLM18BD221BH1□ | 220Ω±25% | 250mA | 250mA | 0.45Ω |
| — | BLM18BD331BH1□ | 330Ω±25% | 250mA | 250mA | 0.5Ω |
| — | BLM18BD421BH1□ | 420Ω±25% | 250mA | 250mA | 0.55Ω |
| — | BLM18BD471BH1□ | 470Ω±25% | 250mA | 250mA | 0.55Ω |
| — | BLM18BD601BH1□ | 600Ω±25% | 200mA | 200mA | 0.65Ω |
| — | BLM18BD102BH1□ | 1000Ω±25% | 200mA | 200mA | 0.85Ω |
| — | BLM18BD152BH1□ | 1500Ω±25% | 150mA | 150mA | 1.2Ω |
| — | BLM18BD182BH1□ | 1800Ω±25% | 150mA | 150mA | 1.5Ω |
| — | BLM18BD222BH1□ | 2200Ω±25% | 150mA | 150mA | 1.5Ω |
| — | BLM18BD252BH1□ | 2500Ω±25% | 150mA | 150mA | 1.5Ω |

Rated Current at 150°C: 10mA
 Operating Temp. Range: -55°C to 150°C

Z-f characteristics: BLM18BD_BH1 series

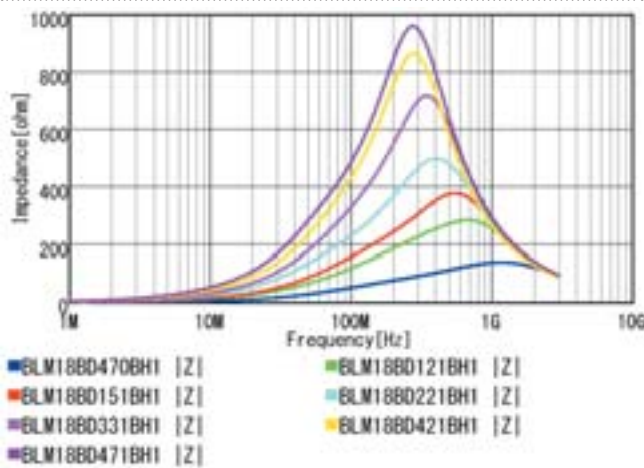


Z-f characteristics: BLM18BD_BH1 series

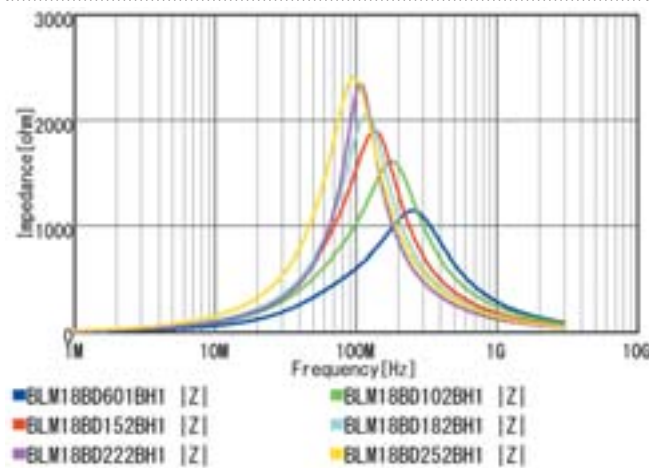

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

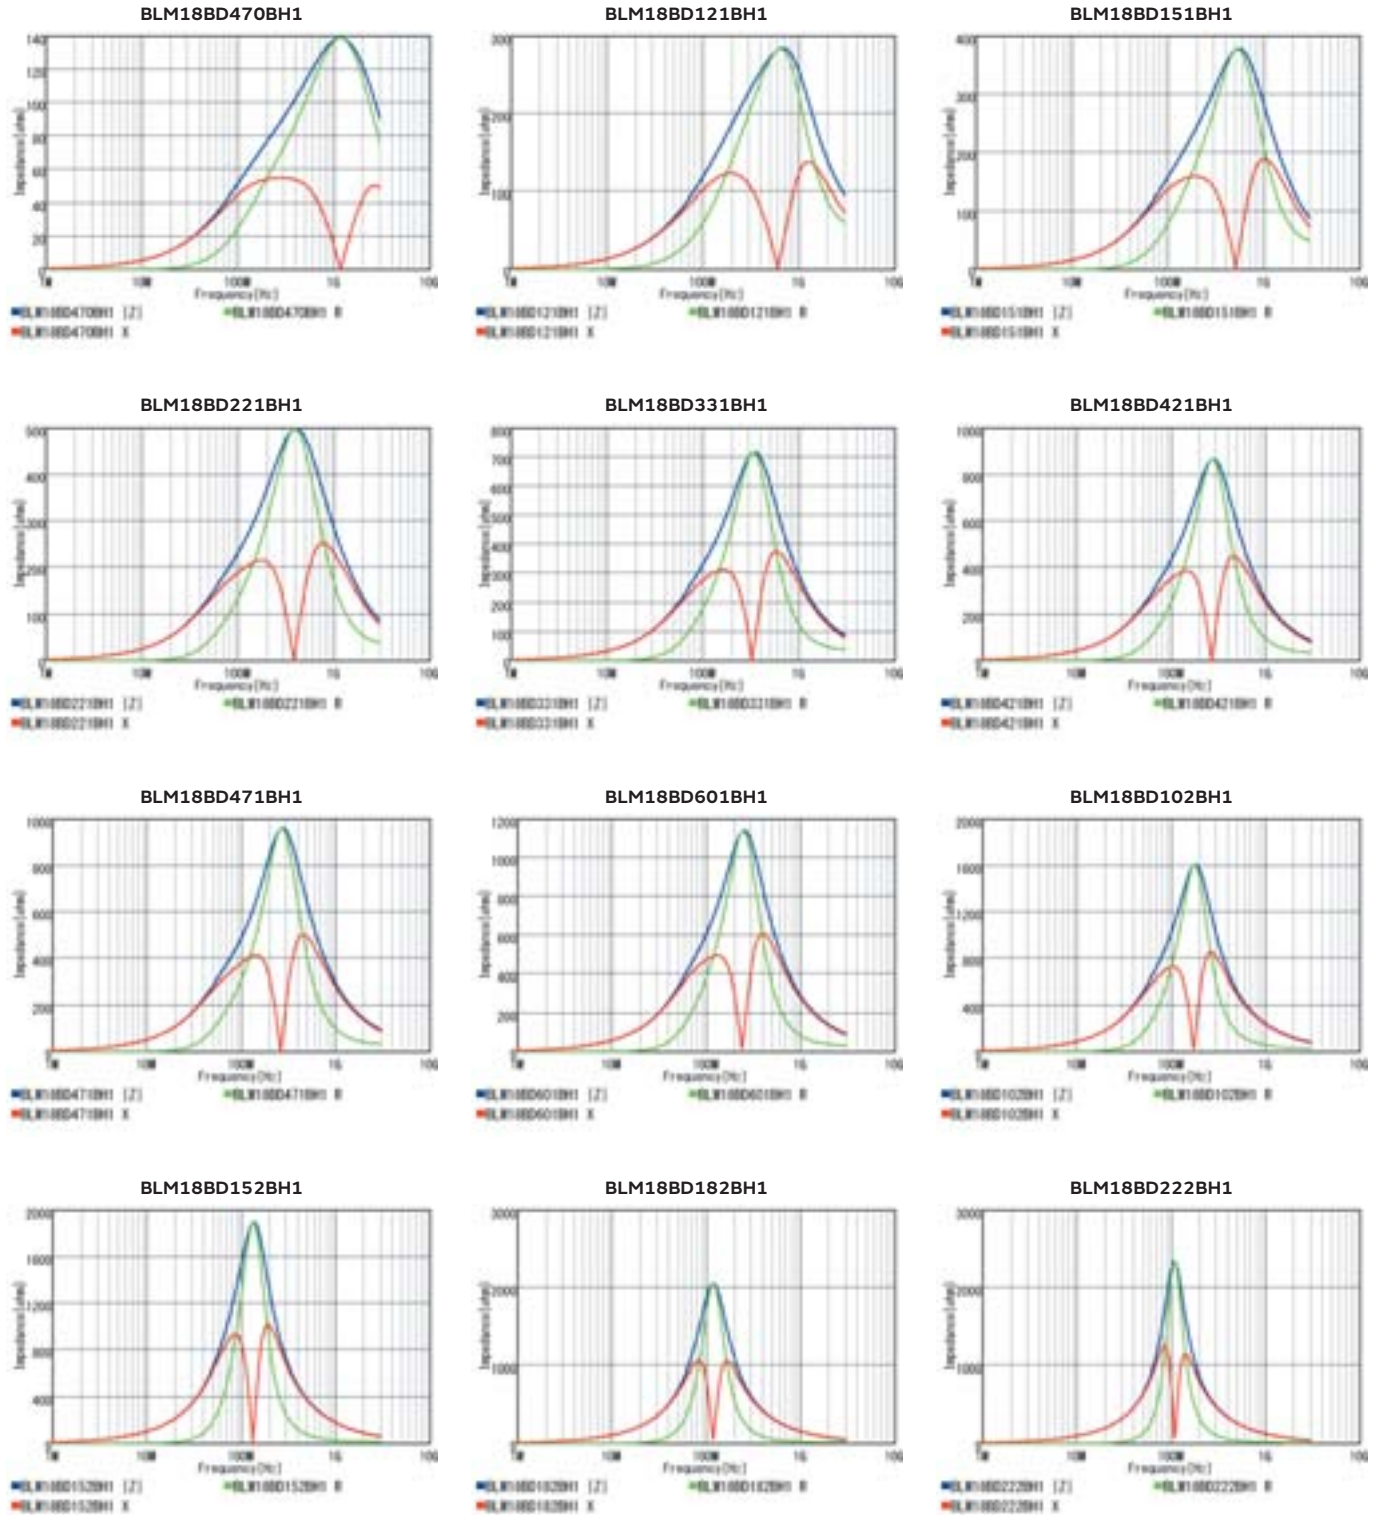

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Z-f characteristics


BLM18BD252BH1

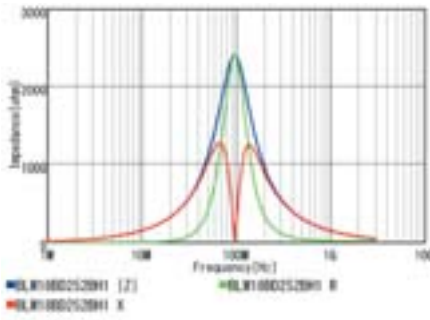

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM18BD_BH1 series.
 Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

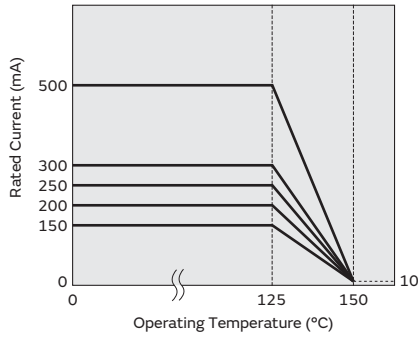

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM18HB/HD/HE/HG Series 0603/1608(inch/mm)

Appearance/Dimensions

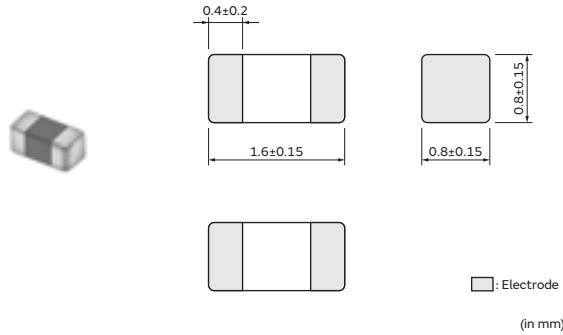

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM18HB121SZ1□ | — | 120Ω±25% | 500Ω±40% | 200mA | 200mA | 0.5Ω |
| BLM18HB221SZ1□ | — | 220Ω±25% | 1100Ω±40% | 100mA | 100mA | 0.8Ω |
| BLM18HB331SZ1□ | — | 330Ω±25% | 1600Ω±40% | 50mA | 50mA | 1.2Ω |
| BLM18HD471SZ1□ | BLM18HD471SH1□ | 470Ω±25% | 1000Ω(Typ.) | 100mA | 100mA | 1.2Ω |
| BLM18HD601SZ1□ | BLM18HD601SH1□ | 600Ω±25% | 1200Ω(Typ.) | 100mA | 100mA | 1.5Ω |
| BLM18HD102SZ1□ | BLM18HD102SH1□ | 1000Ω±25% | 1700Ω(Typ.) | 50mA | 50mA | 1.8Ω |
| BLM18HE601SZ1□ | BLM18HE601SH1□ | 600Ω±25% | 600Ω(Typ.) | 800mA | 600mA | 0.25Ω |
| BLM18HE102SZ1□ | BLM18HE102SH1□ | 1000Ω±25% | 1000Ω(Typ.) | 600mA | 500mA | 0.35Ω |
| BLM18HE152SZ1□ | BLM18HE152SH1□ | 1500Ω±25% | 1500Ω(Typ.) | 500mA | 400mA | 0.5Ω |
| BLM18HG471SZ1□ | BLM18HG471SH1□ | 470Ω±25% | 600Ω(Typ.) | 200mA | 200mA | 0.85Ω |
| BLM18HG601SZ1□ | BLM18HG601SH1□ | 600Ω±25% | 700Ω(Typ.) | 200mA | 200mA | 1Ω |
| BLM18HG102SZ1□ | BLM18HG102SH1□ | 1000Ω±25% | 1000Ω(Typ.) | 100mA | 100mA | 1.6Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM18HB_SZ1 series

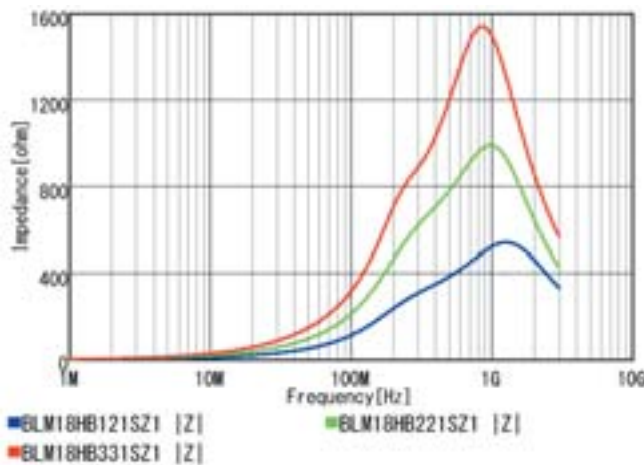


Z-f characteristics: BLM18HD_SZ1 series

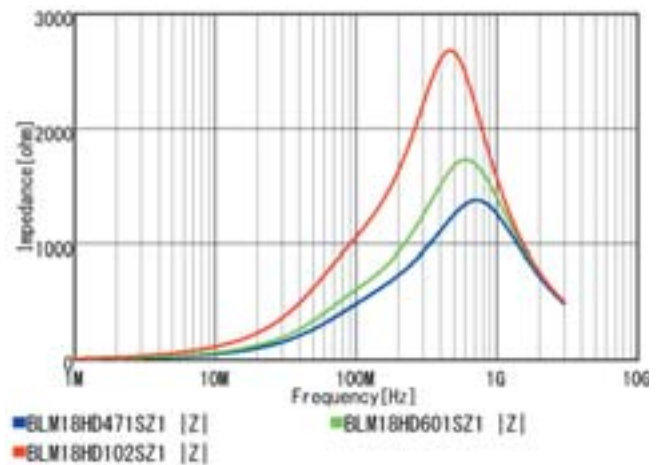


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLM18HD_SH1 series

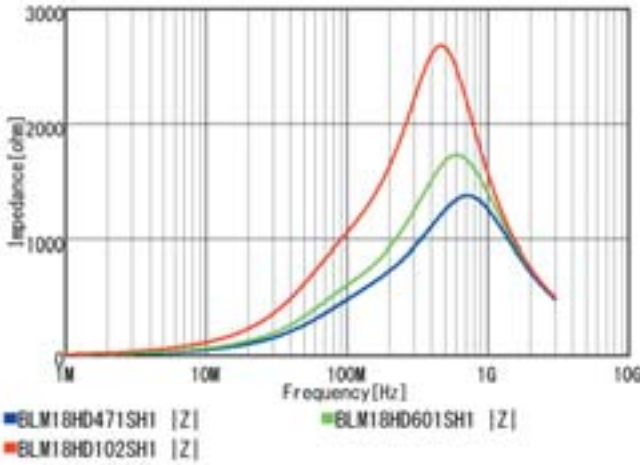


Z-f characteristics: BLM18HE_SZ1 series

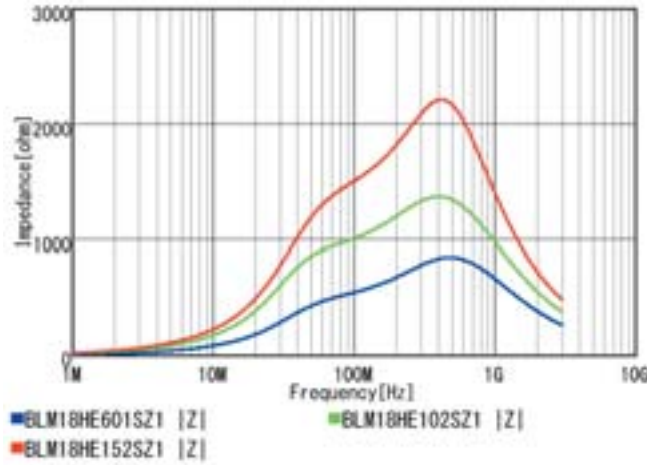


Z-f characteristics: BLM18HE_SH1 series

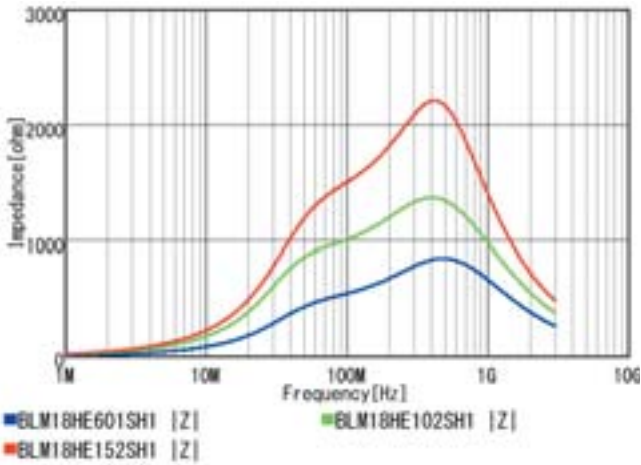

Z-f characteristics: BLM18HG_SZ1 series

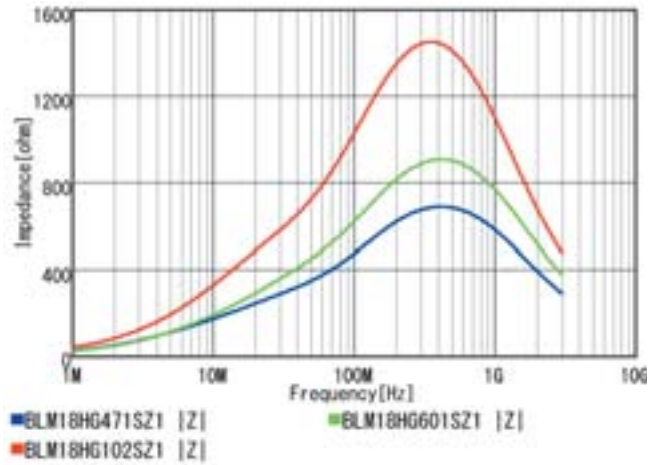

Z-f characteristics: BLM18HG_SH1 series

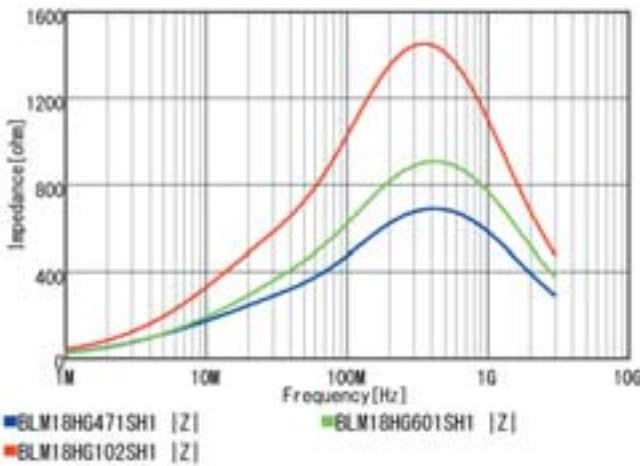


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics

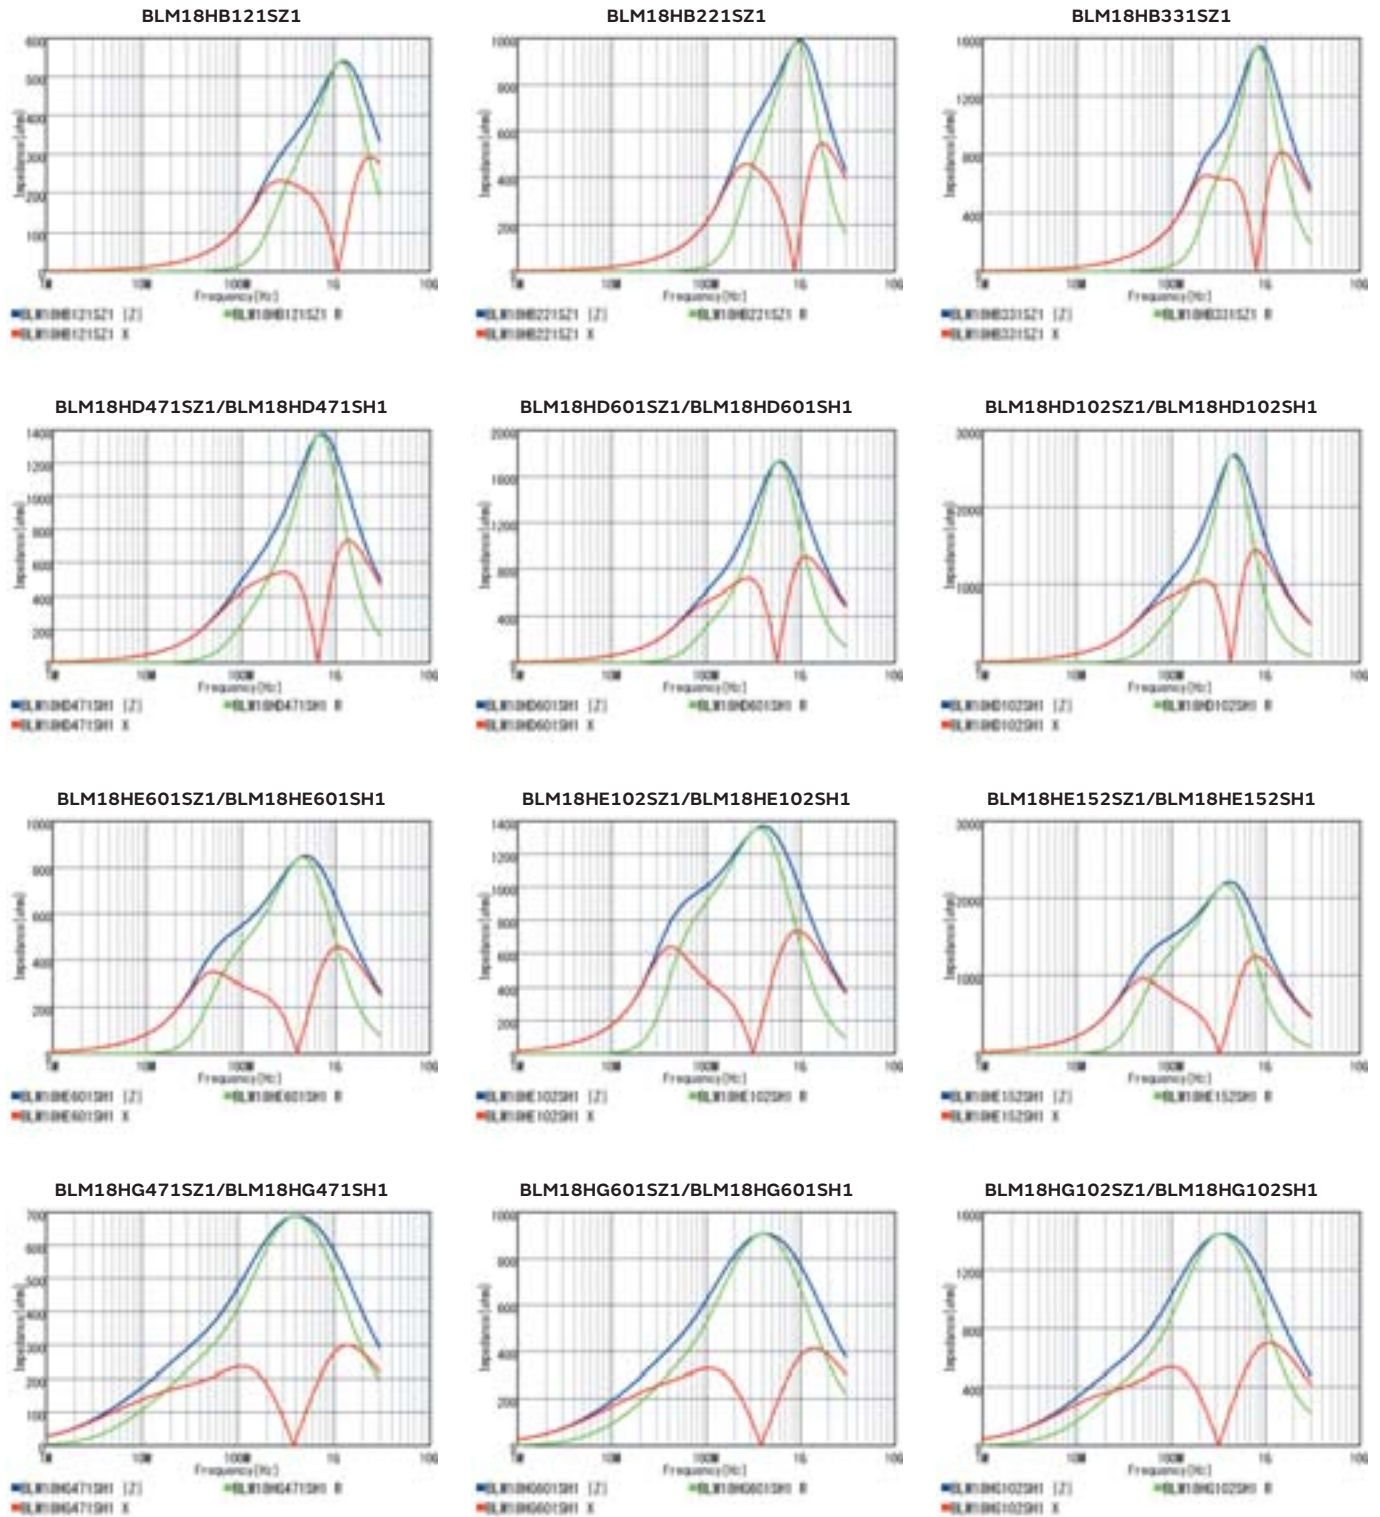

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI/FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI/FIL®

Lead Type
 EMI Suppression Filters


SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM18HE series.
Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

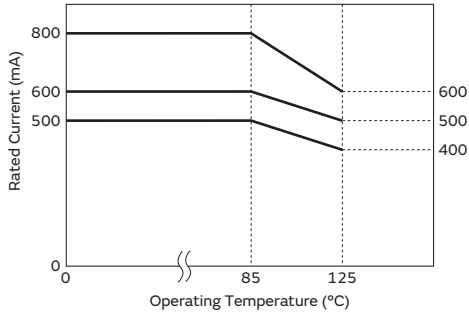

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Ferrite Bead SMD Type

BLM18EG Series 0603/1608(inch/mm)

Appearance/Dimensions

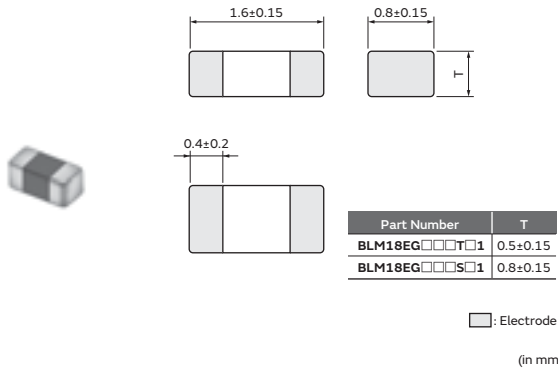

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM18EG121SZ1□ | BLM18EG121SH1□ | 120Ω±25% | 145Ω(Typ.) | 2A | 1A | 0.04Ω |
| — | BLM18EG181SH1□ | 180Ω±25% | 240Ω(Typ.) | 2A | 1A | 0.05Ω |
| BLM18EG221SZ1□ | — | 220Ω±25% | 260Ω(Typ.) | 2A | 1A | 0.05Ω |
| BLM18EG471SZ1□ | BLM18EG471SH1□ | 470Ω±25% | 550Ω(Typ.) | 500mA | 500mA | 0.21Ω |
| BLM18EG601SZ1□ | BLM18EG601SH1□ | 600Ω±25% | 700Ω(Typ.) | 500mA | 500mA | 0.35Ω |
| BLM18EG101TZ1□ | BLM18EG101TH1□ | 100Ω±25% | 140Ω(Typ.) | 2A | 1A | 0.045Ω |
| BLM18EG221TZ1□ | BLM18EG221TH1□ | 220Ω±25% | 300Ω(Typ.) | 1A | 1A | 0.15Ω |
| BLM18EG331TZ1□ | BLM18EG331TH1□ | 330Ω±25% | 450Ω(Typ.) | 500mA | 500mA | 0.21Ω |
| BLM18EG391TZ1□ | BLM18EG391TH1□ | 390Ω±25% | 520Ω(Typ.) | 500mA | 500mA | 0.3Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM18EG_SZ1 series

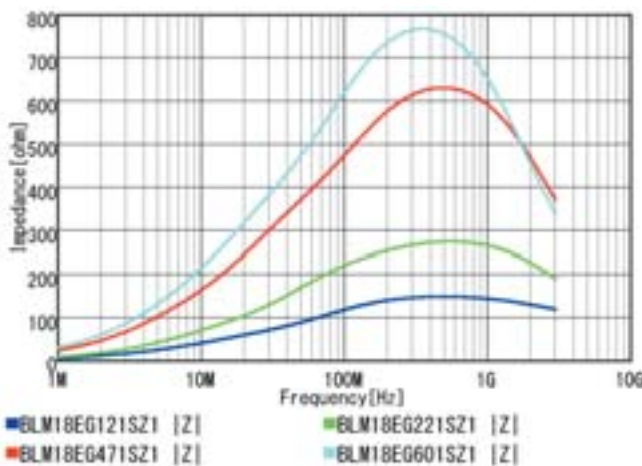


Z-f characteristics: BLM18EG_SH1 series

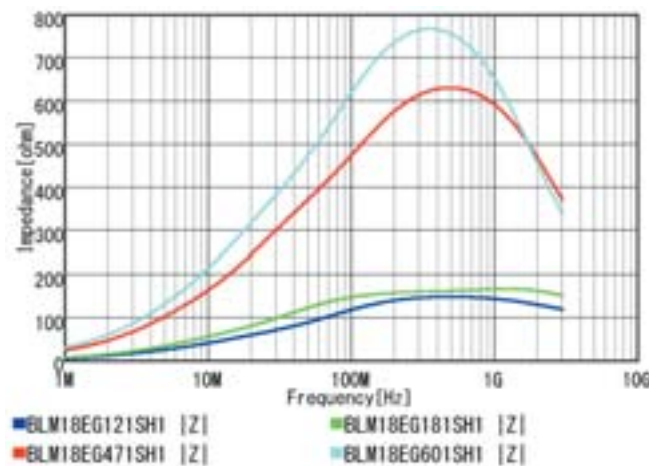


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLM18EG_TZ1 series

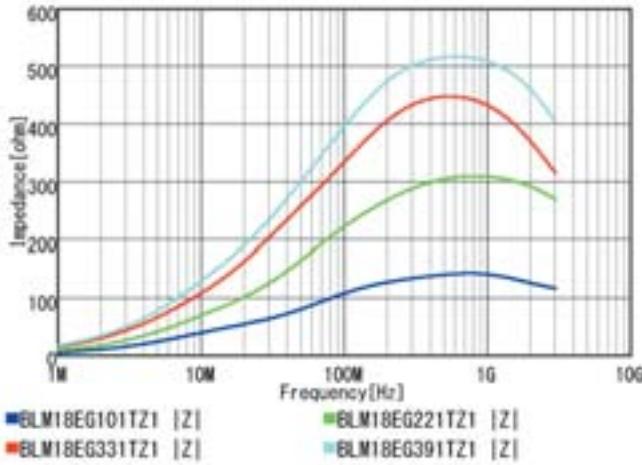


Z-f characteristics: BLM18EG_TH1 series

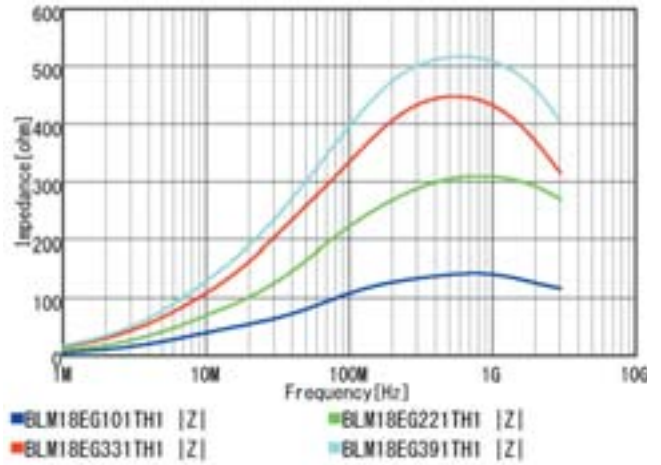


BLM18EG121SZ1/BLM18EG121SH1

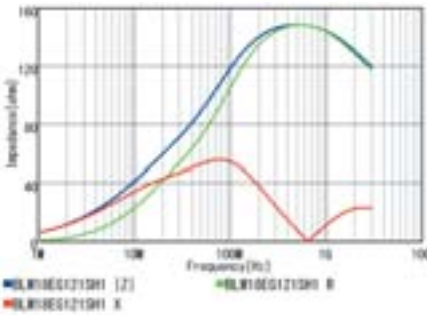


BLM18EG181SH1

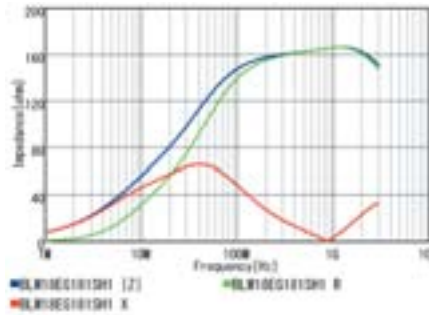


BLM18EG221SZ1

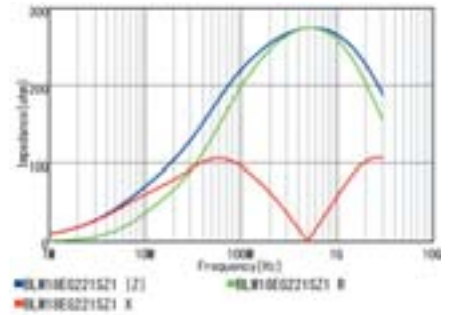


BLM18EG471SZ1/BLM18EG471SH1

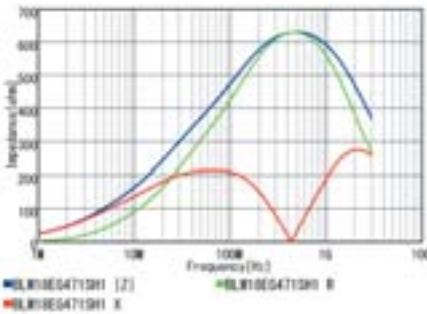


BLM18EG601SZ1/BLM18EG601SH1

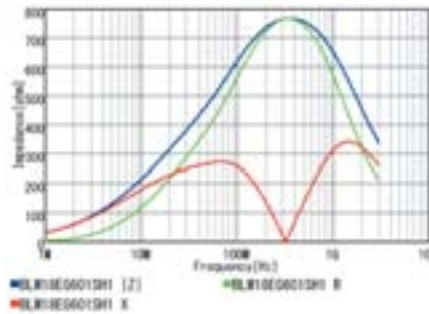


BLM18EG101TZ1/BLM18EG101TH1

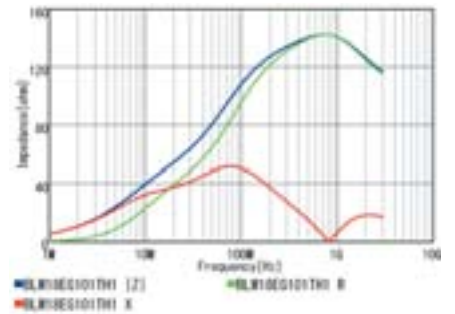


BLM18EG221TZ1/BLM18EG221TH1

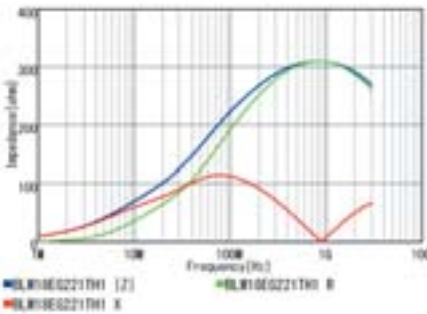

BLM18EG331TZ1/BLM18EG331TH1

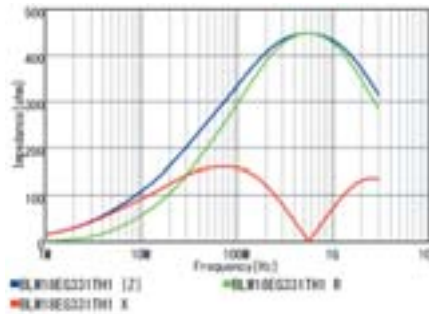

BLM18EG391TZ1/BLM18EG391TH1

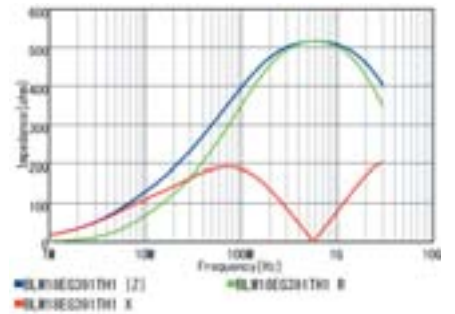

Continued on the following page. ↗


Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMI Filter SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM18EG series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

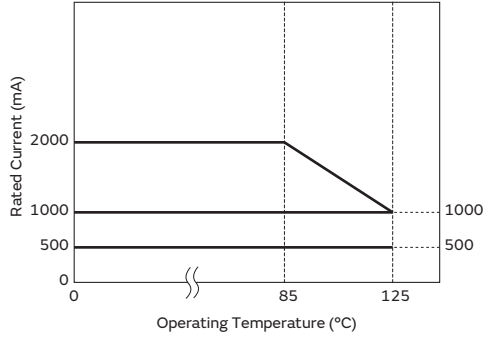

SMD Type
Chip Ferrite Bead

SMD Type
Chip EMIFIL®

SMD Type
Chip Common Mode Choke Coil

SMD Type
Block Type EMIFIL®


Lead Type
EMI Suppression Filters

SMD Type
Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM18G Series 0603/1608(inch/mm)

Appearance/Dimensions

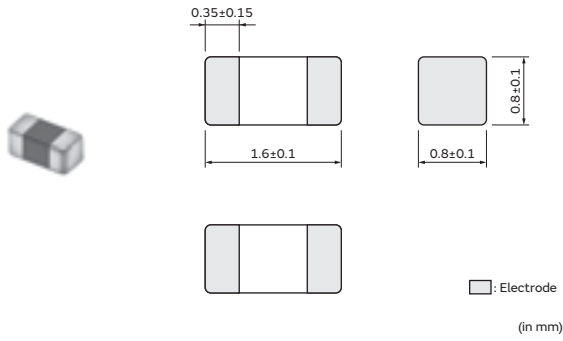

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Impedance at 1GHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) | Operating Temp. Range |
|----------------|-------------------|---------------------|-------------------|-----------------------|------------------------|----------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | | |
| BLM18GG471SZ1□ | — | 470Ω±25% | 1800Ω±30% | 200mA | 200mA | 1.3Ω | -55°C to 125°C |


Z-f characteristics

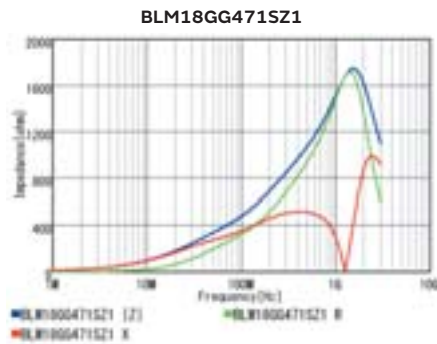

Chip Ferrite Bead SMD Type

BLM21PG Series 0805/2012(inch/mm)

Appearance/Dimensions

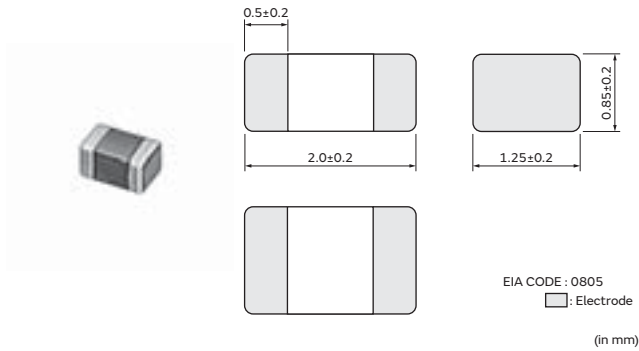

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM21PG220SZ1□ | BLM21PG220SH1□ | 22Ω±25% | 6A | 3.3A | 0.009Ω |
| BLM21PG300SZ1□ | BLM21PG300SH1□ | 30Ω(Typ.) | 4A | 2.3A | 0.014Ω |
| BLM21PG600SZ1□ | BLM21PG600SH1□ | 60Ω±25% | 3.5A | 1.9A | 0.02Ω |
| BLM21PG121SZ1□ | BLM21PG121SH1□ | 120Ω±25% | 3A | 1.55A | 0.03Ω |
| BLM21PG221SZ1□ | BLM21PG221SH1□ | 220Ω±25% | 2A | 1.25A | 0.045Ω |
| BLM21PG331SZ1□ | BLM21PG331SH1□ | 330Ω±25% | 1.5A | 1A | 0.07Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM21PG_SZ1 series

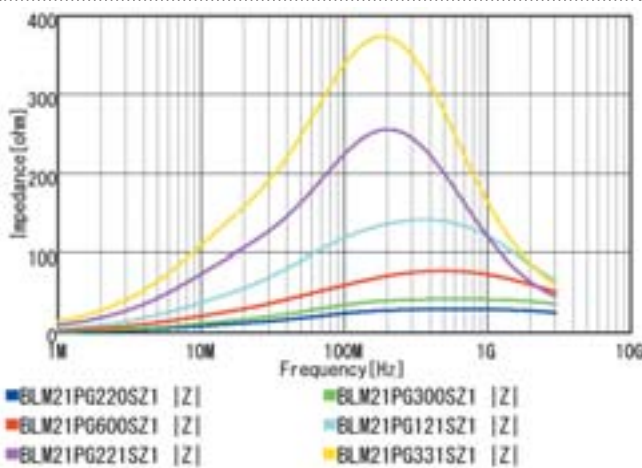







Z-f characteristics: BLM21PG_SH1 series

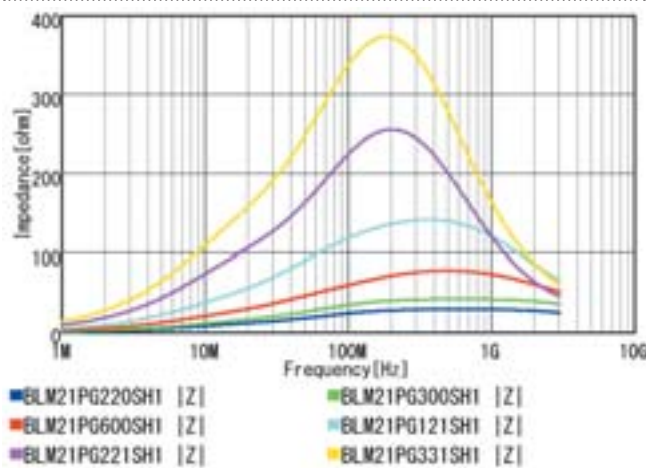

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

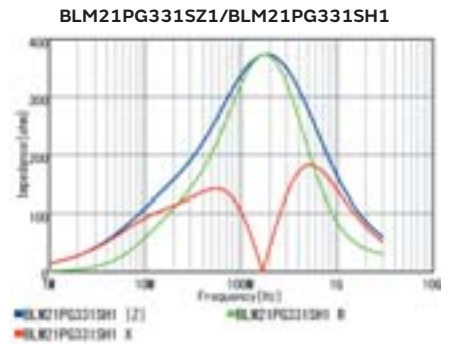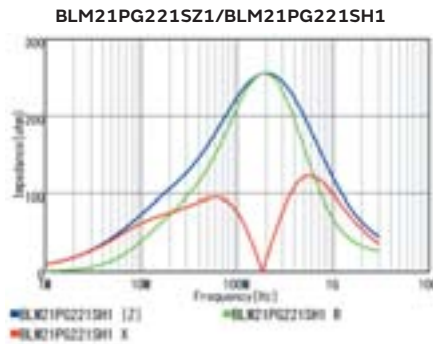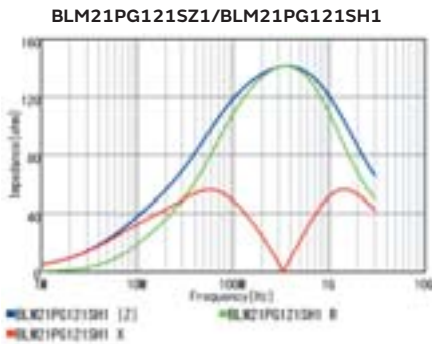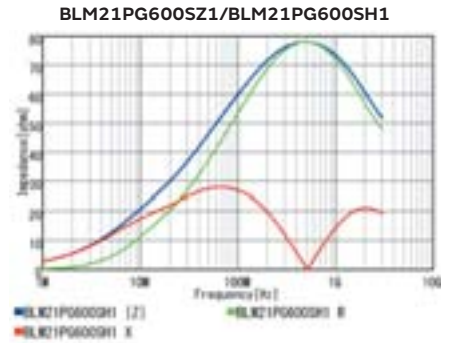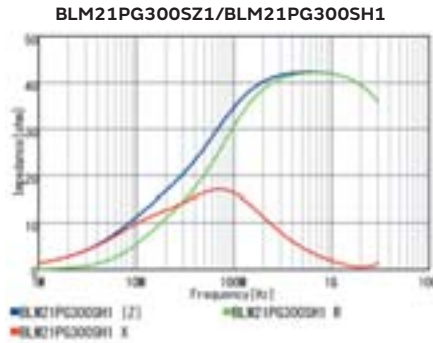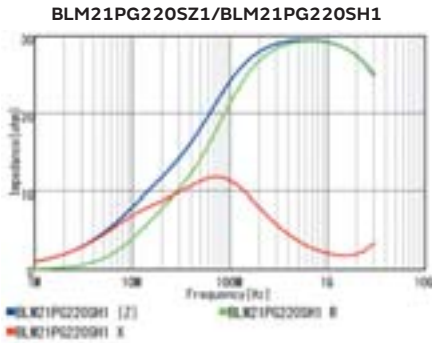

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM21PG series.
 Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

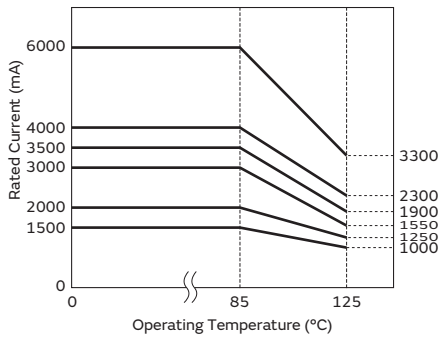

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM21PG(150°C available) Series 0805/2012(inch/mm)

Appearance/Dimensions

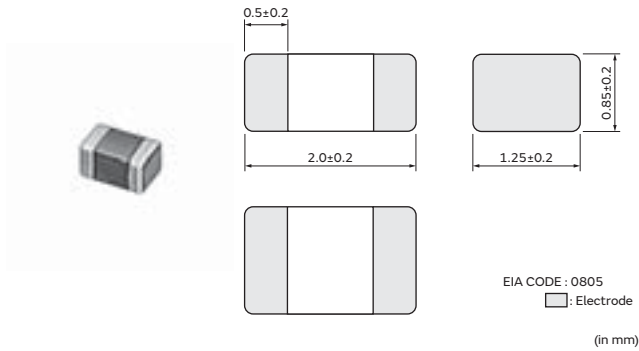

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| — | BLM21PG220BH1□ | 22Ω±25% | 3.3A | 3.3A | 0.009Ω |
| — | BLM21PG300BH1□ | 30Ω(Typ.) | 2.3A | 2.3A | 0.014Ω |
| — | BLM21PG600BH1□ | 60Ω±25% | 1.9A | 1.9A | 0.02Ω |
| — | BLM21PG121BH1□ | 120Ω±25% | 1.55A | 1.55A | 0.03Ω |
| — | BLM21PG221BH1□ | 220Ω±25% | 1.25A | 1.25A | 0.045Ω |
| — | BLM21PG331BH1□ | 330Ω±25% | 1A | 1A | 0.07Ω |

Rated Current at 150°C: 10mA
 Operating Temp. Range: -55°C to 150°C


Z-f characteristics: BLM21PG_BH1 series

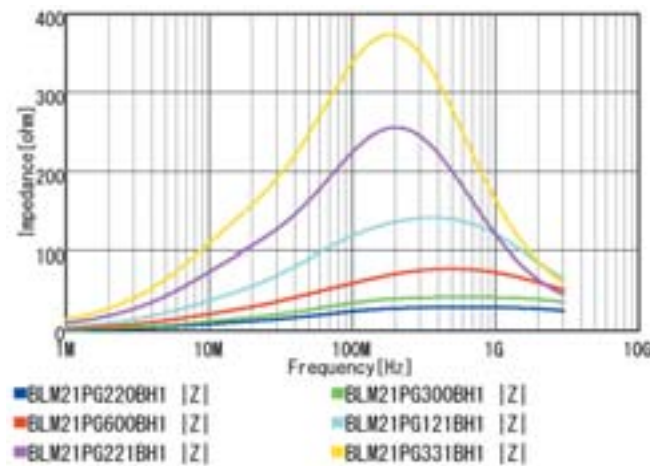

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

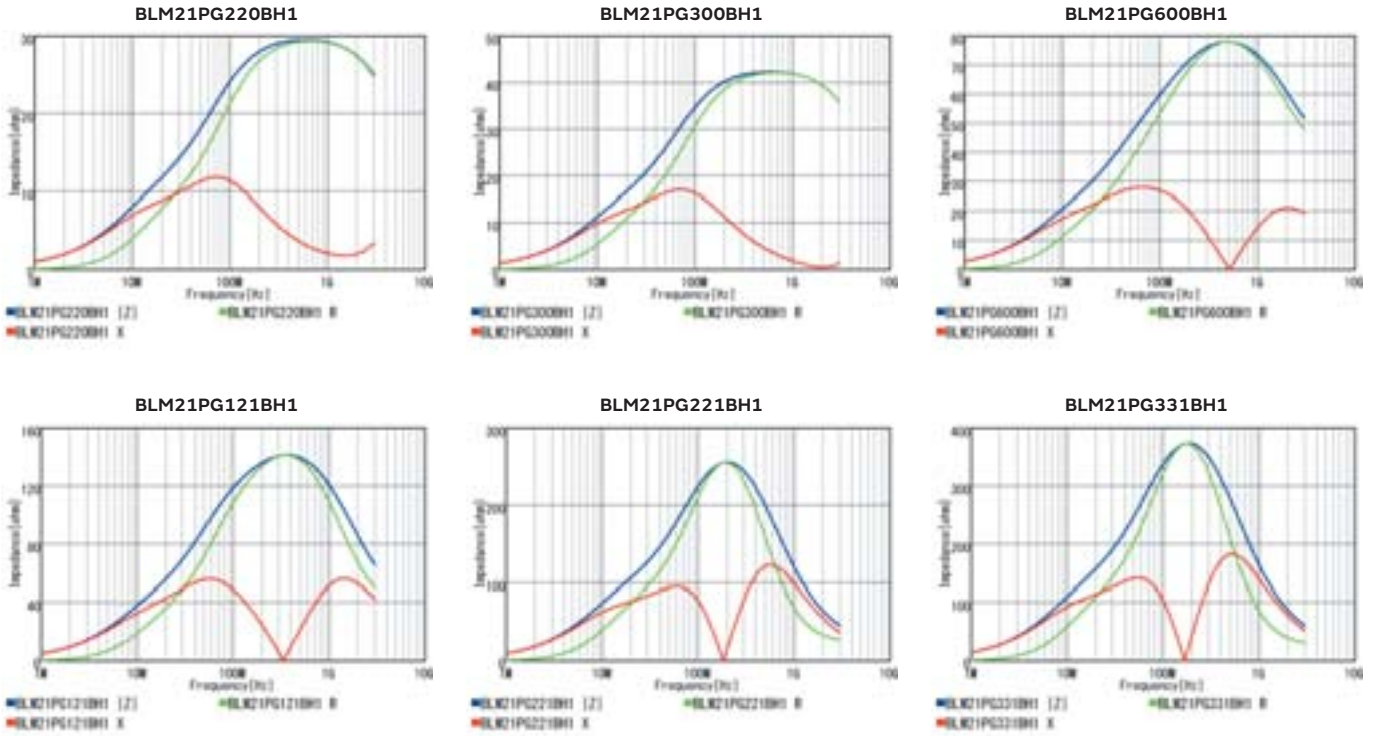

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM21PG_BH1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

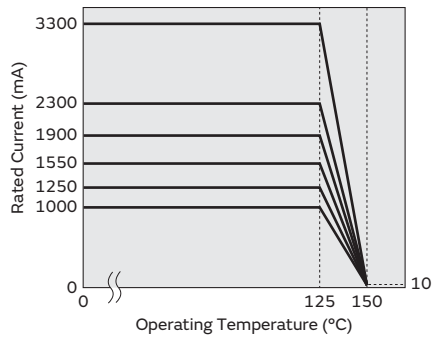


Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMI Filter SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Chip Ferrite Bead SMD Type

BLM21SN Series 0805/2012(inch/mm)

Appearance/Dimensions

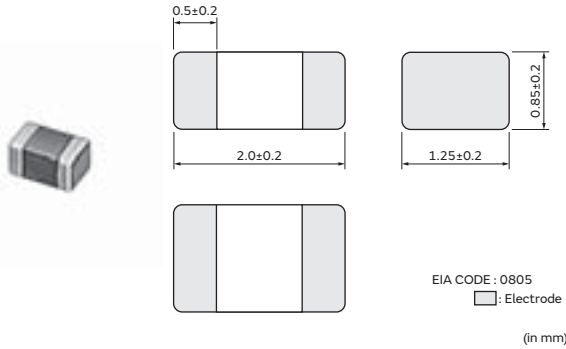

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) | Operating Temp. Range |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM21SN300SZ1□ | BLM21SN300SH1□ | 30Ω±10Ω | 8.5A | 6A | 0.004Ω | -55°C to 125°C |


Z-f characteristics

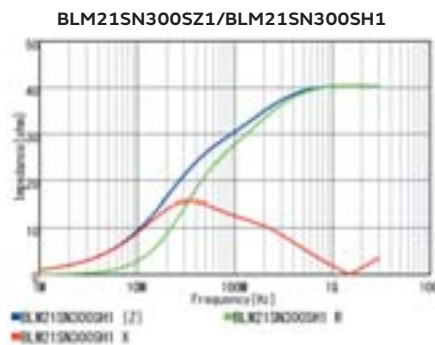

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM21SN series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

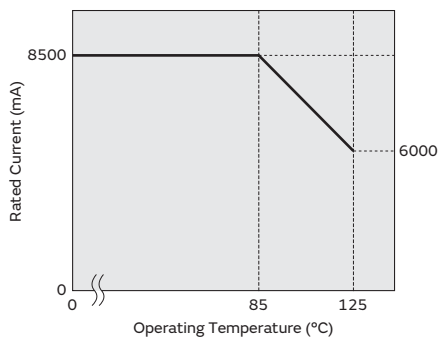

Chip Ferrite Bead SMD Type

BLM21AG Series 0805/2012(inch/mm)

Appearance/Dimensions

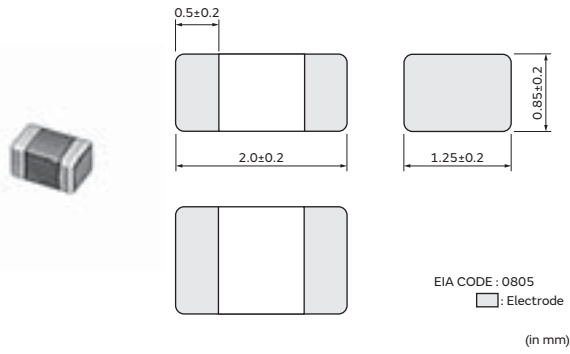

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM21AG121SZ1□ | BLM21AG121SH1□ | 120Ω±25% | 1A | 1A | 0.09Ω |
| BLM21AG151SZ1□ | BLM21AG151SH1□ | 150Ω±25% | 1A | 1A | 0.09Ω |
| BLM21AG221SZ1□ | BLM21AG221SH1□ | 220Ω±25% | 900mA | 900mA | 0.12Ω |
| BLM21AG331SZ1□ | BLM21AG331SH1□ | 330Ω±25% | 800mA | 800mA | 0.15Ω |
| BLM21AG471SZ1□ | BLM21AG471SH1□ | 470Ω±25% | 700mA | 700mA | 0.18Ω |
| BLM21AG601SZ1□ | BLM21AG601SH1□ | 600Ω±25% | 700mA | 700mA | 0.2Ω |
| BLM21AG102SZ1□ | BLM21AG102SH1□ | 1000Ω±25% | 600mA | 600mA | 0.27Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM21AG_SZ1 series

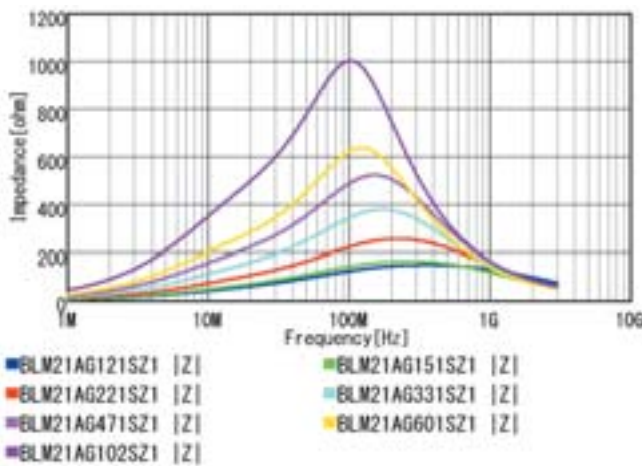


Z-f characteristics: BLM21AG_SH1 series

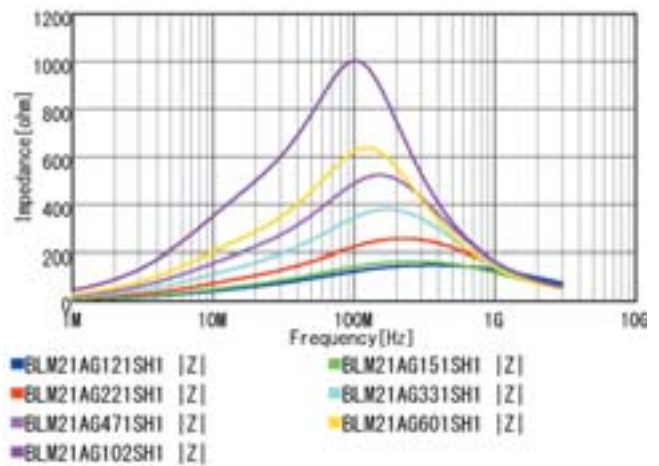

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

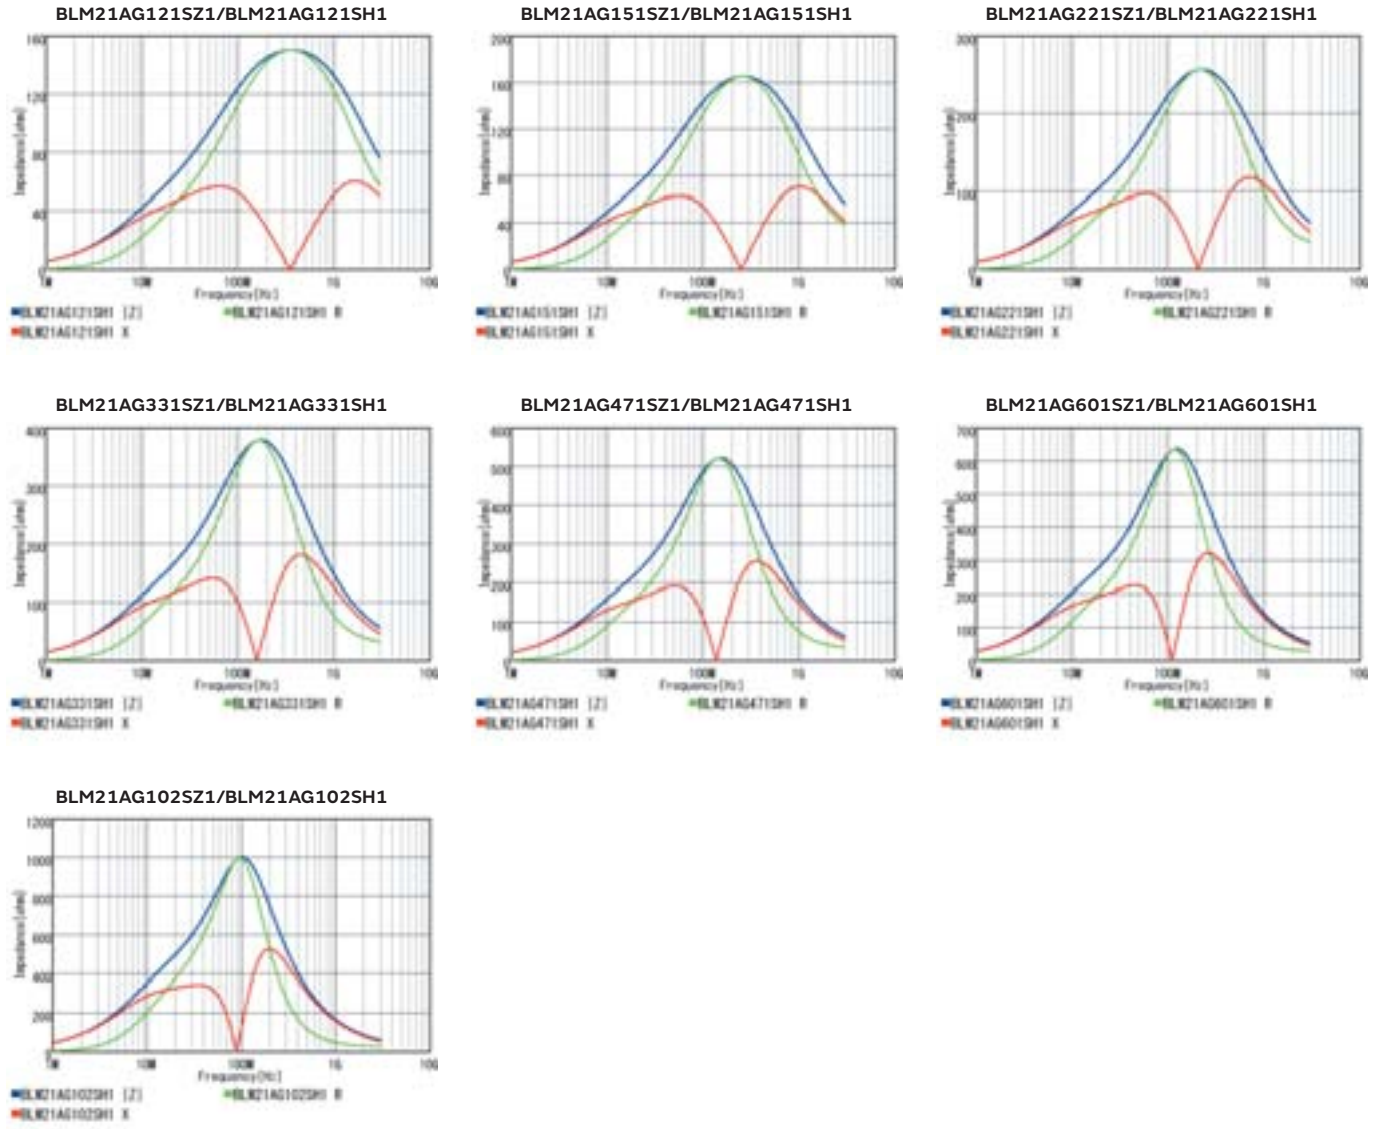

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM21AG(150°C available) Series 0805/2012(inch/mm)

Appearance/Dimensions

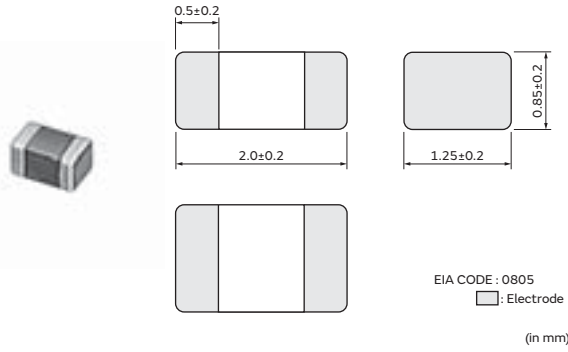

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| — | BLM21AG121BH1□ | 120Ω±25% | 1A | 1A | 0.09Ω |
| — | BLM21AG151BH1□ | 150Ω±25% | 1A | 1A | 0.09Ω |
| — | BLM21AG221BH1□ | 220Ω±25% | 900mA | 900mA | 0.12Ω |
| — | BLM21AG331BH1□ | 330Ω±25% | 800mA | 800mA | 0.15Ω |
| — | BLM21AG471BH1□ | 470Ω±25% | 700mA | 700mA | 0.18Ω |
| — | BLM21AG601BH1□ | 600Ω±25% | 700mA | 700mA | 0.2Ω |
| — | BLM21AG102BH1□ | 1000Ω±25% | 600mA | 600mA | 0.27Ω |

Rated Current at 150°C: 10mA
 Operating Temp. Range: -55°C to 150°C

Z-f characteristics: BLM21AG_BH1 series

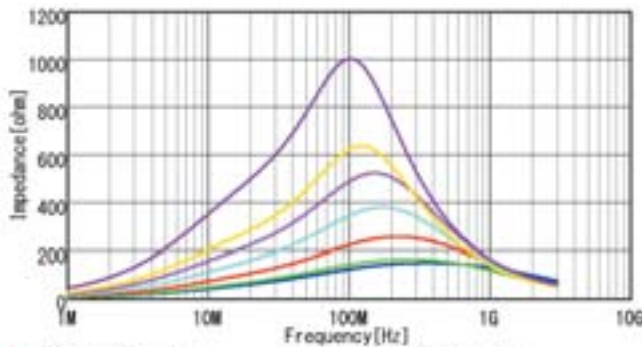


- BLM21AG121BH1 |Z|
- BLM21AG151BH1 |Z|
- BLM21AG221BH1 |Z|
- BLM21AG331BH1 |Z|
- BLM21AG471BH1 |Z|
- BLM21AG601BH1 |Z|
- BLM21AG102BH1 |Z|

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

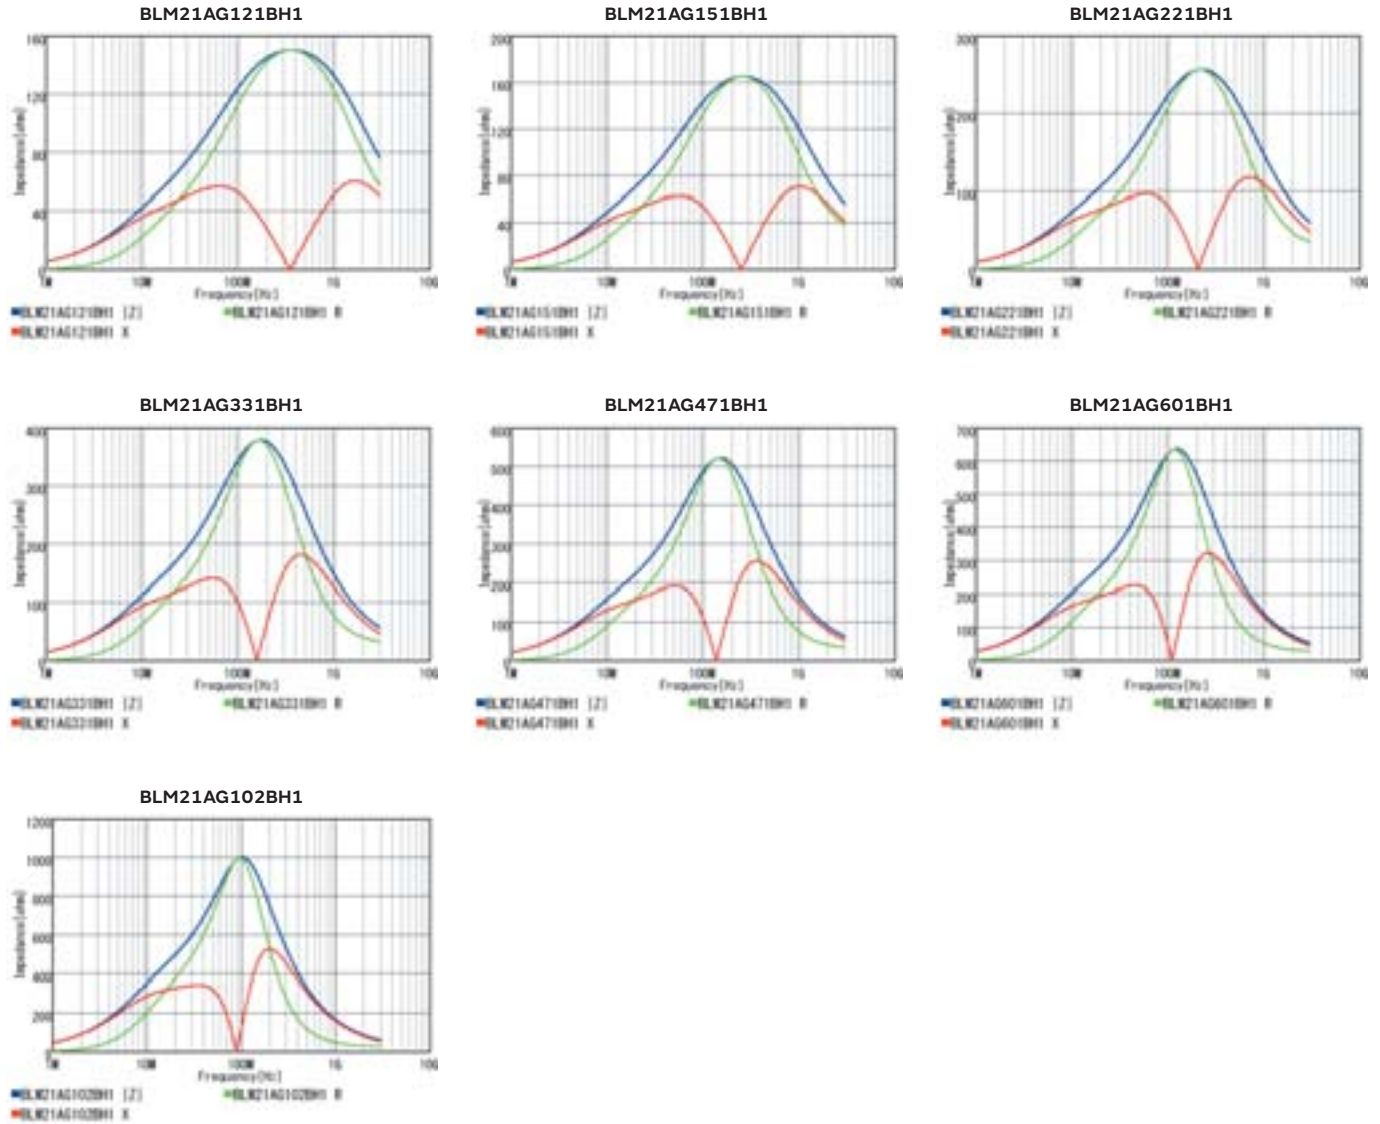

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM21AG_BH1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

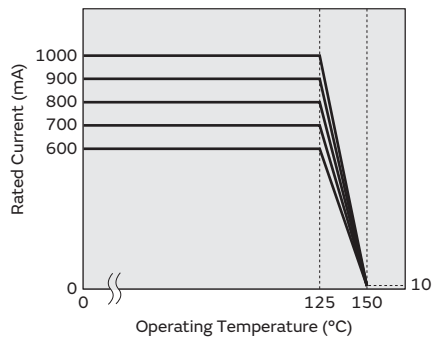

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM21BB/BD Series 0805/2012(inch/mm)

Appearance/Dimensions

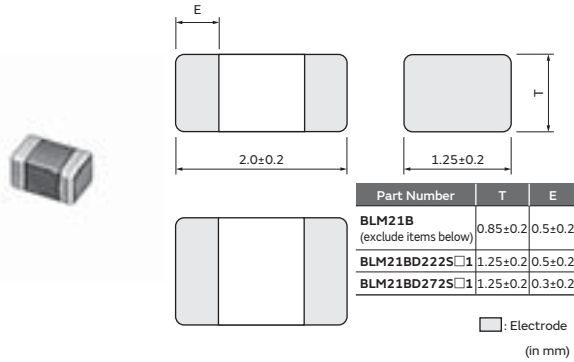

Packaging

All except for BLM21BD222SZ1/BLM21BD222SH1/BLM21BD272SZ1/BLM21BD272SH1

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |

BLM21BD222SZ1/BLM21BD222SH1/BLM21BD272SZ1/BLM21BD272SH1 only

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 10000 |
| L | ø180mm Embossed Tape | 3000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit



(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM21BB050SZ1□ | BLM21BB050SH1□ | 5Ω±25% | 1A | 1A | 0.02Ω |
| BLM21BB600SZ1□ | BLM21BB600SH1□ | 60Ω±25% | 800mA | 800mA | 0.13Ω |
| BLM21BB750SZ1□ | BLM21BB750SH1□ | 75Ω±25% | 700mA | 700mA | 0.16Ω |
| BLM21BB121SZ1□ | BLM21BB121SH1□ | 120Ω±25% | 600mA | 600mA | 0.19Ω |
| BLM21BB151SZ1□ | BLM21BB151SH1□ | 150Ω±25% | 600mA | 600mA | 0.21Ω |
| BLM21BB201SZ1□ | BLM21BB201SH1□ | 200Ω±25% | 500mA | 500mA | 0.26Ω |
| BLM21BB221SZ1□ | BLM21BB221SH1□ | 220Ω±25% | 500mA | 500mA | 0.26Ω |
| BLM21BB331SZ1□ | BLM21BB331SH1□ | 330Ω±25% | 400mA | 400mA | 0.33Ω |
| BLM21BB471SZ1□ | BLM21BB471SH1□ | 470Ω±25% | 400mA | 400mA | 0.4Ω |
| BLM21BD121SZ1□ | BLM21BD121SH1□ | 120Ω±25% | 350mA | 350mA | 0.25Ω |
| BLM21BD151SZ1□ | BLM21BD151SH1□ | 150Ω±25% | 350mA | 350mA | 0.25Ω |
| BLM21BD221SZ1□ | BLM21BD221SH1□ | 220Ω±25% | 350mA | 350mA | 0.25Ω |
| BLM21BD331SZ1□ | BLM21BD331SH1□ | 330Ω±25% | 300mA | 300mA | 0.3Ω |
| BLM21BD421SZ1□ | BLM21BD421SH1□ | 420Ω±25% | 300mA | 300mA | 0.3Ω |
| BLM21BD471SZ1□ | BLM21BD471SH1□ | 470Ω±25% | 300mA | 300mA | 0.35Ω |
| BLM21BD601SZ1□ | BLM21BD601SH1□ | 600Ω±25% | 300mA | 300mA | 0.35Ω |
| BLM21BD751SZ1□ | BLM21BD751SH1□ | 750Ω±25% | 250mA | 250mA | 0.4Ω |
| BLM21BD102SZ1□ | BLM21BD102SH1□ | 1000Ω±25% | 250mA | 250mA | 0.4Ω |
| BLM21BD152SZ1□ | BLM21BD152SH1□ | 1500Ω±25% | 250mA | 250mA | 0.45Ω |
| BLM21BD182SZ1□ | BLM21BD182SH1□ | 1800Ω±25% | 250mA | 250mA | 0.5Ω |
| BLM21BD222TZ1□ | BLM21BD222TH1□ | 2200Ω±25% | 200mA | 200mA | 0.6Ω |
| BLM21BD222SZ1□ | BLM21BD222SH1□ | 2250Ω(Typ.) | 250mA | 250mA | 0.6Ω |
| BLM21BD272SZ1□ | BLM21BD272SH1□ | 2700Ω±25% | 200mA | 200mA | 0.8Ω |

Operating Temp. Range: -55°C to 125°C


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLM21BB_SZ1 series

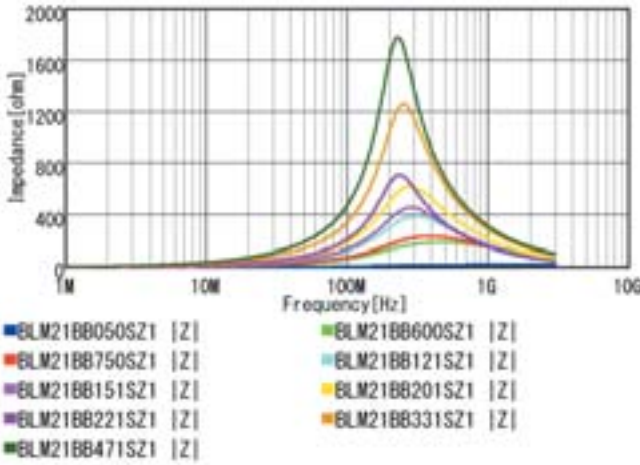


Z-f characteristics: BLM21BB_SH1 series

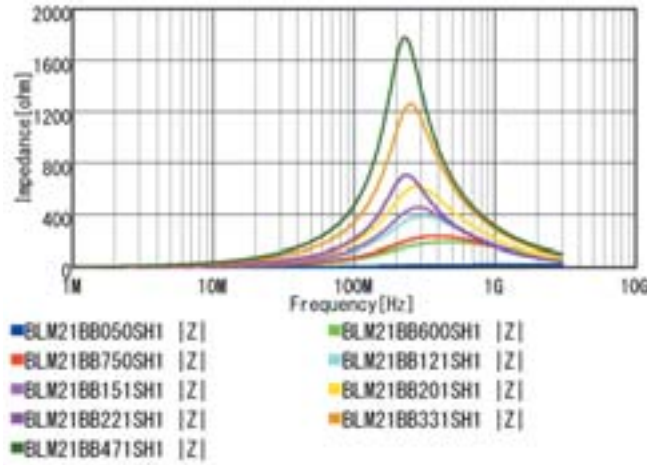


Z-f characteristics: BLM21BD_SZ1/TZ1 series

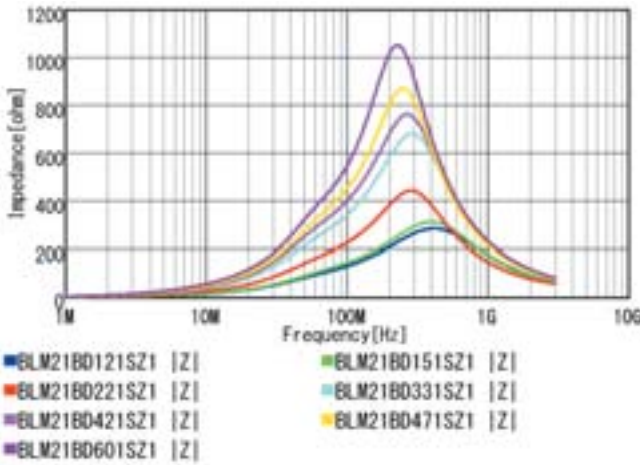


Z-f characteristics: BLM21BD_SH1/TH1 series

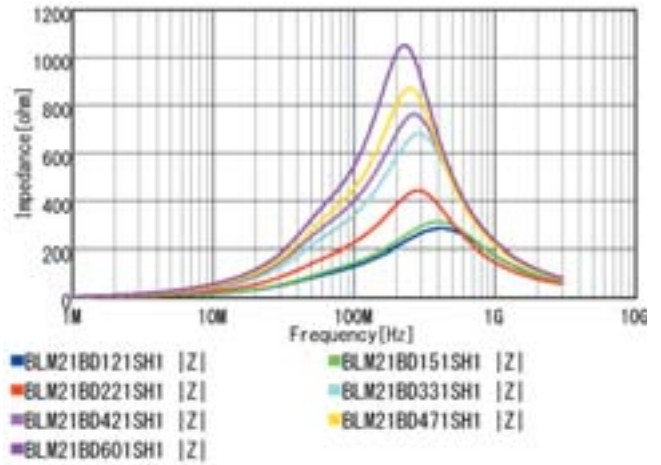

Z-f characteristics: BLM21BD_SZ1/TZ1 series

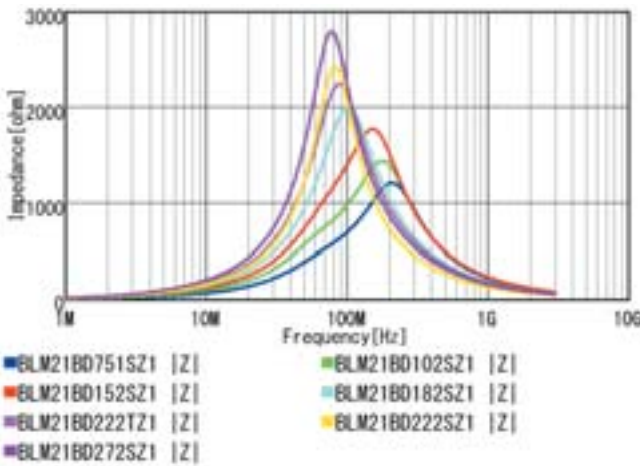

Z-f characteristics: BLM21BD_SH1/TH1 series

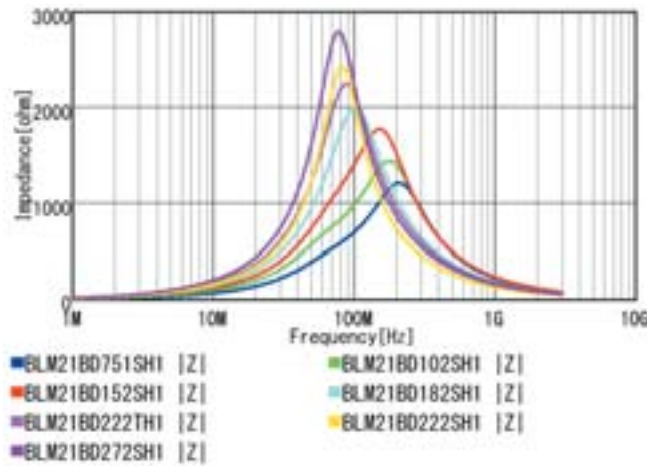


Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead
 SMD Type
 Chip EMIFIL®
 SMD Type
 Chip Common Mode Choke Coil
 SMD Type
 Block Type EMIFIL®
 Lead Type
 EMI Suppression Filters
 SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Z-f characteristics

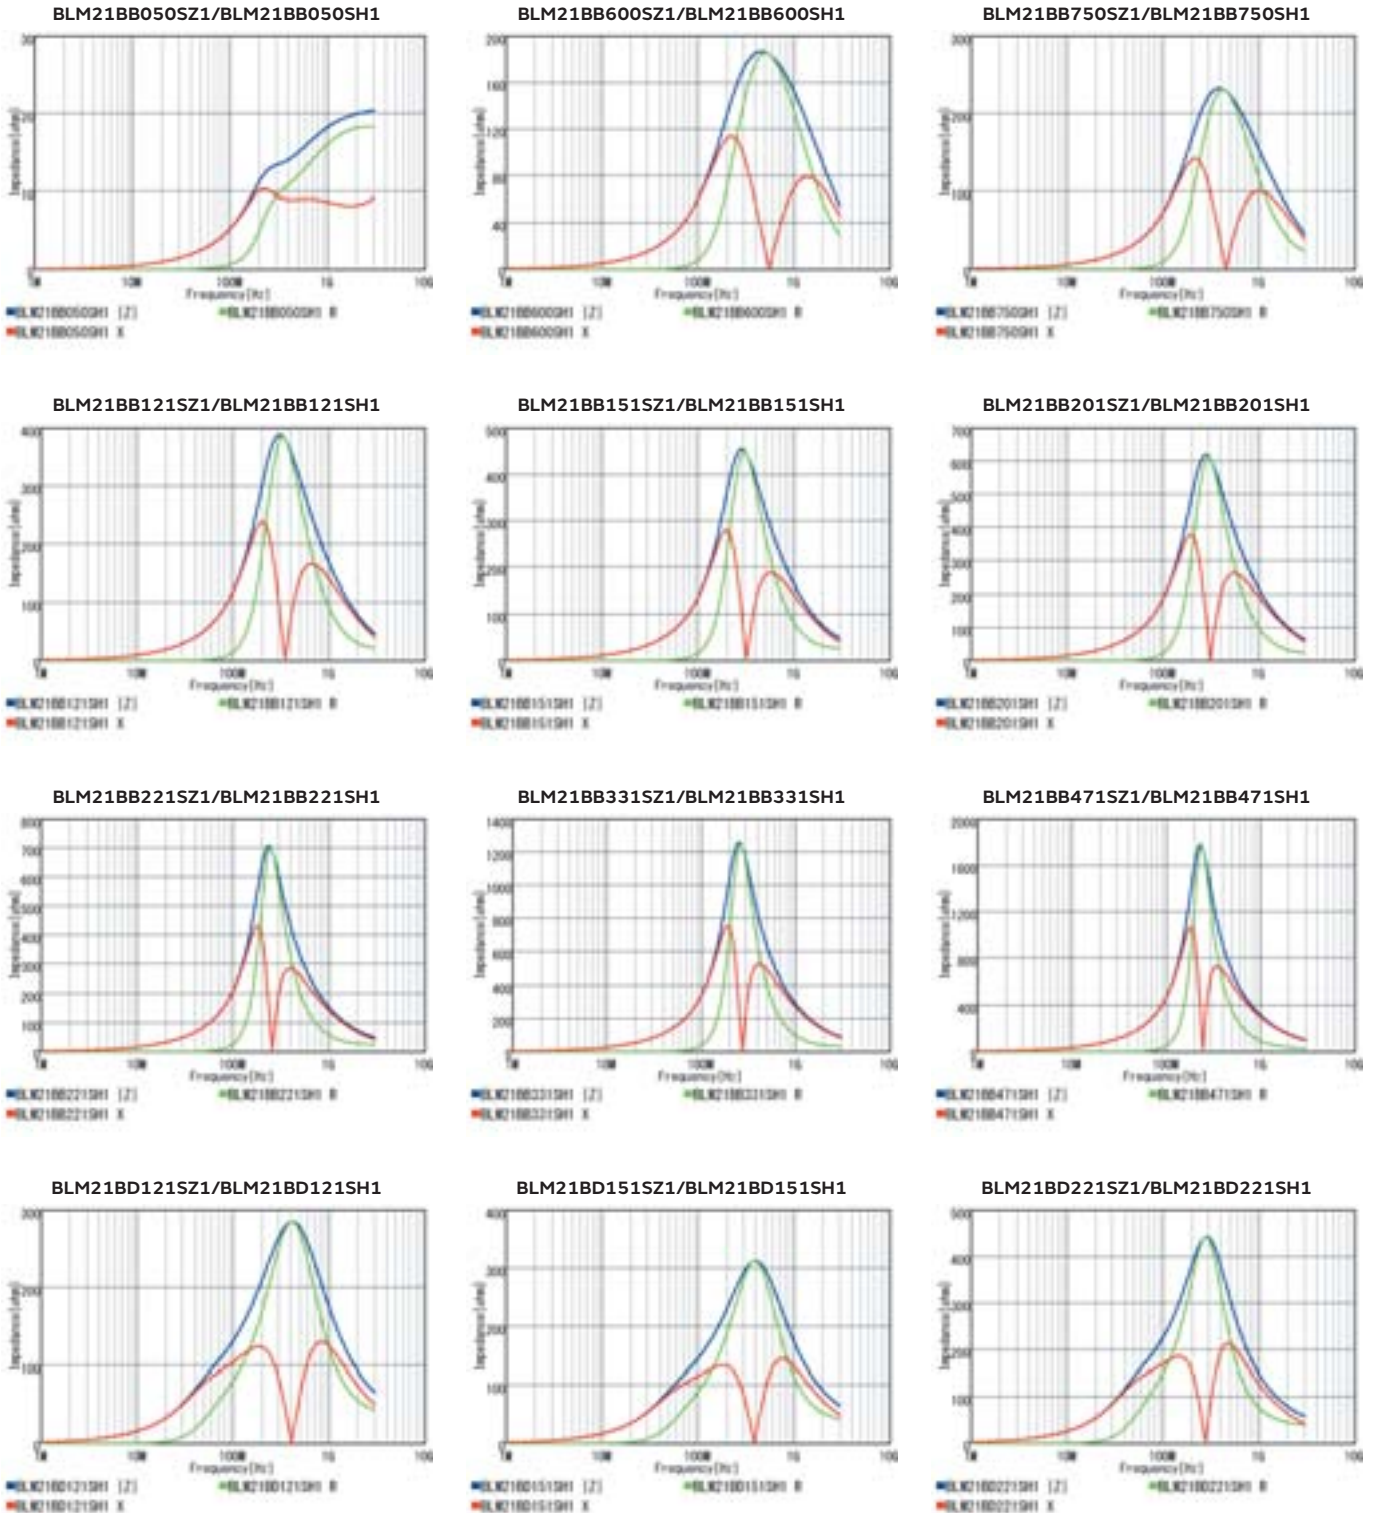


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics

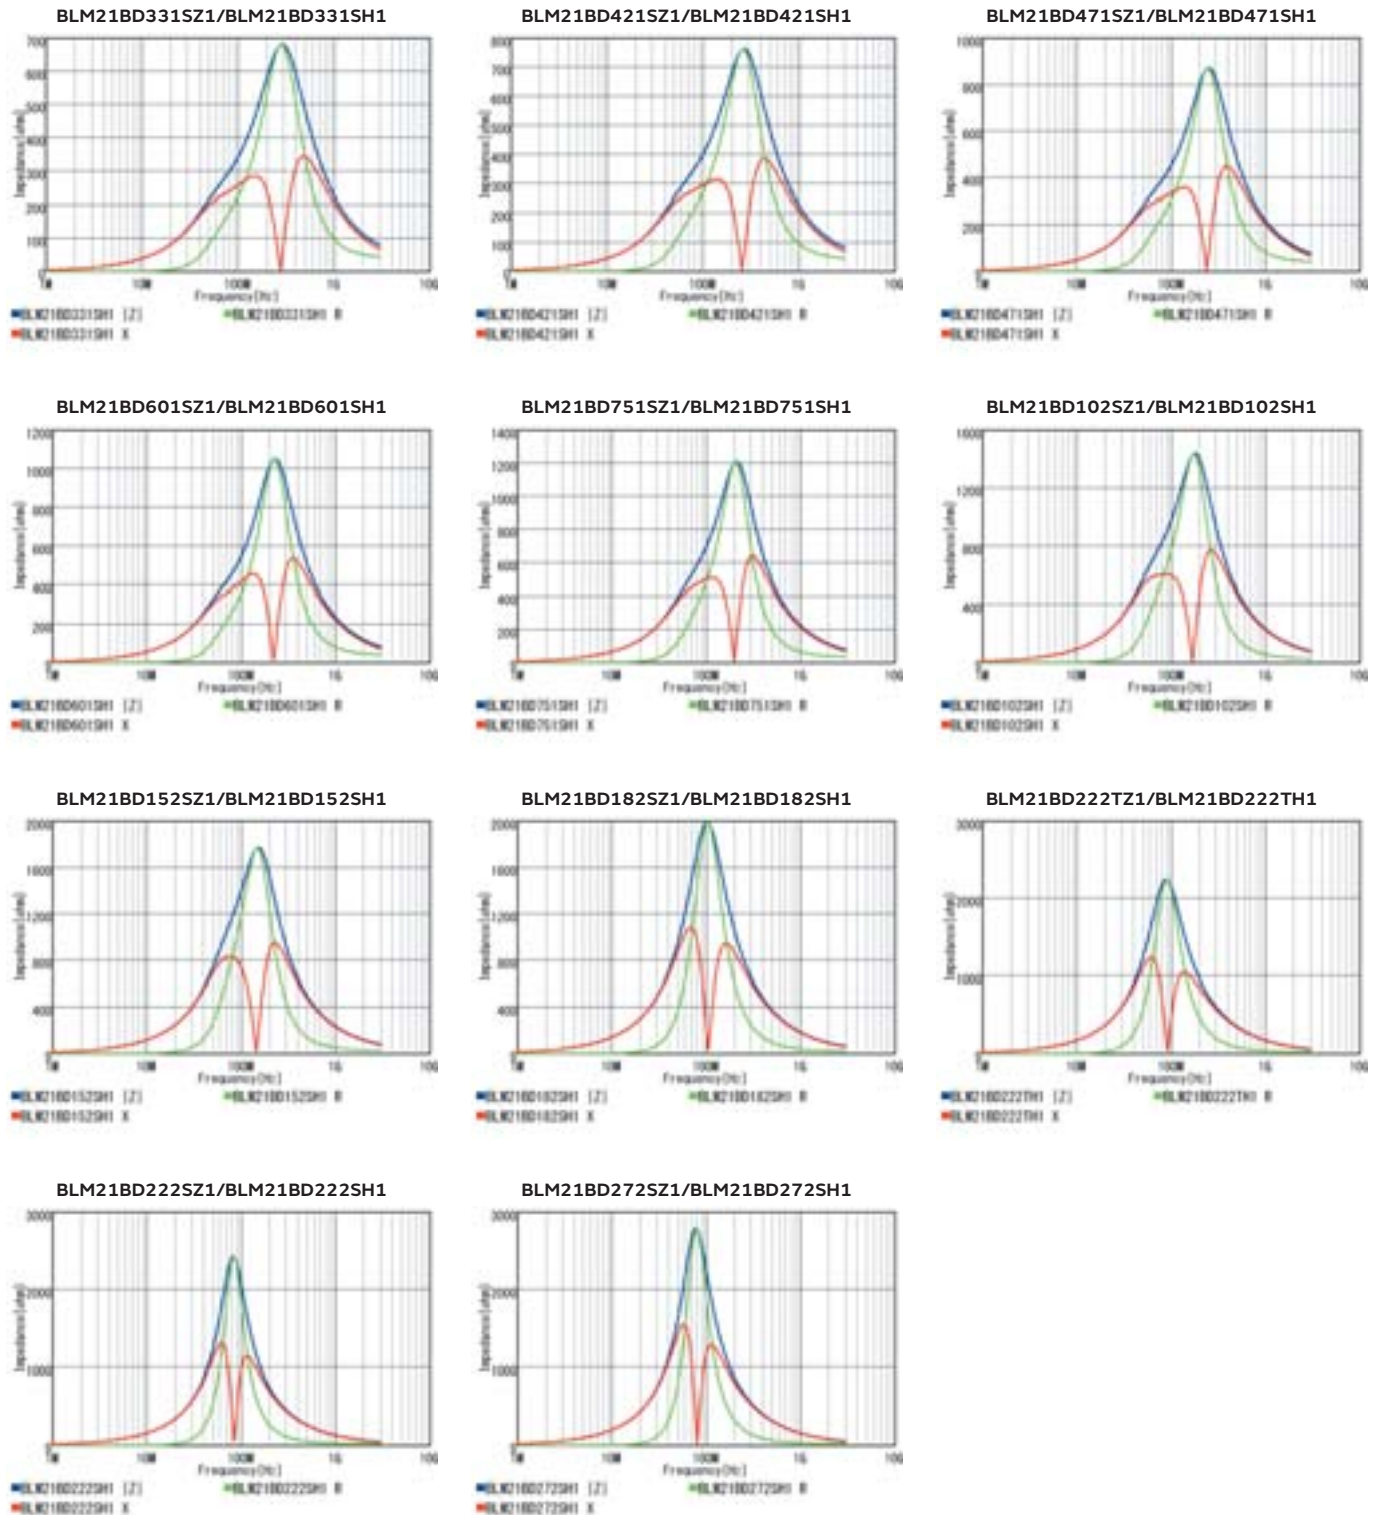

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM31PG Series 1206/3216(inch/mm)

Appearance/Dimensions

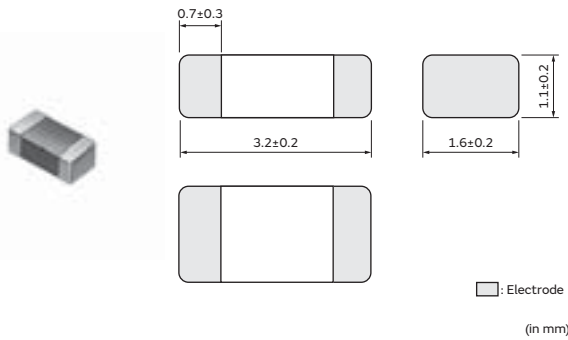

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 10000 |
| L | ø180mm Embossed Tape | 3000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM31PG330SZ1□ | BLM31PG330SH1□ | 33Ω±25% | 6A | 3.5A | 0.009Ω |
| BLM31PG500SZ1□ | BLM31PG500SH1□ | 50Ω(Typ.) | 3.5A | 2.3A | 0.015Ω |
| BLM31PG121SZ1□ | BLM31PG121SH1□ | 120Ω±25% | 3.5A | 2A | 0.02Ω |
| BLM31PG391SZ1□ | BLM31PG391SH1□ | 390Ω±25% | 2A | 1.25A | 0.05Ω |
| BLM31PG601SZ1□ | BLM31PG601SH1□ | 600Ω±25% | 1.5A | 1A | 0.08Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM31PG_SZ1 series

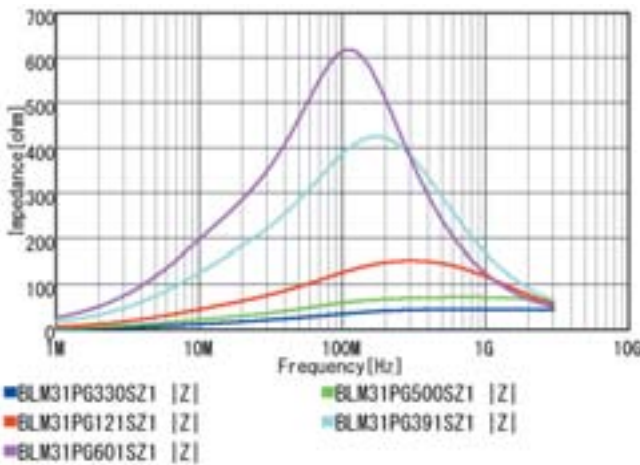


Z-f characteristics: BLM31PG_SH1 series

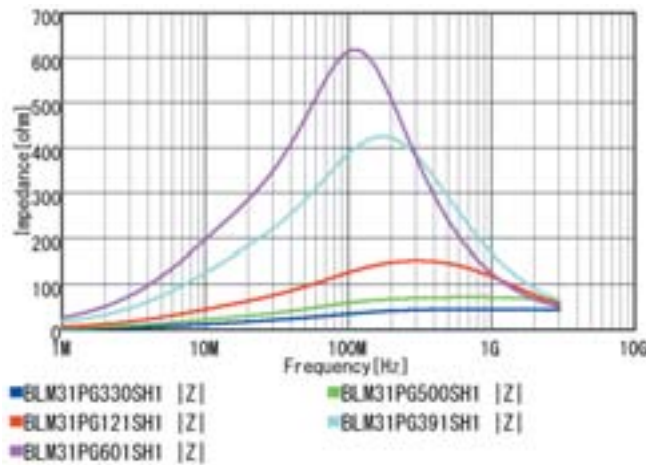

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

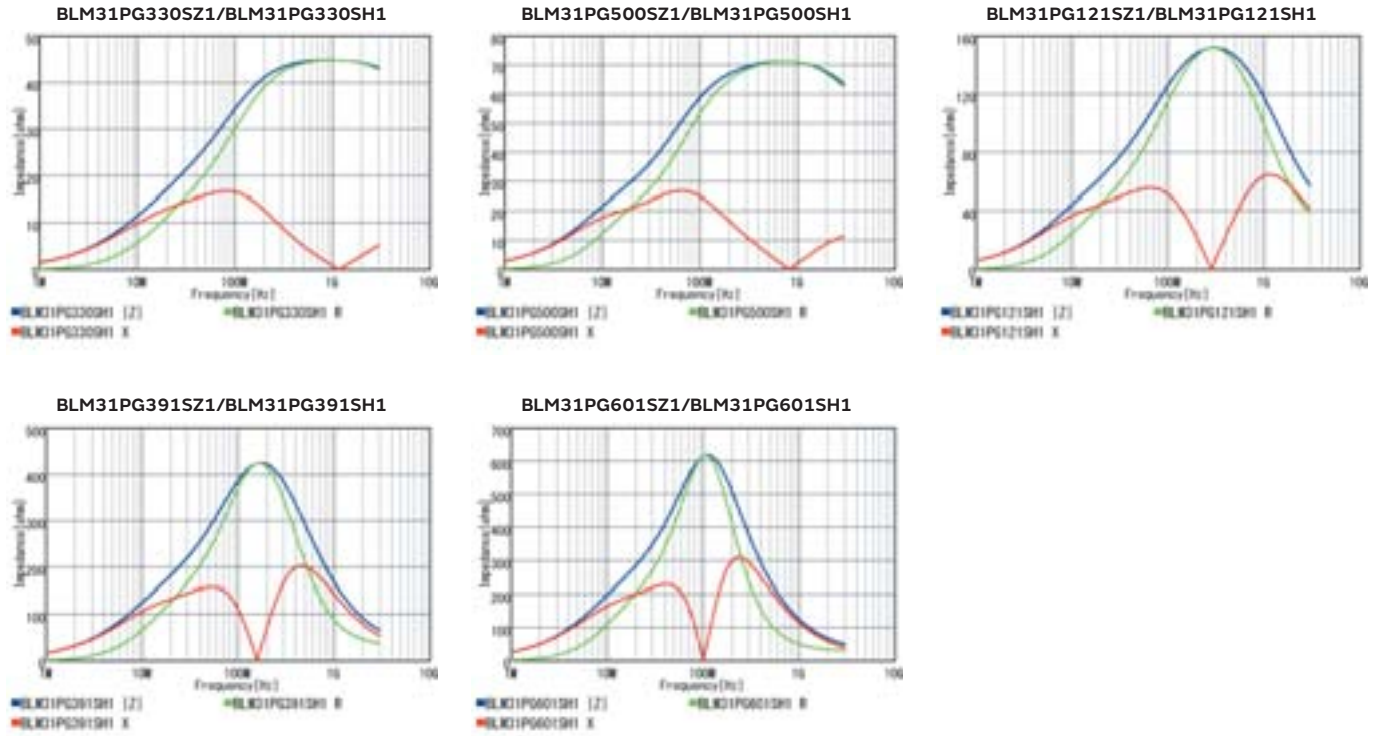

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM31PG series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

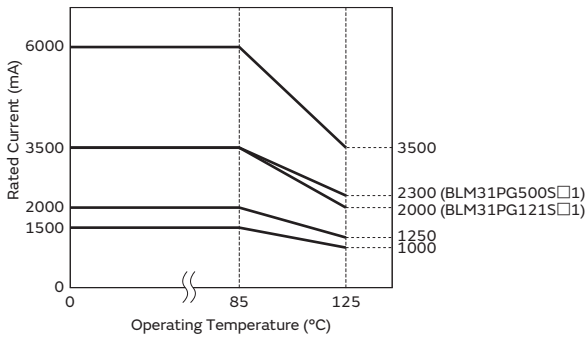

Chip Ferrite Bead SMD Type

BLM31KN Series 1206/3216(inch/mm)

Appearance/Dimensions

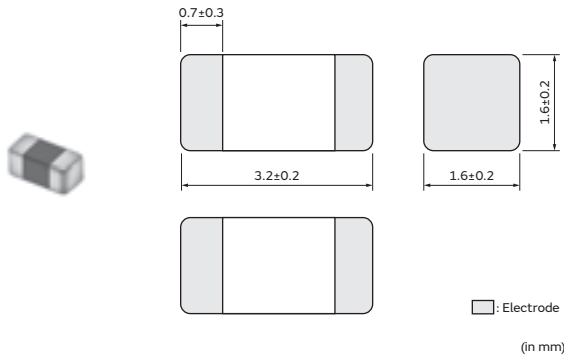

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 8000 |
| L | ø180mm Embossed Tape | 2500 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM31KN121SZ1□ | BLM31KN121SH1□ | 120Ω±25% | 6A | 4A | 0.009Ω |
| BLM31KN271SZ1□ | BLM31KN271SH1□ | 270Ω±25% | 4.5A | 3A | 0.016Ω |
| BLM31KN471SZ1□ | BLM31KN471SH1□ | 470Ω±25% | 4A | 2.7A | 0.02Ω |
| BLM31KN601SZ1□ | BLM31KN601SH1□ | 600Ω±25% | 2.9A | 2A | 0.038Ω |
| BLM31KN801SZ1□ | BLM31KN801SH1□ | 800Ω±25% | 2.5A | 1.7A | 0.05Ω |
| BLM31KN102SZ1□ | BLM31KN102SH1□ | 1000Ω±25% | 2A | 1.4A | 0.075Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM31KN_SZ1 series

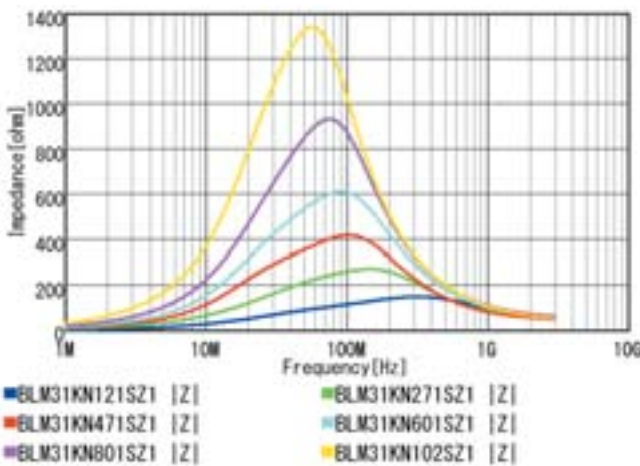


Z-f characteristics: BLM31KN_SH1 series

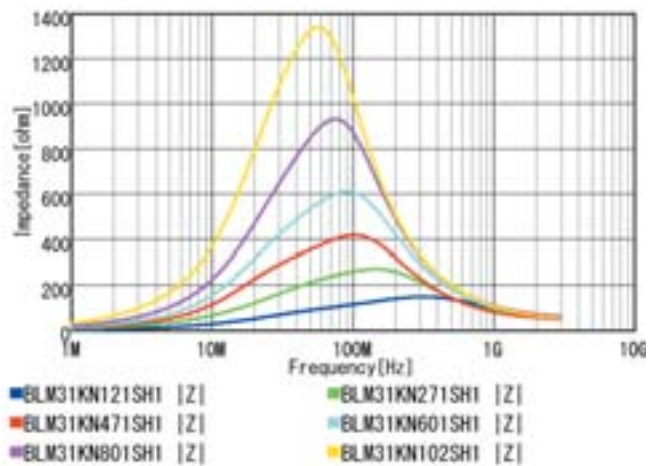

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

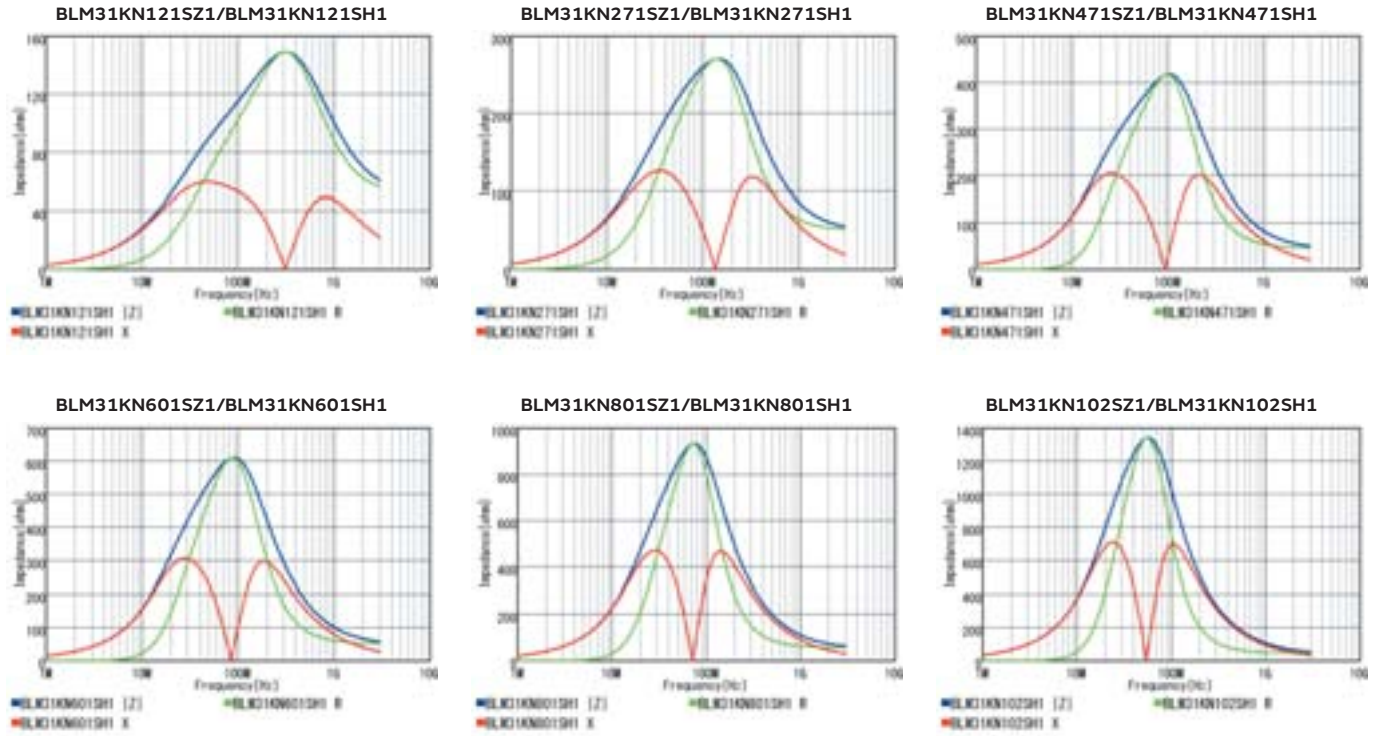

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM31KN series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

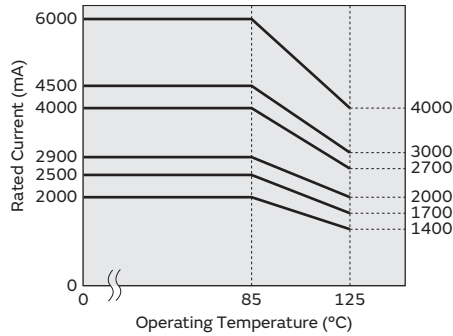

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI FIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM31KN(150°C available) Series 1206/3216(inch/mm)

Appearance/Dimensions

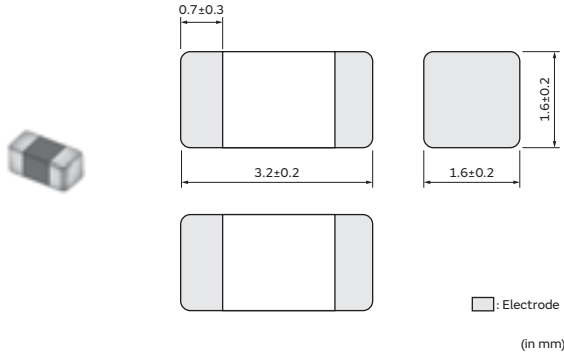

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 8000 |
| L | ø180mm Embossed Tape | 2500 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| — | BLM31KN121BH1□ | 120Ω±25% | 4A | 4A | 0.009Ω |
| — | BLM31KN271BH1□ | 270Ω±25% | 3A | 3A | 0.016Ω |
| — | BLM31KN471BH1□ | 470Ω±25% | 2.7A | 2.7A | 0.02Ω |
| — | BLM31KN601BH1□ | 600Ω±25% | 2A | 2A | 0.038Ω |
| — | BLM31KN801BH1□ | 800Ω±25% | 1.7A | 1.7A | 0.05Ω |
| — | BLM31KN102BH1□ | 1000Ω±25% | 1.4A | 1.4A | 0.075Ω |

Rated Current at 150°C: 10mA
 Operating Temp. Range: -55°C to 150°C


Z-f characteristics: BLM31KN_BH1 series

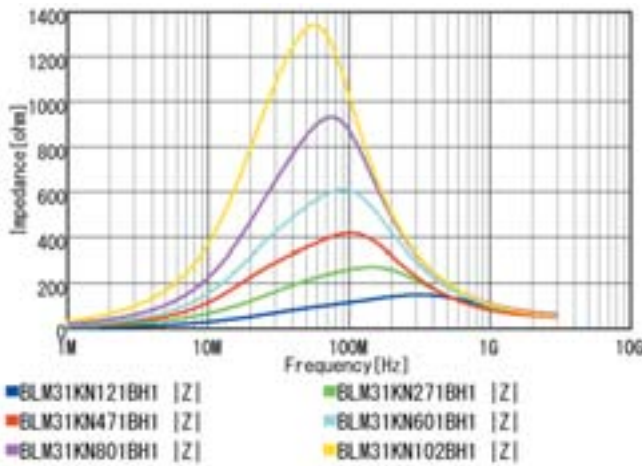

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

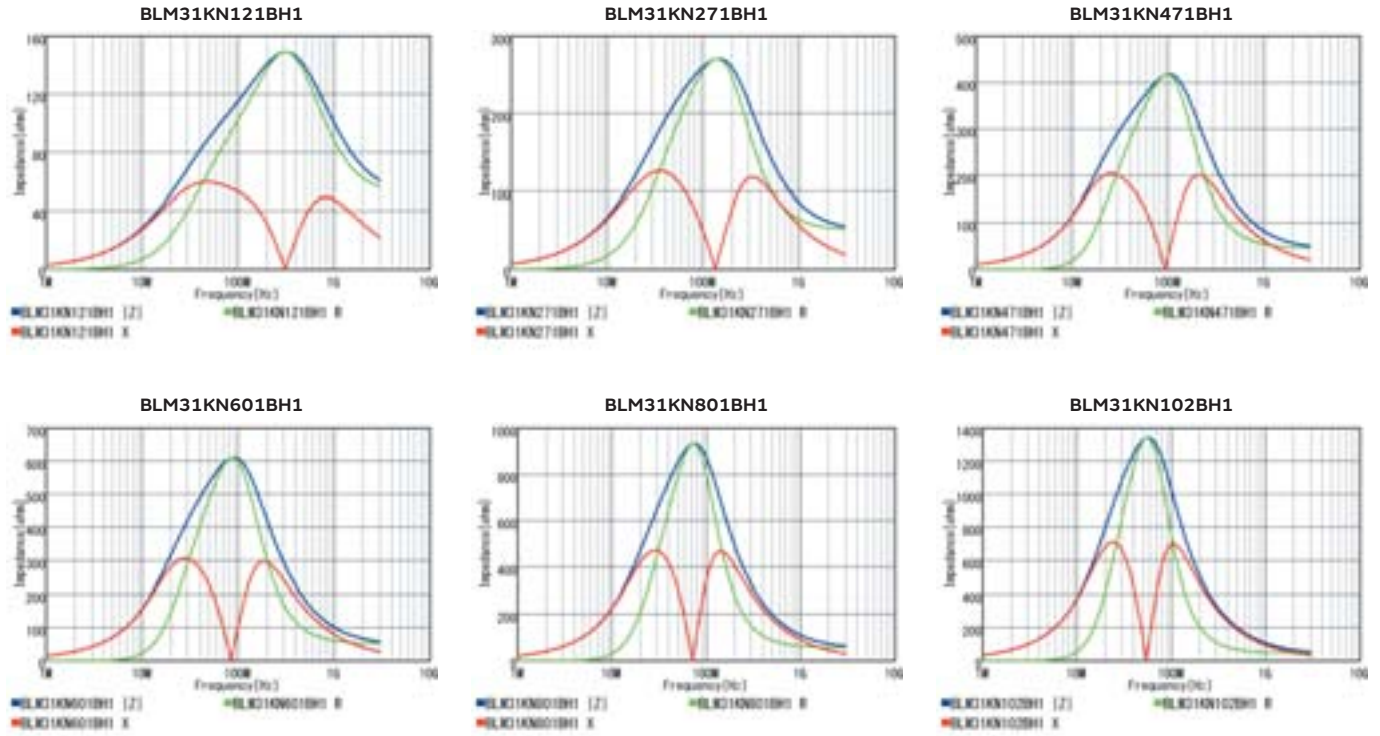

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for BLM31KN_BH1 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

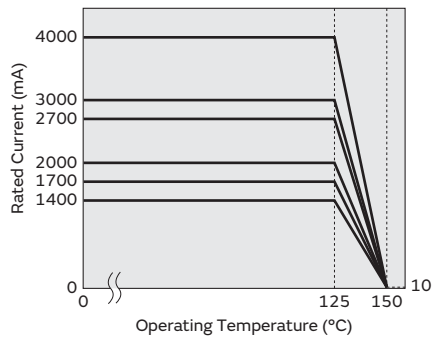

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI FIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead SMD Type

BLM31SN Series 1206/3216(inch/mm)


Appearance/Dimensions

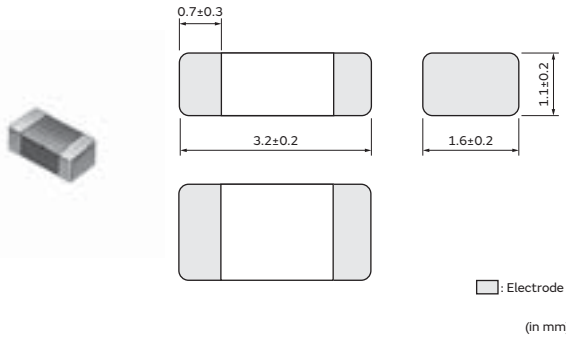

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| L | ø180mm Embossed Tape | 3000 |
| B | Bulk(Bag) | 1000 |


Equivalent Circuit



Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) | Operating Temp. Range |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLM31SN500SZ1□ | BLM31SN500SH1□ | 50Ω±12.5Ω | 12A | 10A | 0.0016Ω | -55°C to 125°C |


Z-f characteristics

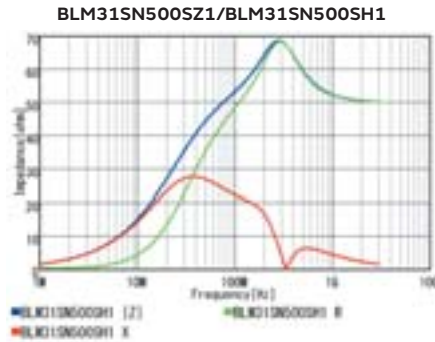

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM31SN series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

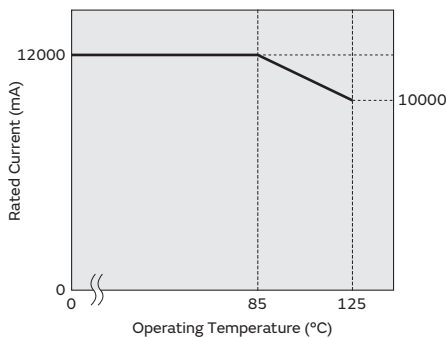

Chip Ferrite Bead SMD Type

BLM31AJ Series 1206/3216(inch/mm)

Appearance/Dimensions

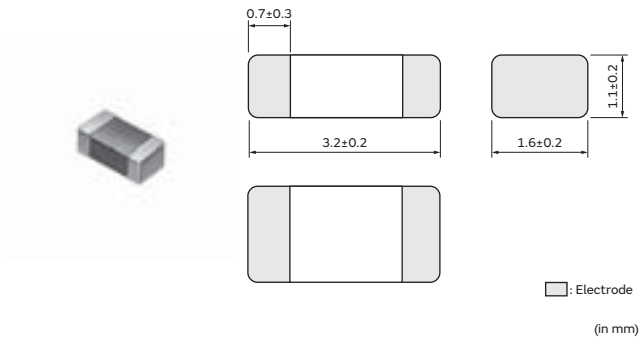

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 10000 |
| L | ø180mm Embossed Tape | 3000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) | Operating Temp. Range |
|--------------|-------------------|---------------------|-----------------------|------------------------|----------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | BLM31AJ601SH1□ | 600Ω±25% | 200mA | 200mA | 0.9Ω | -55°C to 125°C |

Z-f characteristics

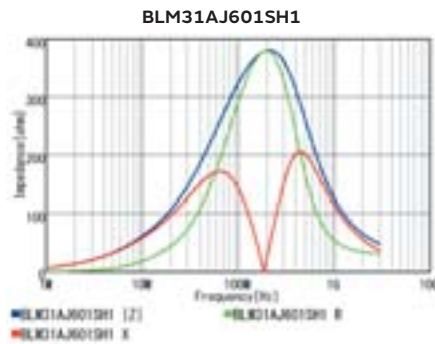

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead SMD Type

BLM41PG Series 1806/4516(inch/mm)

Appearance/Dimensions

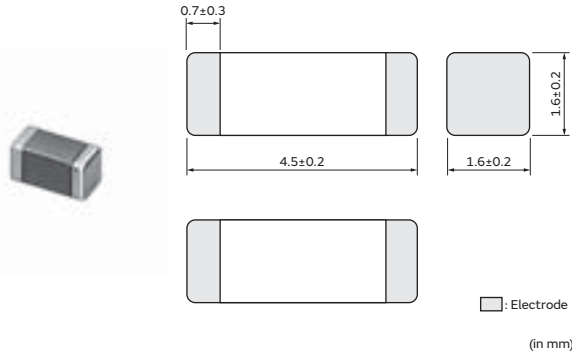

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 8000 |
| L | ø180mm Embossed Tape | 2500 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLM41PG600SZ1□ | BLM41PG600SH1□ | 60Ω(Typ.) | 6A | 3.7A | 0.009Ω |
| BLM41PG750SZ1□ | BLM41PG750SH1□ | 75Ω(Typ.) | 3.5A | 2.45A | 0.015Ω |
| BLM41PG181SZ1□ | BLM41PG181SH1□ | 180Ω±25% | 3.5A | 2.1A | 0.02Ω |
| BLM41PG471SZ1□ | BLM41PG471SH1□ | 470Ω±25% | 2A | 1.35A | 0.05Ω |
| BLM41PG102SZ1□ | BLM41PG102SH1□ | 1000Ω±25% | 1.5A | 1A | 0.09Ω |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: BLM41PG_SZ1 series

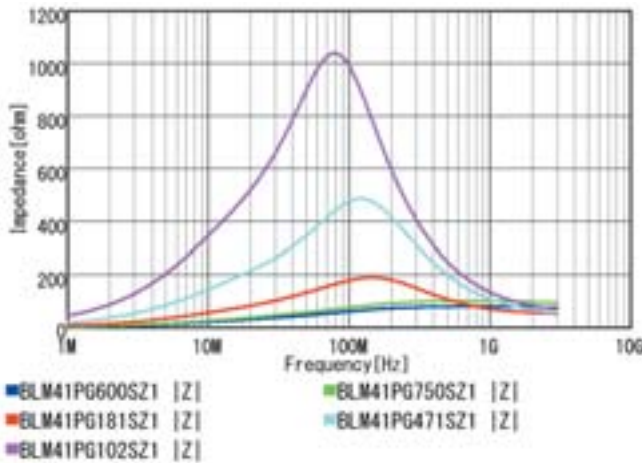


Z-f characteristics: BLM41PG_SH1 series

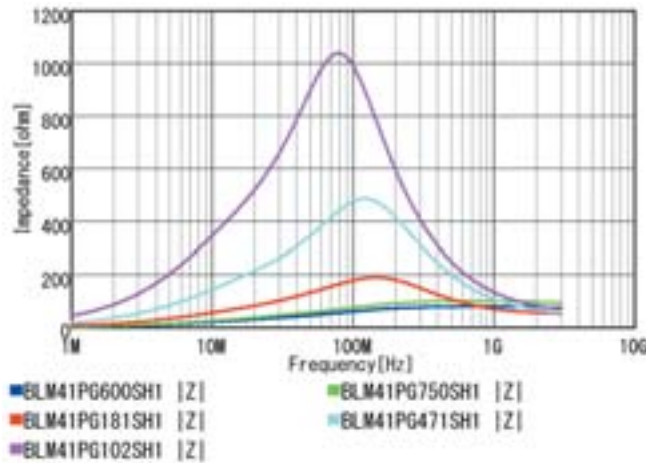

Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics

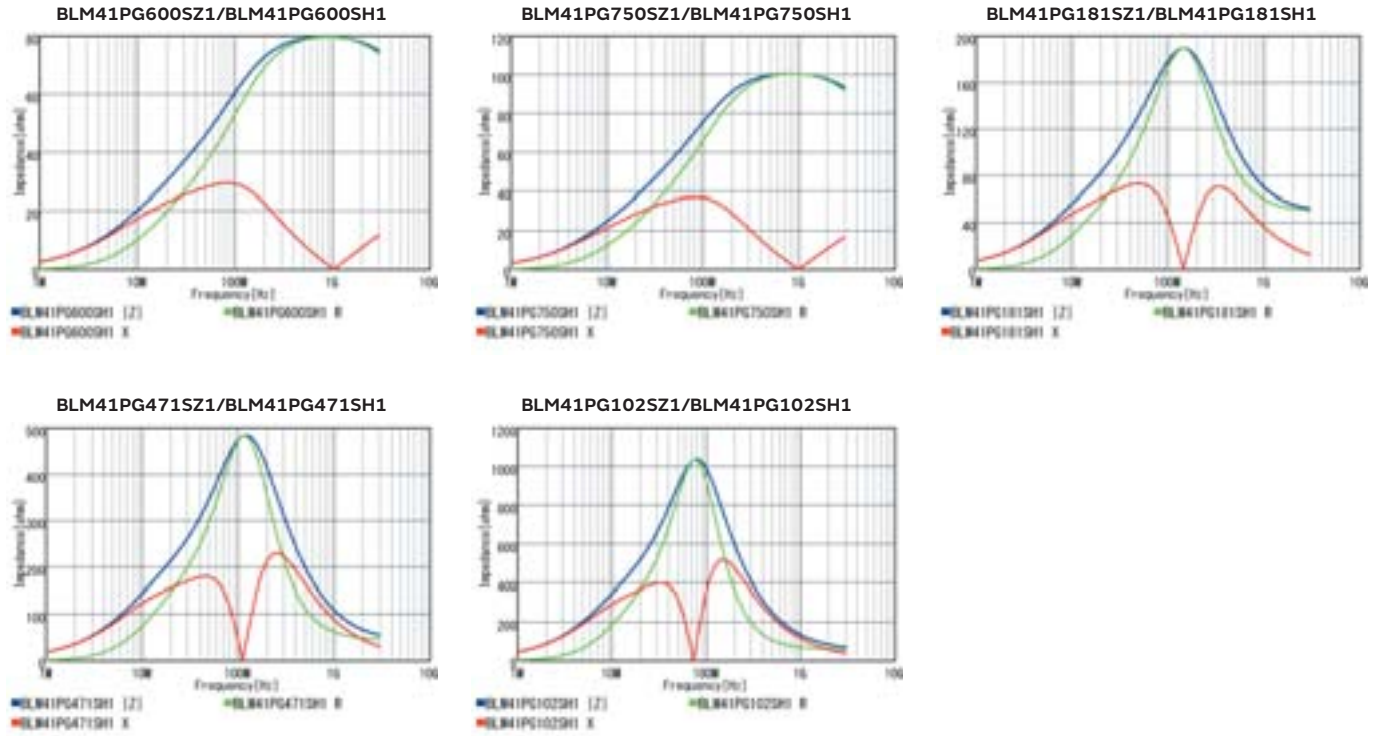

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLM41PG series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

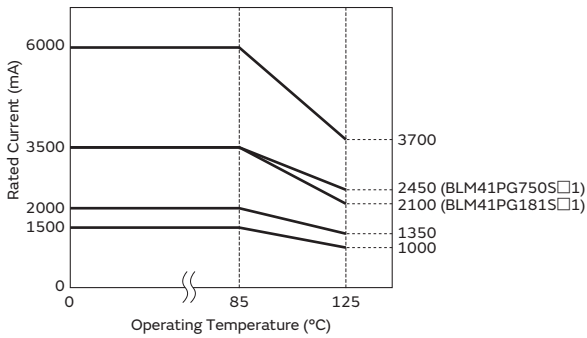

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI/FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI/FIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Power Bead SMD Type

BLE18PS Series 0603/1608(inch/mm)


Appearance/Dimensions

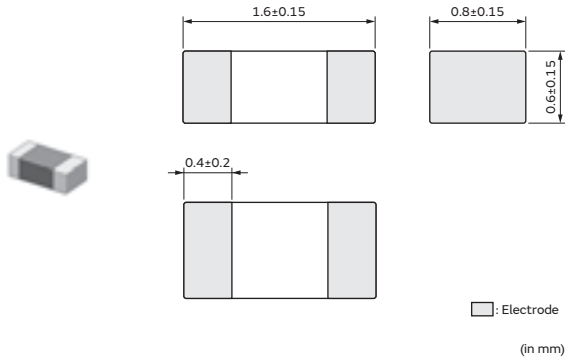

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| J | ø330mm Paper Tape | 10000 |
| B | Bulk(Bag) | 1000 |


Equivalent Circuit



Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) | Operating Temp. Range |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| BLE18PS080SZ1□ | — | 8.5Ω±25% | 8A | 5A | 0.004Ω | -55°C to 125°C |


Z-f characteristics

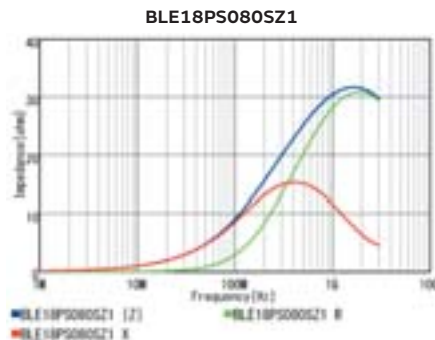

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BLE18PS series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

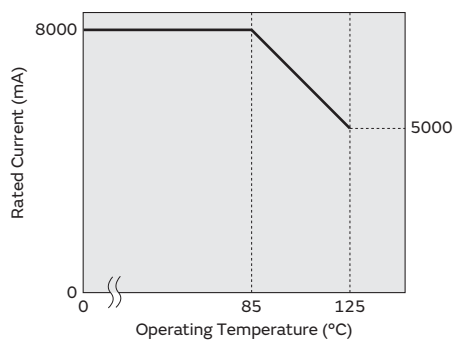

Chip Power Bead SMD Type

BLE32PN Series 1210/3225(inch/mm)


Appearance/Dimensions

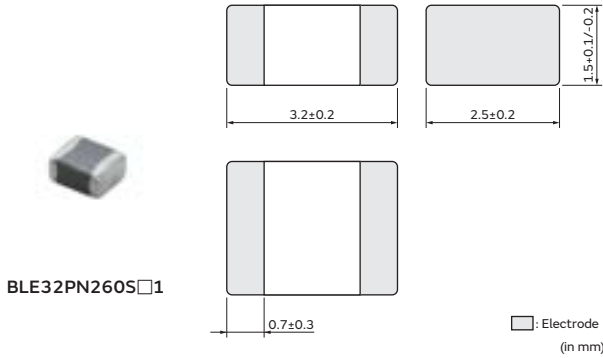


Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 7000 |
| L | ø180mm Embossed Tape | 1500 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit



Appearance/Dimensions

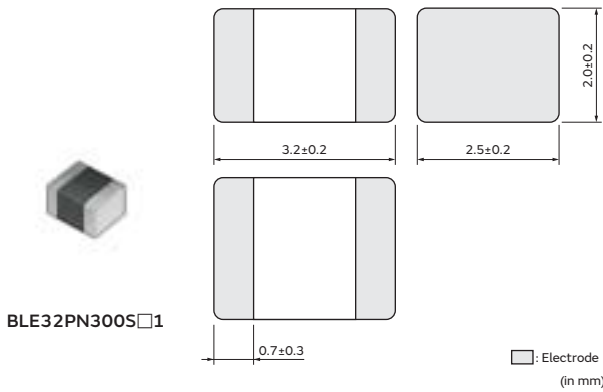

Rated Value (□: packaging code)


| Part Number | | Impedance at 100MHz | Rated Current at 85°C | Rated Current at 125°C | DC Resistance (Max.) |
|----------------|-------------------|---------------------|-----------------------|------------------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| BLE32PN260SZ1□ | BLE32PN260SH1□ | 26Ω±10Ω | 10A | 10A | 1.6mΩ |
| BLE32PN300SZ1□ | BLE32PN300SH1□ | 30Ω±10Ω | 10A | 10A | 1.6mΩ |

Operating Temp. Range: -55°C to 125°C


Continued on the following page. ↗

Continued from the preceding page. ↘


Z-f characteristics: BLE32PN_SZ1 series

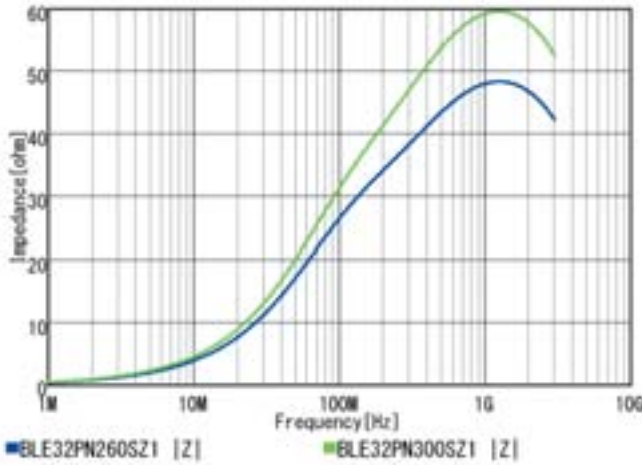


Z-f characteristics: BLE32PN_SH1 series

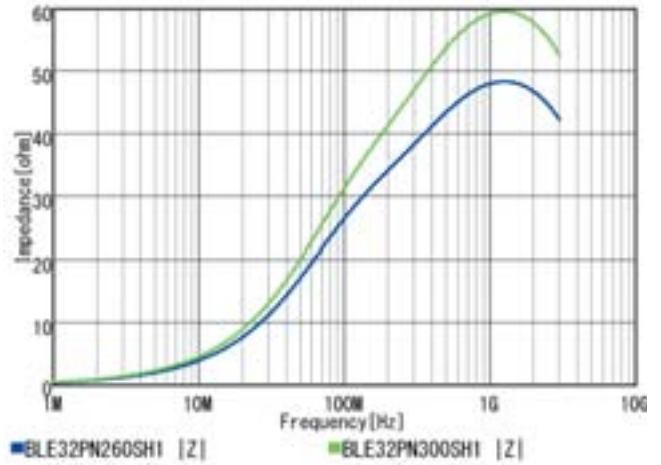

BLE32PN260SZ1/BLE32PN260SH1

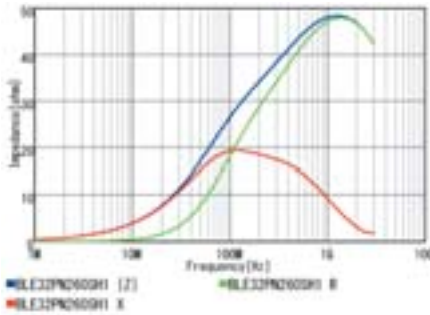

BLE32PN300SZ1/BLE32PN300SH1

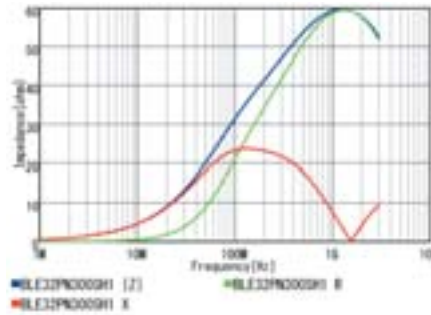

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type

EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Ferrite Bead (BL□ Series) ⚠Caution/Notice

⚠Caution

Rating


1. About the Rated Current
 Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.
2. About the Excessive Surge Current
 Excessive surge current (pulse current or rush current)

than specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise. Please contact us in advance in case of applying the surge current.

Soldering and Mounting

1. Self-heating
 Please pay special attention when mounting chip ferrite beads BLM□□AX/P/K/S series chip power beads BLE series in close proximity to other products that radiate heat. The heat generated by other products may deteriorate the insulation resistance and cause excessive heat in this component.
2. Terminal Connection (BLT)
 The terminations shall be connected correctly. The product consists of two coils. In order to provide the appropriate performance, two terminations shall be connected to the single power line and used as one coil.

If the terminations are connected to the power line and ground line separately, serious problems such as open circuit, short circuit, or flames might be caused due to extreme heat generation.

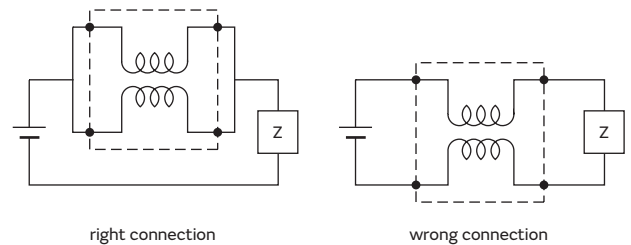

Notice

Storage and Operating Conditions

<Operating Environment>
 Do not use products in the corrodible atmosphere such as acidic gases, alkaline gases, chlorine, sulfur gases, organic gases. (the sea breeze, Cl₂, H₂S, NH₃, SO₂, NO₂, etc)
 Do not use products in the environment close to the organic solvent.

<Storage and Handling Requirements>

1. Storage Period
 BLM15E/15H/15G series should be used within 12

months, the other series should be used within 6 months. Solderability should be checked if this period is exceeded.

2. Storage Conditions
 - (1) Storage temperature: -10 to +40°C
 Relative humidity: 15 to 85%
 Avoid sudden changes in temperature and humidity.
 - (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Notice (Soldering and Mounting)

1. Cleaning
 Failure and degradation of a product are caused by the cleaning method. When you clean in conditions that are not in mounting information, please contact Murata engineering.
2. Soldering
 Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.
3. Mounting on-board with Conductive Glue
 BLM18AG□□□WH is designed for conductive glue mounting method. Please refer to Mounting information.

4. Other
 Noise suppression levels resulting from Murata's EMI suppression filters EMIFIL® may vary, depending on the circuits and ICs used, type of noise, mounting pattern, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Continued on the following page. ↗

Chip Ferrite Bead (BL□ Series) ⚠Caution/Notice

Continued from the preceding page. ↘

Handling

1. Resin Coating

Using resin for coating/molding products may affect the products performance.

So please pay careful attention in selecting resin.

Prior to use, please make the reliability evaluation with the product mounted in your application set.

2. Handling of a Substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.


Excessive mechanical stress may cause cracking in the Product.

3. Mounting Density


Add special attention to radiating heat of products when mounting the inductor near the products with heating.

The excessive heat by other products may cause deterioration at joint of this product with substrate.

Bending





Twisting



Chip Ferrite Bead (BL□ Series) Soldering and Mounting

1. Standard Land Pattern Dimensions

Land Pattern + Solder Resist
 Land Pattern
 Solder Resist
 (in mm)

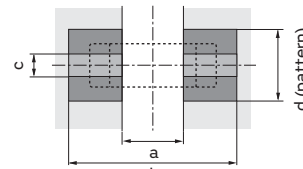
| Series | Standard Land Dimensions | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|---|-------------------|---|------------------------|--------------------------|------|------------------------------------|---------------------------------|---|--|------|-------------------|-----------|---|---|--------------|------------------------------------|------|-----|------|--------------|--------|----------------|-----|------|--------------|-------------------|-----|-----|-----|--------|--------|-----|--------------|------|-----|-----|----------------|--------|-------------|-----|------|------|---|--------------------------------|---|---|---------------------------------|---|--|---------|--------|------|-----|-----|-----|-----|-----|---------|-----|-----|-----|--|--|--|--|--|---------|--------|-----|-----|-----|-----|-----|-----|---------|-----|-----|-----|--|-----|-----|-----|---------|--|--|--|--|---------|-------------|------------------------|------------------------|------------------------|-----|-----|-----|---------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|--------------------|---|--|--|--|--|---|-----|-----|--|---------|------|-----|-----|-----|-----|-----|-----|---------|-----|-----|-----|---------|--------|-----|-----|-----|-----|-----|---------|-----|-----|------|----------------|-----|-------------|------------------------|------------------------|--------------------------|-----|-----|-----|---|-----|-----|-----|-----|-----|-----|-----|---|-----|-----|------|----------------|-------|------|-----|-----|------|---|-----|-----|--|--------|-----|-----|------|--|--|--|----------------|-------|--|--|--|--|-----|-----|-----|-----|-----|-----|-----|---|-----|-----|------|--------------------|---|-------------|----------------------|------------------------|------------------------|-----|-----|-----|---------|-----|-----|-----|-----|-----|-----|------|--------------------|-----|--|--|--|--|-----|-----|-----|---------|-----|-----|-----|-------|-----|-----|------|----------------|-------|--|--|--|--|---|-----|-----|----------------|-------|-------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|---|-----|-----|------|
| BLE18 BLE32 BLM03 BLM15 BLM18 BLM21 BLM31 BLM41 | ●Reflow and Flow BLM Series (Except for type (2).) *Please refer to (1). | |  | | | (1) | | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Type</th> <th>Soldering</th> <th>a</th> <th>b</th> <th>c</th> </tr> </thead> <tbody> <tr> <td>BLM03</td> <td>Reflow</td> <td>0.25</td> <td>0.8</td> <td>0.3</td> </tr> <tr> <td>BLM15</td> <td>Reflow</td> <td>0.4</td> <td>1.2</td> <td>0.5</td> </tr> <tr> <td rowspan="2">BLM18</td> <td>Flow (except 18G)</td> <td>0.8</td> <td>2.5</td> <td rowspan="2">0.7</td> </tr> <tr> <td>Reflow</td> <td>0.7</td> <td>2.0</td> </tr> <tr> <td rowspan="2">BLM21</td> <td>Flow</td> <td>1.1</td> <td>3.5</td> <td>0.95</td> </tr> <tr> <td>Reflow</td> <td>1.2</td> <td>2.4</td> <td>1.25</td> </tr> </tbody> </table> | | Type | Soldering | a | b | c | BLM03 | Reflow | 0.25 | 0.8 | 0.3 | BLM15 | Reflow | 0.4 | 1.2 | 0.5 | BLM18 | Flow (except 18G) | 0.8 | 2.5 | 0.7 | Reflow | 0.7 | 2.0 | BLM21 | Flow | 1.1 | 3.5 | 0.95 | Reflow | 1.2 | 2.4 | 1.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Type | Soldering | a | b | c | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLM03 | Reflow | 0.25 | 0.8 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLM15 | Reflow | 0.4 | 1.2 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLM18 | Flow (except 18G) | 0.8 | 2.5 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Reflow | 0.7 | 2.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLM21 | Flow | 1.1 | 3.5 | 0.95 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Reflow | 1.2 | 2.4 | 1.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLE18PS-32PN-BLM□□AX/P/E/K/S-18KG_JH1/_BH1-AG_BH1-BD_BH1 *Please refer to (2). | |  | | | (2) | | | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2">Type</th> <th rowspan="2">Rated Current (A)</th> <th rowspan="2">Soldering</th> <th rowspan="2">a</th> <th rowspan="2">b</th> <th rowspan="2">c</th> <th colspan="3">Land Pad Thickness and Dimension d</th> </tr> <tr> <th>18μm</th> <th>35μm</th> <th>70μm</th> </tr> </thead> <tbody> <tr> <td rowspan="2">BLE18PS</td> <td rowspan="2">8</td> <td>Flow</td> <td>0.8</td> <td>2.5</td> <td rowspan="2">0.7</td> <td>-</td> <td>6.4</td> <td>3.3</td> </tr> <tr> <td>Reflow</td> <td>0.7</td> <td>2.0</td> <td>-</td> <td>-</td> <td>-</td> </tr> <tr> <td rowspan="2">BLE32PN</td> <td rowspan="2">10</td> <td rowspan="2">Flow/Reflow</td> <td rowspan="2">2.2</td> <td rowspan="2">4.4</td> <td rowspan="2">2.05</td> <td>-</td> <td>4.0 (Temperature 85°C or less)</td> <td>-</td> </tr> <tr> <td>-</td> <td>8.0 (Temperature 125°C or less)</td> <td>-</td> </tr> <tr> <td rowspan="3">BLM03AX BLM03P□ BLM03EB</td> <td>0.9max.</td> <td rowspan="3">Reflow</td> <td rowspan="3">0.25</td> <td rowspan="3">0.8</td> <td rowspan="3">0.3</td> <td>0.3</td> <td>0.3</td> <td>0.3</td> </tr> <tr> <td>1.8max.</td> <td>1.2</td> <td>0.7</td> <td>0.3</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td rowspan="4">BLM15AX BLM15PD BLM15PG BLM15PX</td> <td>1.5max.</td> <td rowspan="4">Reflow</td> <td rowspan="4">0.4</td> <td rowspan="4">1.2</td> <td rowspan="4">0.5</td> <td>0.5</td> <td>0.5</td> <td>0.5</td> </tr> <tr> <td>2.2max.</td> <td>1.2</td> <td>0.7</td> <td>0.5</td> </tr> <tr> <td></td> <td>2.4</td> <td>1.2</td> <td>0.5</td> </tr> <tr> <td>3.0max.</td> <td></td> <td></td> <td></td> </tr> <tr> <td rowspan="4">BLM18PG_S□1 BLM18KG_S□1 BLM18KG_T□1 BLM18SG_T□1</td> <td>0.5-1.5</td> <td rowspan="4">Flow/Reflow</td> <td rowspan="4">Flow 0.8 Reflow 0.7</td> <td rowspan="4">Flow 2.5 Reflow 2.0</td> <td rowspan="4">Flow 0.7 Reflow 0.7</td> <td>0.7</td> <td>0.7</td> <td>0.7</td> </tr> <tr> <td>1.7-2.5</td> <td>1.2</td> <td>0.7</td> <td>0.7</td> </tr> <tr> <td>3-4</td> <td>2.4</td> <td>1.2</td> <td>0.7</td> </tr> <tr> <td>5-6</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> <tr> <td>BLM18SN_T□1</td> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td>-</td> <td>6.4</td> <td>3.3</td> </tr> <tr> <td rowspan="4">BLM18KG_JH1 BLM18KG_BH1 BLM18AG_BH1 BLM18BD_BH1</td> <td>1.0max.</td> <td rowspan="2">Flow</td> <td rowspan="2">0.8</td> <td rowspan="2">2.5</td> <td rowspan="4">0.7</td> <td>0.7</td> <td>0.7</td> <td>0.7</td> </tr> <tr> <td>1.5max.</td> <td>1.2</td> <td>0.7</td> <td>0.7</td> </tr> <tr> <td>2.5max.</td> <td rowspan="2">Reflow</td> <td rowspan="2">0.7</td> <td rowspan="2">2.0</td> <td>2.4</td> <td>1.2</td> <td>0.7</td> </tr> <tr> <td>4.0max.</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> <tr> <td rowspan="4">BLM21PG</td> <td>1.5</td> <td rowspan="4">Flow/Reflow</td> <td rowspan="4">Flow 1.1 Reflow 1.2</td> <td rowspan="4">Flow 3.5 Reflow 2.4</td> <td rowspan="4">Flow 0.95 Reflow 1.25</td> <td>1.0</td> <td>1.0</td> <td>1.0</td> </tr> <tr> <td>2</td> <td>1.2</td> <td>1.0</td> <td>1.0</td> </tr> <tr> <td>3-4</td> <td>2.4</td> <td>1.2</td> <td>1.0</td> </tr> <tr> <td>6</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> <tr> <td rowspan="2">BLM21SN</td> <td>6-8.5</td> <td>Flow</td> <td>1.1</td> <td>3.5</td> <td>0.95</td> <td>-</td> <td>6.8</td> <td>3.4</td> </tr> <tr> <td></td> <td>Reflow</td> <td>1.2</td> <td>2.4</td> <td>1.25</td> <td></td> <td></td> <td></td> </tr> <tr> <td rowspan="3">BLM31PG</td> <td>1.5-2</td> <td rowspan="3"></td> <td rowspan="3"></td> <td rowspan="3"></td> <td rowspan="3"></td> <td>1.2</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>3.5</td> <td>2.4</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>6</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> <tr> <td rowspan="3">BLM31KN_S□1</td> <td>2</td> <td rowspan="3">Flow/Reflow</td> <td rowspan="3">Flow 2.4 Reflow 2</td> <td rowspan="3">Flow 4.7 Reflow 4.3</td> <td rowspan="3">Flow 1.2 Reflow 1.8</td> <td>1.2</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>2.5-2.9</td> <td>2.4</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>4-6</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> <tr> <td rowspan="3">BLM31KN_B□1</td> <td>1.4</td> <td rowspan="3"></td> <td rowspan="3"></td> <td rowspan="3"></td> <td rowspan="3"></td> <td>1.2</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>1.7-2.0</td> <td>2.4</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>2.7-4</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> <tr> <td>BLM31SN</td> <td>10-12</td> <td></td> <td></td> <td></td> <td></td> <td>-</td> <td>9.8</td> <td>4.9</td> </tr> <tr> <td rowspan="3">BLM41PG</td> <td>1.5-2</td> <td rowspan="3">Flow/Reflow</td> <td rowspan="3">1.2</td> <td rowspan="3">6.0</td> <td rowspan="3">3.0</td> <td>1.2</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>3.5</td> <td>2.4</td> <td>1.2</td> <td>1.2</td> </tr> <tr> <td>6</td> <td>6.4</td> <td>3.3</td> <td>1.65</td> </tr> </tbody> </table> | | Type | Rated Current (A) | Soldering | a | b | c | Land Pad Thickness and Dimension d | | | 18μm | 35μm | 70μm | BLE18PS | 8 | Flow | 0.8 | 2.5 | 0.7 | - | 6.4 | 3.3 | Reflow | 0.7 | 2.0 | - | - | - | BLE32PN | 10 | Flow/Reflow | 2.2 | 4.4 | 2.05 | - | 4.0 (Temperature 85°C or less) | - | - | 8.0 (Temperature 125°C or less) | - | BLM03AX BLM03P□ BLM03EB | 0.9max. | Reflow | 0.25 | 0.8 | 0.3 | 0.3 | 0.3 | 0.3 | 1.8max. | 1.2 | 0.7 | 0.3 | | | | | BLM15AX BLM15PD BLM15PG BLM15PX | 1.5max. | Reflow | 0.4 | 1.2 | 0.5 | 0.5 | 0.5 | 0.5 | 2.2max. | 1.2 | 0.7 | 0.5 | | 2.4 | 1.2 | 0.5 | 3.0max. | | | | BLM18PG_S□1 BLM18KG_S□1 BLM18KG_T□1 BLM18SG_T□1 | 0.5-1.5 | Flow/Reflow | Flow 0.8 Reflow 0.7 | Flow 2.5 Reflow 2.0 | Flow 0.7 Reflow 0.7 | 0.7 | 0.7 | 0.7 | 1.7-2.5 | 1.2 | 0.7 | 0.7 | 3-4 | 2.4 | 1.2 | 0.7 | 5-6 | 6.4 | 3.3 | 1.65 | BLM18SN_T□1 | 8 | | | | | - | 6.4 | 3.3 | BLM18KG_JH1 BLM18KG_BH1 BLM18AG_BH1 BLM18BD_BH1 | 1.0max. | Flow | 0.8 | 2.5 | 0.7 | 0.7 | 0.7 | 0.7 | 1.5max. | 1.2 | 0.7 | 0.7 | 2.5max. | Reflow | 0.7 | 2.0 | 2.4 | 1.2 | 0.7 | 4.0max. | 6.4 | 3.3 | 1.65 | BLM21PG | 1.5 | Flow/Reflow | Flow 1.1 Reflow 1.2 | Flow 3.5 Reflow 2.4 | Flow 0.95 Reflow 1.25 | 1.0 | 1.0 | 1.0 | 2 | 1.2 | 1.0 | 1.0 | 3-4 | 2.4 | 1.2 | 1.0 | 6 | 6.4 | 3.3 | 1.65 | BLM21SN | 6-8.5 | Flow | 1.1 | 3.5 | 0.95 | - | 6.8 | 3.4 | | Reflow | 1.2 | 2.4 | 1.25 | | | | BLM31PG | 1.5-2 | | | | | 1.2 | 1.2 | 1.2 | 3.5 | 2.4 | 1.2 | 1.2 | 6 | 6.4 | 3.3 | 1.65 | BLM31KN_S□1 | 2 | Flow/Reflow | Flow 2.4 Reflow 2 | Flow 4.7 Reflow 4.3 | Flow 1.2 Reflow 1.8 | 1.2 | 1.2 | 1.2 | 2.5-2.9 | 2.4 | 1.2 | 1.2 | 4-6 | 6.4 | 3.3 | 1.65 | BLM31KN_B□1 | 1.4 | | | | | 1.2 | 1.2 | 1.2 | 1.7-2.0 | 2.4 | 1.2 | 1.2 | 2.7-4 | 6.4 | 3.3 | 1.65 | BLM31SN | 10-12 | | | | | - | 9.8 | 4.9 | BLM41PG | 1.5-2 | Flow/Reflow | 1.2 | 6.0 | 3.0 | 1.2 | 1.2 | 1.2 | 3.5 | 2.4 | 1.2 | 1.2 | 6 | 6.4 | 3.3 | 1.65 |
| | Type | Rated Current (A) | Soldering | a | b | c | Land Pad Thickness and Dimension d | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | 18μm | 35μm | 70μm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLE18PS | 8 | Flow | 0.8 | 2.5 | 0.7 | - | 6.4 | 3.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | Reflow | 0.7 | 2.0 | | - | - | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | BLE32PN | 10 | Flow/Reflow | 2.2 | 4.4 | 2.05 | - | 4.0 (Temperature 85°C or less) | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | - | 8.0 (Temperature 125°C or less) | - | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM03AX BLM03P□ BLM03EB | 0.9max. | Reflow | 0.25 | 0.8 | 0.3 | 0.3 | 0.3 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.8max. | | | | | 1.2 | 0.7 | 0.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM15AX BLM15PD BLM15PG BLM15PX | 1.5max. | Reflow | 0.4 | 1.2 | 0.5 | 0.5 | 0.5 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2.2max. | | | | | 1.2 | 0.7 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | 2.4 | 1.2 | 0.5 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3.0max. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM18PG_S□1 BLM18KG_S□1 BLM18KG_T□1 BLM18SG_T□1 | 0.5-1.5 | Flow/Reflow | Flow 0.8 Reflow 0.7 | Flow 2.5 Reflow 2.0 | Flow 0.7 Reflow 0.7 | 0.7 | 0.7 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.7-2.5 | | | | | 1.2 | 0.7 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3-4 | | | | | 2.4 | 1.2 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 5-6 | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM18SN_T□1 | 8 | | | | | - | 6.4 | 3.3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM18KG_JH1 BLM18KG_BH1 BLM18AG_BH1 BLM18BD_BH1 | 1.0max. | Flow | 0.8 | 2.5 | 0.7 | 0.7 | 0.7 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.5max. | | | | | 1.2 | 0.7 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2.5max. | Reflow | 0.7 | 2.0 | | 2.4 | 1.2 | 0.7 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4.0max. | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM21PG | 1.5 | Flow/Reflow | Flow 1.1 Reflow 1.2 | Flow 3.5 Reflow 2.4 | Flow 0.95 Reflow 1.25 | 1.0 | 1.0 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2 | | | | | 1.2 | 1.0 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3-4 | | | | | 2.4 | 1.2 | 1.0 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6 | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM21SN | 6-8.5 | Flow | 1.1 | 3.5 | 0.95 | - | 6.8 | 3.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | Reflow | 1.2 | 2.4 | 1.25 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM31PG | 1.5-2 | | | | | 1.2 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3.5 | | | | | 2.4 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6 | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM31KN_S□1 | 2 | Flow/Reflow | Flow 2.4 Reflow 2 | Flow 4.7 Reflow 4.3 | Flow 1.2 Reflow 1.8 | 1.2 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2.5-2.9 | | | | | 2.4 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 4-6 | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM31KN_B□1 | 1.4 | | | | | 1.2 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 1.7-2.0 | | | | | 2.4 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 2.7-4 | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM31SN | 10-12 | | | | | - | 9.8 | 4.9 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| BLM41PG | 1.5-2 | Flow/Reflow | 1.2 | 6.0 | 3.0 | 1.2 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 3.5 | | | | | 2.4 | 1.2 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | 6 | | | | | 6.4 | 3.3 | 1.65 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • Except for BLM03AX-PG-PX-EB/15AX-PD-PG-PX/18PG_S□1-KG_S□1-KG_T□1-SG_T□1-SN_T□1-18KG_JH1/_BH1-AG_BH1-BD_BH1/21PG-SN. And BLM03/15/18G is specially adapted for reflow soldering. • BLM18A_WH series is designed for conductive glue mounting method, not for normal soldering method. • Please contact us for applicable mounting method for BLM18A_WH series. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <ul style="list-style-type: none"> • About land pad thickness of BLE32PN, please note the upper limit of the temperature. • Do not apply narrower pattern than listed above to BLMppAX/P/K/S. Narrow pattern can cause excessive heat or open circuit. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Chip Ferrite Bead (BL□ Series) Soldering and Mounting

Continued from the preceding page. ↘

● PCB Warping

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

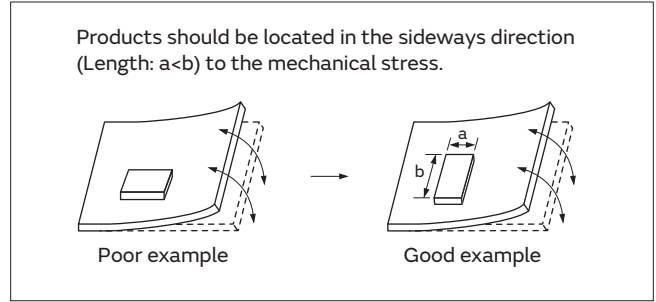

2. Solder Paste Printing and Adhesive Application

When reflow soldering the chip ferrite beads and bead inductor the printing must be conducted in accordance with the following cream solder printing conditions. If too much solder is applied, the chip will be prone to

damage by mechanical and thermal stress from the PCB and may crack. Standard land dimensions should be used for resist and copper foil patterns.

(in mm)

| Series | Solder Paste Printing |
|------------|---|
| BLM BLE | <ul style="list-style-type: none"> ● Ensure that solder is applied smoothly to a minimum height of 0.2mm to 0.3mm at the end surface of the part. ● Guideline of solder paste thickness: 100-150μm: BLM03 100-200μm: BLM15/18/21/31/41/BLE18/32 |

3. Standard Soldering Conditions

(1) Soldering Methods

Use flow and reflow soldering methods only.
 Use standard soldering conditions when soldering chip ferrite beads and bead inductor.
 In cases where several different parts are soldered, each having different soldering conditions, use those conditions requiring the least heat and minimum time.

Solder: Use Sn-3.0Ag-0.5Cu solder. Use of Sn-Zn based solder will deteriorate performance of products. If using BLA series with Sn-Zn based solder, please contact Murata in advance.

Flux:

- Use Rosin-based flux.
 In case of using RA type solder, products should be cleaned completely with no residual flux.
- Do not use strong acidic flux (with chlorine content exceeding 0.20wt%)
- Do not use water-soluble flux.

For additional mounting methods, please contact Murata.


Continued on the following page. ↗

Chip Ferrite Bead (BL□ Series) Soldering and Mounting

Continued from the preceding page. ↘


(2) Soldering Profile

● Flow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

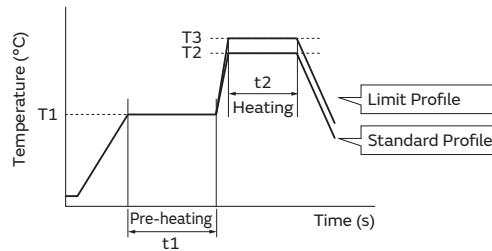

| Series | Pre-heating | | Standard Profile | | | Limit Profile | | |
|--|-------------|------------|------------------|------------|---------------|---------------|------------|---------------|
| | Temp. (T1) | Time. (t1) | Heating | | Cycle of Flow | Heating | | Cycle of Flow |
| | | | Temp. (T2) | Time. (t2) | | Temp. (T3) | Time. (t2) | |
| BLM (Except for BLM03/15/18G/18AG_W/31KN) BLE | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 2 times max. |

● Reflow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

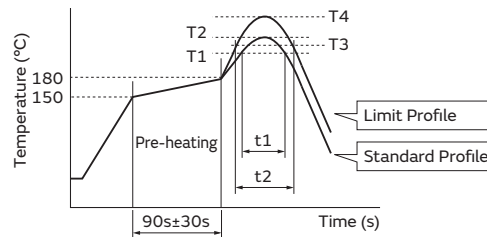

| Series | Standard Profile | | | | Limit Profile | | | |
|---|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak Temperature (T2) | Cycle of Reflow | Heating | | Peak Temperature (T4) | Cycle of Reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| BLM (Except for BLM18AG_W) BLE | 220°C min. | 30 to 60s | 245±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |

(3) Reworking with Solder Iron

The following conditions must be strictly followed when using a soldering iron.

Pre-heating: 150°C 60s min.

Soldering iron power output / Tip diameter:
 80W max. / ø3mm max.

Temperature of soldering iron tip / Soldering time / Times:

350°C max. / 3-4s / 2 times

Do not allow the tip of the soldering iron to directly contact the chip.

For additional methods of reworking with a soldering iron, please contact Murata engineering.

Continued on the following page. ↗


Chip Ferrite Bead (BL□ Series) Soldering and Mounting

Continued from the preceding page. ↘

4. Mounting on-board with Conductive Glue of BLM18AG□□□WH1

Please adhere rigidly to the condition below which shows the method of mounting with conductive glue.

Please coat print pads with conductive glue using metal mask and metal squeegee, and then mount our products on the substrates with a mount machine or human hand.
 Please put the substrates into an oven (140 to 150°C) for 30 minutes in order to cure the adhesive.
 Please check whether the chips and the substrates are connected with the conductive glue or not and there is no electrical short of the conductive glue.

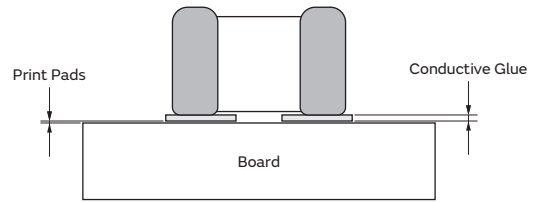

| | |
|--------------------------------|-------------------------------------|
| 1. Board | Ceramic Board or Alumina Board |
| 2. Thickness of Glue | 30 to 50μm |
| 3. Recommended Conductive Glue | PC3000 (Manufactured by Heraeus) |

5. Cleaning

Following conditions should be observed when cleaning chip ferrite beads.

- (1) Cleaning Temperature: 60°C max. (40°C max. for alcohol type cleaner)
- (2) Ultrasonic
 - Output: 20W/liter max.
 - Duration: 5 minutes max.
 - Frequency: 28 to 40kHz
- (3) Cleaning Agent

The following list of cleaning agents have been tested on the individual components. Evaluation of final assembly should be completed prior to production.

Do not clean BLM18AG□□□WH1 series. Before cleaning, please contact Murata engineering.


- (a) Alcohol cleaning agent
 - Isopropyl alcohol (IPA)
- (b) Aqueous cleaning agent
 - Pine Alpha ST-100S

- (4) Ensure that flux residue is completely removed. Component should be thoroughly dried after aqueous agent has been removed with deionized water.
- (5) BLM□□G type is processed with resin. On rinsing the product, using water for ultrasonic cleaning may affect the resin quality used for the product by water element. In case of set cleaning conditions, please make sure the reliability according to the cleaning conditions.

For additional cleaning methods, please contact Murata engineering.

Chip Ferrite Bead (BL□ Series) Packaging

Minimum Quantity and Dimensions of 8mm Width Paper / Embossed Tape

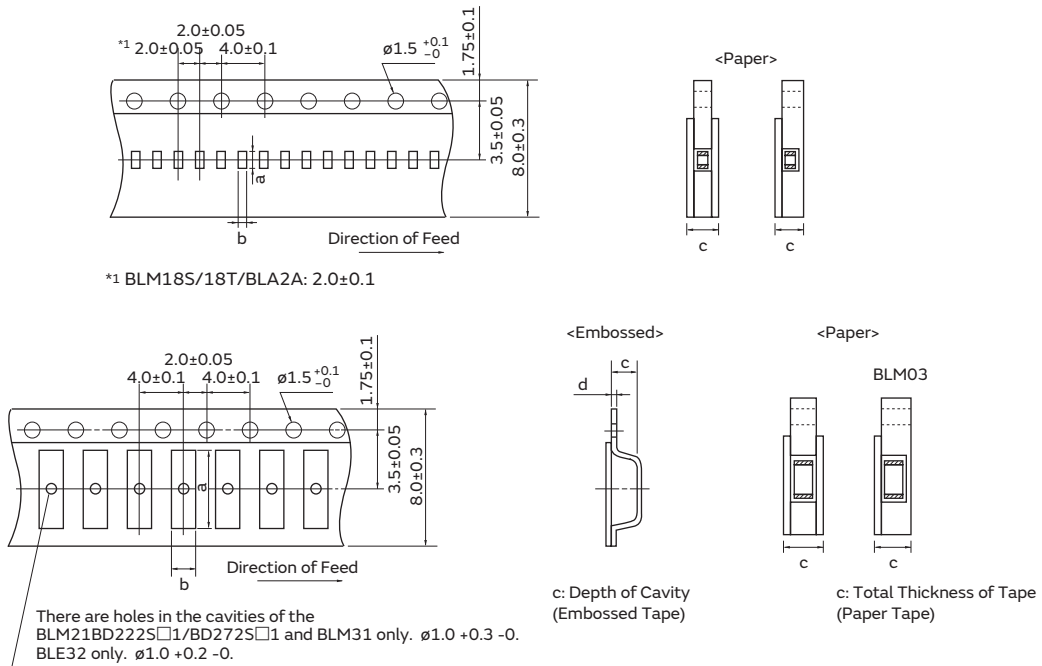


Dimension of the cavity of embossed tape is measured at the bottom side.

| Part Number | Dimensions | | | | Minimum Qty. (pcs.) | | | | |
|------------------------|-----------------------|-----------------------|----------------------------|------|---------------------|---------------|-------------|---------------|------|
| | | | | | ø180mm Reel | | ø330mm Reel | | Bulk |
| | a | b | c | d | Paper Tape | Embossed Tape | Paper Tape | Embossed Tape | |
| BLM03 | 0.70 (except 03H/03E) | 0.40 (except 03H/03E) | 0.55 max. | - | 15000 | - | 50000 | - | 1000 |
| BLM15 | 1.15 | 0.65 | 0.8 max. | - | 10000 | - | 50000 | - | 1000 |
| BLM18A/B/P/H/G | 1.85 | 1.05 | 1.1 max. (except JH/TH/TZ) | - | 4000 | - | 10000 | - | 1000 |
| BLM18EG/KG_T□ | 1.85 | 1.05 | 0.85 max. | - | 4000 | - | 10000 | - | 1000 |
| BLM18EG/KG_S□ | | | 1.1 max. | | | | | | |
| BLM18S | 1.85 | 1.05 | 0.90 max. | - | 10000 | - | 30000 | - | 1000 |
| BLM21 | 2.25 | 1.45 | 1.1 max. | - | 4000 | - | 10000 | - | 1000 |
| BLM31 | 3.5 | 1.9 | 1.3 | 0.2 | - | 3000 | - | 10000 | 1000 |
| BLM21BD222S□1/BD272S□1 | 2.25 | 1.45 | 1.3 | 0.2 | - | 3000 | - | 10000 | 1000 |
| BLE18PS080S□1 | 1.85 | 1.05 | 0.85 | - | 4000 | - | 10000 | - | 1000 |
| BLE32PN260S□1 | 3.5 | 2.8 | 1.75 | 0.25 | - | 1500 | - | 7000 | 1000 |
| BLE32PN300S□1 | | | 2.3 | | | | | | |
| BLM31KN_S□1/B□1 | 3.5 | 1.9 | 1.75 | 0.2 | - | 2500 | - | 8000 | 1000 |

- BLM03H/03E. Dimensions a: 0.66, b: 0.36.
- BLM18_JH/TH/TZ. Dimensions c: 0.85 max.

(in mm)

Minimum Quantity and Dimensions of 12mm Width Embossed Tape

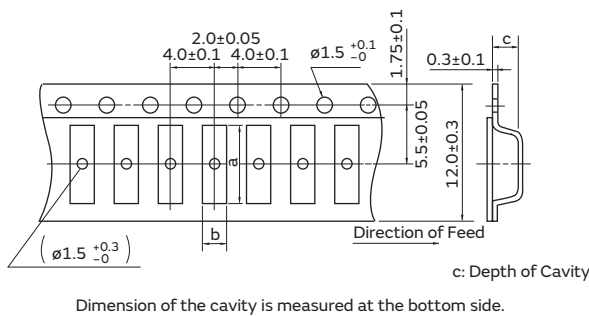

| Part Number | Dimensions | | | Minimum Qty. (pcs.) | | |
|-------------|------------|-----|------|---------------------|-------------|------|
| | a | b | c | ø180mm Reel | ø330mm Reel | Bulk |
| BLM41 | 4.8 | 1.9 | 1.75 | 2500 | 8000 | 1000 |

(in mm)

"Minimum Quantity" means the number of units of each delivery or order. The quantity should be an integral multiple of the "Minimum Quantity."

● Part Numbering

Chip EMIFIL® for Automotive LC Combined

(Part Number)

| | | | | | | | | |
|----|---|----|----|-----|---|----|---|---|
| NF | L | 18 | ZT | 107 | H | 1A | 3 | L |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ |

① Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

② Structure

| Code | Structure |
|------|------------------------------|
| L | Multilayer, LC Combined Type |
| E | Block, LC Combined Type |

③ Dimensions (LxW)

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| 18 | 1.6x0.8mm | 0603 |
| 31 | 3.2x1.6mm | 1206 |
| 61 | 6.8x1.6mm | 2706 |

④ Features

| Code | Features | |
|------|----------------|-------------------------------|
| HT | For Automotive | Powertrain, Safety, T Circuit |
| ZT | | Infotainment, T Circuit |

⑤ Cut-off Frequency (NFL Series)

Expressed by three figures. The unit is in hertz (Hz). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑥ Capacitance (NFE Series)

Expressed by three figures. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑨ Packaging

| Code | Packaging | Series |
|------|-------------------------------|-----------|
| K | Embossed Taping (ø330mm Reel) | NFE |
| L | Embossed Taping (ø180mm Reel) | NFE |
| B | Bulk | NFL18/NFE |
| D | Paper Taping (ø180mm Reel) | NFL18 |

⑥ Characteristics (NFL Series)

| Code | Characteristics |
|------|-------------------|
| H | Cut-off Frequency |

⑥ Characteristics (NFE Series)

| Code | Capacitance Temperature Characteristics |
|------|---|
| C | ±20%, ±22% |
| D | +20/-30%, +22/-33% |
| F | +30/-80%, +22/-82% |
| R | ±15% |
| U | -750 ±120ppm/ °C |
| Z | Other |

⑦ Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 1A | 10V |
| 1E | 25V |
| 2A | 100V |

⑧ Electrode

| Code | Electrode | Series |
|------|------------|--------|
| 3 | Sn Plating | NFL |
| 9 | Others | NFE |

Chip EMIFIL® for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|----|-----|---|---|---|---|---|
| NF | Z | 32 | BW | 3R6 | H | Z | 1 | 0 | L |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|--------------|
| NF | Chip EMIFIL® |

② Structure

| Code | Structure |
|------|---------------|
| Z | Inductor Type |

③ Dimensions (LxW)

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| 18 | 1.6x0.8mm | 0603 |
| 32 | 3.2x2.5mm | 1210 |
| 5B | 5.0x5.0mm | 2020 |

④ Features

| Code | Features |
|------|---------------------------------|
| SM | For Audio Lines Multilayer Type |
| BW | For LED Lines Wire Wound Type |

⑤ Impedance

Expressed by three figures. The unit is in ohm (Ω). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑥ Inductance Tolerance

| Code | Features |
|------|--------------------------------|
| S | For General Use (Sn Plating) |
| H | For General Use (LF Solder) *1 |
| L | For General Use (LF Solder) |

*1 NFZ32BW_H□1 only.

⑦ Category

| Code | Category | |
|------|----------------|--------------|
| Z | For Automotive | Infotainment |

⑧ Number of Circuits

| Code | Number of Circuits |
|------|--------------------|
| 1 | 1 Circuit |

⑨ Specification

| Code | Specification |
|------|---------------|
| 0 | Standard Type |
| 1 | Low Rdc Type |

⑩ Packaging

| Code | Packaging | Series |
|------|--------------------------------------|----------|
| K | Embossed Taping (ϕ 330mm Reel) | NFZ32/5B |
| L | Embossed Taping (ϕ 180mm Reel) | NFZ32/5B |
| B | Bulk | NFZ18 |
| D | Paper Taping (ϕ 180mm Reel) | NFZ18 |

SMD Type
Chip Ferrite Bead

SMD Type
Chip EMIFIL®

SMD Type
Chip Common Mode Choke Coil

SMD Type
Block Type EMIFIL®


Lead Type
EMI Suppression Filters

SMD Type
Microchip Transformer (Balun)

Feed Through Chip EMI Filters SMD Type

NFE31ZT Series 1206/3216(inch/mm)


Appearance/Dimensions

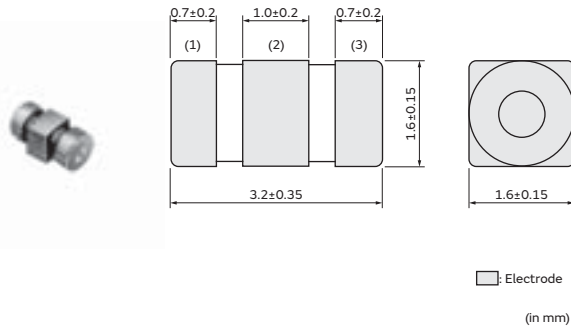

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 2000 |
| K | ø330mm Embossed Taping | 8000 |
| B | Packing in Bulk | 500 |

Equivalent Circuit

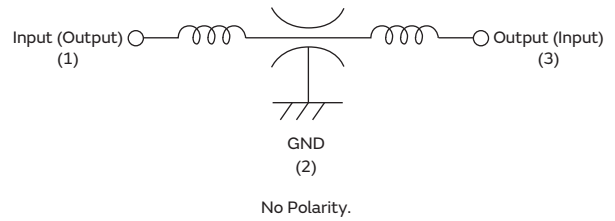


Rated Value (□: packaging code)

| Part Number | | Capacitance | Rated Current | Rated Voltage | Insulation Resistance (min.) | Operating Temperature Range |
|------------------|-----------------------|----------------|---------------|---------------|------------------------------|-----------------------------|
| For Infotainment | For Powertrain/Safety | | | | | |
| NFE31ZT220R1E9□ | — | 22pF ±30% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |
| NFE31ZT470C1E9□ | — | 47pF 50/-20% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |
| NFE31ZT101C1E9□ | — | 100pF 80/-20% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |
| NFE31ZT221D1E9□ | — | 220pF 50/-20% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |
| NFE31ZT471F1E9□ | — | 470pF 50/-20% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |
| NFE31ZT152Z1E9□ | — | 1500pF 50/-20% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |
| NFE31ZT222Z1E9□ | — | 2200pF ±50% | 6A | 25Vdc | 1000MΩ | -40°C to +85°C |

Number of Circuits: 1


Insertion Loss Characteristics (Main Items)

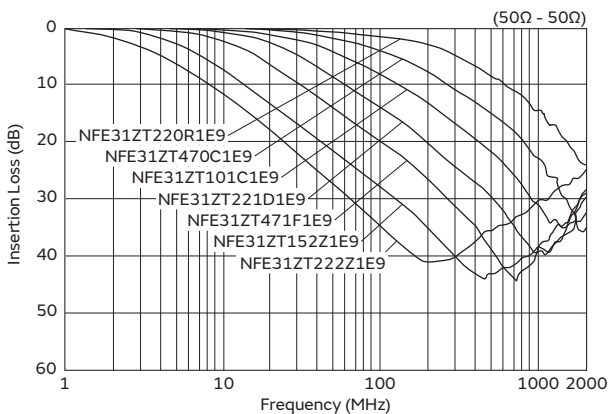

Feed Through Chip EMI Filters SMD Type

NFE61HT Series 2706/6816(inch/mm)

Appearance/Dimensions

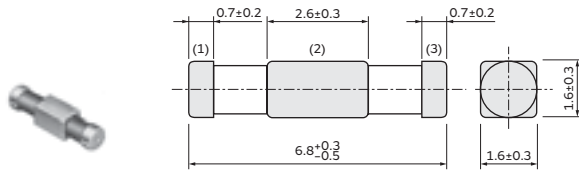


(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 2500 |
| K | ø330mm Embossed Taping | 8000 |
| B | Packing in Bulk | 500 |

Equivalent Circuit

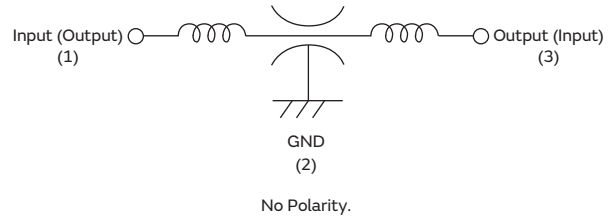


Rated Value (□: packaging code)

| Part Number | | Capacitance | Rated Current | Rated Voltage | Insulation Resistance (min.) | Operating Temperature Range |
|------------------|-----------------------|----------------|---------------|---------------|------------------------------|-----------------------------|
| For Infotainment | For Powertrain/Safety | | | | | |
| — | NFE61HT330U2A9□ | 33pF ±30% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT680R2A9□ | 68pF ±30% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT101Z2A9□ | 100pF ±30% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT181C2A9□ | 180pF ±30% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT361C2A9□ | 360pF ±20% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT681D2A9□ | 680pF ±30% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT102F2A9□ | 1000pF 80/-20% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |
| — | NFE61HT332Z2A9□ | 3300pF 80/-20% | 2A | 100Vdc | 1000MΩ | -55°C to +125°C |

Number of Circuit: 1


Insertion Loss Characteristics (Main Items)

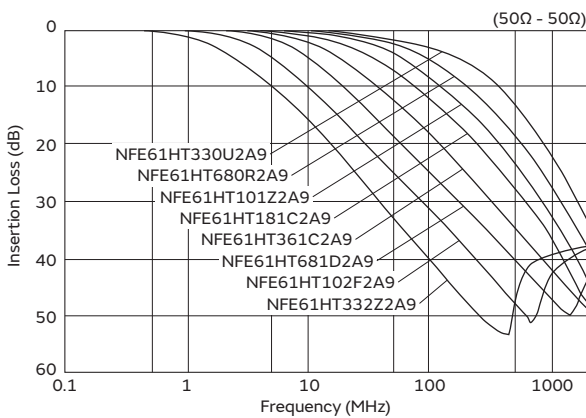

LC Combined Filters (Multilayer Type) SMD Type

NFL18ZT Series 0603/1608(inch/mm)


Appearance/Dimensions

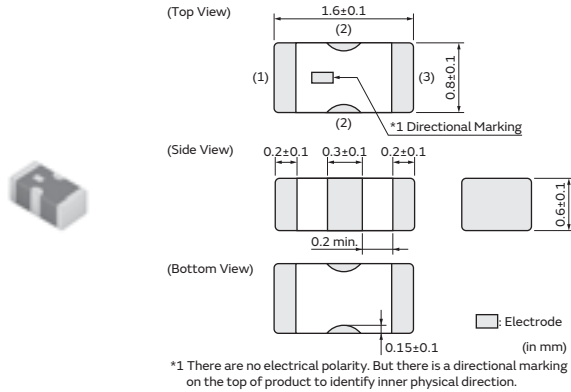

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Equivalent Circuit

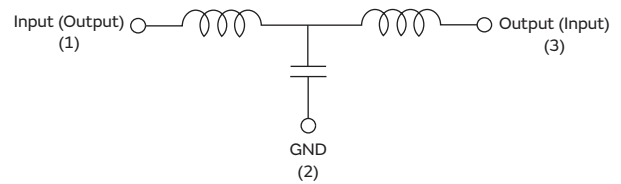


No Polarity.

Rated Value (□: packaging code)

| Part Number | | Nominal Cut-off Frequency | Capacitance | Inductance | Rated Current | Rated Voltage | Insulation Resistance (min.) | Withstand Voltage |
|------------------|-----------------------|---------------------------|--------------|--------------|---------------|---------------|------------------------------|-------------------|
| For Infotainment | For Powertrain/Safety | | | | | | | |
| NFL18ZT506H1A3□ | — | 50MHz | 110pF (Typ.) | 350nH (Typ.) | 75mA | 10Vdc | 1000MΩ | 30Vdc |
| NFL18ZT706H1A3□ | — | 70MHz | 70pF (Typ.) | 230nH (Typ.) | 75mA | 10Vdc | 1000MΩ | 30Vdc |
| NFL18ZT107H1A3□ | — | 100MHz | 50pF (Typ.) | 150nH (Typ.) | 75mA | 10Vdc | 1000MΩ | 30Vdc |
| NFL18ZT207H1A3□ | — | 200MHz | 22pF (Typ.) | 110nH (Typ.) | 100mA | 10Vdc | 1000MΩ | 30Vdc |
| NFL18ZT307H1A3□ | — | 300MHz | 16pF (Typ.) | 74nH (Typ.) | 100mA | 10Vdc | 1000MΩ | 30Vdc |
| NFL18ZT507H1A3□ | — | 500MHz | 10pF (Typ.) | 42nH (Typ.) | 100mA | 10Vdc | 1000MΩ | 30Vdc |

Number of Circuit: 1 Operating Temperature Range: -55°C to +125°C

Insertion Loss Characteristics (Main Items)

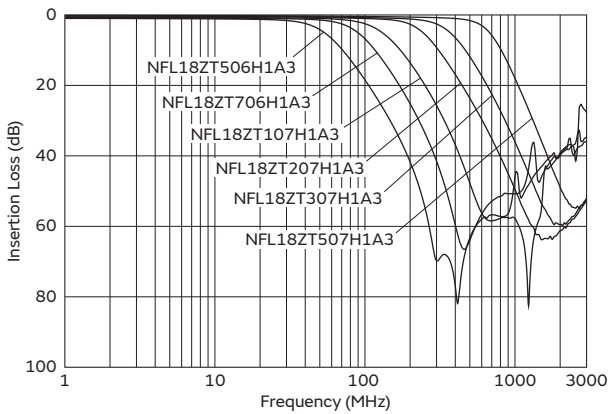

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


Leaded Multilayer Ferrite Beads
Lead Type

Microchip Transformer (Balun)
SMD Type

Impedance Type Filters SMD Type

NFZ18SM_10 Series 0603/1608(inch/mm)

Appearance/Dimensions

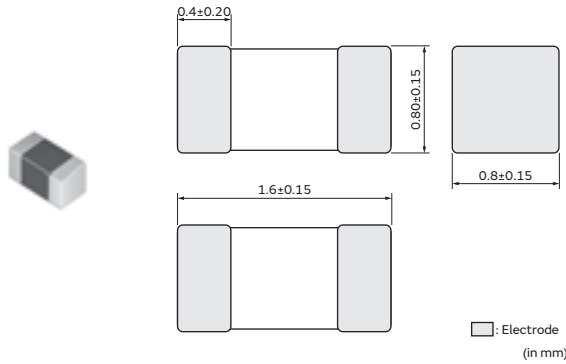

Packaging

| Code | Packaging | Minimum Quantity |
|------|-------------------|------------------|
| D | ø180mm Paper Tape | 4000 |
| B | Bulk(Bag) | 1000 |

Equivalent Circuit







(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance at 100MHz | Rated Current | DC Resistance | DC Resistance (Max.) |
|-----------------|-------------------|---------------------|---------------|---------------|----------------------|
| Infotainment | Powertrain/Safety | | | | |
| NFZ18SM121SZ10□ | — | 120Ω±25% | 1.25A | 0.11Ω (Typ.) | 0.14Ω |
| NFZ18SM251SZ10□ | — | 250Ω±25% | 1.1A | 0.15Ω (Typ.) | 0.19Ω |
| NFZ18SM501SZ10□ | — | 500Ω±25% | 950mA | 0.20Ω (Typ.) | 0.25Ω |
| NFZ18SM701SZ10□ | — | 700Ω±25% | 800mA | 0.23Ω (Typ.) | 0.29Ω |

Operating Temp. Range: -55°C to 125°C

Z-f Characteristics: NFZ18SM_10 Series

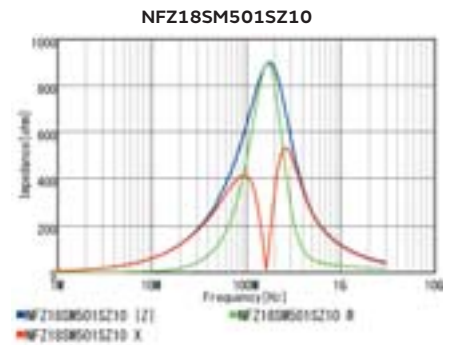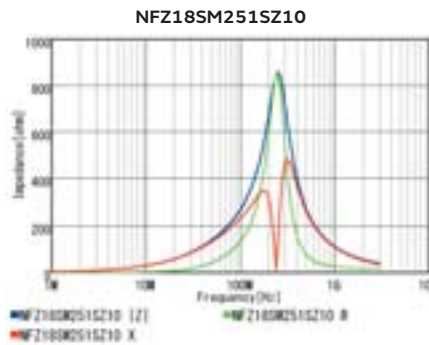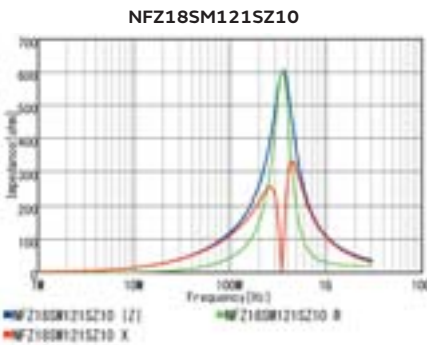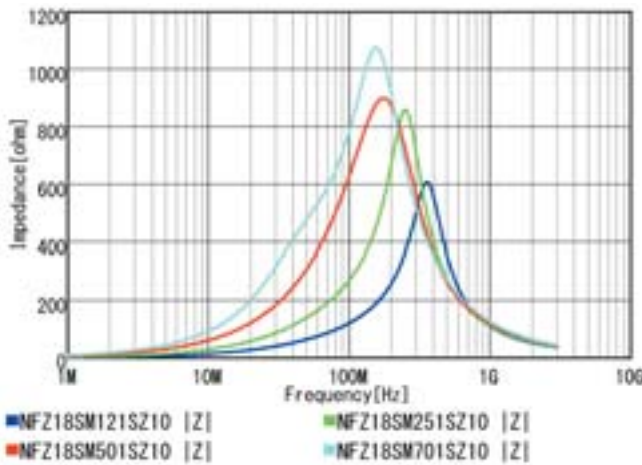


Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics


NFZ18SM701SZ10

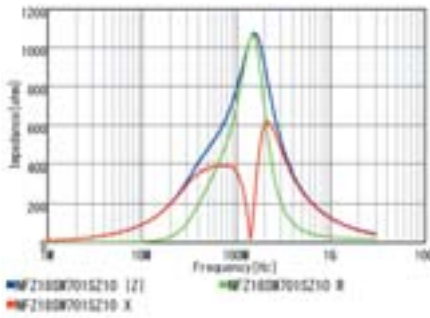

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for NFZ18SM series.
 Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

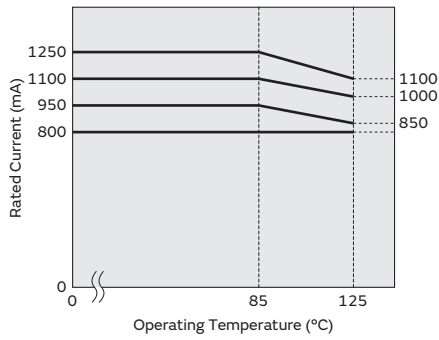

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Impedance Type Filters SMD Type

NFZ32BW_10 Series 1210/3225(inch/mm)

Appearance/Dimensions

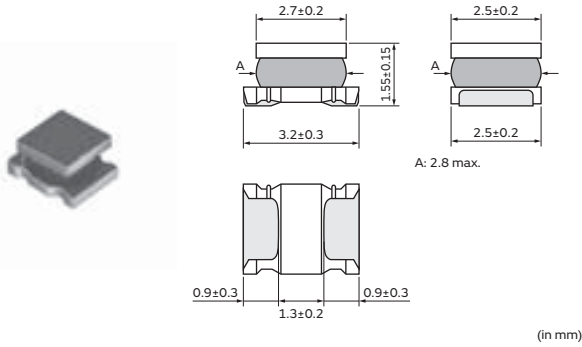

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 7500 |
| L | ø180mm Embossed Tape | 2000 |

Equivalent Circuit



(Resistance element becomes dominant at high frequencies.)


Rated Value (□: packaging code)

| Part Number | | Impedance at 1MHz | Rated Current | DC Resistance |
|-----------------|-------------------|-------------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | |
| NFZ32BW3R6HZ10□ | — | 3.6Ω±30% | 2.55A | 0.03Ω±20% |
| NFZ32BW7R4HZ10□ | — | 7.4Ω±30% | 2.05A | 0.045Ω±20% |
| NFZ32BW9R0HZ10□ | — | 9Ω±30% | 1.75A | 0.057Ω±20% |
| NFZ32BW150HZ10□ | — | 15Ω±30% | 1.6A | 0.076Ω±20% |
| NFZ32BW210HZ10□ | — | 21Ω±30% | 1.2A | 0.12Ω±20% |
| NFZ32BW320HZ10□ | — | 32Ω±30% | 1A | 0.18Ω±20% |
| NFZ32BW420HZ10□ | — | 42Ω±30% | 850mA | 0.24Ω±20% |
| NFZ32BW700HZ10□ | — | 70Ω±30% | 700mA | 0.38Ω±20% |
| NFZ32BW111HZ10□ | — | 110Ω±30% | 520mA | 0.57Ω±20% |
| NFZ32BW151HZ10□ | — | 150Ω±30% | 450mA | 0.81Ω±20% |
| NFZ32BW221HZ10□ | — | 220Ω±30% | 390mA | 1.15Ω±20% |
| NFZ32BW291HZ10□ | — | 290Ω±30% | 310mA | 1.78Ω±20% |
| NFZ32BW451HZ10□ | — | 450Ω±30% | 275mA | 2.28Ω±20% |
| NFZ32BW621HZ10□ | — | 620Ω±30% | 250mA | 2.7Ω±20% |
| NFZ32BW881HZ10□ | — | 880Ω±30% | 200mA | 4.38Ω±20% |


Operating Temp. Range: -40°C to 105°C

Operating Temp. Range self-temp. rise included: -40°C to 125°C

Z-f Characteristics: NFZ32BW_10 Series

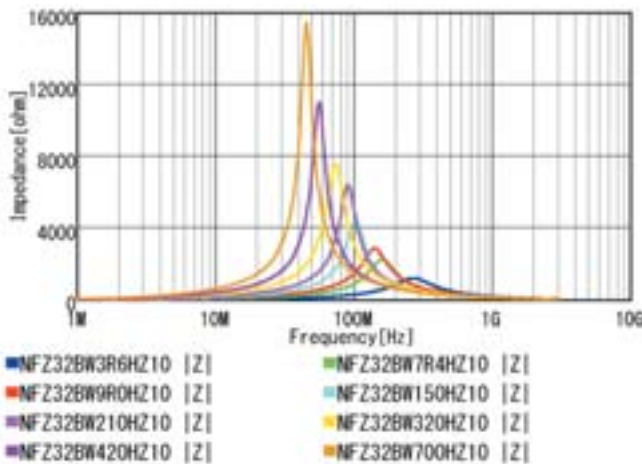

Z-f Characteristics: NFZ32BW_10 Series

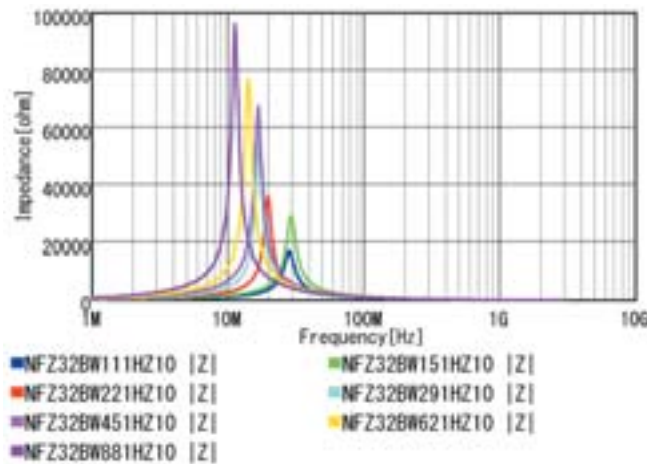


Continued on the following page. ↗


Continued from the preceding page. ↘

Z-f characteristics


NFZ32BW3R6HZ10

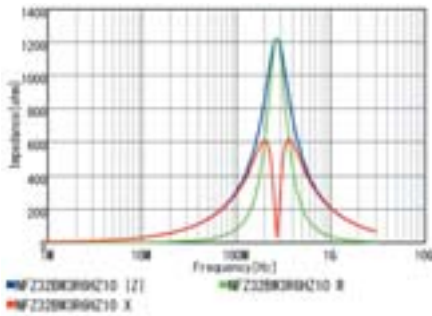


NFZ32BW7R4HZ10

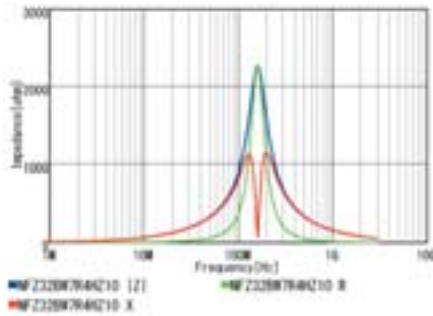


NFZ32BW9R0HZ10

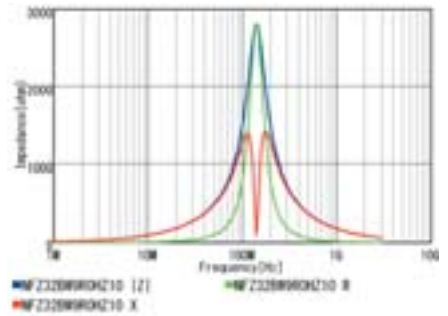


NFZ32BW150HZ10

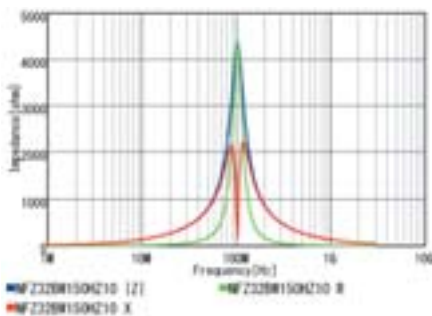


NFZ32BW210HZ10

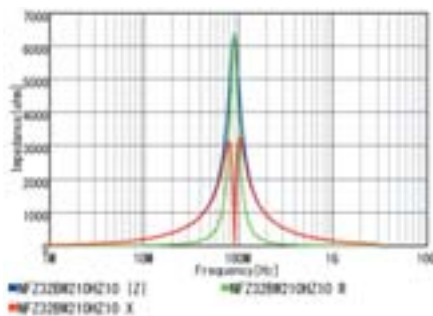


NFZ32BW320HZ10

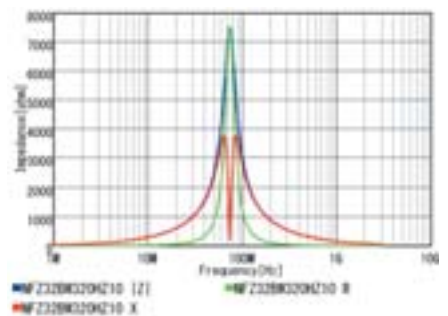


NFZ32BW420HZ10

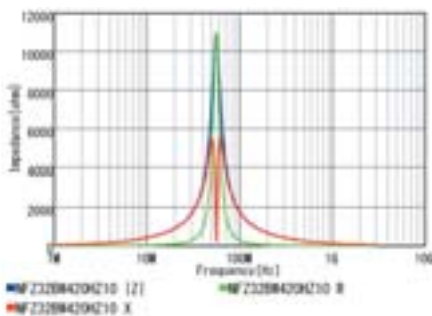


NFZ32BW700HZ10

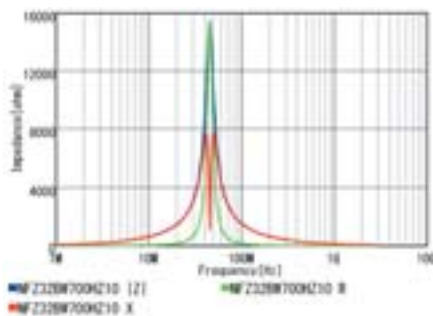


NFZ32BW111HZ10

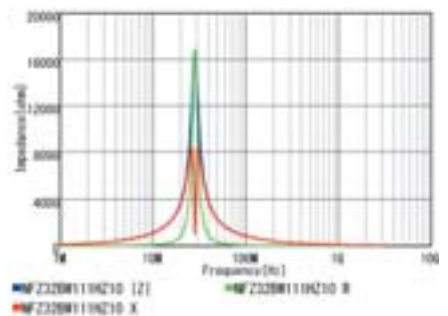


NFZ32BW151HZ10

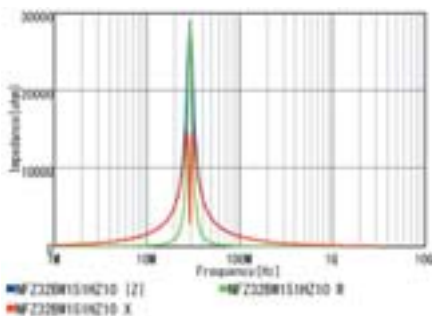

NFZ32BW221HZ10

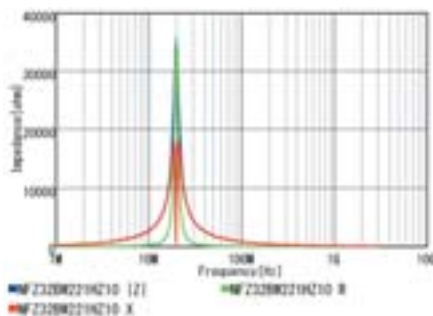

NFZ32BW291HZ10

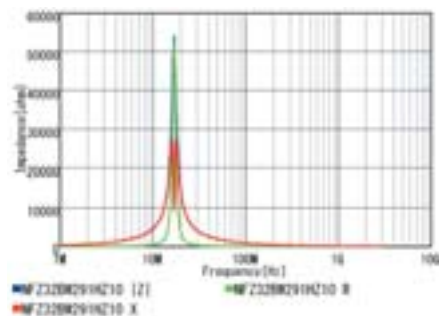


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip EMIFIL® SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘


Z-f characteristics

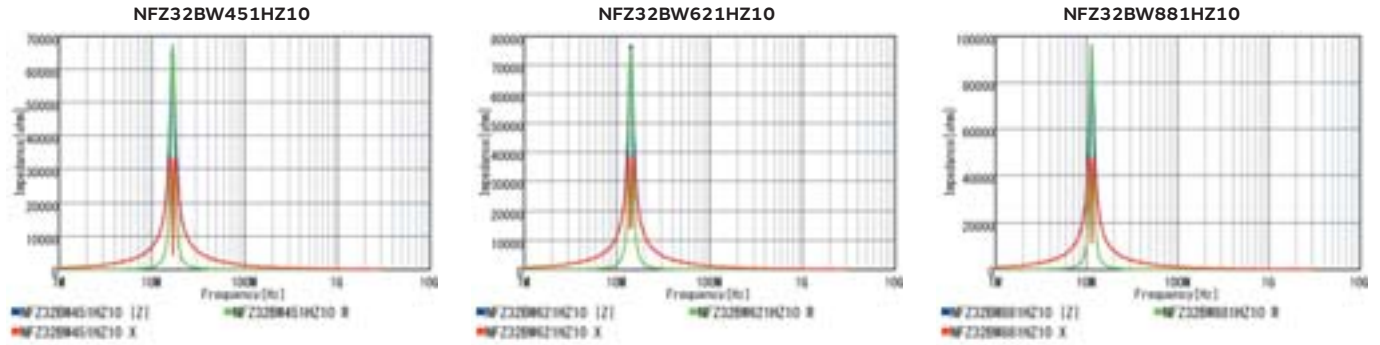

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for NFZ32BW_H□10 series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

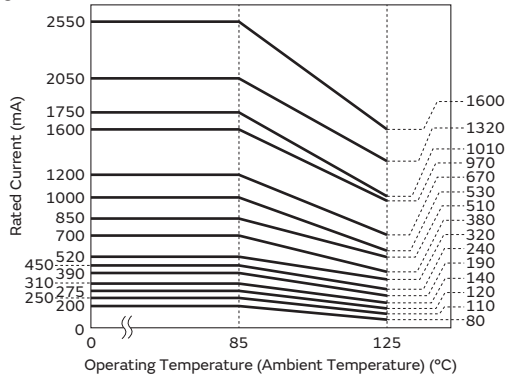

Impedance Type Filters SMD Type

NFZ32BW_11 Series 1210/3225(inch/mm)

Appearance/Dimensions

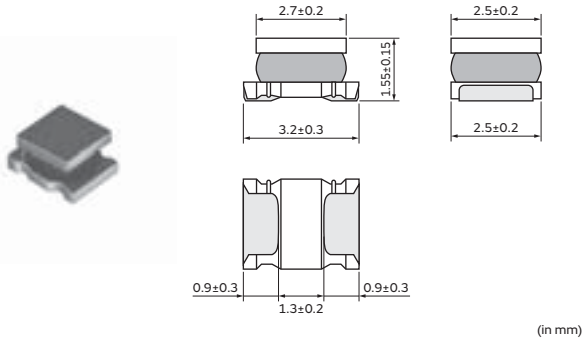

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 7500 |
| L | ø180mm Embossed Tape | 2000 |

Equivalent Circuit



(Resistance element becomes dominant at high frequencies.)


Rated Value (□: packaging code)

| Part Number | | Impedance at 1MHz | Rated Current | DC Resistance |
|-----------------|-------------------|-------------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | |
| NFZ32BW3R3HZ11□ | — | 3.3Ω±30% | 2.9A | 0.024Ω±20% |
| NFZ32BW6R8HZ11□ | — | 6.8Ω±30% | 2.5A | 0.036Ω±20% |
| NFZ32BW8R4HZ11□ | — | 8.4Ω±30% | 2.4A | 0.048Ω±20% |
| NFZ32BW9R8HZ11□ | — | 9.8Ω±30% | 2.1A | 0.053Ω±20% |
| NFZ32BW120HZ11□ | — | 12Ω±30% | 1.85A | 0.064Ω±20% |
| NFZ32BW190HZ11□ | — | 19Ω±30% | 1.8A | 0.089Ω±20% |
| NFZ32BW210HZ11□ | — | 21Ω±30% | 1.55A | 0.100Ω±20% |
| NFZ32BW310HZ11□ | — | 31Ω±30% | 1.2A | 0.155Ω±20% |
| NFZ32BW520HZ11□ | — | 52Ω±30% | 1.1A | 0.220Ω±20% |
| NFZ32BW650HZ11□ | — | 65Ω±30% | 900mA | 0.295Ω±20% |
| NFZ32BW101HZ11□ | — | 100Ω±30% | 900mA | 0.475Ω±20% |
| NFZ32BW151HZ11□ | — | 150Ω±30% | 700mA | 0.685Ω±20% |


Operating Temp. Range: -40°C to 105°C

Operating Temp. Range self-temp. rise included: -40°C to 125°C

Z-f Characteristics: NFZ32BW_11 Series

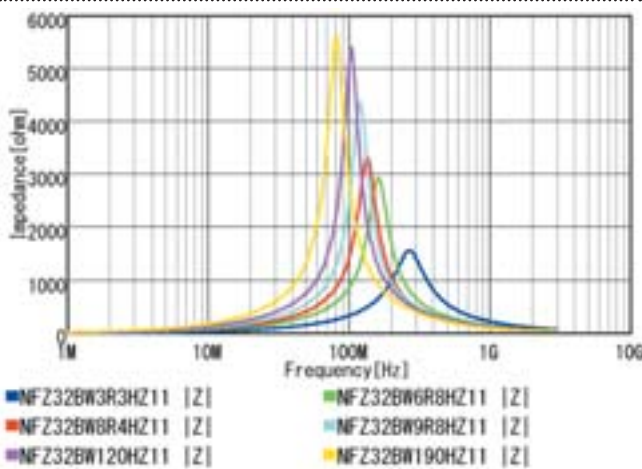

Z-f Characteristics: NFZ32BW_11 Series

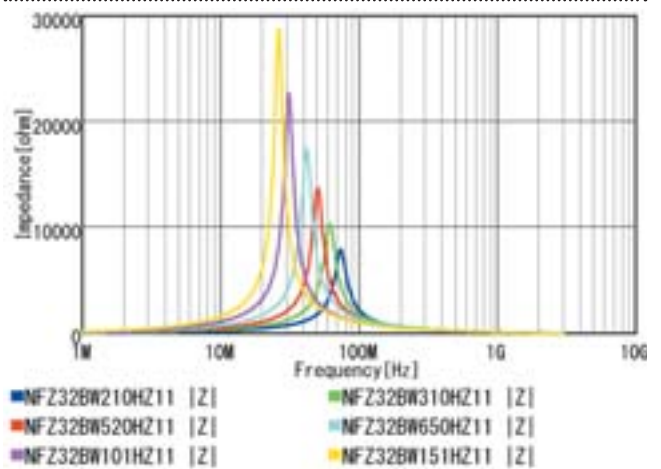

Continued on the following page. ↗

Chip Ferrite Bead SMD Type

Chip EMIFIL® SMD Type

Chip Common Mode Choke Coil SMD Type


Block Type EMIFIL® SMD Type

EMI Suppression Filters Lead Type

Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics

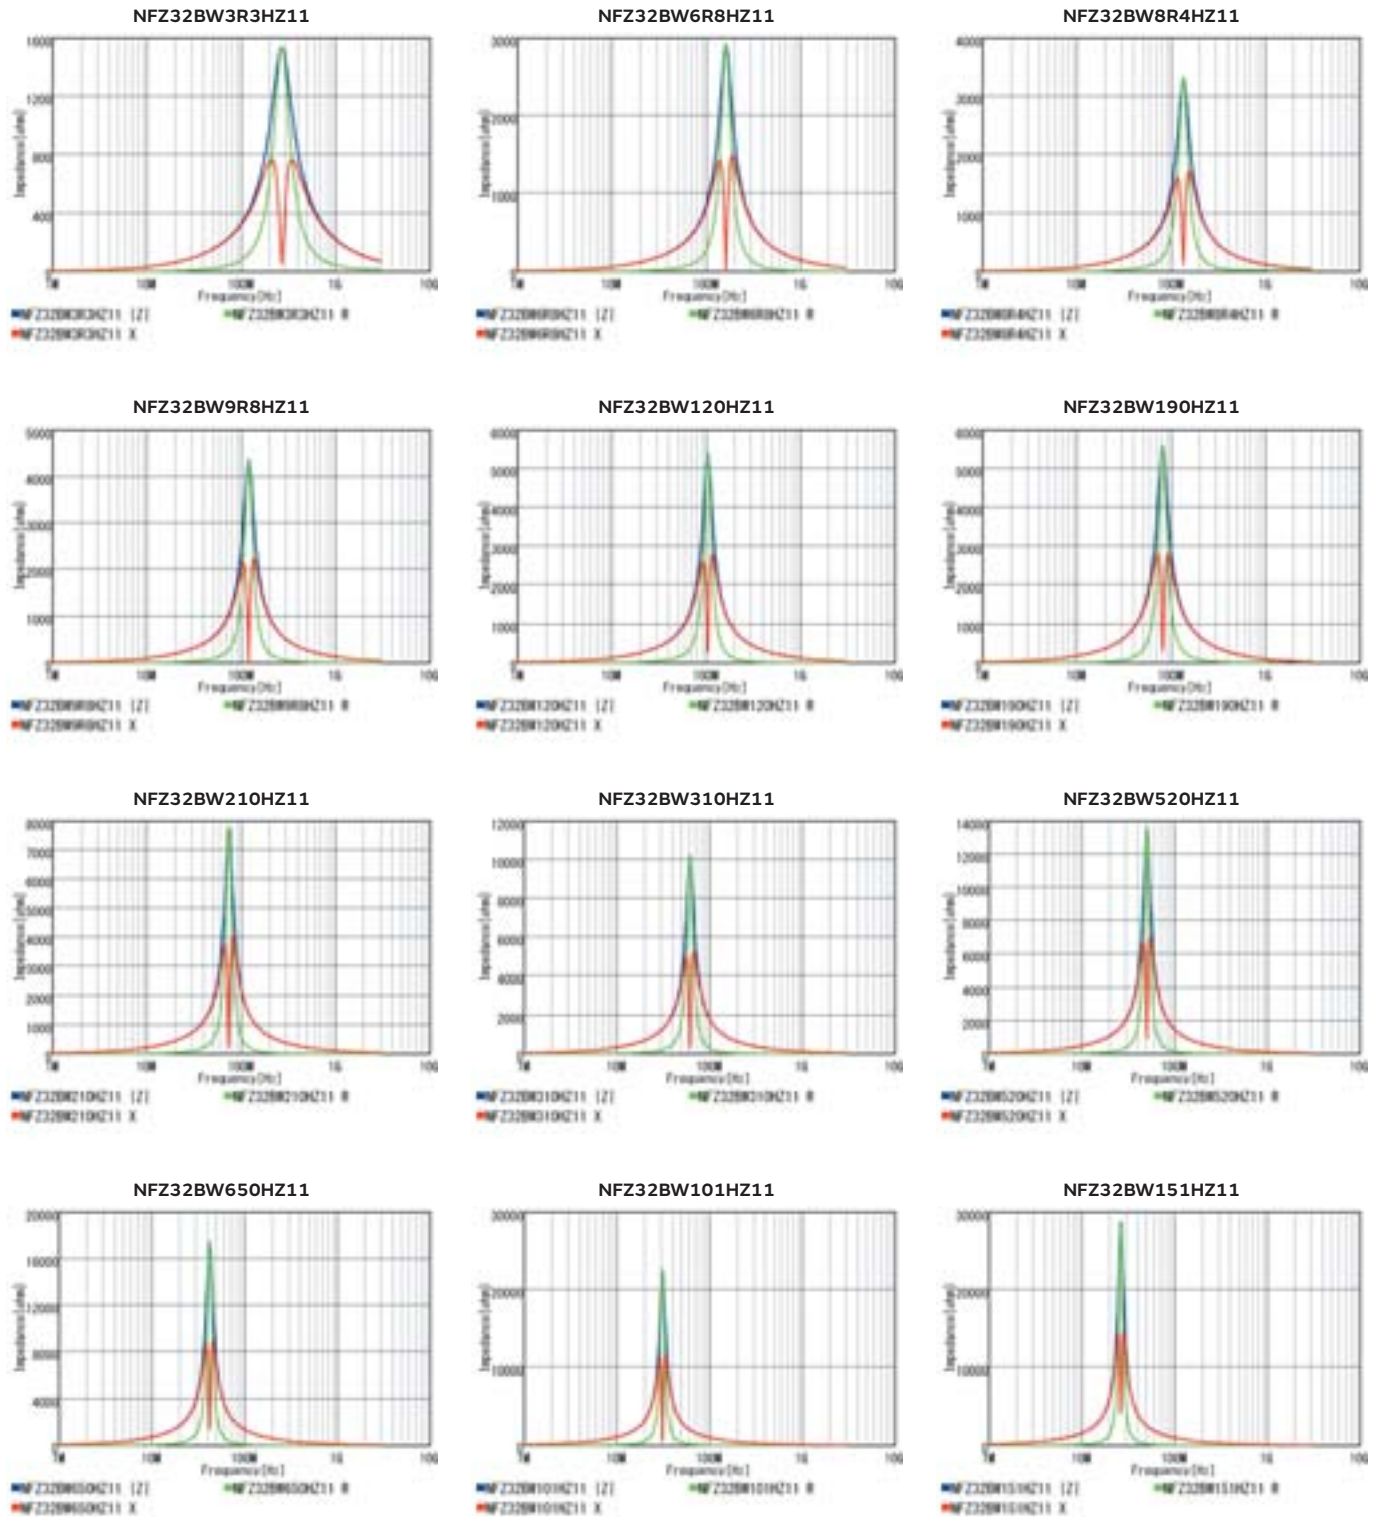

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMI FIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMI FIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for NFZ32BW_H□11 series.
 Please apply the derating curve shown in chart according to the operating temperature.

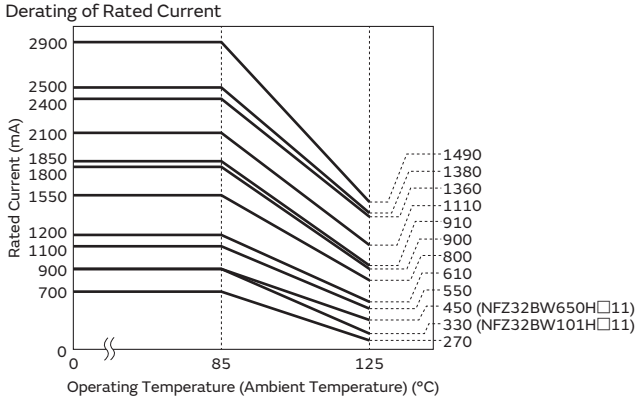

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Impedance Type Filters SMD Type

NFZ5BBW_10 Series 2020/5050(inch/mm)


Appearance/Dimensions

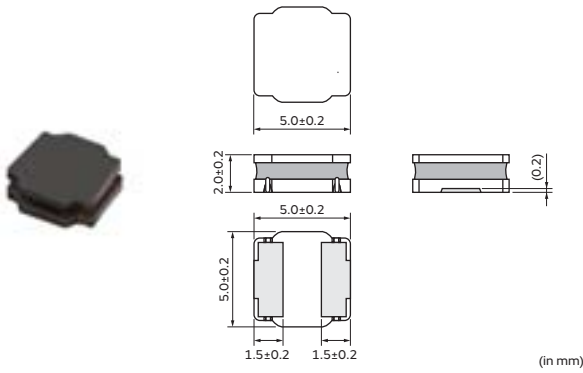

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 3000 |
| L | ø180mm Embossed Tape | 500 |

Equivalent Circuit

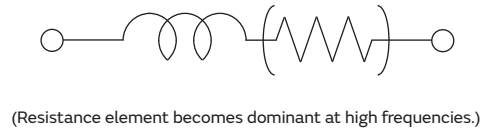


Rated Value (□: packaging code)

| Part Number | | Impedance at 1MHz | Rated Current | DC Resistance |
|-----------------|-------------------|-------------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | |
| NFZ5BBW2R9LZ10□ | — | 2.9Ω±30% | 4A | 0.012Ω±20% |
| NFZ5BBW4R5LZ10□ | — | 4.5Ω±30% | 3.4A | 0.015Ω±20% |
| NFZ5BBW6R7LZ10□ | — | 6.7Ω±30% | 3.1A | 0.019Ω±20% |
| NFZ5BBW7R6LZ10□ | — | 7.6Ω±30% | 3.1A | 0.019Ω±20% |
| NFZ5BBW100LZ10□ | — | 10Ω±30% | 3A | 0.024Ω±20% |
| NFZ5BBW140LZ10□ | — | 14Ω±30% | 2.6A | 0.030Ω±20% |
| NFZ5BBW170LZ10□ | — | 17Ω±30% | 2.5A | 0.035Ω±20% |
| NFZ5BBW220LZ10□ | — | 22Ω±30% | 2.3A | 0.044Ω±20% |
| NFZ5BBW310LZ10□ | — | 31Ω±30% | 2A | 0.058Ω±20% |
| NFZ5BBW450LZ10□ | — | 45Ω±30% | 1.65A | 0.083Ω±20% |
| NFZ5BBW520LZ10□ | — | 52Ω±30% | 1.61A | 0.100Ω±20% |
| NFZ5BBW610LZ10□ | — | 61Ω±30% | 1.6A | 0.106Ω±20% |
| NFZ5BBW970LZ10□ | — | 97Ω±30% | 1.2A | 0.187Ω±20% |
| NFZ5BBW141LZ10□ | — | 140Ω±30% | 1.05A | 0.259Ω±20% |


Operating Temp. Range: -40°C to 105°C

Operating Temp. Range self-temp. rise included: -40°C to 125°C

Z-f Characteristics: NFZ5BBW_10 Series

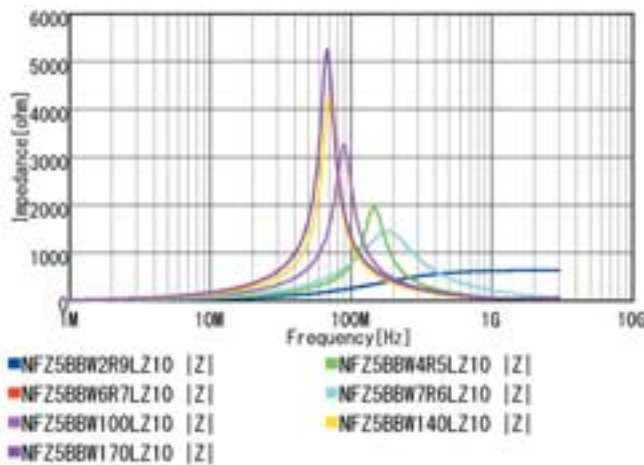













Z-f Characteristics: NFZ5BBW_10 Series

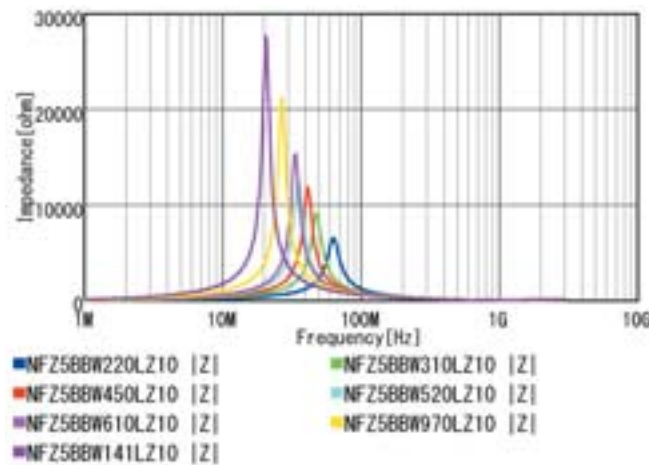

Continued on the following page. ↗

Continued from the preceding page. ↘

Z-f characteristics

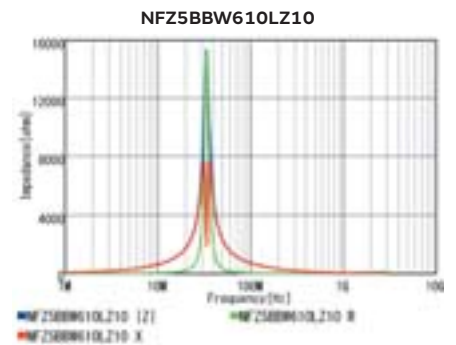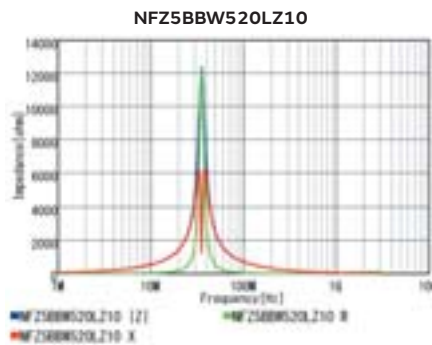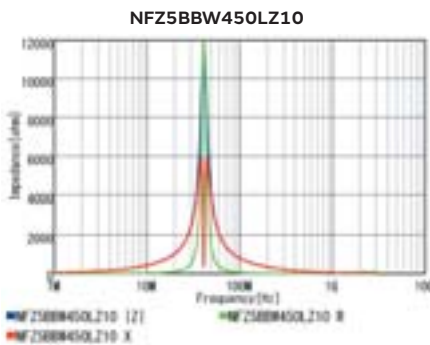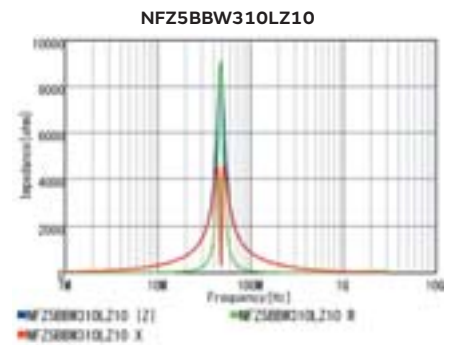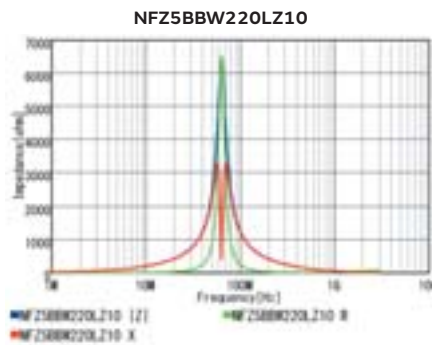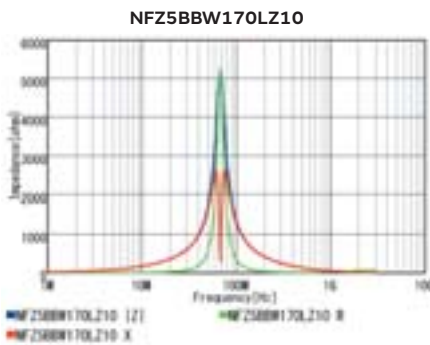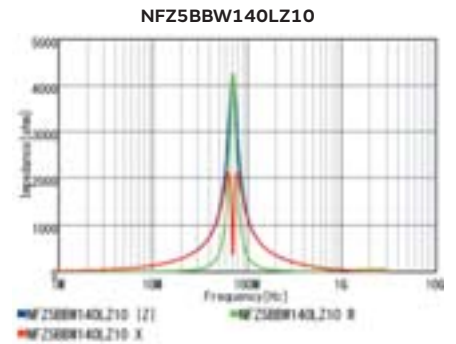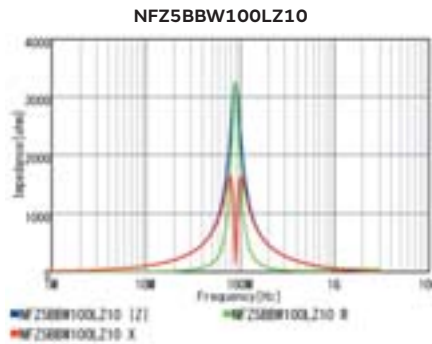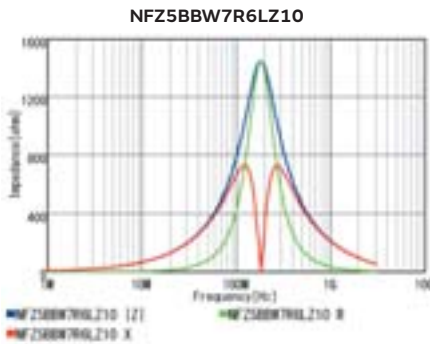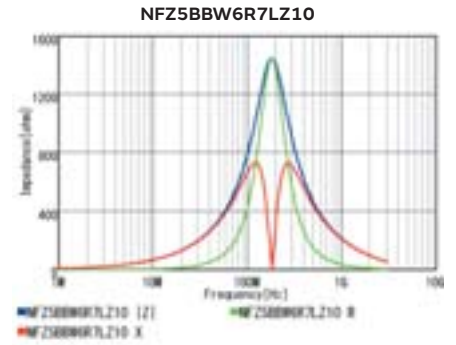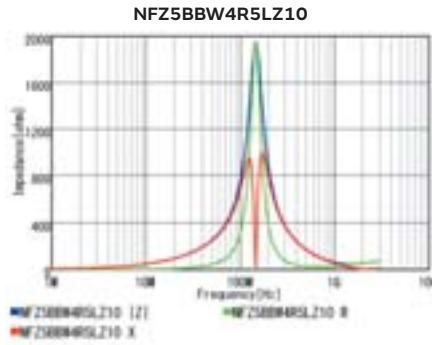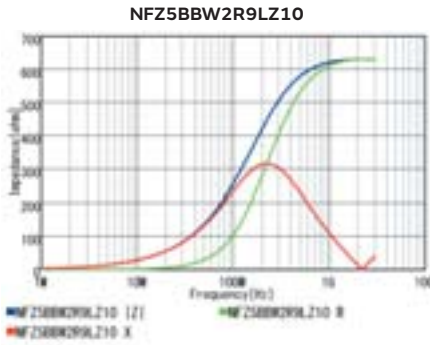


Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip EMIFIL® SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘


Z-f characteristics

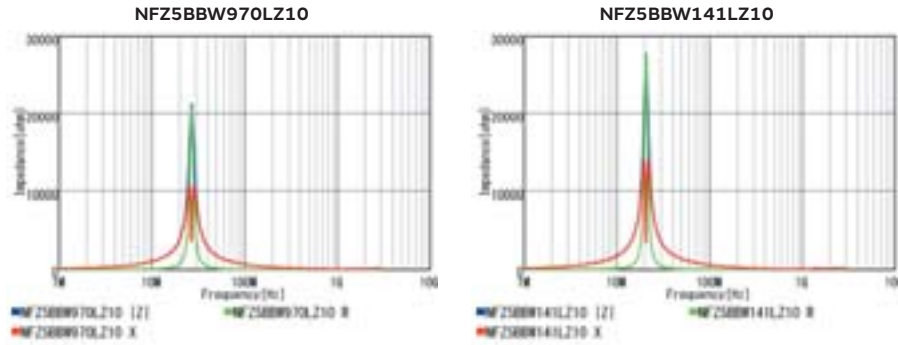

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for NFZ5BBW_L□10 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

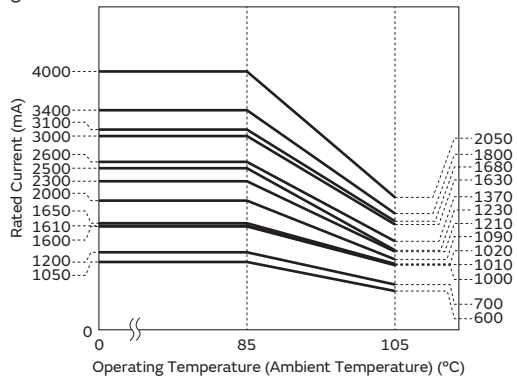

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip EMIFIL® (NF□ Series) ⚠Caution/Notice

⚠Caution

Rating

1. About the Rated Current

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

2. About the Excessive Surge Current (NFZ Series)

Excessive surge current (pulse current or rush current)

than specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise. Please contact us in advance in case of applying the surge current.

Soldering and Mounting

1. Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure our product.

Notice

Storage and Operating Condition

<Operating Environment>

Do not use products in the corrodible atmosphere such as acidic gases, alkaline gases, chlorine, sulfur gases, organic gases. (the sea breeze, Cl₂, H₂S, NH₃, SO₂, NO₂,etc)
Do not use products in the environment close to the organic solvent.

<Storage and Handling Requirements>

1. Storage Period

The NF series should be used within 12 months.
Products to be used after this period should be checked for solderability or bondability with glue.

2. Storage Conditions

- (1) Storage temperature: -10 to +40°C
Relative humidity: 15 to 85%
Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Notice (Soldering and Mounting)

1. Cleaning

Failure and degradation of a product are caused by the cleaning method. When you clean in conditions that are not in mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters EMIFIL® may vary, depending on the circuits and ICs used, type of noise, mounting pattern, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Continued on the following page. ↗

Chip EMIFIL® (NF□ Series) ⚠Caution/Notice

Continued from the preceding page. ↘

Handling

1. Resin Coating (Except for NFZ Series)

Using resin for coating/molding products may affect the products performance.

So please pay careful attention in selecting resin.

Prior to use, please make the reliability evaluation with the product mounted in your application set.

Resin Coating (NFZ_W Series)


To prevent breaking the wire, avoid touching with sharp material, such as tweezers or other material such as bristles of cleaning brush, to the wire wound portion of this product. To prevent breaking the core, avoid applying excessive mechanical shock to products mounted on the board. An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resins containing impurities or chloride may possibly.

2. Handling of a Substrate


After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the Product.

Bending



Twisting



Chip EMIFIL® (NF□ Series) Soldering and Mounting

1. Standard Land Pattern Dimensions

NF□ series suppress noise by conducting the high-frequency noise element to ground. Therefore, to obtain maximum performance from these filters, the ground pattern should be made as large as possible during the PCB design stage. As shown below, one side of the PCB is used for chip mounting, and the other is used for grounding.

Small diameter feedthrough holes are then used to connect the grounds on each side of the PCB. This reduces the high-frequency impedance of the grounding and maximizes the filter's performance.



| Series | Standard Land Dimensions | |
|----------------|-----------------------------------|---|
| NFL18ZT | <p>● Reflow Soldering NFL18ZT</p> | |
| NFE31ZT | <p>● Reflow Soldering NFE31ZT</p> | |
| NFE61HT | <p>● Reflow Soldering</p> | <p>● Flow Soldering (Except for NFE61HT332)</p> |
| NFZ18SM | <p>● Reflow Soldering</p> | |

Continued on the following page. ↗

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type





EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip EMIFIL® (NF□ Series) Soldering and Mounting


Continued from the preceding page. ↘


 Land Pattern + Solder Resist
 Land Pattern
 Solder Resist (in mm)
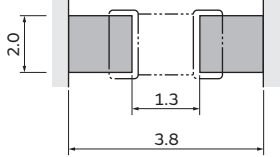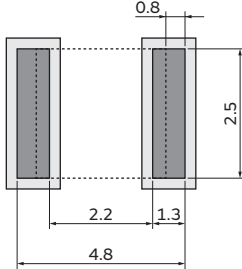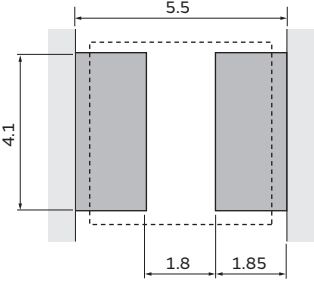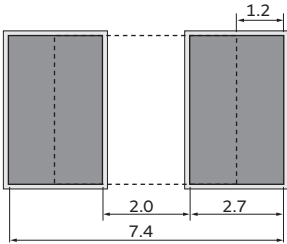
| Series | Standard Land Dimensions | |
|---------|---|--|
| NFZ32BW | ● Reflow Soldering  | ● Flow Soldering  |
| | ● Reflow Soldering  | ● Flow Soldering  |

(1) PCB Warping


PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

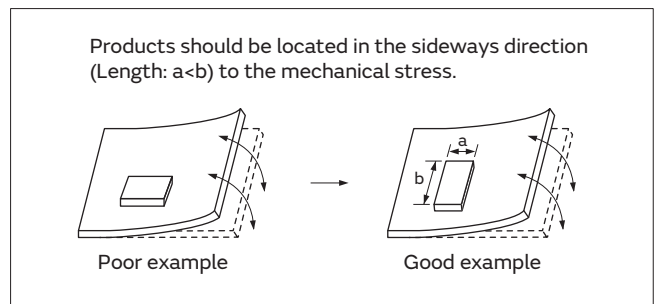

(2) Amount of Solder Paste

Excessive solder causes electrode corrosion, while insufficient solder causes low electrode bonding strength. Adjust the amount of solder paste as shown on the right so that solder is applied.

- Guideline of solder paste thickness
 - NFZ32BW / 5BBW: 100 to 150μm
 - NFZ18SM: 100 to 200μm

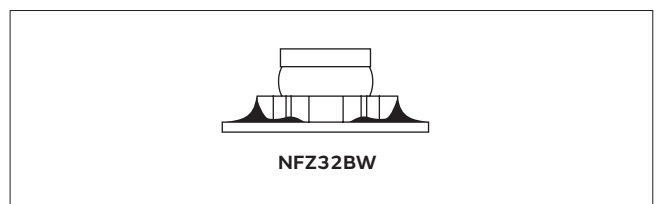

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip EMIFIL® (NF□ Series) Soldering and Mounting

Continued from the preceding page. ↘

2. Solder Paste Printing and Adhesive Application

When reflow soldering the chip EMI suppression filter, the printing must be conducted in accordance with the following cream solder printing conditions.

If too much solder is applied, the chip will be prone to damage by mechanical and thermal stress from the PCB and may crack.

Standard land dimensions should be used for resist and copper foil patterns.

When flow soldering the EMI suppression filter, apply the adhesive in accordance with the following conditions. If too much adhesive is applied, then it may overflow into the land or termination areas and yield poor solderability. In contrast, if insufficient adhesive is applied, or if the adhesive is not sufficiently hardened, then the chip may become detached during flow soldering process.

| Series | Solder Paste Printing | Adhesive Application | |
|---------|--|----------------------|---|
| NFL18ZT | <p>●Guideline of solder paste thickness: 100-150μm</p> | (in mm) | |
| NFE31ZT | <p>●Guideline of solder paste thickness: 150-200μm</p> | | |
| NFE61HT | <p>●Guideline of solder paste thickness: 150-200μm</p> | | <p>Apply 1.0mg of bonding agent at each chip.</p> <p>* Except for NFE61HT332</p> |
| NFZ5BBW | | | <p>Amount of adhesive applied is a standard 1/2 to 2/3 of the bottom flange thickness.</p> <p>Adhesive application is recommended the 3-point application. (prevent the drop of products)</p> |

Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip EMIFIL® SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Chip EMIFIL® (NF□ Series) Soldering and Mounting

Continued from the preceding page. ↘

3. Standard Soldering Conditions

(1) Soldering Methods

Use flow and reflow soldering methods only.
 Use standard soldering conditions when soldering chip EMI suppression filters.
 In cases where several different parts are soldered, each having different soldering conditions, use those conditions requiring the least heat and minimum time.

Flux:


- Use Rosin-based flux.
 In case of using RA type solder, products should be cleaned completely with no residual flux.
- Do not use strong acidic flux (with chlorine content exceeding 0.20wt%)
- Do not use water-soluble flux.

Solder: Use Sn-3.0Ag-0.5Cu solder. Use of Sn-Zn based solder will deteriorate performance of products.
 If using NFM series with Sn-Zn based solder, please contact Murata in advance.

For additional mounting methods, please contact Murata.


(2) Soldering Profile

● Flow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

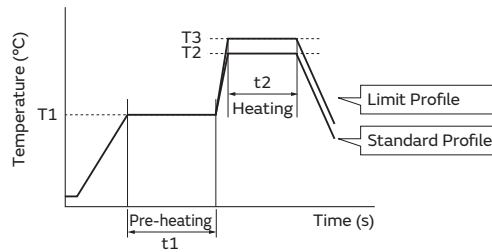

| Series | Pre-heating | | Standard Profile | | | Limit Profile | | |
|---------------------------------|-------------|------------|------------------|------------|---------------|---------------|------------|---------------|
| | Temp. (T1) | Time. (t1) | Temp. (T2) | Time. (t2) | Cycle of Flow | Temp. (T3) | Time. (t2) | Cycle of Flow |
| NFE61HT (Except for NFE61HT332) | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 2 times max. |
| NFZ5BBW | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 1 time |

● Reflow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

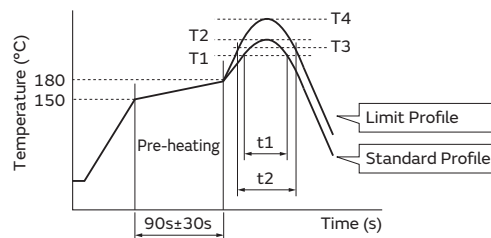

| Series | Standard Profile | | | | Limit Profile | | | |
|--|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Temp. (T1) | Time. (t1) | Peak Temperature (T2) | Cycle of Reflow | Temp. (T3) | Time. (t2) | Peak Temperature (T4) | Cycle of Reflow |
| NFE31ZT NFE61HT NFL18ZT NFZ18SM NFZ32BW NFZ5BBW | 220°C min. | 30 to 60s | 245±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |

Continued on the following page. ↗

Chip EMIFIL® (NF□ Series) Soldering and Mounting

Continued from the preceding page. ↘

(3) Reworking with Solder Iron

The following conditions must be strictly followed when using a soldering iron.

Pre-heating: 150°C 60s min.

Soldering iron power output / Tip diameter:

30W max. / ø3mm max.*¹

*¹ NFZ18SM/32/5BBW: 80W max. / ø3mm max.

Temperature of soldering iron tip / Soldering time /

Times:

350°C max. / 3-4s / 2 times*²

*² NFE31ZT152Z1E9□: 280°C max. / 10s max.

NFZ5BBW: 380°C max. /3-4s

Do not allow the tip of the soldering iron to directly contact the chip.

For additional methods of reworking with a soldering iron, please contact Murata engineering.

4. Cleaning

Following conditions should be observed when cleaning chip EMI filter.

(1) Cleaning Temperature: 60°C max. (40°C max. for alcohol type cleaner)

(2) Ultrasonic

Output: 20W/liter max.

Duration: 5 minutes max.

Frequency: 28 to 40kHz

Care should be taken not to cause resonance of the PCB and mounted products.

(3) Cleaning Agent

The following list of cleaning agents have been tested on the individual components. Evaluation of final assembly should be completed prior to production.

(a) Alcohol cleaning agent

Isopropyl alcohol (IPA)

(b) Aqueous cleaning agent

Pine Alpha ST-100S


(4) Ensure that flux residue is completely removed.

Component should be thoroughly dried after aqueous agent has been removed with deionized water.


Chip EMIFIL® (NF□ Series) Packaging

Minimum Quantity and Dimensions of 8mm Width Paper / Embossed Tape

(Common to Paper Tape / Embossed Tape)

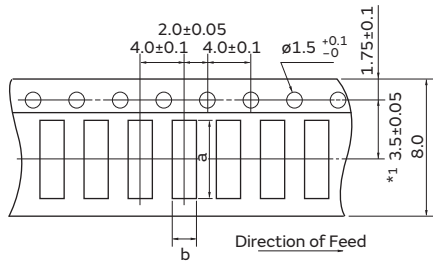


<Embossed>



c: Depth of Cavity
 (Embossed Tape)

<Paper>




c: Total Thickness of Tape
 (Paper Tape)

Dimension of the cavity of embossed tape is measured at the bottom side.

| Part Number | Dimensions | | | | Minimum Qty. (pcs.) | | | | |
|-------------|------------|------|----------|-----|---------------------|---------------|-------------|---------------|------|
| | | | | | ø180mm Reel | | ø330mm Reel | | Bulk |
| | a | b | c | d | Paper Tape | Embossed Tape | Paper Tape | Embossed Tape | |
| NFL18ZT | 1.85 | 1.05 | 0.9 max. | - | 4000 | - | - | - | 1000 |
| NFE31ZT | 3.6 | 1.8 | 1.85 | 0.2 | - | 2000 | - | 8000 | 500 |
| NFZ18SM | 1.85 | 1.05 | 1.1 | - | 4000 | - | - | - | 1000 |
| NFZ32BW | 3.6 | 2.9 | 1.7 | 0.2 | - | 2000 | - | 7500 | - |


(in mm)

Minimum Quantity and Dimensions of 12mm Width Embossed Tape

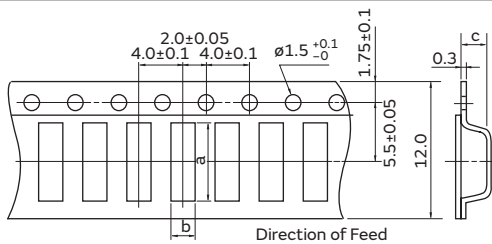

c: Depth of Cavity

| Part Number | Dimensions | | | Minimum Qty. (pcs.) | | |
|-------------|------------|-----|------|---------------------|-------------|------|
| | a | b | c | ø180mm Reel | ø330mm Reel | Bulk |
| NFE61HT | 7.2 | 1.9 | 1.75 | 2500 | 8000 | 500 |

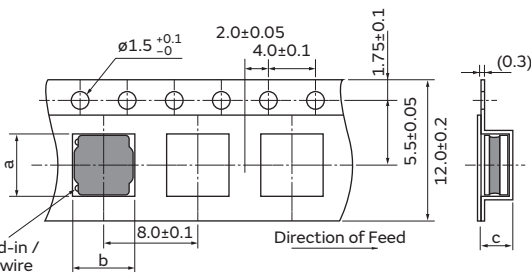

Dimension of the cavity is measured at the bottom side.

| Part Number | Dimensions | | | Minimum Qty. (pcs.) | | |
|-------------|------------|-----|-----|---------------------|-------------|------|
| | a | b | c | ø180mm Reel | ø330mm Reel | Bulk |
| NFZ5BBW | 5.3 | 5.3 | 2.4 | 500 | 3000 | - |

(in mm)

"Minimum Quantity" means the number of units of each delivery or order. The quantity should be an integral multiple of the "Minimum Quantity."

● Part Numbering

Chip Common Mode Choke Coil for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|---|---|-----|---|---|---|---|
| DL | W | 43 | S | H | 101 | X | K | 2 | L |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|------------------------------|
| DL | Chip Common Mode Choke Coils |

② Structure

| Code | Structure |
|------|-----------------|
| W | Wire Wound Type |

③ Dimensions (LxW)

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| 21 | 2.0x1.2mm | 0805 |
| 31 | 3.2x1.6mm | 1206 |
| 32 | 3.2x2.5mm | 1210 |
| 43 | 4.5x3.2mm | 1812 |
| 44 | 4.0x4.0mm | 1515 |
| 5A | 5.0x3.6mm | 2014 |
| 5B | 5.0x5.0mm | 2020 |

④ Features (1)

| Code | Type |
|------|---|
| S | Magnetically Shielded One Circuit Type |
| T | One Circuit Low Profile Type |
| M | Magnetically Shielded One Circuit Type (Transfer mode conversion characteristics improved) |

⑤ Category

| Code | Category | |
|------|----------------|--------------------|
| Z | For Automotive | Infotainment |
| H | | Powertrain, Safety |

⑩ Packaging

| Code | Packaging | Series |
|------|-------------------------------|--|
| K | Embossed Taping (ø330mm Reel) | DLW43/DLW44S/DLW5AT/DLW5BS/DLW5BT |
| L | Embossed Taping (ø180mm Reel) | All Series |
| B | Bulk | All Series |

⑥ Impedance

Typical impedance at 100MHz is expressed by three figures. The unit is in ohm (Ω). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑥ Inductance (DLW43SH)

Expressed by three figures. The unit is micro-henry (μ H). The first and second figures are significant digits, and the third figure expresses the number of zeros which follow the two figures.

⑦ Circuit

| Code | Circuit |
|------|------------------------|
| S | Expressed by a letter. |
| M | |
| H | |
| T | |
| X | |

⑧ Features (2)

| Code | Features |
|------|------------------------|
| K | Expressed by a letter. |
| P | |
| Q | |

⑨ Number of Signal Lines

| Code | Number of Signal Lines |
|------|------------------------|
| 2 | Two Lines |

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type

EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Common Mode Choke Coil for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|---|---|-----|---|---|---|---|
| DL | M | 11 | S | N | 900 | H | Z | 2 | L |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|------------------------------|
| DL | Chip Common Mode Choke Coils |

② Structure

| Code | Structure |
|------|-----------------|
| M | Multilayer Type |

③ Dimensions (LxW)

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| OQ | 0.65x0.5mm | 025020 |
| ON | 0.85x0.65mm | 03025 |
| 11 | 1.25x1.0mm | 0504 |

④ Features (1)

| Code | Type |
|------|--|
| S | Magnetically Shielded One Circuit Type |

⑤ Category

| Code | Category |
|------|-------------|
| N | For General |

⑥ Impedance

Typical impedance at 100MHz is expressed by three figures. The unit is in ohm (Ω). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑦ Circuit

| Code | Circuit |
|------|------------------------|
| H | Expressed by a letter. |

⑧ Features (2)

| Code | Features |
|------|--------------------------------------|
| Z | Infotainment |
| H | For Automotive Powertrain, Safety |

⑨ Number of Signal Lines

| Code | Number of Signal Lines |
|------|------------------------|
| 2 | Two Lines |

⑩ Packaging

| Code | Packaging |
|------|--------------------------------------|
| L | Embossed Taping (ϕ 180mm Reel) |
| B | Bulk |

Common Mode Choke Coil for Automotive

(Part Number)

| | | | | | | | | |
|----|---|-----|---|-----|-----|---|---|---|
| PL | T | 10H | H | 102 | 6R0 | P | N | B |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ |

① Product ID

| Product ID | |
|------------|-------------------------|
| PL | Common Mode Choke Coils |

② Type

| Code | Type |
|------|---------|
| T | DC Type |

③ Applications

| Code | Applications |
|------|---------------------------------|
| 10H | For DC Line High-frequency Type |
| 5BP | 5.0x5.0mm Size, for DC Lines |

④ Features (1)

| Code | Features | |
|------|----------------|--------------------|
| H | For Automotive | Powertrain, Safety |

⑤ Impedance

Expressed by three figures. The unit is ohm (Ω). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑥ Rated Current

Expressed by three figures. The unit is ampere (A). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures. A decimal point is expressed by the capital letter "R." In this case, all figures are significant digits.

⑦ Features (2)

| Code | Features |
|------|------------------------|
| P | Expressed by a letter. |
| S | |

⑧ Lead Dimensions

| Code | Lead Dimensions |
|------|------------------------|
| N | No Lead Terminal (SMD) |


⑨ Packaging

| Code | Packaging | Series |
|------|--|----------------|
| B | Bulk | PLT10H, PLT5BP |
| L | Embossed Taping (ϕ 178mm/ ϕ 180mm Reel) | PLT10H, PLT5BP |
| K | Embossed Taping (ϕ 330mm Reel) | PLT10H |

Chip Common Mode Choke Coil SMD Type

DLM11S Series 0504/1210(inch/mm)


Appearance/Dimensions

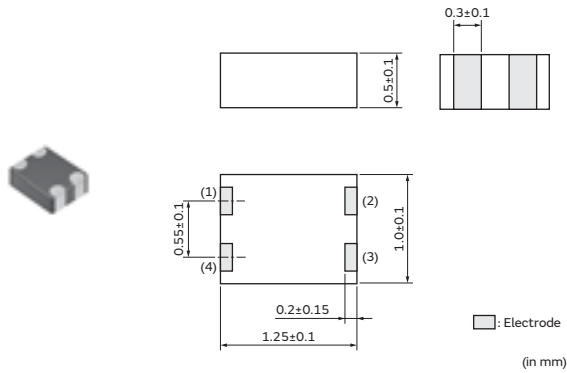

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| L | ø180mm Embossed Tape | 4000 |
| B | Bulk(Bag) | 500 |

Equivalent Circuit

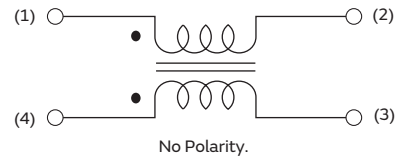


Rated Value (□: packaging code)


| Part Number | | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|----------------|-------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| DLM11SN450HZ2□ | — | 45Ω±25% | 100mA | 5Vdc | 100MΩ | 12.5Vdc | 0.7Ω±25% |
| DLM11SN900HZ2□ | — | 90Ω±25% | 100mA | 5Vdc | 100MΩ | 12.5Vdc | 1.1Ω±25% |

Operating Temp. Range: -55°C to 125°C

Z-f characteristics: DLM11SN_HZ2 series

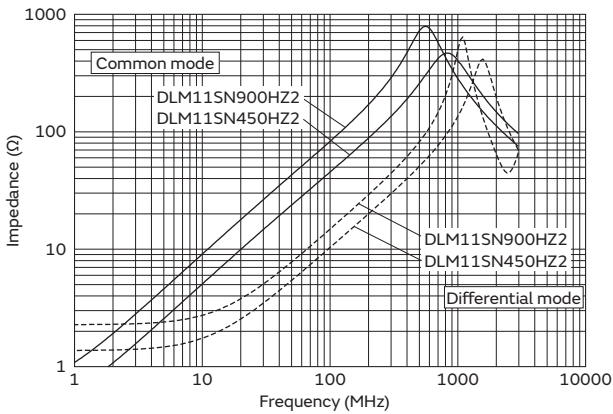

Differential mode Z-f characteristics: DLM11SN_HZ2 series

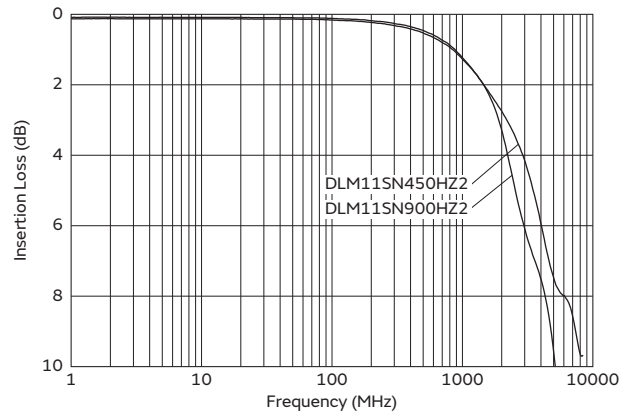

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Common Mode Choke Coil SMD Type

DLW21S Series 0805/2012(inch/mm)


Appearance/Dimensions

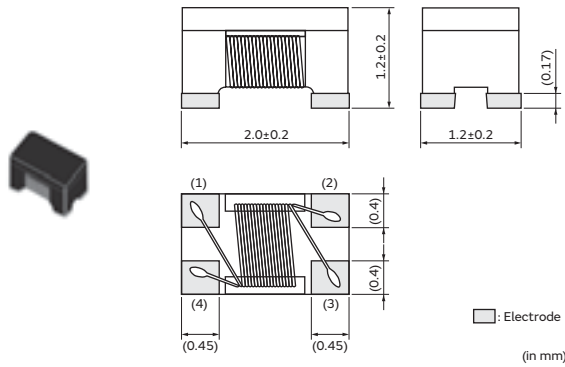

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| L | ø180mm Embossed Tape | 2000 |
| B | Bulk(Bag) | 500 |

Equivalent Circuit

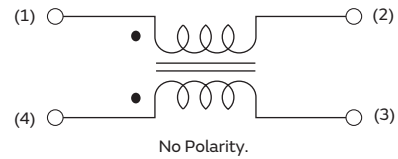


Rated Value (□: packaging code)


| Part Number | | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|----------------|-------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| DLW21SZ670HQ2□ | — | 67Ω±25% | 320mA | 20Vdc | 10MΩ | 50Vdc | 0.31Ω max. |
| DLW21SZ900HQ2□ | — | 90Ω±25% | 280mA | 20Vdc | 10MΩ | 50Vdc | 0.41Ω max. |
| DLW21SZ121HQ2□ | — | 120Ω±25% | 280mA | 20Vdc | 10MΩ | 50Vdc | 0.41Ω max. |
| DLW21SZ181XQ2□ | — | 180Ω±25% | 240mA | 20Vdc | 10MΩ | 50Vdc | 0.39Ω max. |
| DLW21SZ261XQ2□ | — | 260Ω±25% | 220mA | 20Vdc | 10MΩ | 50Vdc | 0.59Ω max. |
| DLW21SZ491XQ2□ | — | 490Ω±25% | 200mA | 20Vdc | 10MΩ | 50Vdc | 0.77Ω max. |

Operating Temp. Range: -40°C to 105°C

Z-f characteristics: DLW21SZ_HQ2 series

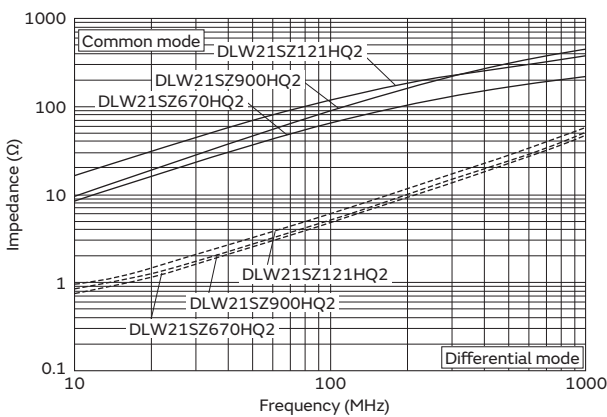

Differential mode transmission loss: DLW21SZ_HQ2 series

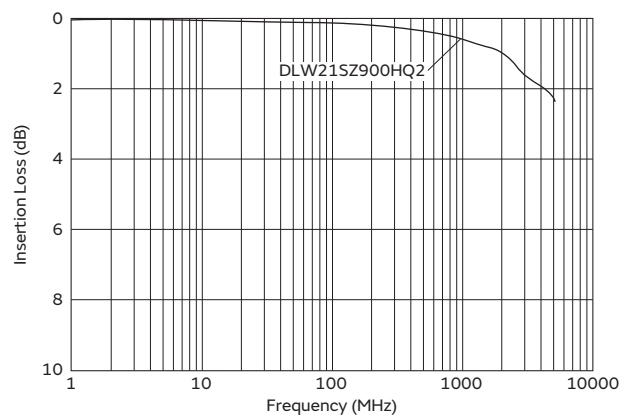



Continued on the following page. ↗

Chip Ferrite Bead SMD Type
 Chip EMIFIL® SMD Type
 Chip Common Mode Choke Coil SMD Type
 Block Type EMIFIL® SMD Type
 EMI Suppression Filters Lead Type
 Microchip Transformer (Balun) SMD Type

Continued from the preceding page. ↘

Z-f characteristics: DLW21SZ_XQ2 series

Differential mode transmission loss: DLW21SZ_XQ2 series

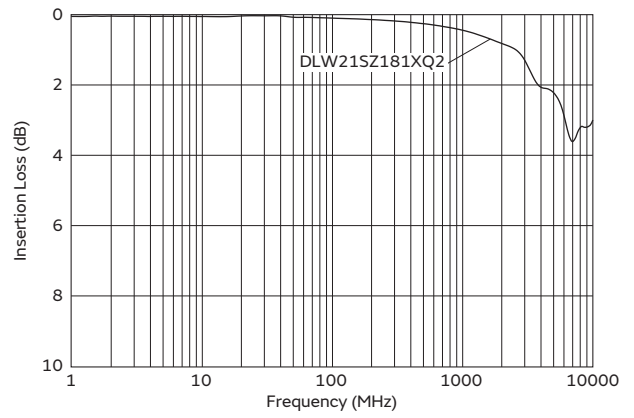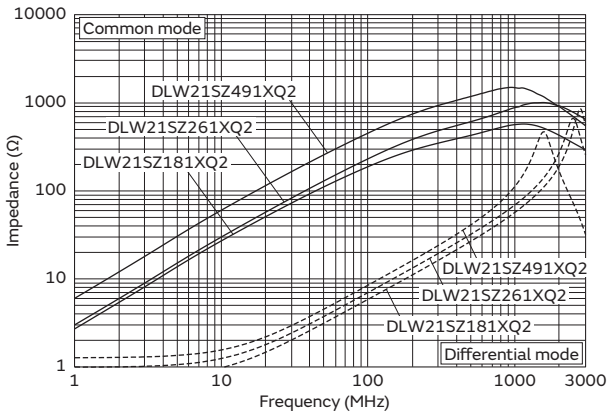

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Common Mode Choke Coil SMD Type

DLW31S Series 1206/3216(inch/mm)


Appearance/Dimensions

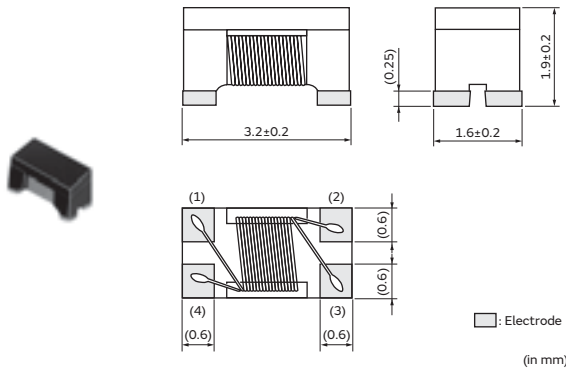

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| L | ø180mm Embossed Tape | 2000 |
| B | Bulk(Bag) | 500 |

Equivalent Circuit

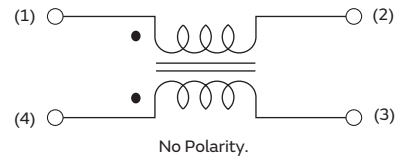


Rated Value (□: packaging code)

| Part Number | | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|--------------|-------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| — | DLW31SH222SQ□ | 2200Ω±25% | 80mA | 32Vdc | 10MΩ | 80Vdc | 1.6Ω±20% |

Operating Temp. Range: -40°C to 125°C


Z-f characteristics: DLW31SH_SQ2 series

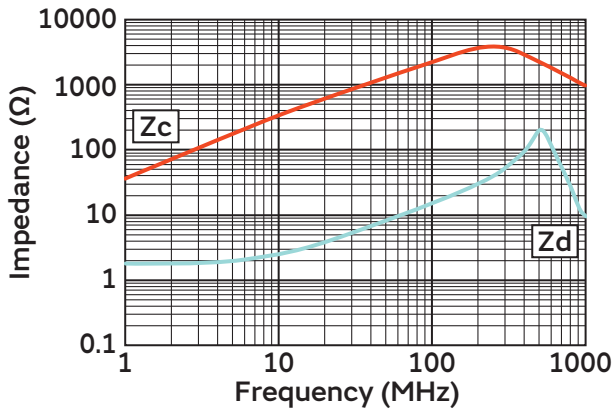

Chip Common Mode Choke Coil SMD Type

DLW32S Series 1210/3225(inch/mm)


Appearance/Dimensions

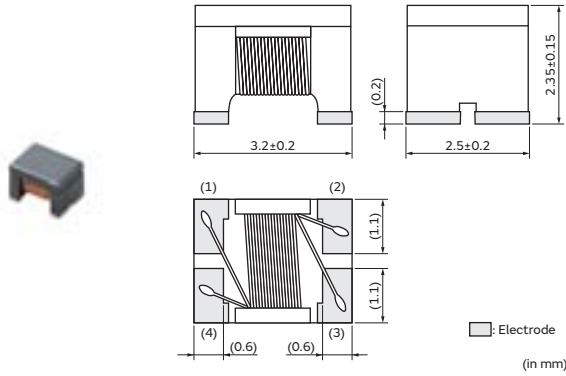

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| L | ø180mm Embossed Tape | 1500 |
| B | Bulk(Bag) | 500 |

Equivalent Circuit

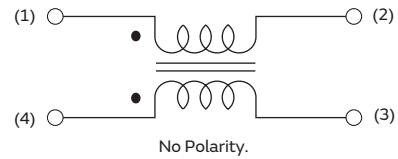


Rated Value (□: packaging code)

| Part Number | | Common Mode Inductance | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|--------------|-------------------|----------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| — | DLW32SH110XK2□ | 11μH-30%/+50% (at 0.1MHz) | 300mA | 80Vdc | 10MΩ | 200Vdc | 0.4Ω max. |
| — | DLW32SH220XK2□ | 22μH-30%/+50% (at 0.1MHz) | 250mA | 80Vdc | 10MΩ | 200Vdc | 0.5Ω max. |
| — | DLW32SH510XK2□ | 51μH-30%/+50% (at 0.1MHz) | 200mA | 80Vdc | 10MΩ | 200Vdc | 0.7Ω max. |
| — | DLW32SH101XK2□ | 100μH-30%/+50% (at 0.1MHz) | 150mA | 80Vdc | 10MΩ | 200Vdc | 1.5Ω max. |

Operating Temp. Range: -40°C to 125°C

Z-f characteristics: DLW32SH_XK2 series

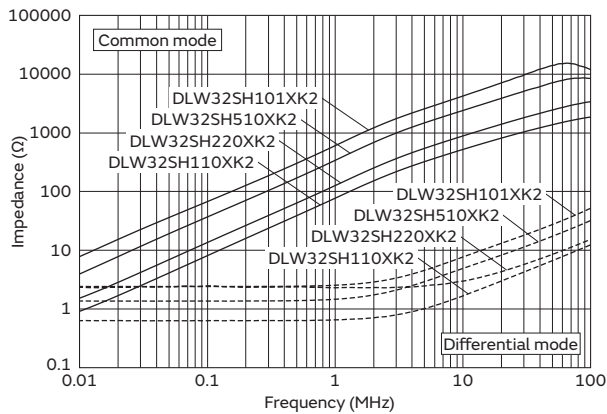

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Common Mode Choke Coil SMD Type

DLW43M Series 1812/4532(inch/mm)


Appearance/Dimensions

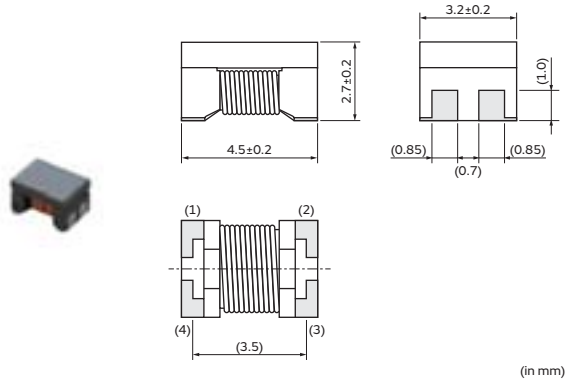

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 2500 |
| L | ø180mm Embossed Tape | 500 |
| B | Bulk(Bag) | 100 |

Equivalent Circuit

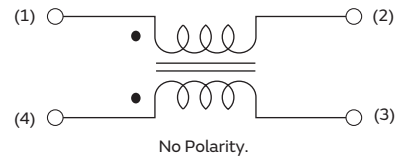


Rated Value (□: packaging code)

| Part Number | | Common Mode Inductance | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|--------------|-------------------|----------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| — | DLW43MH201XK2□ | 200μH-25%/+50% (at 0.1MHz) | 110mA | 20Vdc | 10MΩ | 50Vdc | 4.5Ω max. |

Operating Temp. Range: -40°C to 105°C

Z-f characteristics: DLW43MH_XK2 series

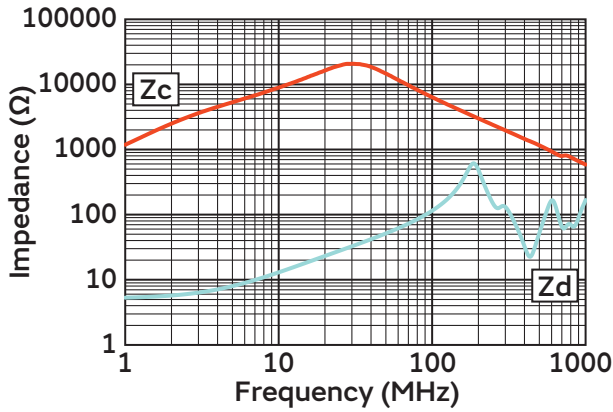

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Common Mode Choke Coil SMD Type

DLW43S Series 1812/4532(inch/mm)


Appearance/Dimensions

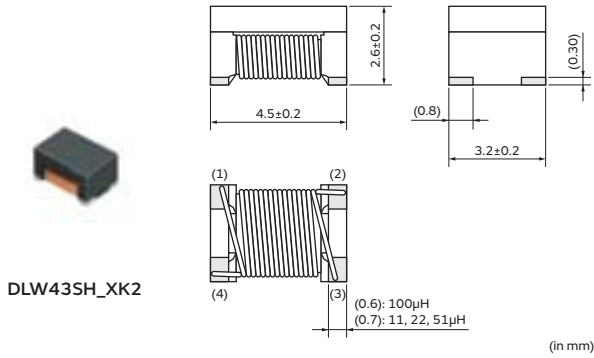


Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 2500 |
| L | ø180mm Embossed Tape | 500 |
| B | Bulk(Bag) | 100 |

Equivalent Circuit

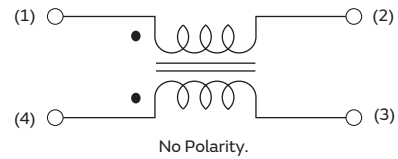

Appearance/Dimensions

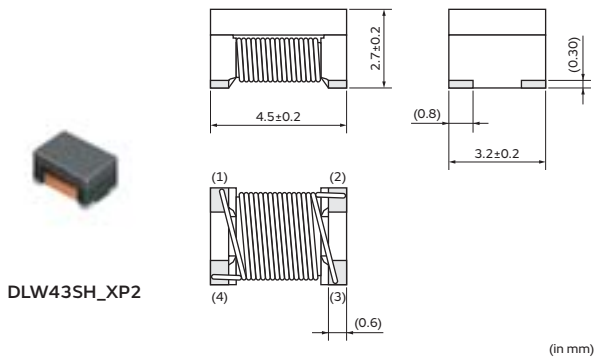

Rated Value (□: packaging code)

| Part Number | | Common Mode Inductance | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|--------------|-------------------|----------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| — | DLW43SH110XK2□ | 11μH-30%/+50% (at 0.1MHz) | 360mA | 50Vdc | 10MΩ | 125Vdc | 0.5Ω max. |
| — | DLW43SH220XK2□ | 22μH-30%/+50% (at 0.1MHz) | 310mA | 50Vdc | 10MΩ | 125Vdc | 0.6Ω max. |
| — | DLW43SH510XK2□ | 51μH-30%/+50% (at 1MHz) | 230mA | 50Vdc | 10MΩ | 125Vdc | 1.0Ω max. |
| — | DLW43SH101XK2□ | 100μH-30%/+50% (at 1MHz) | 200mA | 50Vdc | 10MΩ | 125Vdc | 2.0Ω max. |
| — | DLW43SH101XP2□ | 100μH-30%/+80% (at 0.1MHz) | 170mA | 50Vdc | 10MΩ | 125Vdc | 2.0Ω max. |

Operating Temp. Range: -40°C to 125°C

Continued on the following page. ↗

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®



Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Continued from the preceding page. ↘

Z-f characteristics: DLW43SH_XK2 series

Z-f characteristics: DLW43SH_XP2 series

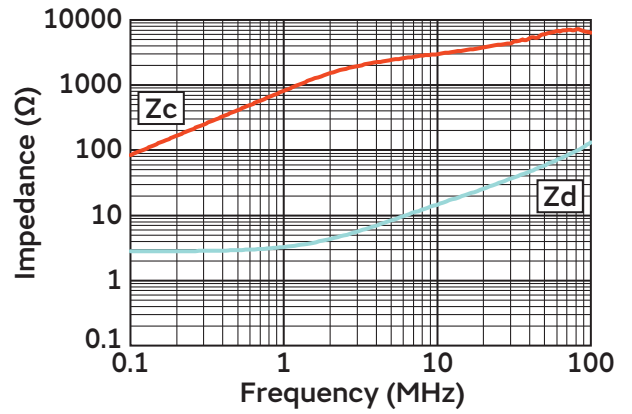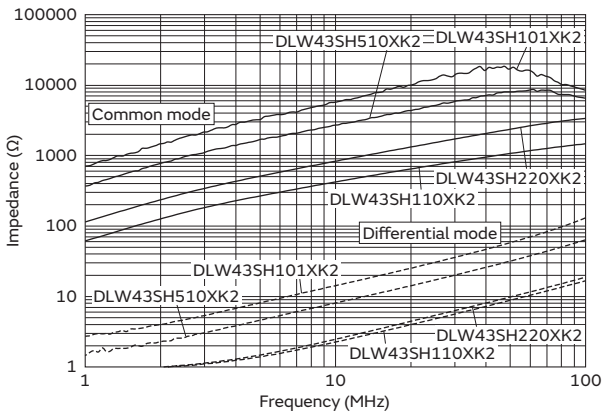

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Common Mode Choke Coil SMD Type

DLW5AT Series 2014/5036(inch/mm)


Appearance/Dimensions

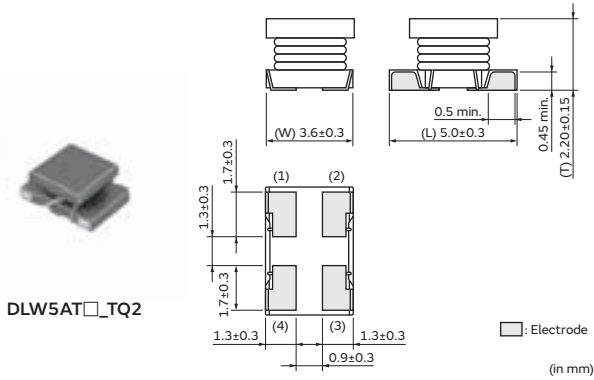


Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 2500 |
| L | ø180mm Embossed Tape | 700 |
| B | Bulk(Bag) | 100 |

Equivalent Circuit

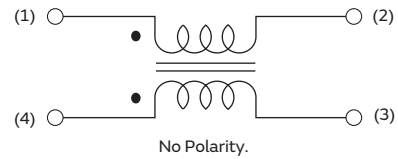

Appearance/Dimensions

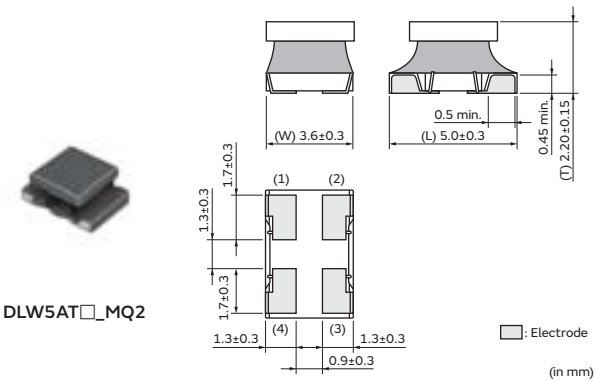

Rated Value (□: packaging code)

| Part Number | | Common Mode Impedance at 10MHz | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|----------------|-------------------|--------------------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| DLW5ATZ450TQ2□ | DLW5ATH450TQ2□ | 4.7Ω±25% | 45Ω(Typ.) | 4A | 50Vdc | 10MΩ | 125Vdc | 0.013Ω max. |
| DLW5ATZ500MQ2□ | DLW5ATH500MQ2□ | 4.6Ωmin. | 50Ω(Typ.) | 4A | 50Vdc | 10MΩ | 125Vdc | 0.013Ω max. |
| DLW5ATZ111TQ2□ | DLW5ATH111TQ2□ | 12Ω±25% | 110Ω(Typ.) | 3A | 50Vdc | 10MΩ | 125Vdc | 0.020Ω max. |
| DLW5ATZ151MQ2□ | DLW5ATH151MQ2□ | 11Ωmin. | 150Ω(Typ.) | 3A | 50Vdc | 10MΩ | 125Vdc | 0.020Ω max. |
| DLW5ATZ231TQ2□ | DLW5ATH231TQ2□ | 22Ω±25% | 230Ω(Typ.) | 2.5A | 50Vdc | 10MΩ | 125Vdc | 0.027Ω max. |
| DLW5ATZ331MQ2□ | DLW5ATH331MQ2□ | 20Ωmin. | 330Ω(Typ.) | 2.5A | 50Vdc | 10MΩ | 125Vdc | 0.027Ω max. |
| DLW5ATZ401TQ2□ | DLW5ATH401TQ2□ | 35Ω±25% | 400Ω(Typ.) | 2A | 50Vdc | 10MΩ | 125Vdc | 0.034Ω max. |
| DLW5ATZ501MQ2□ | DLW5ATH501MQ2□ | 35Ωmin. | 500Ω(Typ.) | 2A | 50Vdc | 10MΩ | 125Vdc | 0.034Ω max. |
| DLW5ATZ501TQ2□ | DLW5ATH501TQ2□ | 55Ω±25% | 500Ω(Typ.) | 1.5A | 50Vdc | 10MΩ | 125Vdc | 0.056Ω max. |
| DLW5ATZ112MQ2□ | DLW5ATH112MQ2□ | 50Ωmin. | 1100Ω(Typ.) | 1.5A | 50Vdc | 10MΩ | 125Vdc | 0.056Ω max. |



Operating Temp. Range: -40°C to 105°C/-40°C to 125°C

Continued on the following page. ↗

Continued from the preceding page. ↘



Z-f characteristics: DLW5ATZ_TQ2 series

Z-f characteristics: DLW5ATH_TQ2 series

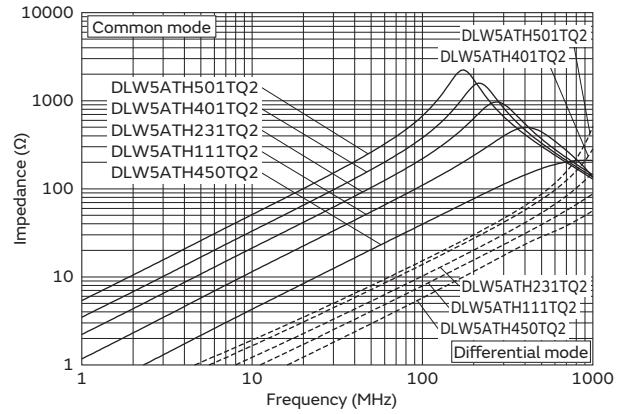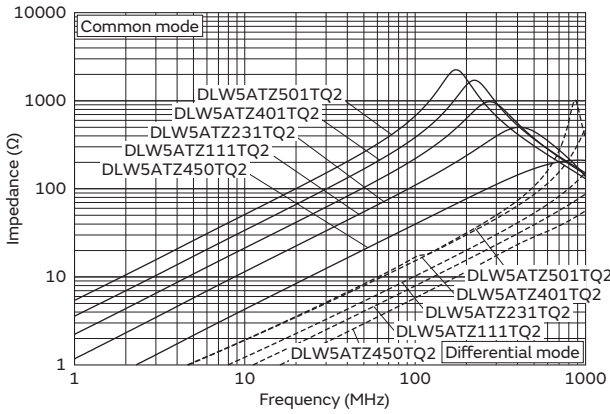

Z-f characteristics: DLW5ATZ_MQ2 series

Z-f characteristics: DLW5ATH_MQ2 series

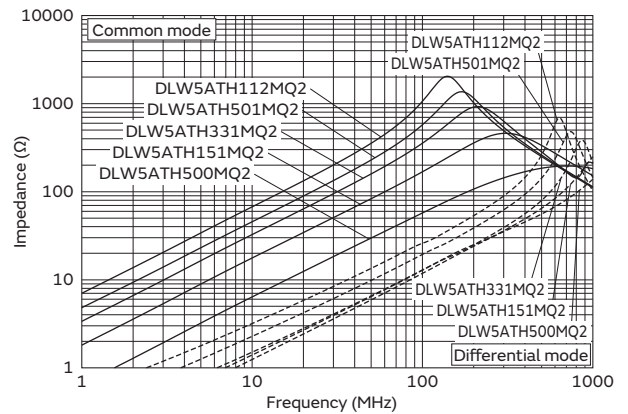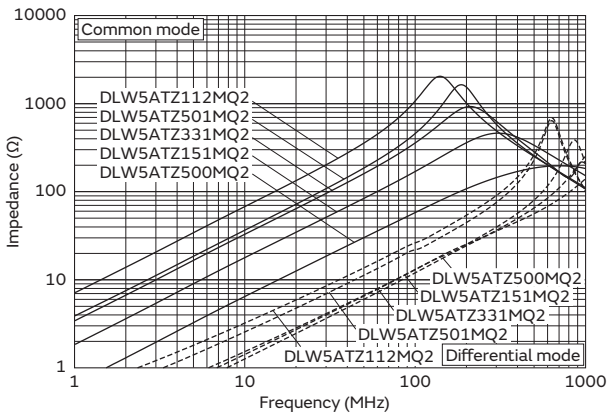

Continued on the following page. ↗

Chip Ferrite Bead
 SMD Type

Chip EMI FIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMI FIL®
 SMD Type

EMI Suppression Filters
 Lead Type


Microchip Transformer (Balun)
 SMD Type

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +105°C, derating of current is necessary for DLW5ATH_TQ2 series. Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

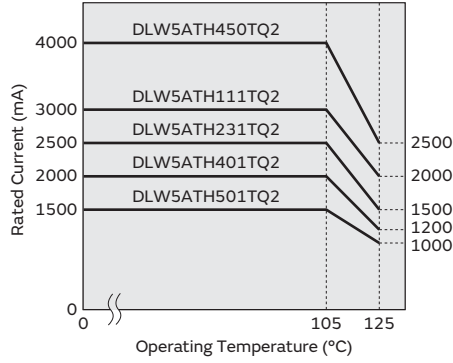

Derating of Rated Current

In operating temperature exceeding +105°C, derating of current is necessary for DLW5ATH_MQ2 series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

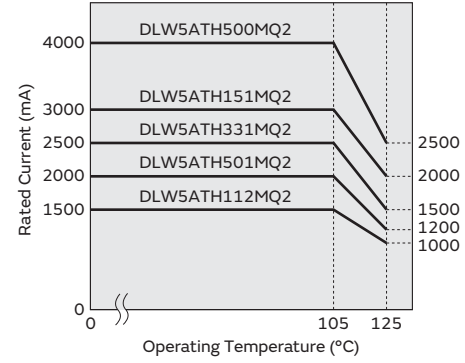

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Common Mode Choke Coil SMD Type

DLW5BS Series 2020/5050(inch/mm)


Appearance/Dimensions

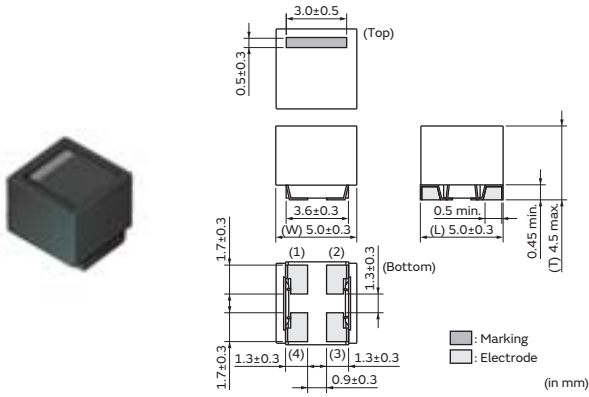

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 1500 |
| L | ø180mm Embossed Tape | 400 |
| B | Bulk(Bag) | 100 |

Equivalent Circuit

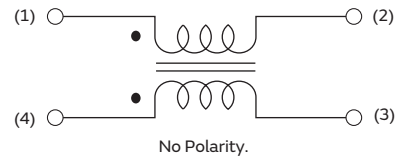


Rated Value (□: packaging code)

| Part Number | | Common Mode Impedance at 10MHz | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|----------------|-------------------|--------------------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| DLW5BSZ501TQ2□ | — | 2800Ω±40% | 500Ω(Typ.) | 700mA | 50Vdc | 10MΩ | 125Vdc | 0.23Ω max. |
| DLW5BSZ601TQ2□ | — | 1200Ω±40% | 600Ω(Typ.) | 1A | 50Vdc | 10MΩ | 125Vdc | 0.12Ω max. |
| DLW5BSZ801TQ2□ | — | 550Ω±40% | 800Ω(Typ.) | 1.5A | 50Vdc | 10MΩ | 125Vdc | 0.056Ω max. |

Operating Temp. Range: -40°C to 105°C


Z-f characteristics: DLW5BSZ_TQ2 series

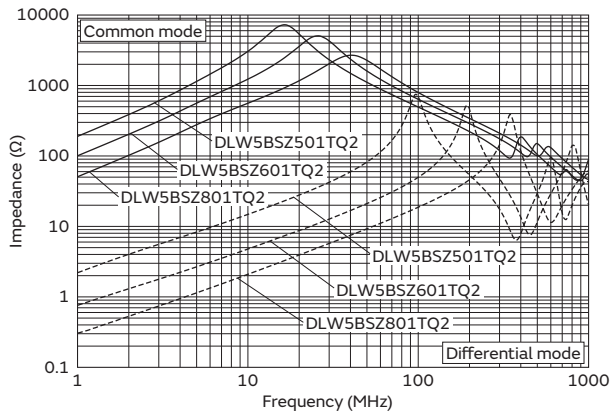

Chip Common Mode Choke Coil SMD Type

DLW5BT Series 2020/5050(inch/mm)


Appearance/Dimensions

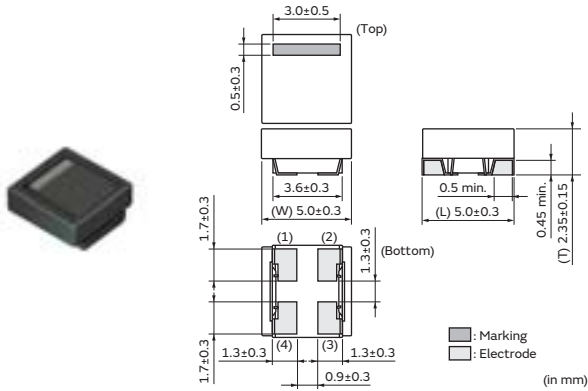

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 2500 |
| L | ø180mm Embossed Tape | 700 |
| B | Bulk(Bag) | 100 |

Equivalent Circuit

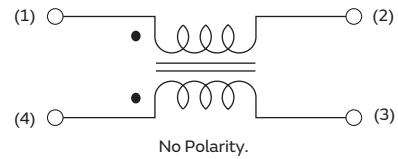


Rated Value (□: packaging code)


| Part Number | | Common Mode Impedance at 10MHz | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|----------------|-------------------|--------------------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| DLW5BTZ101TQ2□ | DLW5BTH101TQ2□ | 10Ωmin. | 100Ω(Typ.) | 4A | 50Vdc | 10MΩ | 125Vdc | 0.013Ω max. |
| DLW5BTZ251TQ2□ | DLW5BTH251TQ2□ | 20Ωmin. | 250Ω(Typ.) | 3A | 50Vdc | 10MΩ | 125Vdc | 0.020Ω max. |
| DLW5BTZ501TQ2□ | DLW5BTH501TQ2□ | 30Ωmin. | 500Ω(Typ.) | 2.5A | 50Vdc | 10MΩ | 125Vdc | 0.027Ω max. |
| DLW5BTZ102TQ2□ | DLW5BTH102TQ2□ | 60Ωmin. | 1000Ω(Typ.) | 2A | 50Vdc | 10MΩ | 125Vdc | 0.034Ω max. |
| DLW5BTZ142TQ2□ | DLW5BTH142TQ2□ | 100Ωmin. | 1400Ω(Typ.) | 1.5A | 50Vdc | 10MΩ | 125Vdc | 0.056Ω max. |

Operating Temp. Range: -40°C to 105°C/-40°C to 125°C

Z-f characteristics: DLW5BTZ_TQ2 series

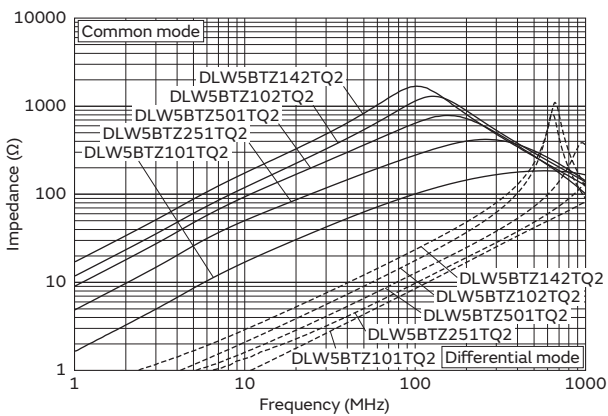

Z-f characteristics: DLW5BTH_TQ2 series

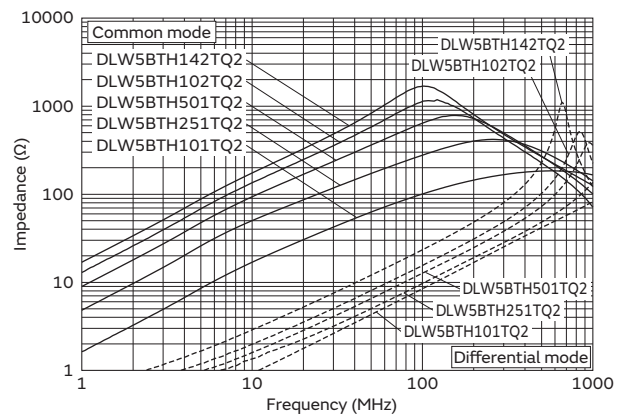


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +105°C, derating of current is necessary for DLW5BTH_TQ2 series.
 Please apply the derating curve shown in chart according to the operating temperature.


Derating of Rated Current

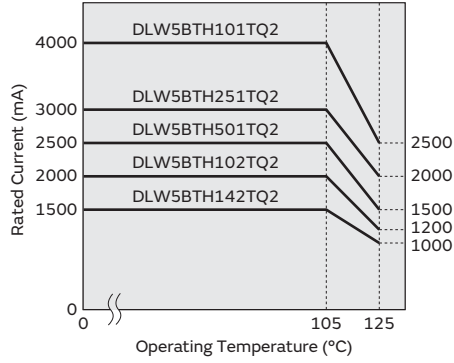

Chip Common Mode Choke Coil SMD Type

PLT5BP Series 2020/5050(inch/mm)


Appearance/Dimensions

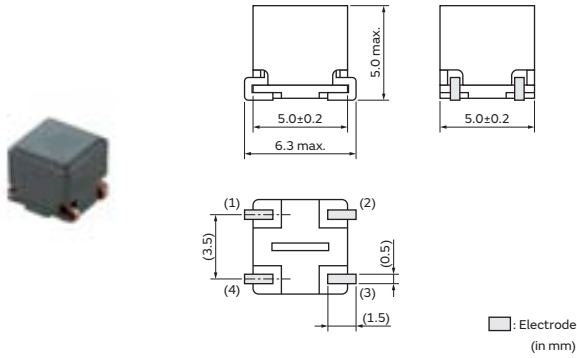

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| L | ø180mm Embossed Tape | 300 |
| B | Bulk(Bag) | 100 |

Equivalent Circuit

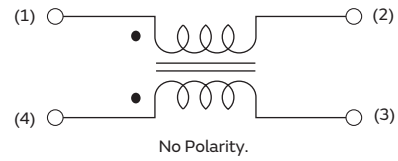


Rated Value (□: packaging code)

| Part Number | | Common Mode Impedance at 10MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|--------------|-------------------|--------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| — | PLT5BPH1015R6SN□ | 100Ω(Typ.) | 5.6A | 80Vdc | 10MΩ | 200Vdc | 4mΩ±30% |
| — | PLT5BPH2014R4SN□ | 200Ω(Typ.) | 4.4A | 80Vdc | 10MΩ | 200Vdc | 7mΩ±30% |
| — | PLT5BPH3013R7SN□ | 300Ω(Typ.) | 3.7A | 80Vdc | 10MΩ | 200Vdc | 11mΩ±30% |
| — | PLT5BPH5013R1SN□ | 500Ω(Typ.) | 3.1A | 80Vdc | 10MΩ | 200Vdc | 17mΩ±30% |

Operating Temp. Range: -55°C to 150°C

Z-f characteristics: PLT5BPH series

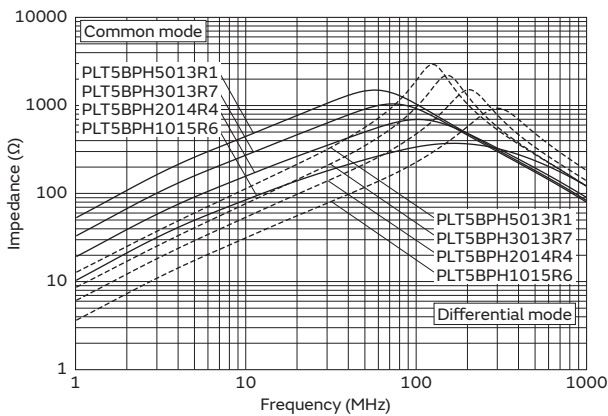


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +125°C, derating of current is necessary for PLT5BP series.
 Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

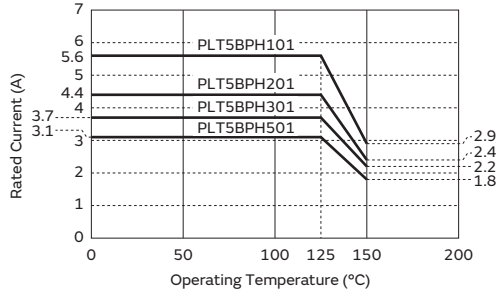

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Common Mode Choke Coil SMD Type

PLT10H Series


Appearance/Dimensions

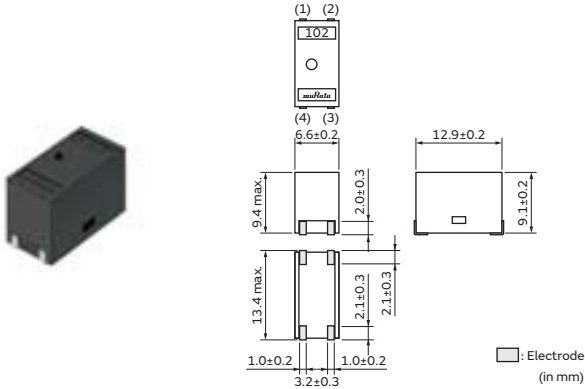

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| K | ø330mm Embossed Tape | 500 |
| L | ø180mm Embossed Tape | 125 |
| B | Bulk(Bag) | 50 |

Equivalent Circuit

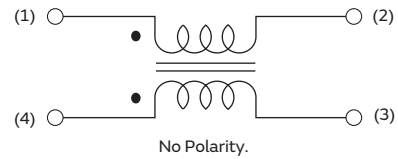


Rated Value (□: packaging code)

| Part Number | | Common Mode Impedance at 10MHz | Common Mode Inductance | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance | Operating Temp. Range |
|--------------|-------------------|--------------------------------|------------------------|---------------|---------------|------------------------------|----------------------|---------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | | | | |
| — | PLT10HH450180PN□ | 45Ω(Typ.) | 0.8μHmin. | 18A | 300Vdc | 10MΩ | 750Vdc | 1.3mΩ±0.5mΩ | -55°C to 125°C |
| — | PLT10HH101150PN□ | 100Ω(Typ.) | 2.0μHmin. | 15A | 300Vdc | 10MΩ | 750Vdc | 1.8mΩ±0.5mΩ | -55°C to 125°C |
| — | PLT10HH401100PN□ | 400Ω(Typ.) | 6μHmin. | 10A | 100Vdc | 10MΩ | 250Vdc | 3.6mΩ±0.5mΩ | -55°C to 125°C |
| — | PLT10HH501100PN□ | 500Ω(Typ.) | 9μHmin. | 10A | 100Vdc | 10MΩ | 250Vdc | 3.6mΩ±0.5mΩ | -55°C to 105°C |
| — | PLT10HH9016R0PN□ | 900Ω(Typ.) | 14μHmin. | 6A | 100Vdc | 10MΩ | 250Vdc | 8.0mΩ±0.5mΩ | -55°C to 125°C |
| — | PLT10HH1026R0PN□ | 1000Ω(Typ.) | 20μHmin. | 6A | 100Vdc | 10MΩ | 250Vdc | 8.0mΩ±0.5mΩ | -55°C to 105°C |

Operating temperature should include self-temperature rise.

Z-f characteristics: PLT10HH series

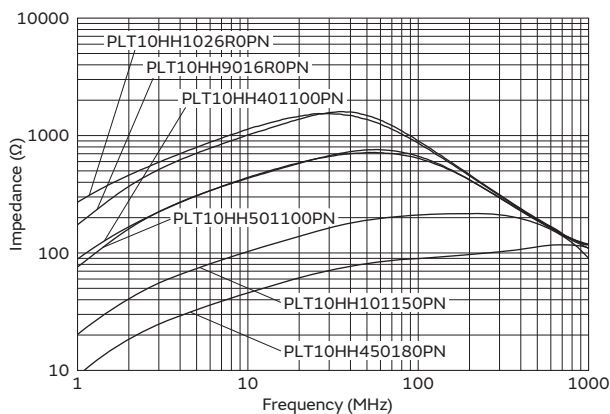


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +65°C, derating of current is necessary for PLT10H series.
 Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

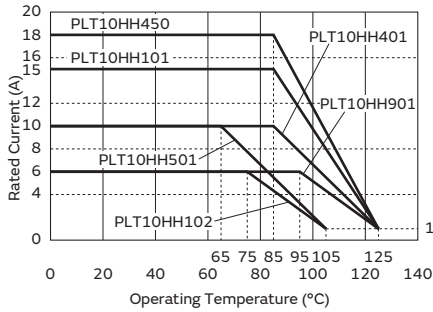

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type


EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

Chip Common Mode Choke Coil SMD Type

UCMH0907 Series 3527/9070(inch/mm)


Appearance/Dimensions

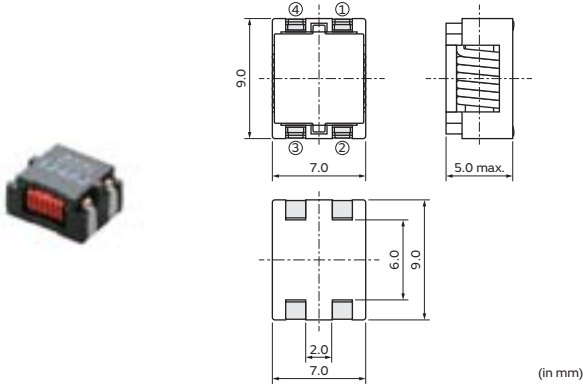

Packaging

| Code | Packaging | Minimum Quantity |
|------|----------------------|------------------|
| =P3 | ø330mm Embossed Tape | 750 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Common Mode Impedance at 100MHz | Rated Current | Rated Voltage | Insulation Resistance (Min.) | Withstanding Voltage | DC Resistance |
|--------------|-------------------|---------------------------------|---------------|---------------|------------------------------|----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| 1259CM-0001□ | — | 700Ω(Typ.) | 5A | 50Vdc | 100MΩ | 100Vdc | 0.01Ω max. |


Operating Temp. Range: -40°C to 125°C

Operating temperature should include self-temperature rise.

Z-f characteristics: UCMH0907 series

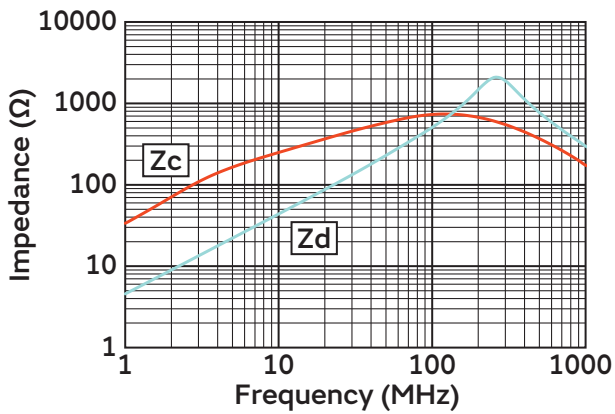

Insertion loss: UCMH0907 series

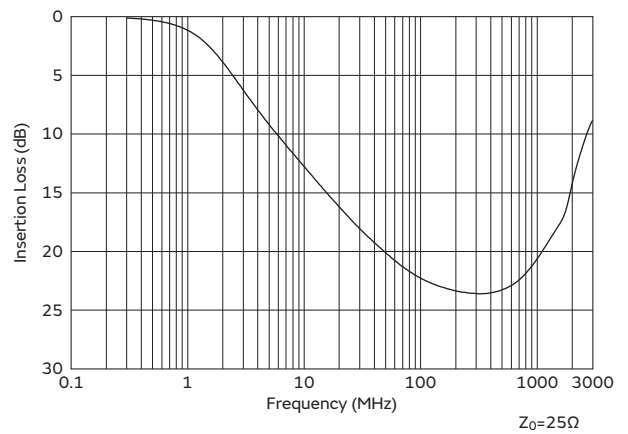

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Common Mode Choke Coil (DL□ Series) ⚠️Caution/Notice

⚠️Caution

Rating

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance. Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure our product.

Soldering and Mounting


1. Self-heating

Please provide special attention when mounting chip common mode choke coils DLW5 series in close proximity to other products that radiate heat. The heat generated by other products may deteriorate the insulation resistance and cause excessive heat in this component.

2. Mounting Direction

Mount Chip Common Mode Choke Coils in right direction. Wrong direction, which is 90 degrees rotated from right

direction, causes not only open or short circuit but also flames or other serious trouble.

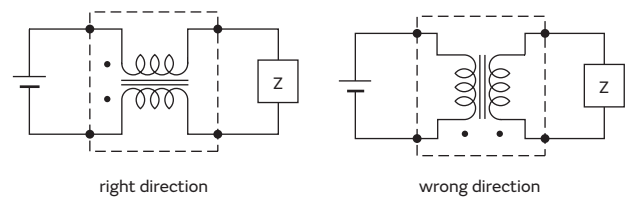

Notice

Storage and Operating Condition

<Operating Environment>

Do not use products in the corrodible atmosphere such as acidic gases, alkaline gases, chlorine, sulfur gases, organic gases. (the sea breeze, Cl₂, H₂S, NH₃, SO₂, NO₂, etc)

Do not use products in the environment close to the organic solvent.

<Storage and Handling Requirements>

1. Storage Period

The DL series should be used within 12 months. Solderability should be checked if this period is exceeded.

2. Storage Conditions

(1) Storage temperature: -10 to +40°C

Relative humidity: 15 to 85%

Avoid sudden changes in temperature and humidity.

(2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Notice (Soldering and Mounting)

1. Cleaning

Failure and degradation of a product are caused by the cleaning method. When you clean in conditions that are not in mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters EMIFIL® may vary, depending on the circuits and ICs used, type of noise, mounting pattern, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Continued on the following page. ↗

Chip Common Mode Choke Coil (DL□ Series) ⚠Caution/Notice

Continued from the preceding page. ↘

Handling

1. Resin Coating (Except for DLW Series.)

Using resin for coating/molding products may affect the products performance.

So please pay careful attention in selecting resin.

Prior to use, please make the reliability evaluation with the product mounted in your application set.

2. Resin Coating (DLW31S Series)

Do not make any resin coating DLW31S series.

The impedance value may change due to high cure-stress of resin to be used for coating/molding products.

An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resin contains some impurities or chloride possible to generate chlorine by hydrolysis under some operating condition may cause corrosion of wire of coil, leading to open circuit.

So, please pay your careful attention in selecting resin in case of coating/molding the products with the resin.

3. Resin Coating (Except DLW31S Series)

The impedance value may change due to high cure-stress of resin to be used for coating/molding products. An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resin contains some impurities or chloride possible to generate chlorine by hydrolysis under some operating condition may cause corrosion of wire of coil, leading to open circuit.

So, please pay your careful attention in selecting resin in case of coating/molding the products with the resin. Prior to use the coating resin, please make sure no reliability issue is observed by evaluating products mounted on your board.

4. Caution for Use (DLW Series)

When you hold products with a tweezer, please hold by the sides. Sharp materials, such as a pair of tweezers, should not touch the winding portion to prevent breaking the wire. Mechanical shock should not be applied to the products mounted on the board to prevent breaking the core.


5. Brushing (DLW21S/31S/32S/43S/43M Series)

When you clean the neighborhood of products such as connector pins, bristles of cleaning brush shall not be touched to the winding portion of this product to prevent the breaking of wire.


6. Handling of a Substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate. Excessive mechanical stress may cause cracking in the Product.

Bending



Twisting



Chip Common Mode Choke Coil (PL□ Series) ⚠Caution/Notice

⚠Caution


Rating

1. Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.
2. Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure our product.

Soldering and Mounting

1. Self-heating
 Please provide special attention when mounting chip common mode choke coils in close proximity to other products that radiate heat.
 The heat generated by other products may deteriorate the insulation resistance and cause excessive heat in this component.
2. Mounting Direction
 Mount Chip Common Mode Choke Coils in right direction.

Wrong direction, which is 90 degrees rotated from right direction, causes not only open or short circuit but also flames or other serious trouble.

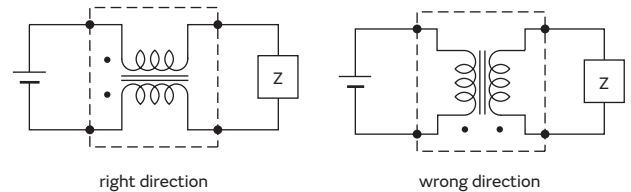

Notice

Storage and Operating Condition

<Operating Environment>

Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Do not use products in the environment close to the organic solvent.

<Storage and Handling Requirements>

1. Storage Period
 PLT10H series, PLT5BP series should be used within 12 months.

Solderability should be checked if this period is exceeded.

2. Storage Conditions

- (1) Storage temperature: -10 to +40°C
 Relative humidity: 15 to 85%
 Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Notice (Soldering and Mounting)

1. Cleaning
 Failure and degradation of a product are caused by the cleaning method. When you clean in conditions that are not in mounting information, please contact Murata engineering.
2. Soldering
 Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters EMIFIL® may vary, depending on the circuits and ICs used, type of noise, mounting pattern, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Handling

1. Handling of a Substrate
 After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the Product.



Chip Common Mode Choke Coil (UCMH□ Series) ⚠️Caution/Notice

⚠️Caution

Rating

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance. Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure our product.


Soldering and Mounting

1. Self-heating

Please provide special attention when mounting this product close to other products that radiate heat. The heat generated by other products may deteriorate the insulation resistance and cause excessive heat in this component.

2. Mounting Direction

Mount Chip Common Mode Choke Coils in right direction. Wrong direction, which is 90 degrees rotated from right direction, causes not only open or short circuit but also flames or other serious trouble.

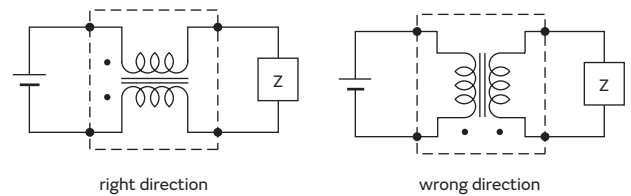

Notice

Handling

1. Resin Coating

The inductance value may change and / or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.

Chip Common Mode Choke Coil (DL□ Series) Soldering and Mounting

1. Standard Land Pattern Dimensions


(in mm)

| Series | Standard Land Dimensions | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|---|--------|-----|---|---|---|----------|-----|-----|-----|-----|--------|-----|-----|-----|-----|--------|-----|-----|-----|-----|--------------------|-----|-----|-----|-----|------------|-----|-----|-----|-----|---------|-----|-----|-----|-----|
| DLM11S DLW21S DLW31S DLW32S DLW43S DLW43M DLW5A DLW5B | ●Reflow Soldering | <table border="1"> <thead> <tr> <th>Series</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>DLW21S/H</td> <td>0.8</td> <td>2.6</td> <td>0.4</td> <td>1.2</td> </tr> <tr> <td>DLW31S</td> <td>1.6</td> <td>3.7</td> <td>0.4</td> <td>1.6</td> </tr> <tr> <td>DLW32S</td> <td>2.0</td> <td>4.1</td> <td>0.4</td> <td>1.6</td> </tr> <tr> <td>DLW43SH110/220/510</td> <td>3.0</td> <td>5.9</td> <td>1.6</td> <td>3.4</td> </tr> <tr> <td>DLW43SH101</td> <td>3.2</td> <td>5.9</td> <td>1.6</td> <td>3.4</td> </tr> <tr> <td>DLW43MH</td> <td>3.5</td> <td>5.9</td> <td>0.7</td> <td>2.1</td> </tr> </tbody> </table> | Series | a | b | c | d | DLW21S/H | 0.8 | 2.6 | 0.4 | 1.2 | DLW31S | 1.6 | 3.7 | 0.4 | 1.6 | DLW32S | 2.0 | 4.1 | 0.4 | 1.6 | DLW43SH110/220/510 | 3.0 | 5.9 | 1.6 | 3.4 | DLW43SH101 | 3.2 | 5.9 | 1.6 | 3.4 | DLW43MH | 3.5 | 5.9 | 0.7 | 2.1 |
| | Series | a | b | c | d | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW21S/H | 0.8 | 2.6 | 0.4 | 1.2 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW31S | 1.6 | 3.7 | 0.4 | 1.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW32S | 2.0 | 4.1 | 0.4 | 1.6 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW43SH110/220/510 | 3.0 | 5.9 | 1.6 | 3.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW43SH101 | 3.2 | 5.9 | 1.6 | 3.4 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW43MH | 3.5 | 5.9 | 0.7 | 2.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW5A/5B (Except for DLW5AT_MQ2) | | <p>*1: If the pattern is made with wider than 1.2mm (DLW21) / 1.6mm (DLW31S) it may result in components turning around, because melting speed is different. In the worst case, short circuit between lines may occur.</p> <p>*2: If the pattern is made with less than specified dimensions, in the worst case, short circuit between lines may occur due to spread of soldering paste or mount placing accuracy.</p> <p>*3: If the pattern is made with wider than 0.8mm (DLW21) / 1.6mm (DLW31SN), the bending strength will be reduced. Moreover, if the pattern is made with less than "a" dimension, in the worst case short circuit may be occurred. (DLW43S)</p> <p>Do not use gild pattern; excess soldering heat may dissolve metal of a copper wire.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DLW5AT_MQ2 | ●Reflow Soldering Chip Mounting Side | ●Flow Soldering Chip Mounting Side | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

● PCB Warping

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

Products should be located in the sideways direction (Length: $a < b$) to the mechanical stress.

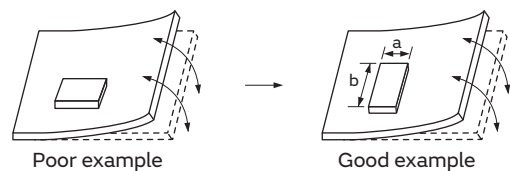

Continued on the following page. ↗

Chip Common Mode Choke Coil (DL□ Series) Soldering and Mounting

Continued from the preceding page. ↘

2. Solder Paste Printing and Adhesive Application

When reflow soldering the chip common mode choke coils, the printing must be conducted in accordance with the following cream solder printing conditions.





If too much solder is applied, the chip will be prone to damage by mechanical and thermal stress from the PCB and may crack.

Standard land dimensions should be used for resist and copper foil patterns.

When flow soldering the chip common mode choke coils, apply the adhesive in accordance with the following conditions.

If too much adhesive is applied, then it may overflow into the land or termination areas and yield poor solderability. In contrast, if insufficient adhesive is applied, or if the adhesive is not sufficiently hardened, then the chip may become detached during flow soldering process.

(in mm)
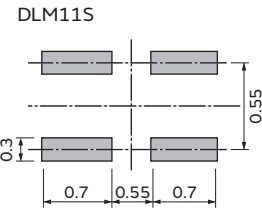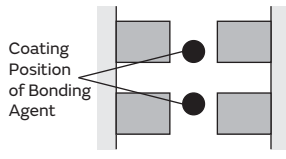
| Series | Solder Paste Printing | Adhesive Application | | | | | | | | | | | | | | | | | | | | |
|--------------------|---|----------------------|-----|-----|---|---|---------------|-----|-----|-----|-----|---------------|-----|-----|-----|-----|---------------|-----|-----|-----|-----|---|
| DLW DLM | <p>●Guideline of solder paste thickness: 100-150μm: DLW21S/31S/32S, DLM11S 150μm: DLW43S 150-200μm: DLW5A/5B</p> <p>*Solderability is subject to reflow conditions and thermal conductivity. Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.</p> <p>DLM11S</p>  <p>DLW21S/31S/32S</p>  <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th>Series</th> <th>a</th> <th>b</th> <th>c</th> <th>d</th> </tr> </thead> <tbody> <tr> <td>DLW21S</td> <td>0.8</td> <td>2.6</td> <td>0.5</td> <td>1.2</td> </tr> <tr> <td>DLW31S</td> <td>1.6</td> <td>3.7</td> <td>0.4</td> <td>1.6</td> </tr> <tr> <td>DLW32S</td> <td>2.0</td> <td>4.1</td> <td>0.4</td> <td>1.6</td> </tr> </tbody> </table> <p>DLW5A/5B</p>  | Series | a | b | c | d | DLW21S | 0.8 | 2.6 | 0.5 | 1.2 | DLW31S | 1.6 | 3.7 | 0.4 | 1.6 | DLW32S | 2.0 | 4.1 | 0.4 | 1.6 | <p>■DLW5AT_MQ2 Apply 0.3mg of bonding agent at each chip.</p> <p>DLW5AT_MQ2</p>  |
| Series | a | b | c | d | | | | | | | | | | | | | | | | | | |
| DLW21S | 0.8 | 2.6 | 0.5 | 1.2 | | | | | | | | | | | | | | | | | | |
| DLW31S | 1.6 | 3.7 | 0.4 | 1.6 | | | | | | | | | | | | | | | | | | |
| DLW32S | 2.0 | 4.1 | 0.4 | 1.6 | | | | | | | | | | | | | | | | | | |

Continued on the following page. ↗

Chip Common Mode Choke Coil (DL□ Series) Soldering and Mounting

Continued from the preceding page. ↘

3. Standard Soldering Conditions

(1) Soldering Methods

Use flow and reflow soldering methods only.
 Use standard soldering conditions when soldering chip common mode choke coils.
 In cases where several different parts are soldered, each having different soldering conditions, use those conditions requiring the least heat and minimum time.

Solder: Use Sn-3.0Ag-0.5Cu solder. Use of Sn-Zn based solder will deteriorate performance of products.
 If using DLM series with Sn-Zn based solder, please contact Murata in advance.


Flux:

- Use Rosin-based flux.
 In case of DLW21/31/43 series, use Rosin-based flux with converting chlorine content of 0.06 to 0.1wt%.
 In case of using RA type solder, products should be cleaned completely with no residual flux.
- Do not use strong acidic flux (with chlorine content exceeding 0.20wt%)
- Do not use water-soluble flux.

For additional mounting methods, please contact Murata.


(2) Soldering Profile

● Flow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

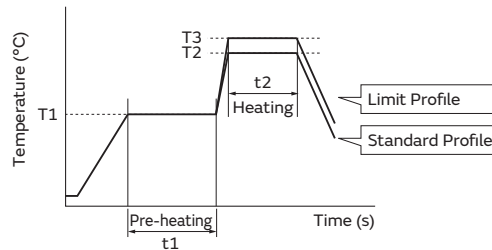

| Series | Pre-heating | | Standard Profile | | | Limit Profile | | |
|------------|-------------|------------|------------------|------------|---------------|---------------|------------|---------------|
| | Temp. (T1) | Time. (t1) | Heating | | Cycle of Flow | Heating | | Cycle of Flow |
| | | | Temp. (T2) | Time. (t2) | | Temp. (T3) | Time. (t2) | |
| DLW5AT_MQ2 | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 2 times max. |

● Reflow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

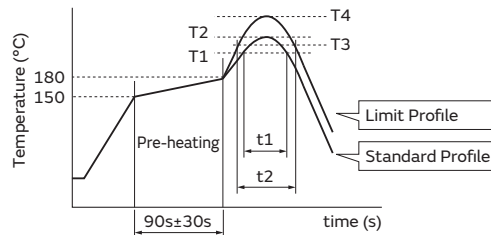

| Series | Standard Profile | | | | Limit Profile | | | |
|-------------------------|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak Temperature (T2) | Cycle of Reflow | Heating | | Peak Temperature (T4) | Cycle of Reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| DLM/ DLW21S/31S/43MH | 220°C min. | 30 to 60s | 245±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |
| DLW32S/43S | 220°C min. | 30 to 60s | 245±3°C | 2 times max. | 240°C min. | 30s max. | 260°C/10s | 2 times max. |
| DLW5A/5B | 220°C min. | 30 to 60s | 250±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |

Continued on the following page. ↗

Chip Common Mode Choke Coil (DL□ Series) Soldering and Mounting

Continued from the preceding page. ↘

(3) Reworking with Solder Iron

The following conditions must be strictly followed when using a soldering iron.

Pre-heating: 150°C 60s min.

Soldering iron power output / Tip diameter:

30W max. / ø3mm max.

Temperature of soldering iron tip / Soldering time /

Times:

350°C max. / 3-4s / 2 times*¹

*¹ DLW315/DLW43S: 350°C max. / 3s / 2 times

Do not allow the tip of the soldering iron to directly contact the chip.

For additional methods of reworking with a soldering iron, please contact Murata engineering.

4. Cleaning

Following conditions should be observed when cleaning chip EMI filter.

Do not clean DLW series.

(1) Cleaning Temperature: 60°C max. (40°C max. for alcohol type cleaner)

(2) Ultrasonic

Output: 20W/liter max.

Duration: 5 minutes max.

Frequency: 28 to 40kHz

(3) Cleaning agent

The following list of cleaning agents have been tested on the individual components. Evaluation of final assembly should be completed prior to production.

Before cleaning, please contact Murata engineering.

(a) Alcohol cleaning agent

Isopropyl alcohol (IPA)

(b) Aqueous cleaning agent

Pine Alpha ST-100S

(4) Ensure that flux residue is completely removed.

Component should be thoroughly dried after aqueous agent has been removed with deionized water.

Chip Common Mode Choke Coil (PL□ Series) Soldering and Mounting


1. Standard Land Pattern Dimensions

(in mm)

| Series | Standard Land Dimensions |
|--------------------------------|--|
| PLT10H PLT5BP | <p>●Reflow Soldering</p> <p>Legend: Copper Foil Pattern Copper Foil Pattern + Resist Resist</p> |

● PCB Warping

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

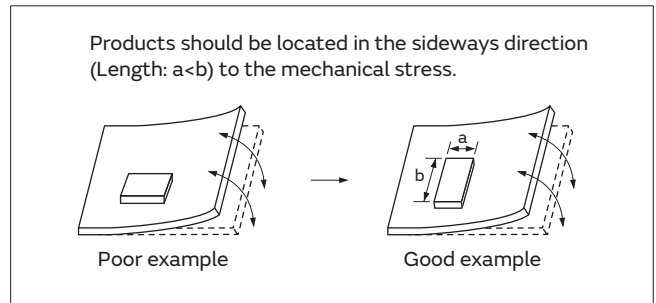

2. Solder Paste Printing and Adhesive Application

When reflow soldering the chip common mode choke coils, the printing must be conducted in accordance with the following cream solder printing conditions. If too much solder is applied, the chip will be prone to damage by mechanical and thermal stress from the PCB and may crack.

Standard land dimensions should be used for resist and copper foil patterns.

| Series | Solder Paste Printing |
|--------------------------------|---|
| PLT10H PLT5BP | <p>●Guideline of solder paste thickness: 150-200μm: PLT10H 150μm: PLT5BP For the solder paste printing pattern, use standard land dimensions.</p> <p>*Solderability is subject to reflow conditions and thermal conductivity. Please make sure that your product has been evaluated in view of your specifications with our product being mounted to your product.</p> |

Continued on the following page. ↗

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type

EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Chip Common Mode Choke Coil (PL□ Series) Soldering and Mounting

Continued from the preceding page. ↘

3. Standard Soldering Conditions

(1) Soldering Methods

Use reflow soldering methods only.
 Use standard soldering conditions when soldering chip common mode choke coils.
 In cases where several different parts are soldered, each having different soldering conditions, use those conditions requiring the least heat and minimum time.

Solder: Use Sn-3.0Ag-0.5Cu solder. Use of Sn-Zn based solder will deteriorate performance of products.


Flux:

- Use Rosin-based flux.
- Do not use strong acidic flux (with chlorine content exceeding 0.20wt%)
- Do not use water-soluble flux.

For additional mounting methods, please contact Murata.

(2) Soldering Profile

- Reflow Soldering Profile (Sn-3.0Ag-0.5Cu Solder)

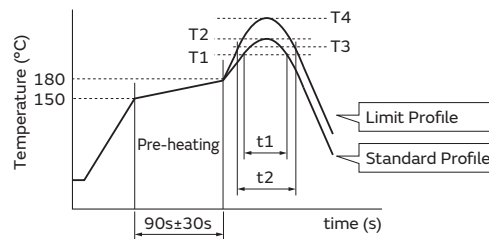

| Series | Standard Profile | | | | Limit Profile | | | |
|--------|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak Temperature (T2) | Cycle of Reflow | Heating | | Peak Temperature (T4) | Cycle of Reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| PLT10H | 220°C min. | 30 to 60s | 250±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |
| PLT5BP | 220°C min. | 30 to 60s | 245±3°C | 2 times max. | 240°C min. | 30s max. | 260°C/10s | 2 times max. |

(3) Reworking with Solder Iron

The following conditions must be strictly followed when using a soldering iron.

Pre-heating: 150°C 60s min.

Soldering iron power output / Tip diameter:

80W max. / ø3mm max.: PLT10HH

30W max. / ø3mm max.: PLT5BP

Temperature of soldering iron tip / Soldering time / Times:

400°C max. / 5s / 2 times: PLT10HH

350°C max. / 3 to 4s / 2 times: PLT5BP

Do not allow the tip of the soldering iron to directly contact the product.


For additional methods of reworking with a soldering iron, please contact Murata engineering.

4. Cleaning

Do not clean after soldering.


Chip Common Mode Choke Coil (UCMH□ Series) Soldering and Mounting

1. Standard Land Pattern Dimensions



2. Standard Soldering Conditions

●Reflow Soldering Condition

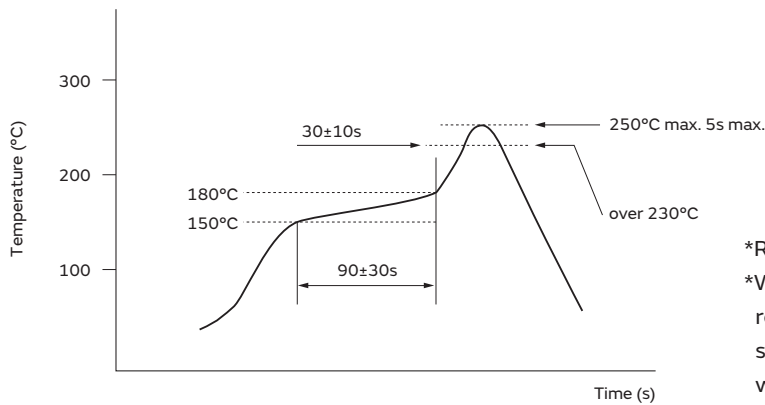


*Reflow times : 2 times max

*We recommend infrared ray as heat source of reflow bath. However halogen lamp shall be used, side heat will be beyond range of resistance heat, so we can't recommend it.

Chip Common Mode Choke Coil (DL□ Series) Packaging

Minimum Quantity and Dimensions of 8mm Width Embossed Tape

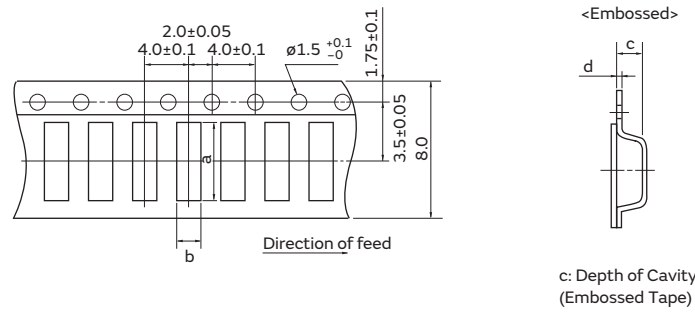


Dimension of the cavity of embossed tape is measured at the bottom side.

| Part Number | Dimensions | | | | Minimum Qty. (pcs.) | | | | |
|---------------|------------|------|------|------|---------------------|---------------|-------------|---------------|------|
| | | | | | ø180mm Reel | | ø330mm Reel | | Bulk |
| | a | b | c | d | Paper Tape | Embossed Tape | Paper Tape | Embossed Tape | |
| DLM11S | 1.4 | 1.15 | 0.65 | 0.25 | - | 4000 | - | - | 500 |
| DLW21S | 2.25 | 1.45 | 1.4 | 0.3 | - | 2000 | - | - | 500 |
| DLW31S | 3.6 | 2.0 | 2.1 | 0.3 | - | 2000 | - | - | 500 |
| DLW32S | 3.6 | 2.9 | 2.65 | 0.3 | - | 1500 | - | - | 500 |

(in mm)

Minimum Quantity and Dimensions of 12mm Width Embossed Tape

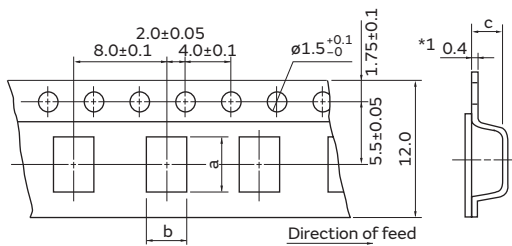

*1 DLW43/DLW5AT: 0.3 c: Depth of Cavity

Dimension of the cavity is measured at the bottom side.


| Part Number | Dimensions | | | Minimum Qty. (pcs.) | | |
|-------------------|------------|-----|-----|---------------------|-------------|------|
| | a | b | c | ø180mm Reel | ø330mm Reel | Bulk |
| DLW43SH_XK | 4.9 | 3.6 | 2.7 | 500 | 2500 | 100 |
| DLW43SH_XP | 4.9 | 3.6 | 2.9 | 500 | 2500 | 100 |
| DLW5AT | 5.4 | 4.1 | 2.7 | 700 | 2500 | 100 |
| DLW5BS | 5.5 | 5.4 | 4.7 | 400 | 1500 | 100 |
| DLW5BT | 5.5 | 5.5 | 2.7 | 700 | 2500 | 100 |
| DLW43MH | 4.9 | 3.6 | 3.0 | 500 | 2500 | 100 |

(in mm)

"Minimum Quantity" means the number of units of each delivery or order. The quantity should be an integral multiple of the "Minimum Quantity."

Chip Common Mode Choke Coil (PL□ Series) Packaging

Minimum Quantity and Dimensions of 12mm Width Embossed Tape

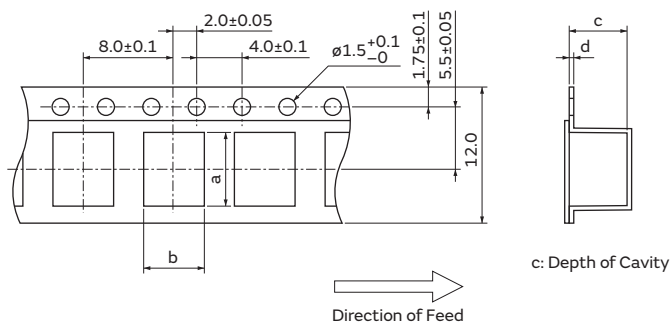


Dimension of the cavity is measured at the bottom side.

| Part Number | Dimensions | | | | Minimum Qty. (pcs.) | | |
|-------------|------------|------|-----|-----|---------------------|-------------|------|
| | a | b | c | d | ø180mm Reel | ø330mm Reel | Bulk |
| PLT5BP | 6.5 | 5.35 | 5.1 | 0.4 | 300 | - | 50 |

(in mm)

Minimum Quantity and Dimensions of 24mm Width Embossed Tape

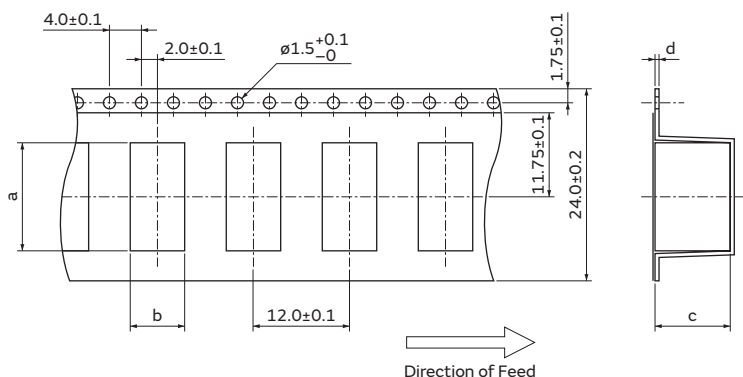


Dimension of the cavity is measured at the bottom side.

| Part Number | Dimensions | | | | Minimum Qty. (pcs.) | | |
|-------------|------------|-----|-----|-----|---------------------|-------------|------|
| | a | b | c | d | ø180mm Reel | ø330mm Reel | Bulk |
| PLT10H | 13.5 | 6.8 | 9.4 | 0.5 | 125 | 500 | 50 |

(in mm)

Chip Common Mode Choke Coil (UCMH□ Series) Packaging

Tape dimensions

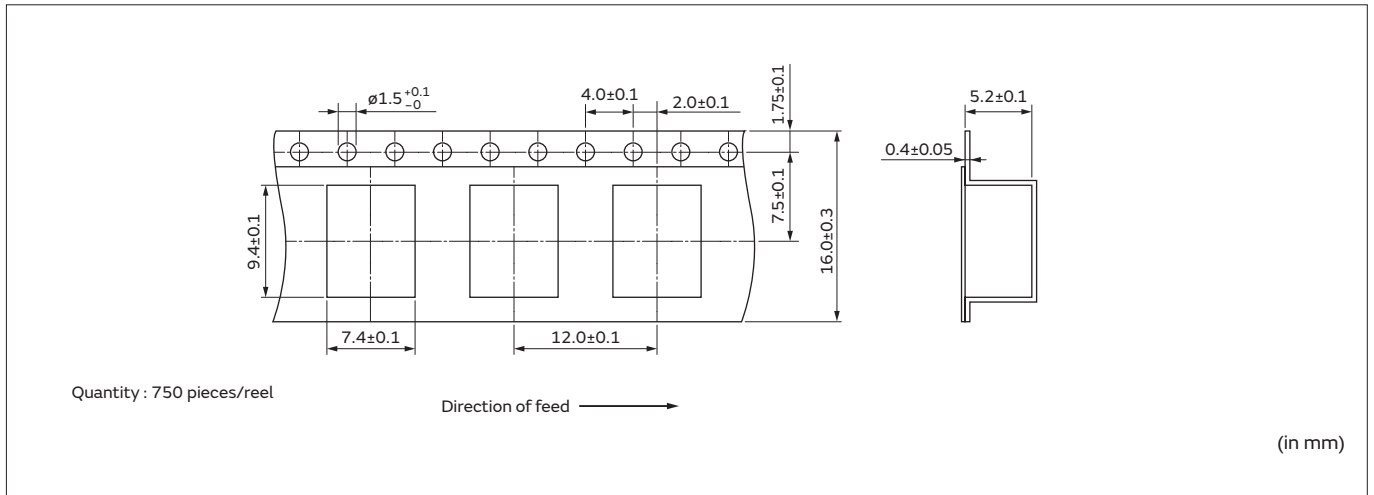

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil


SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Block Type EMIFIL® BNX02□Series


Appearance/Dimensions

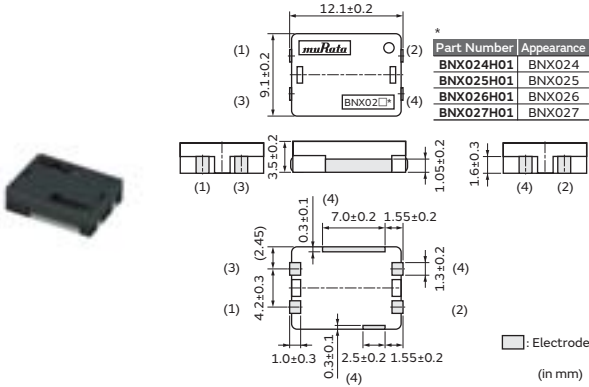

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 400 |
| K | ø330mm Embossed Taping | 1500 |
| B | Packing in Bulk | 100 |

Equivalent Circuit

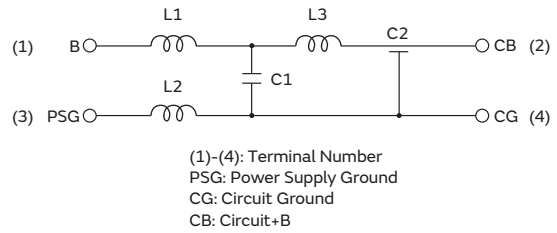


Rated Value (□: packaging code)

| Part Number | | Rated Voltage | Withstand Voltage | Rated Current | Insulation Resistance (min.) | Insertion Loss |
|------------------|-----------------------|---------------|-------------------|---------------|------------------------------|---|
| For Infotainment | For Powertrain/Safety | | | | | |
| — | BNX024H01□ | 50Vdc | 125Vdc | 20A | 100MΩ | 100kHz to 1GHz:35dB min. (Line impedance=50Ω) |
| — | BNX025H01□ | 25Vdc | 62.5Vdc | 20A | 50MΩ | 50kHz to 1GHz:35dB min. (Line impedance=50Ω) |
| — | BNX026H01□ | 50Vdc | 125Vdc | 20A | 10MΩ | 50kHz to 1GHz:35dB min. (Line impedance=50Ω) |
| — | BNX027H01□ | 16Vdc | 40Vdc | 20A | 1MΩ | 40kHz to 1GHz:35dB min. (Line impedance=50Ω) |

Operating Temperature Range: -55°C to +125°C
 In operating temperatures exceeding +85°C, derating of current is necessary.

Insertion Loss Characteristics (Main Items)

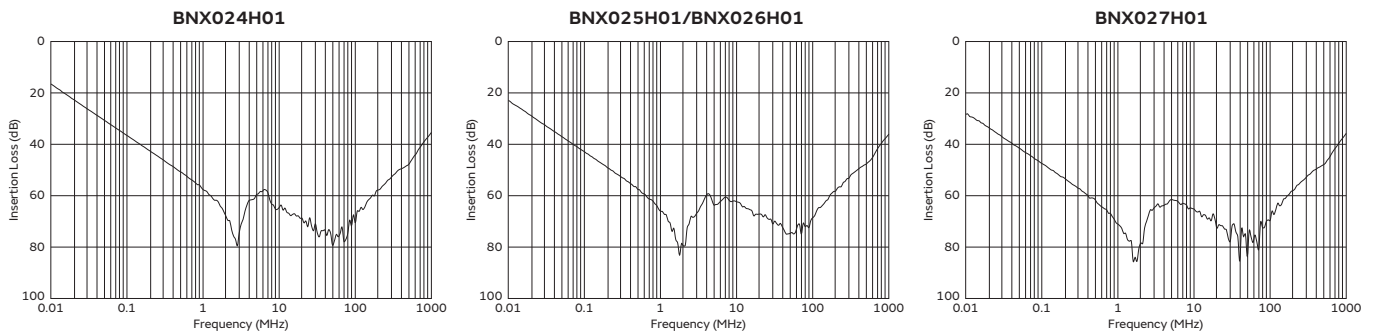


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated Current

In operating temperature exceeding +85°C, derating of current is necessary for BNX024H/025H/026H/027H series. Please apply the derating curve shown in chart according to the operating temperature.

Derating of Rated Current

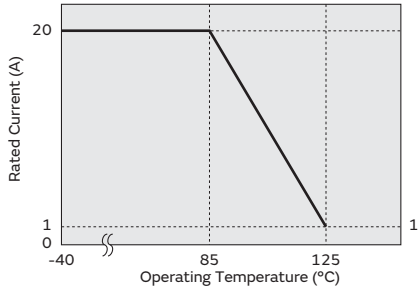

SMD Type
Chip Ferrite Bead

SMD Type
Chip EMIFIL®

SMD Type
Chip Common Mode Choke Coil

SMD Type
Block Type EMIFIL®

Lead Type
EMI Suppression Filters

SMD Type
Microchip Transformer (Balun)

Block Type EMIFIL[®] SMD Type (BNX Series) ⚠Caution/Notice

⚠Caution

Rating

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

Fail-safe

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

ESD

ESD to this product, exceeding condition of IEC61000-4-2 with 30kV, may cause short circuit and fuming or firing.

Notice

Storage and Operating Conditions

<Operating Environment>

Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Do not use products in the environment close to the organic solvent.

<Storage and Handling Requirements>

1. Storage Period

BNX series should be used within 12 months.

Solderability should be checked if this period is exceeded.

2. Storage Conditions

(1) Storage temperature: -10 to +40°C

Relative humidity: 15 to 85%

Avoid sudden changes in temperature and humidity.

(2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Notice (Soldering and Mounting)

1. Cleaning

Do not clean BNX series (SMD Type).

2. Soldering

Reliability decreases with improper soldering methods.

Please solder by the standard soldering conditions shown in mounting information.

3. Other

Noise suppression levels resulting from Murata's EMI

suppression filters EMIFIL[®] may vary, depending on the circuits and ICs used, type of noise, mounting pattern, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Handling

1. Resin Coating

Using resin for coating/molding products may affect the products performance.

So please pay careful attention in selecting resin.



Prior to use, please make the reliability evaluation with the product mounted in your application set.

2. Handling of a Substrate (for BNX02□)

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to

the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.


Excessive mechanical stress may cause cracking in the Product.



Block Type EMIFIL[®] SMD Type (BNX Series) Soldering and Mounting


1. Standard Land Pattern Dimensions

- Land Pattern + Solder Resist
 - Land Pattern
 - Solder Resist
 - Through Hole
- (in mm)

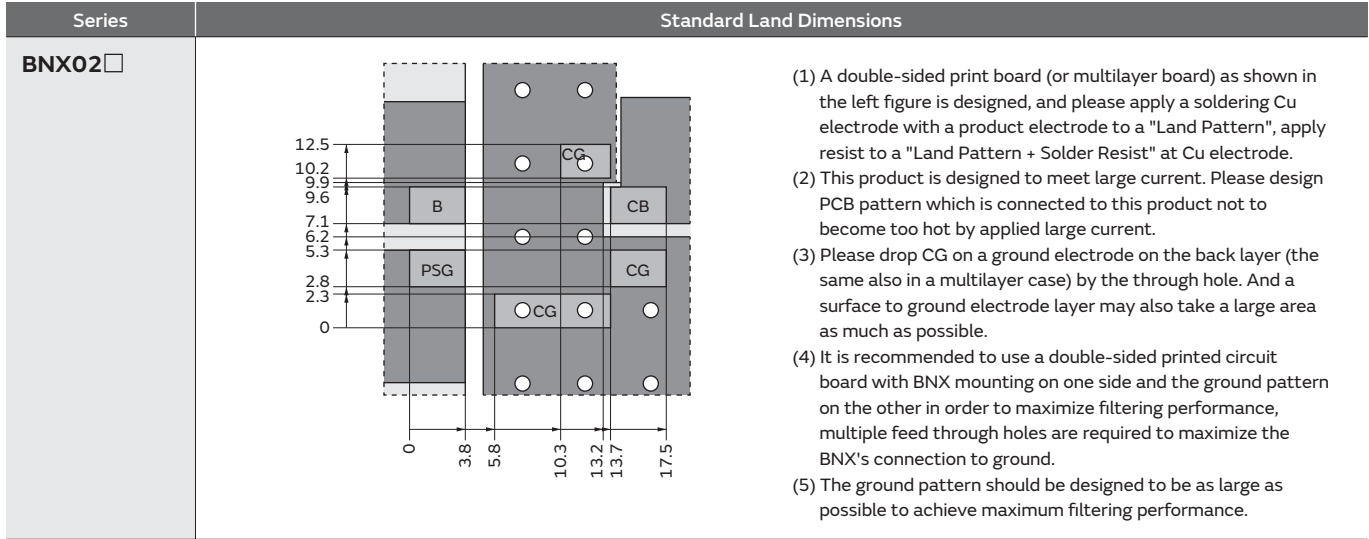

● PCB Warping (for BNX02)

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

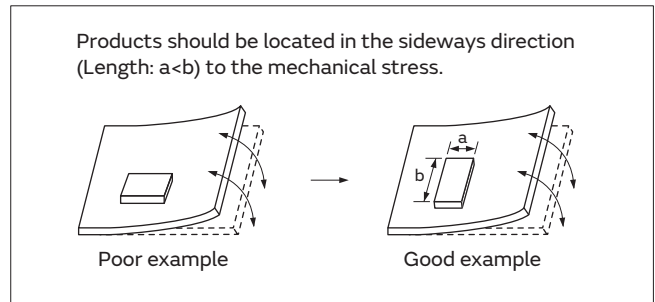

2. Solder Paste Printing and Adhesive Application

When reflow soldering the block type EMIFIL[®], the printing must be conducted in accordance with the following cream solder printing conditions.

If too much solder is applied, the chip will be prone to damage by mechanical and thermal stress from the PCB and may crack.

Standard land dimensions should be used for resist and copper foil patterns.

| Series | Solder Paste Printing | Adhesive Application |
|--------------|--|---|
| BNX02 | <p>●Guideline of solder paste thickness: 150-200μm</p> | <p>Continued on the following page. ↗</p> |

Block Type EMIFIL[®] SMD Type (BNX Series) Soldering and Mounting

Continued from the preceding page. ↘

3. Standard Soldering Conditions

(1) Soldering Methods

- Use reflow soldering methods only.
- Use standard soldering conditions when soldering block type EMIFIL[®] SMD type.
- In cases where several different parts are soldered, each having different soldering conditions, use those conditions requiring the least heat and minimum time.

Solder: Use Sn-3.0Ag-0.5Cu solder. Use of Sn-Zn based solder will deteriorate performance of products.


Flux:

- Use Rosin-based flux.
 In case of using RA type solder, products should be cleaned completely with no residual flux.
- Do not use strong acidic flux (with chlorine content exceeding 0.20wt%)
- Do not use water-soluble flux.

For additional mounting methods, please contact Murata.

(2) Soldering Profile

- Reflow Soldering Profile
 (Sn-3.0Ag-0.5Cu solder)

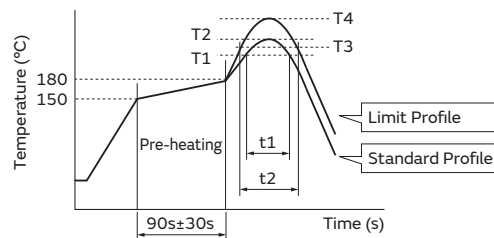

| Series | Standard Profile | | | | Limit Profile | | | |
|--------|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak Temperature (T2) | Cycle of Reflow | Heating | | Peak Temperature (T4) | Cycle of Reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| BNX02□ | 220°C min. | 30 to 60s | 250±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |

(3) Reworking with Solder Iron

- The following conditions must be strictly followed when using a soldering iron.
- Pre-heating: 150°C 60s min.
- Soldering iron power output: 100W max.
- Temperature of soldering iron tip / Soldering time / Times:
- 450°C max. / 5s max. / 2 time


- Do not allow the tip of the soldering iron to directly contact the chip.
- For additional methods of reworking with a soldering iron, please contact Murata engineering.

4. Cleaning

Do not clean BNX02□ series, or inner humidity protect material will be damaged, results product's insulation resistance getting worse.

Block Type EMIFIL[®] SMD Type (BNX Series) Packaging

Minimum Quantity and Dimensions of 24mm Width Embossed Tape

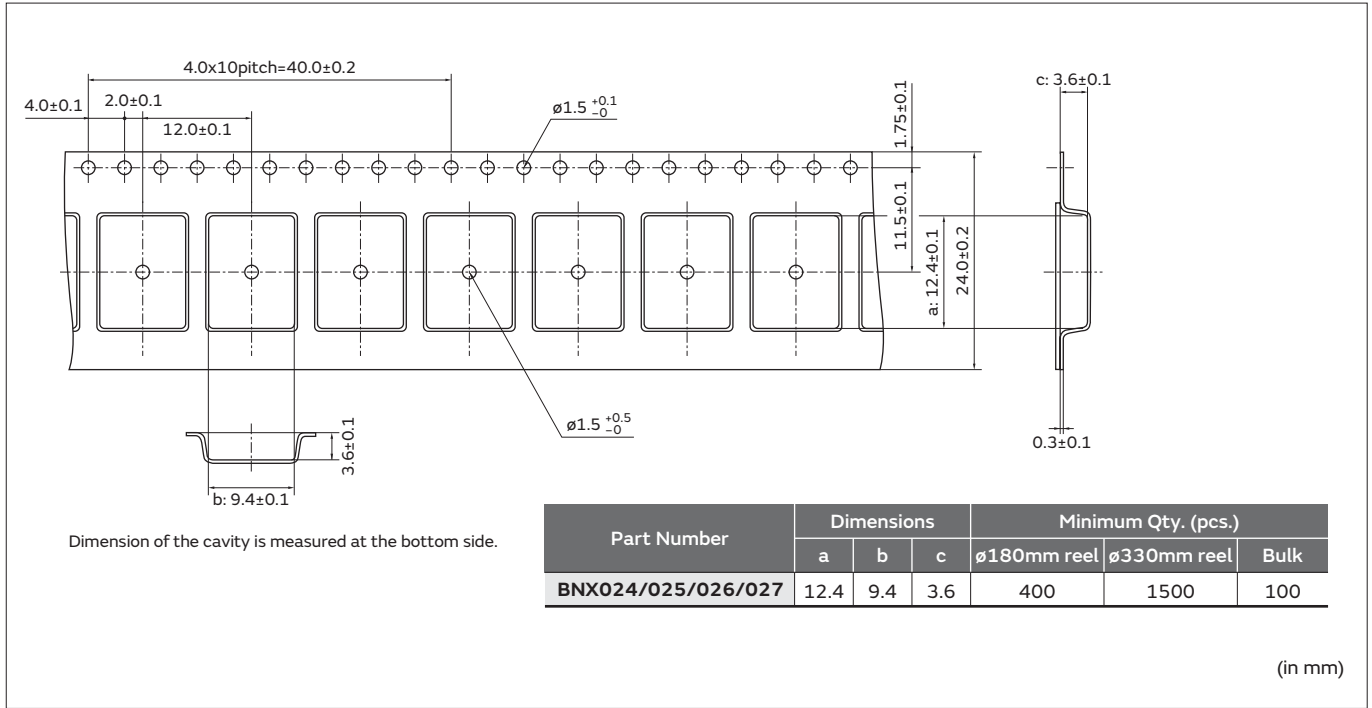

"Minimum Quantity" means the number of units of each delivery or order. The quantity should be an integral multiple of the "Minimum Quantity."

● Part Numbering

Leaded Multilayer Ferrite Beads for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|----|-----|----|----|---|----|---|
| BL | L | 18 | AG | 121 | DB | E1 | H | 01 | A |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|---------------|
| BL | Ferrite Beads |

② Type

| Code | Type |
|------|-----------|
| L | Lead Type |

③ Built-in Chip Dimensions

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| 18 | 1.6x0.8mm | 0603 |

④ Characteristics/Applications

| Code | Characteristics/Applications |
|------|------------------------------|
| AG | For General Signal |

⑤ Impedance

Typical impedance at 100MHz is expressed by three figures.
 The unit is in ohm (Ω).
 The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑥ Lead Type/⑩ Packaging

| Code | | Lead Type | Lead Length* (mm) | Packaging |
|------|---|-----------|-------------------|-----------|
| ⑥ | ⑩ | | | |
| A2 | B | Straight | 28.0±1.0 | Bulk |
| DB | A | | 20.0±1.0 | Ammo Pack |

*Lead distance between reference and bottom planes except for Bulk.

⑦ Category

| Code | Category |
|------|-----------------------------------|
| E1 | Expressed by a letter and numbers |

⑧ Features

| Code | Circuit | |
|------|----------------|--------------------|
| H | For Automotive | Powertrain, Safety |

⑨ Individual Specification Code

| Code | Lead Material |
|------|---------------|
| 01 | CP Line |
| 02 | Cu Line |

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type

EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Disc Type EMIFIL® for Automotive

(Part Number)

| | | | | | | | | |
|----|---|---|---|----|----|-----|-----|---|
| DS | S | 1 | Z | B3 | 2A | 220 | Q55 | B |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ |

① Product ID

| Product ID | |
|------------|--------------------------|
| DS | Three-terminal Capacitor |

② Structure

| Code | Structure |
|----------|-----------------------------|
| S | Built-in Ferrite Beads Type |

③ Style

| Code | Style |
|----------|------------------------|
| 1 | Expressed by a letter. |

④ Category

| Code | Category | |
|----------|----------------|--------------|
| Z | For Automotive | Infotainment |

⑥ Lead Type/⑨ Packaging

| Code | Lead Type | Lead Length* (mm) | Packaging | Series |
|-------------|-----------|-------------------|-----------|-------------|
| Q55B | Straight | 25.0 min. | Bulk | DSS1 |
| Q91A | | 20.0±1.0 | Ammo Pack | |
| Q92A | | 16.5±1.0 | | |
| Q93A | | 18.5±1.0 | | |

*Lead Distance between Reference and Bottom Planes Except for Bulk.

⑤ Temperature Characteristics

| Code | Capacitance Change |
|-----------|--|
| B3 | ±10% (Temperature Range: -25°C to +85°C) |

⑥ Rated Voltage

| Code | Rated Voltage |
|-----------|---------------|
| 1H | 50V |
| 2A | 100V |

⑦ Capacitance

Expressed by three alphanumeric. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

EMIGUARD® (EMIFIL® with Varistor Function) for Automotive

(Part Number)

| | | | | | | | | | | |
|----|---|---|---|----|----|-----|---|---|----|---|
| VF | C | 2 | H | R7 | 1D | 105 | K | 2 | M1 | A |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ | ⑪ |

① Product ID

| Product ID | |
|------------|---------------------|
| VF | EMIGUARD® Lead Type |

② Structure

| Code | Structure |
|------|--------------------|
| C | Built-in Capacitor |

③ Style

| Code | Style |
|------|------------------------------|
| 2 | Size is expressed by a digit |

④ Features

| Code | Features | |
|------|----------------|--------------------|
| H | For Automotive | Powertrain, Safety |

⑤ Temperature Characteristics

| Code | Capacitance Change |
|------|------------------------|
| R7 | ±15% (-55°C to +125°C) |

⑩ Lead Type/⑪ Packaging

| Code | Lead Type | Lead Length* | Packaging | Series |
|------|--------------|--------------|-----------|--------|
| M1A | Inside Crimp | 18.0±1.0mm | Ammo Pack | VFC2 |

*From bottom of the crimp.

⑥ Rated Voltage

| Code | Rated Voltage |
|------|---------------|
| 1D | 22V |

⑦ Capacitance

Expressed by three alphanumerics. The unit is in pico-farad (pF). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures.

⑧ Capacitance Tolerance

| Code | Capacitance Tolerance |
|------|-----------------------|
| K | ±10% |

⑨ Varistor Voltage

| Code | Varistor Voltage |
|------|------------------|
| 2 | 27V |

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type


EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Leaded Multilayer Ferrite Beads Lead Type

BLL18AG Series

Appearance/Dimensions

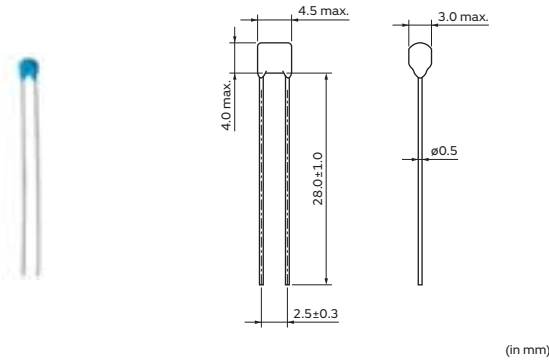

Packaging

| Code | Packaging | Minimum Quantity |
|------|-----------------|------------------|
| B | Packing in Bulk | 500 |
| A | Ammo Pack | 2000 |

Equivalent Circuit




(Resistance element becomes dominant at high frequencies.)

Rated Value (□: packaging code)

| Part Number | | Impedance (at 100MHz/20°C) | Rated Current | DC Resistance | Operating Temperature Range |
|------------------|-----------------------|-------------------------------|---------------|---------------|--------------------------------|
| For Infotainment | For Powertrain/Safety | | | | |
| — | BLL18AG121A2E1H01B | 120Ω±40% | 200mA | 0.5Ω max. | -40°C to +150°C |
| — | BLL18AG121DBE1H01A | 120Ω±40% | 200mA | 0.5Ω max. | -40°C to +150°C |
| — | BLL18AG151A2E1H01B | 150Ω±40% | 200mA | 0.55Ω max. | -40°C to +150°C |
| — | BLL18AG151DBE1H01A | 150Ω±40% | 200mA | 0.55Ω max. | -40°C to +150°C |
| — | BLL18AG221A2E1H01B | 220Ω±40% | 200mA | 0.55Ω max. | -40°C to +150°C |
| — | BLL18AG221DBE1H01A | 220Ω±40% | 200mA | 0.55Ω max. | -40°C to +150°C |
| — | BLL18AG331A2E1H01B | 330Ω±40% | 200mA | 0.6Ω max. | -40°C to +150°C |
| — | BLL18AG331DBE1H01A | 330Ω±40% | 200mA | 0.6Ω max. | -40°C to +150°C |
| — | BLL18AG471A2E1H01B | 470Ω±40% | 200mA | 0.65Ω max. | -40°C to +150°C |
| — | BLL18AG471DBE1H01A | 470Ω±40% | 200mA | 0.65Ω max. | -40°C to +150°C |
| — | BLL18AG601A2E1H01B | 600Ω±40% | 200mA | 0.7Ω max. | -40°C to +150°C |
| — | BLL18AG601DBE1H01A | 600Ω±40% | 200mA | 0.7Ω max. | -40°C to +150°C |
| — | BLL18AG102A2E1H01B | 1000Ω±40% | 200mA | 0.8Ω max. | -40°C to +150°C |
| — | BLL18AG102DBE1H01A | 1000Ω±40% | 200mA | 0.8Ω max. | -40°C to +150°C |

Number of Circuits: 1

Impedance-Frequency Characteristics (Main Items)

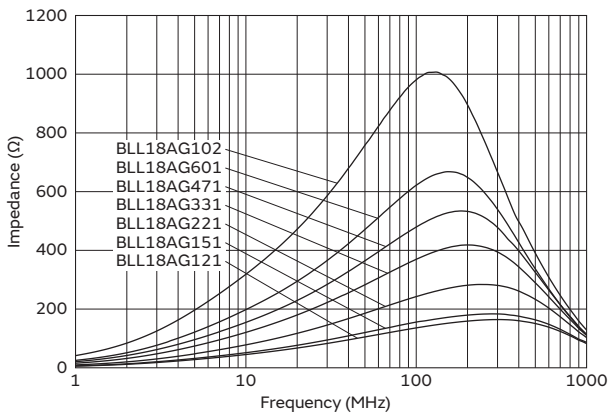


Continued on the following page. ↗


Continued from the preceding page. ↘

Impedance-Frequency Characteristics


BLL18AG121A2E1H01/BLL18AG121DBE1H01

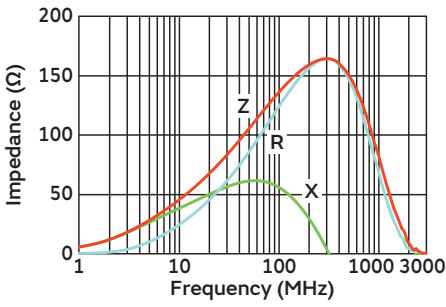


BLL18AG151A2E1H01/BLL18AG151DBE1H01

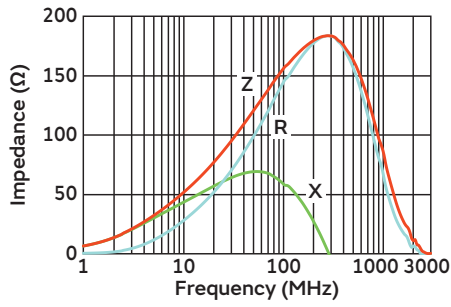


BLL18AG221A2E1H01/BLL18AG221DBE1H01

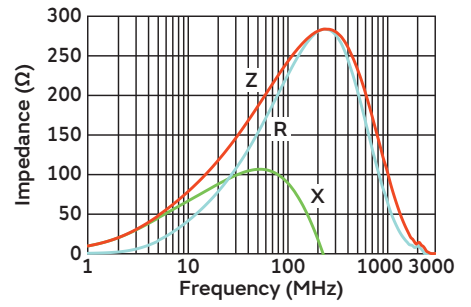


BLL18AG331A2E1H01/BLL18AG331DBE1H01

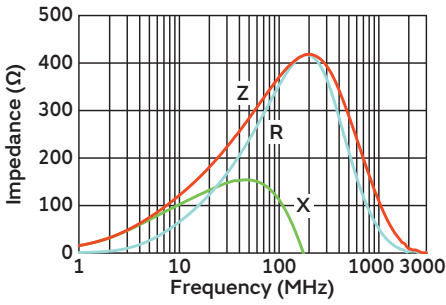


BLL18AG471A2E1H01/BLL18AG471DBE1H01

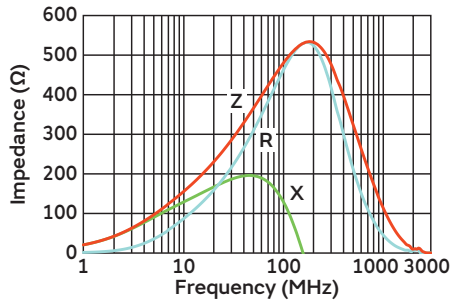

BLL18AG601A2E1H01/BLL18AG601DBE1H01

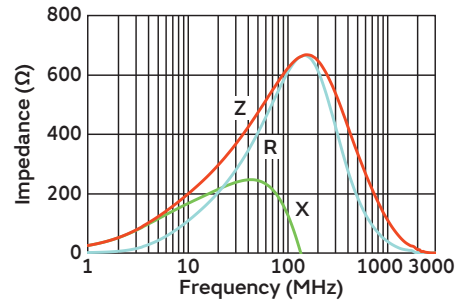

BLL18AG102A2E1H01/BLL18AG102DBE1H01

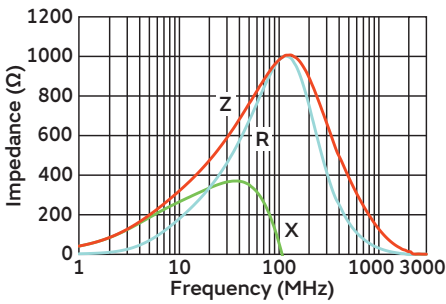

Chip Ferrite Bead
SMD Type

Chip EMI FIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type


Block Type EMI FIL®
SMD Type

EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

EMIFIL® Lead Type DSS1 Series


Appearance/Dimensions

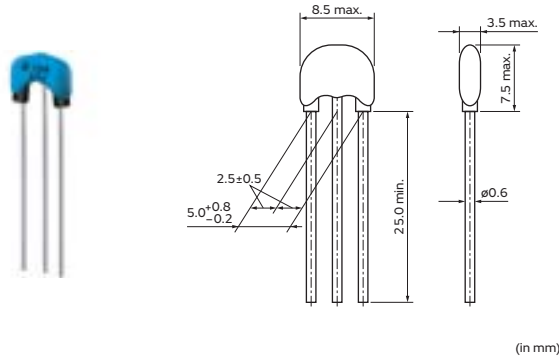

Packaging

| Code | Packaging | Minimum Quantity |
|------|-----------------|------------------|
| B | Packing in Bulk | 250 |
| A | Ammo Pack | 1500 |

Equivalent Circuit



Rated Value (□: packaging code)

| Part Number | | Capacitance | Rated Current | Rated Voltage | Operating Temperature Range |
|------------------|-----------------------|-------------|---------------|---------------|-----------------------------|
| For Infotainment | For Powertrain/Safety | | | | |
| DSS1ZB32A220Q55B | — | 22pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A220Q91A | — | 22pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A220Q92A | — | 22pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A220Q93A | — | 22pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A330Q55B | — | 33pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A330Q91A | — | 33pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A330Q92A | — | 33pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A330Q93A | — | 33pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A470Q55B | — | 47pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A470Q91A | — | 47pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A470Q92A | — | 47pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A470Q93A | — | 47pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A680Q55B | — | 68pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A680Q91A | — | 68pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A680Q92A | — | 68pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A680Q93A | — | 68pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A101Q55B | — | 100pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A101Q91A | — | 100pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A101Q92A | — | 100pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A101Q93A | — | 100pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A121Q55B | — | 120pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A121Q91A | — | 120pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A121Q92A | — | 120pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A121Q93A | — | 120pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A151Q55B | — | 150pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A151Q91A | — | 150pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A151Q92A | — | 150pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A151Q93A | — | 150pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A221Q55B | — | 220pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A221Q91A | — | 220pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A221Q92A | — | 220pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A221Q93A | — | 220pF±10% | 6A | 100Vdc | -40°C to +85°C |

Number of Circuit: 1

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Capacitance | Rated Current | Rated Voltage | Operating Temperature Range |
|------------------|-----------------------|-------------|---------------|---------------|-----------------------------|
| For Infotainment | For Powertrain/Safety | | | | |
| DSS1ZB32A271Q55B | — | 270pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A271Q91A | — | 270pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A271Q92A | — | 270pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A271Q93A | — | 270pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A331Q55B | — | 330pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A331Q91A | — | 330pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A331Q92A | — | 330pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A331Q93A | — | 330pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A471Q55B | — | 470pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A471Q91A | — | 470pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A471Q92A | — | 470pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A471Q93A | — | 470pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A681Q55B | — | 680pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A681Q91A | — | 680pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A681Q92A | — | 680pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A681Q93A | — | 680pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A102Q55B | — | 1000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A102Q91A | — | 1000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A102Q92A | — | 1000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A102Q93A | — | 1000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A152Q55B | — | 1500pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A152Q91A | — | 1500pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A152Q92A | — | 1500pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A152Q93A | — | 1500pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A222Q55B | — | 2200pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A222Q91A | — | 2200pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A222Q92A | — | 2200pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A222Q93A | — | 2200pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A332Q55B | — | 3300pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A332Q91A | — | 3300pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A332Q92A | — | 3300pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A332Q93A | — | 3300pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A472Q55B | — | 4700pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A472Q91A | — | 4700pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A472Q92A | — | 4700pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A472Q93A | — | 4700pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A682Q55B | — | 6800pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A682Q91A | — | 6800pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A682Q92A | — | 6800pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A682Q93A | — | 6800pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A103Q55B | — | 10000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A103Q91A | — | 10000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A103Q92A | — | 10000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A103Q93A | — | 10000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A153Q55B | — | 15000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A153Q91A | — | 15000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A153Q92A | — | 15000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A153Q93A | — | 15000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A223Q55B | — | 22000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A223Q91A | — | 22000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A223Q92A | — | 22000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB32A223Q93A | — | 22000pF±10% | 6A | 100Vdc | -40°C to +85°C |
| DSS1ZB31H333Q55B | — | 33000pF±10% | 6A | 50Vdc | -40°C to +85°C |

Number of Circuit: 1

Continued on the following page. ↗

Chip Ferrite Bead
SMD Type

Chip EMI FIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMI FIL®
SMD Type

EMI Suppression Filters
Lead Type


Microchip Transformer (Balun)
SMD Type

Continued from the preceding page. ↘

| Part Number | | Capacitance | Rated Current | Rated Voltage | Operating Temperature Range |
|------------------|-----------------------|--------------|---------------|---------------|-----------------------------|
| For Infotainment | For Powertrain/Safety | | | | |
| DSS1ZB31H333Q91A | — | 33000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H333Q92A | — | 33000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H333Q93A | — | 33000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H473Q55B | — | 47000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H473Q91A | — | 47000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H473Q92A | — | 47000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H473Q93A | — | 47000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H104Q55B | — | 100000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H104Q91A | — | 100000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H104Q92A | — | 100000pF±10% | 6A | 50Vdc | -40°C to +85°C |
| DSS1ZB31H104Q93A | — | 100000pF±10% | 6A | 50Vdc | -40°C to +85°C |

Number of Circuit: 1

Insertion Loss Characteristics (Main Items)

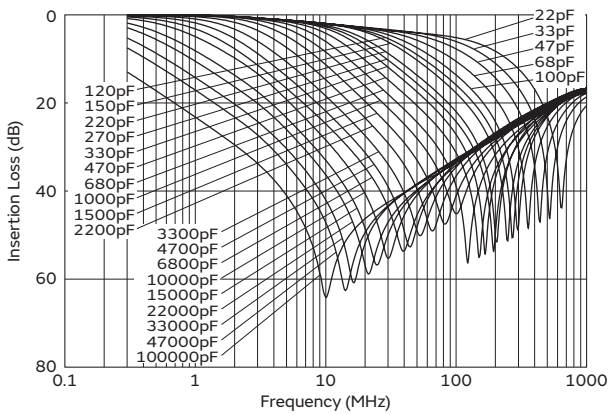

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®


Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

EMIGUARD® (EMIFIL® with Varistor Function) Lead Type

VFC2 Series


Appearance/Dimensions

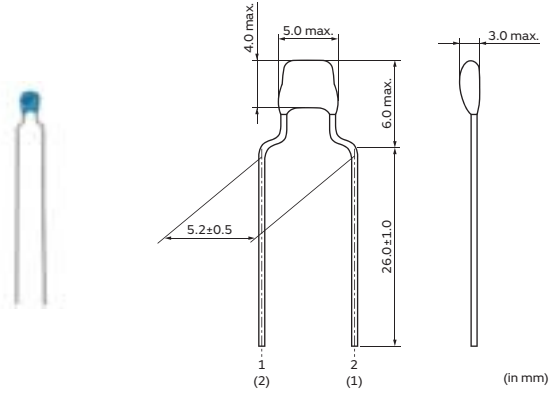

Packaging

| Code | Packaging | Minimum Quantity |
|------|-----------|------------------|
| A | Ammo Pack | 2000 |

Equivalent Circuit




Rated Value (□: packaging code)

| Part Number | | Varistor Voltage | Capacitance | Temperature Characteristics | Rated Voltage | Insulation Resistance (min.) |
|------------------|-----------------------|------------------|-------------|-----------------------------|---------------|------------------------------|
| For Infotainment | For Powertrain/Safety | | | | | |
| — | VFC2HR71D105K2M1□ | 27Vdc +5/-3V | 1.0μF ±10% | R7 (±15%) | 22Vdc | 1MΩ |

Operating Temperature Range: -55°C to +125°C

Block Type EMIFIL® Lead Type BNX012 Series


Appearance/Dimensions

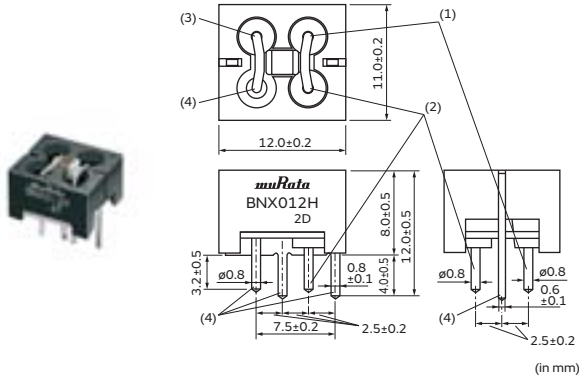

Packaging

| Code | Packaging | Minimum Quantity |
|------|-----------|------------------|
| - | Box | 150 |

Equivalent Circuit

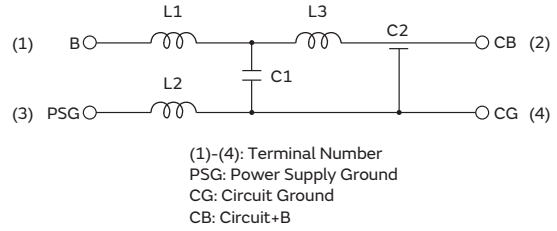


Rated Value (□: packaging code)

| Part Number | | Rated Voltage | Withstand Voltage | Rated Current | Insulation Resistance (min.) | Insertion Loss |
|------------------|-----------------------|---------------|-------------------|---------------|------------------------------|---|
| For Infotainment | For Powertrain/Safety | | | | | |
| — | BNX012H01 | 50Vdc | 125Vdc | 15A | 500MΩ | 1MHz to 1GHz:40dB min. (Line impedance=50Ω) |

Operating Temperature Range: -55°C to +125°C
 In operating temperatures exceeding +85°C, derating of current is necessary.

Insertion Loss Characteristics (Main Items)

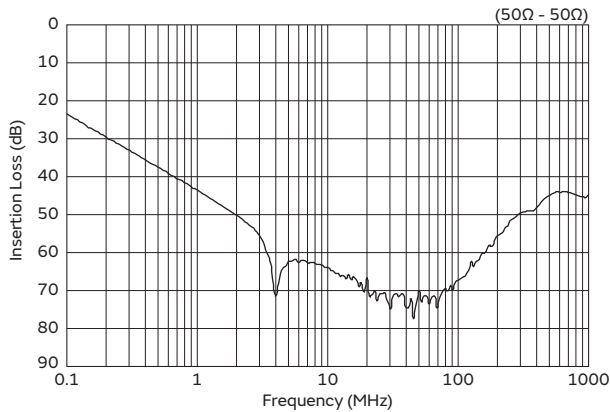


Continued on the following page. ↗

Continued from the preceding page. ↘

Derating of Rated current


● Rating

In operating temperatures exceeding +85°C, derating of current is necessary for BNX012H series. Please apply the derating curve shown in chart according to the operating temperature.

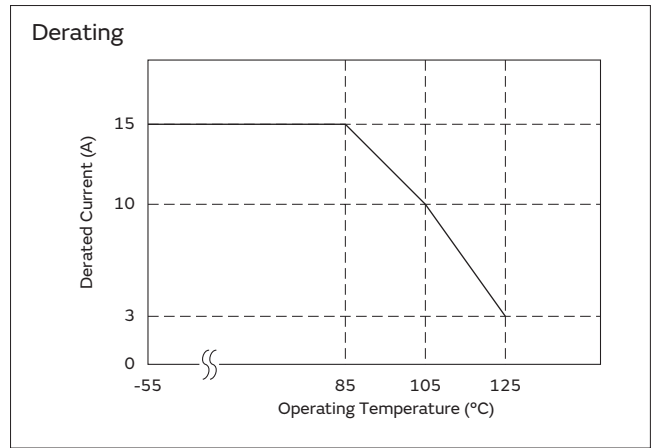

● Connecting ± Power Line

In case of using ± power line, please connect to each terminal as shown.

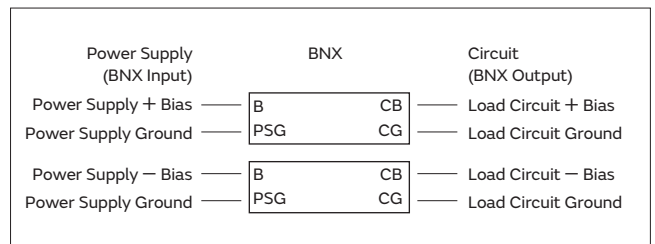

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type

EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Leaded Multilayer Ferrite Beads (BLL□ Series) ⚠️Caution/Notice

⚠️Caution

Rating

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

Soldering and Mounting

1. Bonding, resin molding and coating

In case of bonding, molding or coating this product, verify that these processes do not affect the quality of the capacitor by testing the performance of the bonded, molded or coated product in the intended equipment. In case the amount of application, dryness / hardening conditions of adhesives and molding resins containing organic solvents (ethyl acetate, methyl ethyl ketone, toluene, etc.) are unsuitable, the outer coating resin of a capacitor may be damaged by the organic solvents and may result, worst case, in a short circuit. The variation in thickness of adhesive or molding resin or coating may cause an outer coating resins cracking and / or ceramic element cracking of this product in a temperature cycling.

2. Treatment after bonding, resin molding and coating

When the outer coating is hot (over 100 degrees centigrade) after soldering, it becomes soft and fragile, so please be careful not to give it mechanical stress.

3. Mounting holes

Mounting holes should be designed as specified in this specifications.

Or different design from this specifications may cause cracks in ceramics which may lead to smoking / firing.

4. Caution for the product angle adjust work

Take care not to apply any mechanical stress to product body at the lead terminal bending process for product angle adjustment after insertion.

Notice

Storage and Operating Condition

1. Operating Environment

- (1) Do not use products in corrosive gases such as chlorine gas, acid or sulfide gas.
- (2) Do not use products in the environment where water, oil or organic solvents may adhere to products.
- (3) Do not adhere any resin to products, coat nor mold products with any resin (including adhesive) to prevent mechanical and chemical stress on products.

2. Storage period

Use the products within 12 months after delivered. Solderability should be checked if this period is exceeded.

3. Storage Conditions

- (1) Storage temperature: -10 to +40 degree C
Relative humidity: 15 to 85%
Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Soldering and Mounting

1. Washing

Failure and degradation of a product are caused by the washing method. When you wash in conditions that are not in the mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in the mounting information.

EMIFIL[®] Lead Type (DS□/VF□ Series) ⚠Caution/Notice

⚠Caution

Rating

1. Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.
2. Products should not be applied for the absorption of surge which have large energy (ex. Included lighting surge, switching surges) because it is designed for the absorption of electrostatic surges, or it results cracks in ceramics which may lead to smoking / firing.

Soldering and Mounting

1. Mounting holes should be designed as specified in these specifications. Other designs than those shown in these specifications may cause cracks in ceramics that may lead to smoking or firing.
2. Take care not to apply any mechanical stress to product body at the lead terminal bending process for product angle adjustment after insertion.

Notice

Storage and Operating Conditions

<Operating Environment>

1. Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.
2. Do not use products near water, oil or organic solvents. Avoid environments where dust or dirt may adhere to the product.
3. Do not adhere any resin to products, coat nor mold products with any resin (including adhesive) to prevent mechanical and chemical stress on products.

<Storage and Handling Requirements>

1. Storage Period
Use the products within 12 months after delivery.
Solderability should be checked if this period is exceeded.

2. Storage Conditions

- (1) Storage temperature: -10 to 40 degrees C
Relative humidity: 15 to 85%
Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

<Using EMIGUARD[®] effectively>

1. Products should be used at rated voltage or less and rated current or less.

Soldering and Mounting

1. Washing

Failure and degradation of a product are caused by the washing method. When you wash in conditions that are not in the mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in the mounting information.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters EMIFIL[®] may vary, depending on the circuits and ICs used, type of noise, mounting pattern, lead wire length, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Block Type EMIFIL[®] Lead Type (BNX Series) ⚠️Caution/Notice

⚠️Caution

Rating

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

Fail-safe

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

Notice

Storage and Operating Conditions

<Operating Environment>

1. Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.
2. Do not use products near water, oil or organic solvents.

<Storage and Handling Requirements>

1. Storage Period

- BNX Series should be used within 12 months.
- Solderability should be checked if this period is exceeded.

2. Storage Conditions

- (1) Storage temperature: -10 to +40°C
Relative humidity: 15 to 85%
Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Notice (Soldering and Mounting)

1. Cleaning

Failure and degradation of a product are caused by the cleaning method. When you clean in conditions that are not in mounting information, please contact Murata engineering.

2. Soldering

Reliability decreases with improper soldering methods. Please solder by the standard soldering conditions shown in mounting information.

3. Other

Noise suppression levels resulting from Murata's EMI suppression filters "EMIFIL" may vary, depending on the circuits and ICs used, type of noise, mounting pattern, lead wire length, mounting location, and other operating conditions. Be sure to check and confirm in advance the noise suppression effect of each filter, in actual circuits, etc. before applying the filter in a commercial-purpose equipment design.

Notice (Appearance)



Although some part of the product surface seems to be white in some cases, do not care because it is the result of waxing process for humidity resistance improvement. This wax does not make bad affection to mechanical or electrical performance, reliability of the product.

Leaded Multilayer Ferrite Beads (BLL□ Series) Soldering and Mounting

1. Mounting Hole


Mounting holes should be designed as specified below.

(in mm)

| Part Number | Bulk Type | Taping Type |
|-------------|---|---|
| BLL |  |  |

2. Soldering

- (1) Use Sn-3.0Ag-0.5Cu solder.
- (2) Use Rosin-based flux. Do not use strong acidic flux with halide content exceeding 0.2wt% (chlorine conversion value).
- (3) Products and the leads should not be subjected to any mechanical stress during the soldering process, or while subjected to the equivalent high temperatures.
- (4) Standard flow soldering profile.

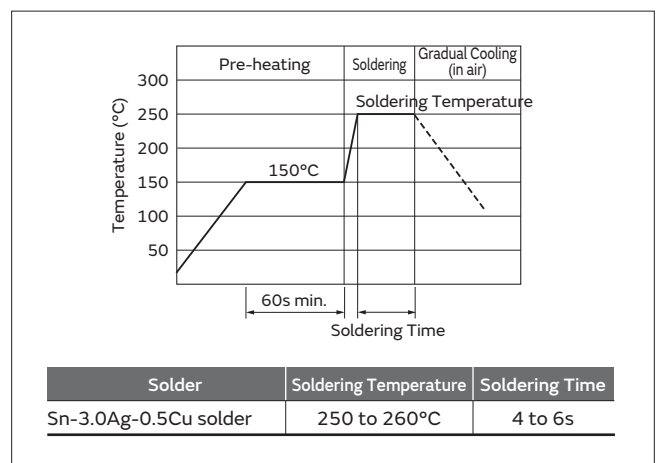

3. Cleaning Conditions

- (1) Do not clean after soldering. If cleaning, please contact us.

EMIFIL[®] Lead Type (DS□/VF□ Series) Soldering and Mounting


1. Mounting Hole

Mounting holes should be designed as specified below.

| Part Number | Bulk Type (in mm) | Taping Type (in mm) |
|-------------|-------------------|---------------------|
| DSS1 | | |
| VFC2H | | |

2. Soldering

- (1) Use Sn-3.0Ag-0.5Cu solder.
- (2) Use Rosin-based flux. Do not use strong acidic flux with halide content exceeding 0.2wt% (chlorine conversion value).
- (3) Products and the leads should not be subjected to any mechanical stress during the soldering process, or while subjected to the equivalent high temperatures.
- (4) Standard flow soldering profile.

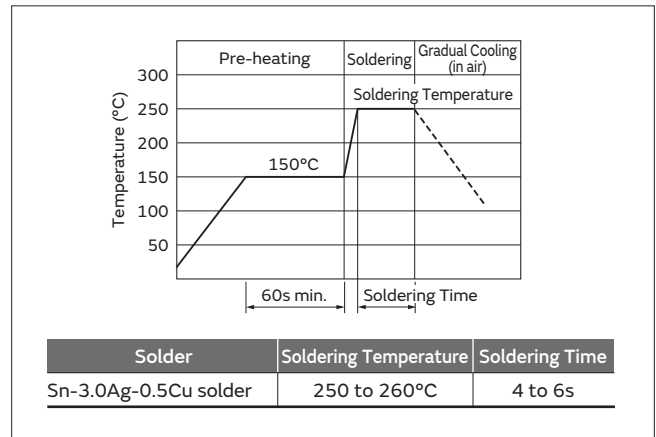

3. Cleaning Conditions



Clean other parts in the following conditions.

- (1) Cleaning temperature should be limited to 60°C max. (40°C max for alcohol type cleaner).
- (2) Ultrasonic cleaning should comply with the following conditions, avoiding the resonance phenomenon at the mounted products and PCB.
 Power: 20 W / l max. Frequency: 28 to 40kHz
 Time: 5 min. max.
- (3) Cleaner
 - (a) Alcohol type cleaner
 Isopropyl alcohol (IPA)
 - (b) Aqueous agent (VFC2 series cannot be cleaned)
 PINE ALPHA ST-100S
- (4) There should be no residual flux or residual cleaner left after cleaning.
 In the case of using aqueous agent, products should be dried completely after rinsing with de-ionized water in order to remove the cleaner.
- (5) The surface of products may become dirty after cleaning, but there is no deterioration on mechanical, electrical characteristics and reliability.
- (6) Other cleaning: Please contact us.

Block Type EMIFIL[®] Lead Type (BNX Series) Soldering and Mounting

1. Mounting Hole

■ Mounting holes should be designed as specified below.
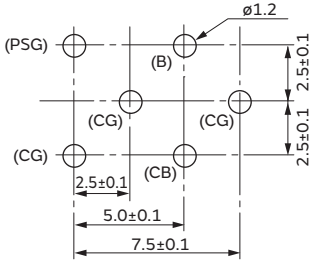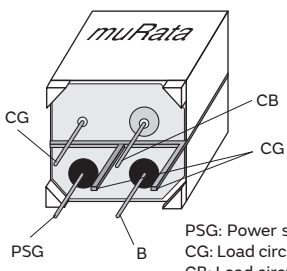
| Series | Mounting Hole |
|--------|--|
| BNX01□ | <p>Component Side</p>  <p>Terminal Layout (Bottom figure)</p>  <p>PSG: Power supply ground CG: Load circuit ground CB: Load circuit + Bias</p> |

2. Using the Block Type EMIFIL[®] (Lead Type) Effectively

(1) How to use effectively

This product effectively prevents undesired radiation and external noise from going out / entering the circuit by grounding the high frequency components which cause noise problems. Therefore, grounding conditions may affect the performance of the filter and attention should be paid to the following for effective use.

- Design maximized grounding area in the P.C. board, and grounding pattern for all the grounding terminals of the product to be connected. (Please follow the specified recommendations.)
- Minimize the distance between ground of the P.C. board and the ground plate of the product. (Recommend using the through hole connection between grounding area both of component side and bottom side.)
- Insert the terminals into the holes on P.C. board completely.
- Don't connect PSG terminal with CG terminal directly. (See the item 1. Terminal Layout)

(2) Self-heating


Though this product has a large rated current, localized selfheating may be caused depending on soldering conditions. To avoid this, attention should be paid to the following:

- Use P.C. board with our recommendation on hole diameter / land pattern dimensions, mentioned in the right hand drawing, especially for 4 terminals which pass current.
- Solder the terminals to the P.C. board with soldercover area at least 90%. Otherwise, excess self-heating at connection between terminals and P.C. board may lead to smoke and / or fire of the product even when operating at rated current.
- After installing this product in your product, please make sure the self-heating is within the rated current recommended.


P. C. Board Patterns

Use a bilateral P.C. board. Insert the BNX into the P.C.board until the root of the terminal is secured, then solder.

(1) Component Side View




(2) Bottom View

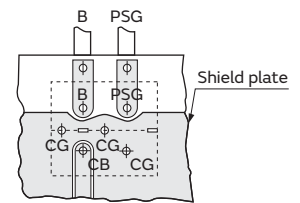

■ Copper foil pattern

Recommended Land Pattern

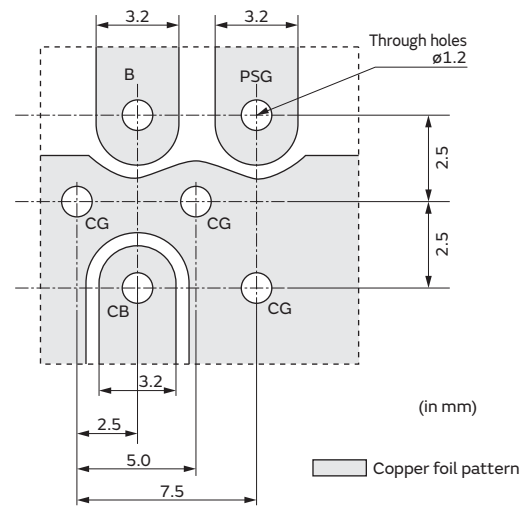


Continued on the following page. ↗

Block Type EMIFIL[®] Lead Type (BNX Series) Soldering and Mounting

Continued from the preceding page. ↘

3. Soldering

- (1) Use Sn-3.0Ag-0.5Cu solder.
- (2) Use Rosin-based flux. Do not use strong acidic flux with halide content exceeding 0.2wt% (chlorine conversion value).
- (3) Products and the leads should not be subjected to any mechanical stress during the soldering process, or while subjected to the equivalent high temperatures.
- (4) Standard flow soldering profile

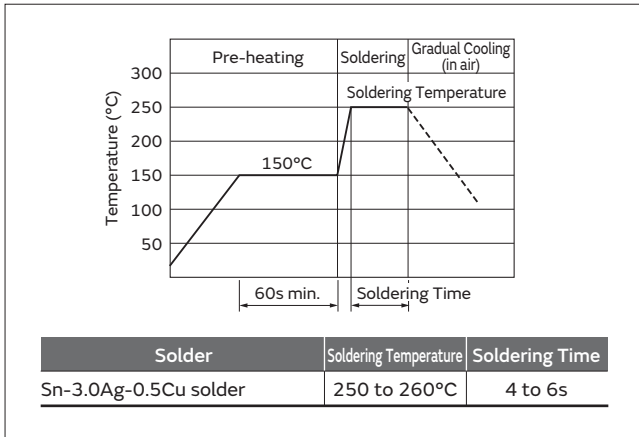

4. Cleaning

Clean the block Type EMIFIL[®](Lead Type) in the following conditions.

- (1) Cleaning temperature should be limited to 60°C max. (40°C max for alcohol type cleaner).
- (2) Ultrasonic cleaning should comply with the following conditions, avoiding the resonance phenomenon at the mounted products and P.C.B.
 Power: 20W/liter max.
 Frequency: 28 to 40kHz
 Time: 5 min. max.
- (3) Cleaner
 - (a) Alcohol type cleaner
 Isopropyl alcohol (IPA)
 - (b) Aqueous agent
 Pine Alpha ST-100S
- (4) There should be no residual flux or residual cleaner left after cleaning.
 In the case of using aqueous agent, products should be dried completely after rinsing with de-ionized water in order to remove the cleaner.
- (5) The surface of products may become dirty after cleaning, but there is no deterioration on mechanical, electrical characteristics and reliability.
- (6) Other cleaning: Please contact us.

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL[®]

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL[®]

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Leaded Multilayer Ferrite Beads (BLL□ Series) Packaging

Minimum Quantity

| Part Number | Minimum Order Quantity (order in sets only) (pcs.) | |
|-------------------|---|------------|
| | Ammo Pack | Bulk (Bag) |
| BLL Series | 2000 | 500 |


(in mm)

Lead Type Code

| Lead Type Code | Lead Length * (mm) | Packaging |
|---------------------------|-----------------------|-----------|
| Straight Type / Packaging | | |
| A2 / B | 28.0±1.0 | Bulk |
| DB / A | 20.0±1.0 | Ammo Pack |

*Lead distance between reference and bottom planes except for Bulk.

Taping Dimensions

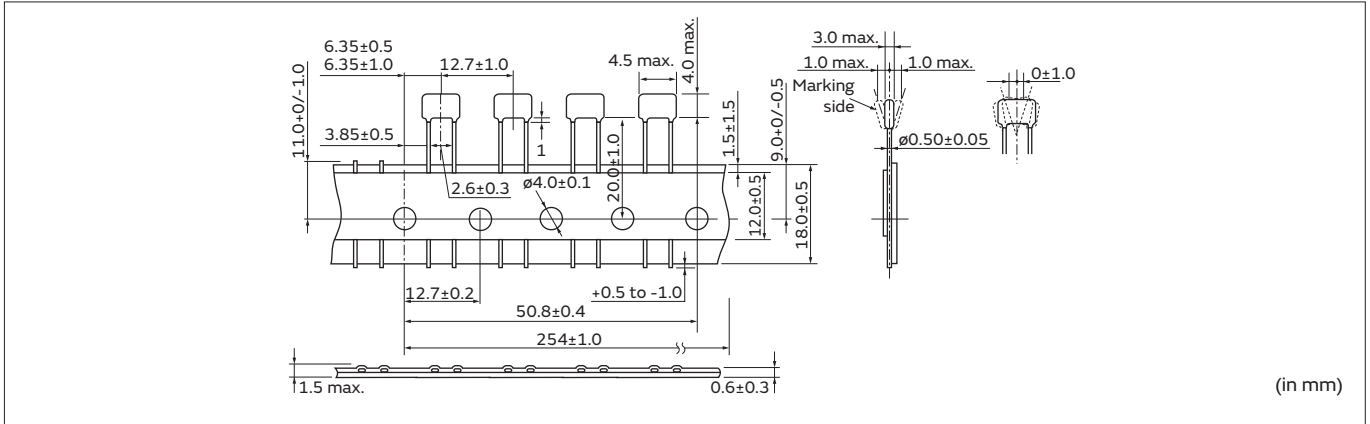

Disc Type EMIFIL®/EMIGUARD® Lead Type (DS□/VF□ Series) Packaging

Minimum Quantity


| Part Number | Minimum Order Quantity (order in sets only) (pcs.) | |
|--------------|--|------------|
| | Ammo Pack | Bulk (Bag) |
| VFC2H Series | 2000 | 500 |
| DSS1 Series | 1500 | 250 |

Lead Type Code

| Lead Type Code | Lead Length (H) |
|----------------|-----------------|
| Straight Type | |
| Q55B | 25.0mm min. |
| Q91A | 20.0±1.0mm |
| Q92A | 16.5±1.0mm |
| Q93A | 18.5±1.0mm |

| Lead Type Code | Lead Length (from bottom of the crimp) |
|----------------|--|
| Inside Crimp | |
| K1B | 26.0±1.0mm |
| M1A | 18.0±1.0mm |

Taping Dimensions

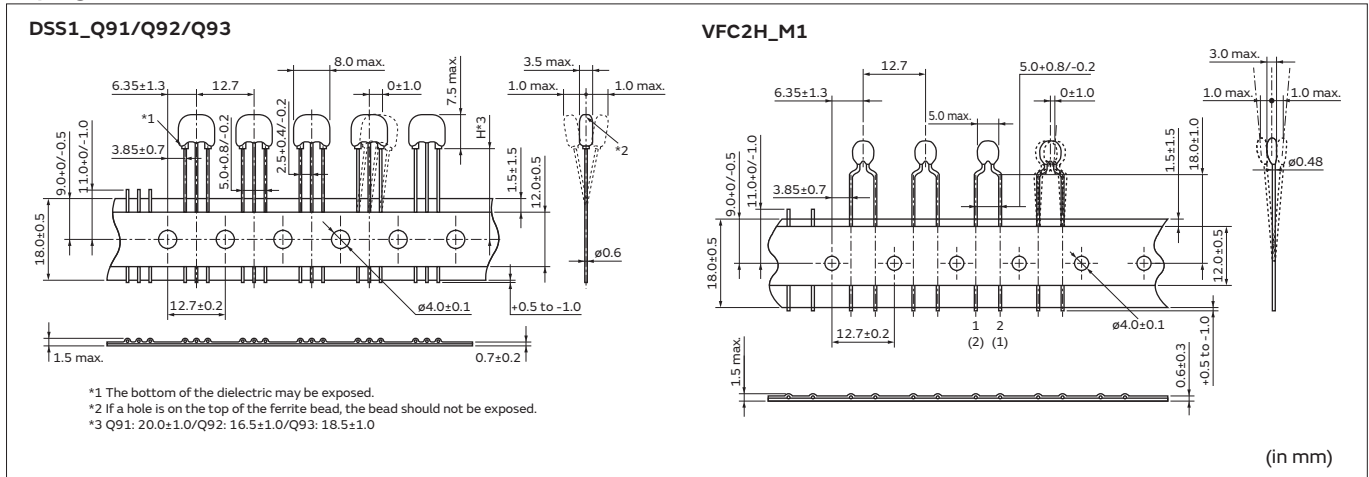

SMD Type
 Chip Ferrite Bead

SMD Type
 Chip EMIFIL®

SMD Type
 Chip Common Mode Choke Coil

SMD Type
 Block Type EMIFIL®

Lead Type
 EMI Suppression Filters

SMD Type
 Microchip Transformer (Balun)

Chip Ferrite Bead
 SMD Type

Chip EMIFIL®
 SMD Type

Chip Common Mode Choke Coil
 SMD Type

Block Type EMIFIL®
 SMD Type

EMI Suppression Filters
 Lead Type

Microchip Transformer (Balun)
 SMD Type

● Part Numbering

Micro Chip Transformer for Automotive

(Part Number)

| | | | | | | | | |
|----|---|----|---|---|----|----|---|---|
| DX | W | 21 | B | Z | 75 | 11 | S | L |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ |

① Product ID

| Product ID | |
|------------|------------------------|
| DX | Micro Chip Transformer |

② Structure

| Code | Structure |
|------|--------------|
| W | Winding Type |

③ Dimensions (LxW)

| Code | Dimensions (LxW) | Size Code (inch) |
|------|------------------|------------------|
| 21 | 2.0x1.2mm | 0805 |

④ Type of Transformer

| Code | Type of Transformer |
|------|---------------------|
| B | Balun |

⑤ Category

| Code | Category | |
|------|----------------|--------------|
| Z | For Automotive | Infotainment |

⑥ Port Impedance

| Code | Port Impedance |
|------|----------------|
| 75 | 75Ω |

⑦ Characteristics

| Code | Impedance Ratio |
|------|-----------------|
| 11 | one to one |

⑧ Rough Frequency Range

| Code | Rough Frequency Range |
|------|-----------------------|
| T | 50MHz to 870MHz |
| S | 950MHz to 2150MHz |


⑨ Packaging

| Code | Packaging |
|------|-------------------------------|
| K | Embossed Taping (ø330mm Reel) |
| L | Embossed Taping (ø180mm Reel) |
| B | Bulk |

Microchip Transformer (Balun)

DXW21B Series 0805/2012 (inch/mm)


Appearance/Dimensions

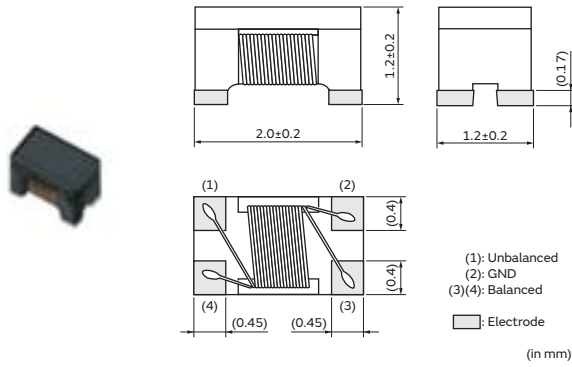

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 2000 |
| K | ø330mm Embossed Taping | 10000 |
| B | Packing in Bulk | 500 |

Equivalent Circuit

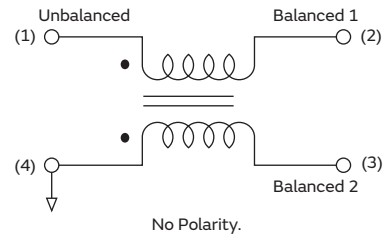


Rated Value (□: packaging code)


| Part Number | | Frequency Range | Port Impedance | Insertion Loss at Freq. Range (max.) | CMRR at Freq. Range (min.) | Rated Power |
|------------------|-----------------------|-----------------|----------------|--------------------------------------|----------------------------|-------------|
| For Infotainment | For Powertrain/Safety | | | | | |
| DXW21BZ7511S□ | — | 1 to 1.5GHz | 75Ω - 75Ω | 1.4dB | 20dB | 27dBm |
| DXW21BZ7511T□ | — | 50 to 870MHz | 75Ω - 75Ω | 1.0dB | 20dB | 27dBm |

Operating Temperature Range: -40°C to +105°C Only for reflow soldering.


Insertion Loss Characteristics

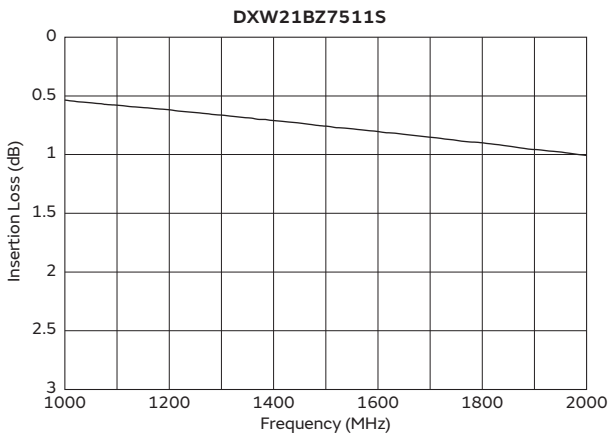


CMRR Characteristics

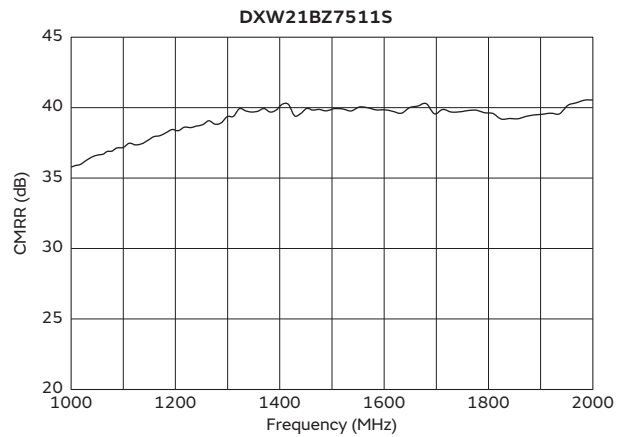

Insertion Loss Characteristics

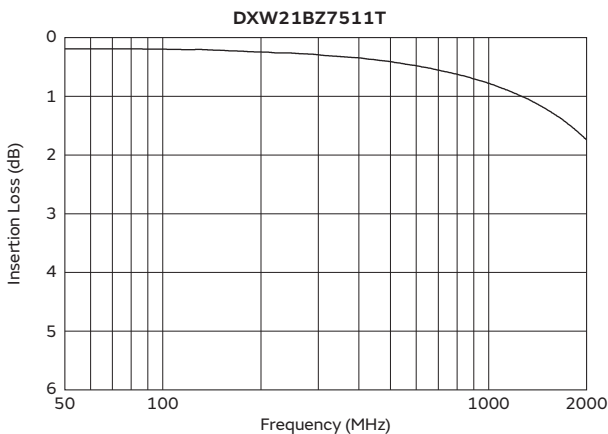

CMRR Characteristics

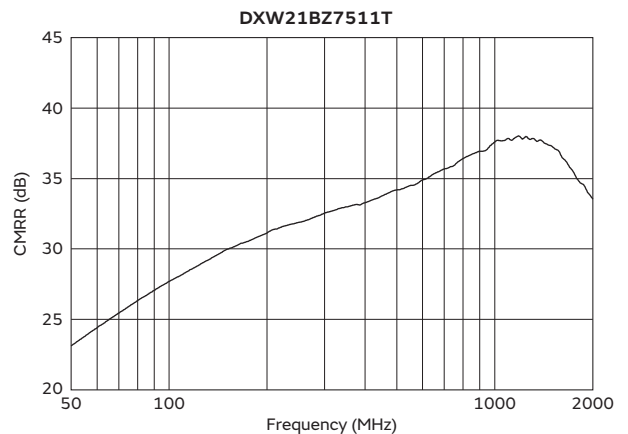

Microchip Transformer (Balun) (DX□ Series) ⚠️Caution/Notice

⚠️Caution

Rating

Do not use products beyond the rated current and rated voltage as this may create excessive heat and deteriorate the insulation resistance.

Soldering and Mounting

1. Self-heating


Please provide special attention when mounting chip Micro Chip Transformer (DXW) series in close proximity to other products that radiate heat.

The heat generated by other products may deteriorate the insulation resistance and cause excessive heat in this component.

2. Mounting Direction

Mount Micro Chip Transformer in right direction. Wrong direction, which is 90 degree rotated from right direction,

the characteristics does not come out as Micro Chip Transformer or causes not only open or short circuit but also flames or other serious trouble.

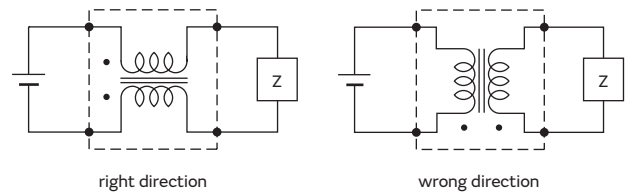

Notice

Storage and Operating Conditions

<Operating Environment>

Do not use products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

<Storage and Handling Requirements>

1. Storage Period

DXW series should be used within 12 months.
 Solderability should be checked if this period is exceeded.

2. Storage Conditions

- (1) Storage temperature: -10 to +40 degree C
 Relative humidity: 15 to 85%
 Avoid sudden changes in temperature and humidity.
- (2) Do not store products in a chemical atmosphere such as chlorine gas, acid or sulfide gas.

Handling

1. Resin Coating

The impedance value may change due to high cure-stress of resin to be used for coating/molding products. An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating condition etc. Some resin contains some impurities or chloride possible to generate chlorine by hydrolysis under some operating condition may cause corrosion of wire of coil, leading to open circuit. So, please pay your careful attention in selecting resin in case of coating/molding the products with the resin. Prior to use the coating resin, please make sure no reliability issue is observed by evaluating products mounted on your board.

2. Handling of a Substrate

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate. Excessive mechanical stress may cause cracking in the Product.



Microchip Transformer (Balun) (DX□ Series) Soldering and Mounting

1. Standard Land Pattern Dimensions



| Series | Standard Land Pattern Dimensions | |
|--------|---------------------------------------|--|
| DXW21 | <p>●Reflow Soldering</p> <p>DXW21</p> | <p>* 1 : If the pattern is made with wider than 1.2mm (DXW21) it may result in components turning around, because melting speed is different. In the worst case, short circuit between lines may occur.</p> <p>* 2 : If the pattern is made with less than 0.4mm, in the worst case, short circuit between lines may occur due to spread of soldering paste or mount placing accuracy.</p> <p>* 3 : If the pattern is made with wider than 0.8mm (DXW21), the bending strength will be reduced.</p> <p>Do not use gild pattern; excess soldering heat may dissolve metal of a copper wire.</p> |
| | | |

2. Solder Paste Printing and Adhesive Application

When reflow soldering the Micro Chip Transformer, the printing must be conducted in accordance with the following cream solder printing conditions.

If too much solder is applied, the chip will be prone to damage by mechanical and thermal stress from the PCB

and may crack. In contrast, if too little solder is applied, there is the potential that the termination strength will be insufficient, creating the potential for detachment. Standard land dimensions should be used for resist and copper foil patterns.

(in mm)

| Series | Solder Paste Printing | |
|--------|--|--|
| DXW21 | <p>●Coat the solder paste a thickness: 100-150µm</p> | |
| | | |

3. Standard Soldering Conditions

(1) Soldering Methods

Use reflow soldering methods only.

Use standard soldering conditions when soldering Micro Chip Transformer.

In cases where several different parts are soldered, each having different soldering conditions, use those conditions requiring the least heat and minimum time.

Solder: Use Sn-3.0Ag-0.5Cu solder.

Flux:

- Use Rosin-based flux, (with converting chlorine content 0.06 to 0.1(wt%), but not highly acidic flux (with Halogen content exceeding 0.2(wt)% conversion to chlorine).
- Do not use water-soluble flux.


Continued on the following page. ↗

Microchip Transformer (Balun) (DX□ Series) Soldering and Mounting

Continued from the preceding page. ↘

(2) Soldering profile

●Reflow Soldering profile (Sn-3.0Ag-0.5Cu)

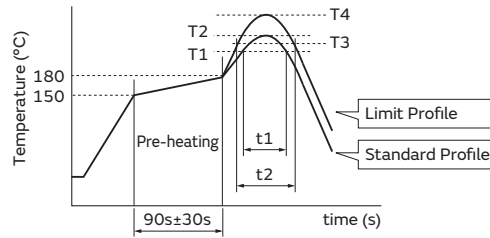

| Series | Standard Profile | | | | Limit Profile | | | |
|------------|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak temperature (T2) | Cycle of reflow | Heating | | Peak temperature (T4) | Cycle of reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| DXW | 220°C min. | 30 to 60s | 245±3°C | 2 times max. | 230°C min. | 60s max. | 260°C/10s | 2 times max. |

(3) Reworking with Solder Iron

The following conditions must be strictly followed when using a soldering iron.

Pre-heating : 150°C 60s min.

Soldering iron power output : 30W max.

Temperature of soldering iron tip / Soldering time :
 350°C max./3s max.


For additional methods of reworking with a soldering iron, please contact Murata engineering.

4. Cleaning

Do not clean.

Microchip Transformer (Balun) (DX□ Series) Packaging

Minimum Quantity and Dimensions of 8mm Width Embossed Tape

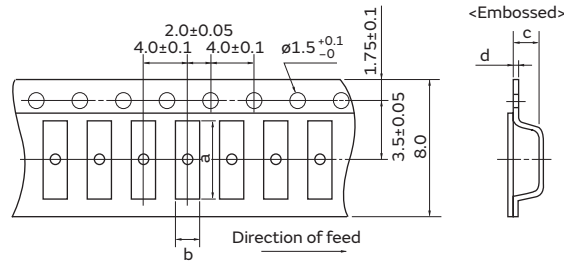

Dimension of the cavity is measured at the bottom side.

| Part Number | Dimensions | | | | Minimum Qty. (pcs.) | | |
|---------------|------------|------|------|------|---------------------|---------------|------|
| | | | | | ø180mm reel | ø330mm reel | Bulk |
| | a | b | c | d | Embossed Tape | Embossed Tape | |
| DXW21B | 2.25 | 1.45 | 1.40 | 0.30 | 2000 | 10000 | 500 |

(in mm)

SMD Type
Chip Ferrite Bead

SMD Type
Chip EMIFIL®

SMD Type
Chip Common Mode Choke Coil

SMD Type
Block Type EMIFIL®

Lead Type
EMI Suppression Filters

SMD Type
Microchip Transformer (Balun)

MEMO

Lined area for writing a memo.

Chip Ferrite Bead
SMD Type

Chip EMIFIL®
SMD Type

Chip Common Mode Choke Coil
SMD Type

Block Type EMIFIL®
SMD Type

EMI Suppression Filters
Lead Type

Microchip Transformer (Balun)
SMD Type

Product Guide p210

Inductors for Power Lines

Part Numbering p212
Product Detail p214
⚠Caution/Notice p304
Soldering and Mounting p308
Packaging p314

Inductors for General Circuits

Part Numbering p317
Product Detail p318
⚠Caution/Notice p327
Soldering and Mounting p329
Packaging p334

RF Inductors

Part Numbering p337
Product Detail p338
⚠Caution/Notice p386
Soldering and Mounting p388
Packaging p391

Product Guide

| Structure | Series | Applications | Size Code in inch (in mm) | Inductance Range | | Rated Current Range | |
|--|-----------------------|--------------|------------------------------|------------------|-------|---------------------|-------|
| | | | | Min. | Max. | Min. | Max. |
| Wire Wound Metal Alloy Core Type | DFE201612P_D | p214 | 0806 (2016) | 150nH | 2.2μH | 1.7A | 6.2A |
| | DFE252012P_D | p216 | 1008 (2520) | 330nH | 4.7μH | 1.9A | 6A |
| | DFEG7030D | p218 | 2726 (7066) | 1μH | 22μH | 2A | 9.1A |
| | DFEH7030D | p220 | 2726 (7066) | 1μH | 22μH | 2A | 9.1A |
| | DFEG10040D | p222 | 4339 (109100) | 1μH | 47μH | 2.9A | 18A |
| | DFEH10040D | p224 | 4339 (109100) | 1μH | 47μH | 2.9A | 18A |
| | DFEG12060D | p226 | 5150 (130126) | 1μH | 47μH | 3.6A | 20A |
| | DFEH12060D | p228 | 5150 (130126) | 1μH | 47μH | 3.6A | 20A |
| Wire Wound Ferrite Core Type | LQH2MPZ_GR | p230 | 0806 (2016) | 330nH | 82μH | 210mA | 2.2A |
| | LQH2HPZ_DR | p232 | 1008 (2520) | 470nH | 22μH | 270mA | 1.67A |
| | LQH2HPZ_GR | p234 | 1008 (2520) | 470nH | 22μH | 460mA | 2.9A |
| | LQH2HPZ_JR | p236 | 1008 (2520) | 470nH | 22μH | 540mA | 3.5A |
| | LQH32CH_23 | p238 | 1210 (3225) | 1μH | 22μH | 250mA | 800mA |
| | LQH32CH_33 | p239 | 1210 (3225) | 150nH | 10μH | 450mA | 1.45A |
| | LQH32CH_53 | p240 | 1210 (3225) | 1μH | 22μH | 250mA | 1A |
| | LQH32DZ_23 | p241 | 1210 (3225) | 1μH | 470μH | 60mA | 800mA |
| | LQH32DZ_53 | p242 | 1210 (3225) | 1μH | 100μH | 100mA | 1A |
| | LQH32PZ_NO | p243 | 1210 (3225) | 470nH | 120μH | 200mA | 3.4A |
| | LQH32PH_NO | p243 | 1210 (3225) | 470nH | 10μH | 750mA | 3.4A |
| | LQH32PZ_NC | p245 | 1210 (3225) | 470nH | 22μH | 650mA | 4.4A |
| | LQH32PH_NC | p245 | 1210 (3225) | 470nH | 22μH | 650mA | 4.4A |
| | LQH3NPZ_GR | p247 | 1212 (3030) | 470nH | 47μH | 460mA | 2.82A |
| | LQH3NPZ_JR | p249 | 1212 (3030) | 680nH | 47μH | 570mA | 2.86A |
| | LQH3NPZ_ME | p251 | 1212 (3030) | 1μH | 100μH | 430mA | 3A |
| | LQH44PZ_GR | p253 | 1515 (4040) | 680nH | 47μH | 410mA | 2.5A |
| | LQH43PZ_26 | p255 | 1812 (4532) | 1μH | 220μH | 240mA | 3.4A |
| | LQH43PH_26 | p255 | 1812 (4532) | 1μH | 220μH | 240mA | 3.4A |
| | LQH5BPZ_T0 | p257 | 2020 (5050) | 470nH | 22μH | 1.4A | 7.7A |
| | MBH6045C High Current | p259 | 2424 (6262) | 1.5μH | 220μH | 480mA | 6.3A |
| | MBH6045C Low Rdc | p261 | 2424 (6262) | 1μH | 470μH | 410mA | 4.4A |
| | MDH6045C High Current | p263 | 2524 (6360) | 1μH | 220μH | 440mA | 5.8A |
| | MDH6045C Low Rdc | p265 | 2524 (6360) | 1.2μH | 470μH | 340mA | 5.5A |
| | MBH7045C High Current | p267 | 2828 (7272) | 3.3μH | 220μH | 550mA | 3.4A |
| | MBH7045C Low Rdc | p269 | 2828 (7272) | 3.3μH | 1mH | 310mA | 3.5A |
| | MDH7045C | p271 | 2928 (7470) | 1μH | 470μH | 360mA | 8.8A |
| | MDH10060C | p273 | 4039 (101100) | 4.7μH | 470μH | 560mA | 5.9A |
| | MBH10145C | p275 | 4141 (104104) | 3.3μH | 1.5mH | 330mA | 4.9A |
| | MBH12282C | p277 | 4949 (125125) | 2μH | 1mH | 590mA | 13A |
| | MDH12577C | p279 | 5049 (128125) | 4.7μH | 470μH | 1A | 11A |
| | MBH12575C | p281 | 5050 (128128) | 2.7μH | 220μH | 1.2A | 10A |
| Multilayer Type | LQM18PZ_CH | p283 | 0603 (1608) | 1μH | 2.5μH | 750mA | 950mA |
| | LQM18PZ_DH | p285 | 0603 (1608) | 2.2μH | 2.2μH | 650mA | 650mA |
| | LQM18PZ_FH | p286 | 0603 (1608) | 2.2μH | 2.2μH | 700mA | 700mA |
| | LQM21PZ_CO | p287 | 0805 (2012) | 470nH | 2.2μH | 600mA | 1.1A |
| | LQM21PZ_GO | p289 | 0805 (2012) | 470nH | 3.3μH | 800mA | 1.3A |
| | LQM21PZ_GC | p291 | 0805 (2012) | 1μH | 2.2μH | 800mA | 900mA |
| | LQM21PH_GC | p291 | 0805 (2012) | 2.2μH | 2.2μH | 800mA | 800mA |
| | LQM21PZ_GR | p293 | 0805 (2012) | 1μH | 4.7μH | 800mA | 1.3A |
| | LQM2MPZ_GO | p295 | 0806 (2016) | 470nH | 4.7μH | 1.1A | 1.6A |
| | LQM2MPZ_JH | p297 | 0806 (2016) | 100nH | 100nH | 4A | 4A |
| | LQM2HPZ_EO | p298 | 1008 (2520) | 560nH | 560nH | 1.5A | 1.5A |
| | LQM2HPZ_GO | p299 | 1008 (2520) | 470nH | 4.7μH | 1.1A | 1.8A |
| | LQM2HPZ_GC | p301 | 1008 (2520) | 1μH | 4.7μH | 800mA | 1.5A |
| | LQM2HPZ_GS | p302 | 1008 (2520) | 2.2μH | 4.7μH | 1A | 1.1A |
| | LQM2HPZ_JO | p303 | 1008 (2520) | 1μH | 3.3μH | 1A | 1.5A |

Inductors for Power Lines

| | Structure | Series | Applications | Size Code in inch (in mm) | Inductance Range | | Rated Current Range | | |
|-----------------------------------|---|------------|--------------|-------------------------------|------------------|--|---------------------|-------|-------|
| | | | | | Min. | Max. | Min. | Max. | |
| RF Inductors | Multilayer Type | LQG15HZ_02 | p338 | Info-tainment | 0402 (1005) | 1nH | 270nH | 110mA | 1A |
| | | LQG15HH_02 | p338 | Info-tainment | 0402 (1005) | 1nH | 270nH | 110mA | 1A |
| | | LQG15WZ_02 | p341 | Info-tainment | 0402 (1005) | 0.7nH | 150nH | 110mA | 1.2A |
| | | LQG15WH_02 | p341 | Info-tainment | 0402 (1005) | 0.7nH | 150nH | 110mA | 1.2A |
| | | LQG18HH_00 | p347 | Info-tainment | 0603 (1608) | 1.2nH | 270nH | 200mA | 1.1A |
| | Film Type | LQP03TN_Z2 | p349 | Info-tainment | 0201 (0603) | 0.6nH | 120nH | 80mA | 850mA |
| | Wire Wound Non-Magnetic Core Type | LQW15AN_0Z | p353 | Info-tainment | 0402 (1005) | 1.5nH | 120nH | 110mA | 1A |
| | | LQW15AN_1Z | p359 | Info-tainment | 0402 (1005) | 1.3nH | 8.4nH | 640mA | 1.2A |
| | | LQW15AN_8Z | p361 | Info-tainment | 0402 (1005) | 1.3nH | 75nH | 320mA | 3.15A |
| | | LQW18AN_0Z | p368 | Info-tainment | 0603 (1608) | 2.2nH | 470nH | 75mA | 850mA |
| | | LQW18AN_1Z | p371 | Info-tainment | 0603 (1608) | 2.2nH | 33nH | 550mA | 1.4A |
| | | LQW18AN_8Z | p372 | Info-tainment | 0603 (1608) | 2.2nH | 390nH | 190mA | 3.2A |
| | | LQW18AS_0Z | p376 | Info-tainment | 0603 (1608) | 1.6nH | 390nH | 100mA | 700mA |
| | Wire Wound Ferrite Core Type | LQW15CN_0Z | p379 | Info-tainment | 0402 (1005) | 18nH | 200nH | 390mA | 1.4A |
| | | LQW15CN_1Z | p381 | Info-tainment | 0402 (1005) | 20nH | 560nH | 300mA | 2.2A |
| | | LQW18CN_0Z | p383 | Info-tainment | 0603 (1608) | 4.9nH | 650nH | 430mA | 2.6A |
| | | LQH31HZ_03 | p385 | Info-tainment | 1206 (3216) | 54nH | 880nH | 180mA | 920mA |
| Inductors for General Circuits | Wire Wound Ferrite Core Type | LQH32NZ_23 | p318 | Info-tainment | 1210 (3225) | 1μH | 470μH | 45mA | 445mA |
| | | LQH32NH_23 | p318 | Info-tainment | 1210 (3225) | 1μH | 560μH | 40mA | 780mA |
| | | LQH43NZ_03 | p320 | Info-tainment | 1812 (4532) | 1μH | 2.4mH | 25mA | 500mA |
| | | HEAWS | p323 | Info-tainment | 4241 (107104) | 10μH | 10μH | 5A | 5A |
| | | HEAW | p324 | Info-tainment | 5551 (140130) | 10μH | 10μH | 7.2A | 7.2A |
| | | 5CCEG | p325 | Info-tainment | 2222 (5656) | Please refer to the product detail page. | | | |
| | | FSDVA | p326 | Info-tainment | 2323 (5858) | | | | |

● Part Numbering

Inductors for Power Lines for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|---|---|-----|---|---|---|---|
| LQ | M | 21 | P | Z | R54 | M | G | 0 | D |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|-----------------------------|
| LQ | Chip Inductors (Chip Coils) |

② Structure

| Code | Structure |
|------|--------------------------------|
| H | Wire Wound Type (Ferrite Core) |
| M | Multilayer Type (Ferrite Core) |
| W | Wire Wound Type (Ferrite Core) |

③ Dimensions (LxW)

| Code | Nominal Dimensions (LxW) | Size Code (in inch) |
|------|--------------------------|---------------------|
| 18 | 1.6x0.8mm | 0603 |
| 21 | 2.0x1.25mm | 0805 |
| 2M | 2.0x1.6mm | 0806 |
| 2H | 2.5x2.0mm | 1008 |
| 3N | 3.0x3.0mm | 1212 |
| 32 | 3.2x2.5mm | 1210 |
| 43 | 4.5x3.2mm | 1812 |
| 44 | 4.0x4.0mm | 1515 |
| 5B | 5.0x5.0mm | 2020 |

④ Applications and Characteristics

| Code | Series | Applications and Characteristics |
|------|---------|----------------------------------|
| D | LQH | for Choke |
| C | | for Choke (Coating Type) |
| P | LQM/LQH | for Power Line |
| F | LQW | for Choke |

⑤ Category

| Code | Series | Category | |
|------|---------|---------------|-------------------|
| Z | LQH/LQM | Automotive | Infotainment |
| H | | | Powertrain/Safety |
| T | LQW | Standard Type | |

⑥ Inductance

Expressed by three-digit alphanumerics. The unit is micro-henry (μH). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures. If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits. If inductance is less than $0.1\mu\text{H}$, the inductance code is expressed by a combination of two figures and the capital letter "N," and the unit of inductance is nano-henry (nH). The capital letter "N" indicates the unit of "nH," and also expresses a decimal point. In this case, all figures are significant digits. For those products whose inductance values are specified using three designated digits, these values may be indicated using the closest two digits instead.

⑦ Inductance Tolerance

| Code | Inductance Tolerance |
|------|----------------------|
| K | $\pm 10\%$ |
| M | $\pm 20\%$ |
| N | $\pm 30\%$ |

⑧ Features (Except for LQH□□P/LQM□□P)

| Code | Features | Series |
|------|-------------------|------------|
| 0 | Standard Type | LQW |
| 2 | Standard Type | LQH32C/32D |
| 3 | Low DC Resistance | |
| 5 | Low Profile Type | |

⑨ Thickness

(LQH□□P/LQM□□P Only • Except for LQH43P)

| Code | Nominal Dimensions (T) |
|------|------------------------|
| C | 0.5mm |
| D | 0.6mm |
| E | 0.7mm |
| F | 0.8mm |
| G | 0.9mm |
| J | 1.1mm |
| M | 1.4mm |
| N | 1.55mm |
| T | 2.0mm |

⑩ Electrode (Except for LQH□□P/LQM□□P)

•Lead (Pb) Free

| Code | Electrode | Series |
|------|------------------------------|--------|
| 0 | Sn | LQM |
| 3 | LF Solder | LQH |
| H | Automotive Powertrain/Safety | LQW |

⑪ Specification

(LQH□□P/LQM□□P Only • Except for LQH43P)

| Code | Specification |
|------|--|
| 0/S | Standard Type |
| C | Good Bias Current Characteristics Type |
| H/E | High Spec Type (Low DC Resistance; Good Bias Current Characteristics Type) |
| R | Low DC Resistance Type |

Continued on the following page. ↗

Continued from the preceding page. ↘

⑨ Thickness (LQH43P Only)

| Code | Dimensions (T) |
|------|----------------|
| 26 | 2.6mm |


⑩ Packaging

| Code | Packaging |
|------|-------------------------------|
| K | Embossed Taping (ø330mm Reel) |
| L | Embossed Taping (ø180mm Reel) |
| B | Bulk |
| D | Paper Taping (ø180mm Reel) |

Inductors for Power Lines

DFE201612P_D Series 0806 (2016) inch (mm)

Appearance/Dimensions

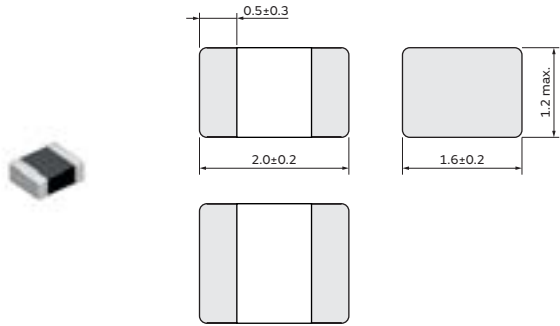

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P2 | ø180mm Embossed Taping | 3000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|-------------------|-------------------|-------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| DFE201612PD-R15M□ | — | 0.15μH ±20% | 1MHz | 6200mA | 5200mA | 0.018Ω |
| DFE201612PD-R24M□ | — | 0.24μH ±20% | 1MHz | 5000mA | 4000mA | 0.022Ω |
| DFE201612PD-R33M□ | — | 0.33μH ±20% | 1MHz | 4500mA | 3800mA | 0.026Ω |
| DFE201612PD-R47M□ | — | 0.47μH ±20% | 1MHz | 3800mA | 3200mA | 0.032Ω |
| DFE201612PD-R68M□ | — | 0.68μH ±20% | 1MHz | 3100mA | 2500mA | 0.046Ω |
| DFE201612PD-1R0M□ | — | 1.0μH ±20% | 1MHz | 2700mA | 2200mA | 0.060Ω |
| DFE201612PD-1R5M□ | — | 1.5μH ±20% | 1MHz | 2000mA | 1700mA | 0.098Ω |
| DFE201612PD-2R2M□ | — | 2.2μH ±20% | 1MHz | 1700mA | 1200mA | 0.172Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Absolute maximum voltage: 10V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 30%. (The ambient reference temperature is 20°C.)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 20°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)

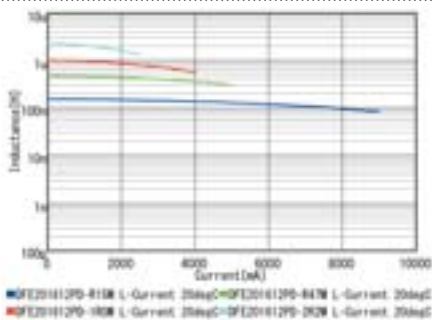

Temperature Rise Characteristics (Typ.)

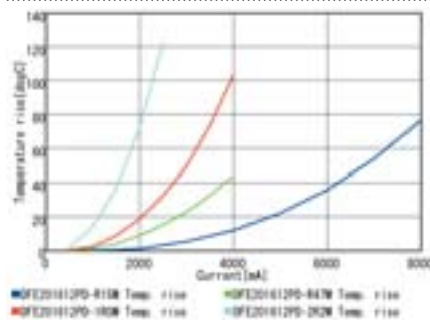

Inductance-Frequency Characteristics (Typ.)

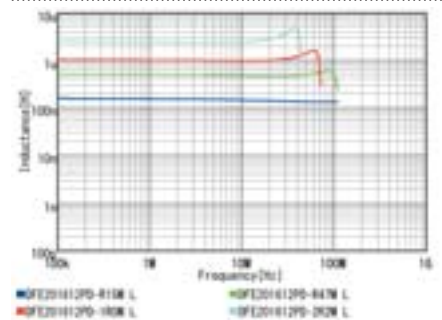


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

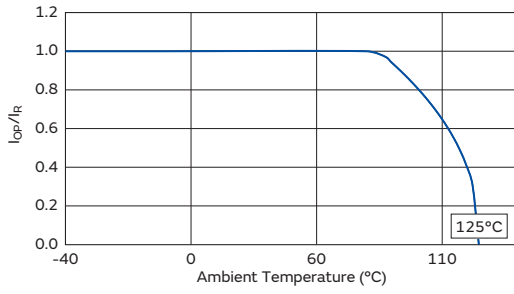

Inductors for Power Lines

DFE252012P_D Series 1008 (2520) inch (mm)

Appearance/Dimensions

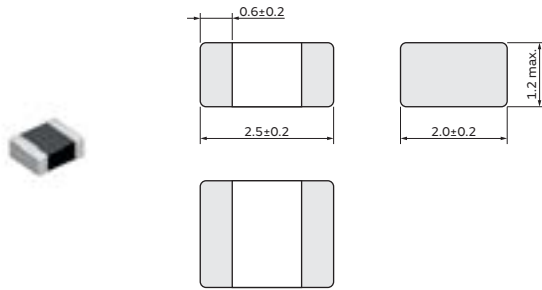

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P2 | ø180mm Embossed Taping | 3000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|-------------------|-------------------|-------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| DFE252012PD-R33M□ | — | 0.33μH ±20% | 1MHz | 6000mA | 4600mA | 0.023Ω |
| DFE252012PD-R47M□ | — | 0.47μH ±20% | 1MHz | 5200mA | 4000mA | 0.027Ω |
| DFE252012PD-R68M□ | — | 0.68μH ±20% | 1MHz | 4300mA | 3500mA | 0.037Ω |
| DFE252012PD-1R0M□ | — | 1.0μH ±20% | 1MHz | 3800mA | 3200mA | 0.042Ω |
| DFE252012PD-1R5M□ | — | 1.5μH ±20% | 1MHz | 3300mA | 2600mA | 0.060Ω |
| DFE252012PD-2R2M□ | — | 2.2μH ±20% | 1MHz | 2800mA | 2200mA | 0.084Ω |
| DFE252012PD-3R3M□ | — | 3.3μH ±20% | 1MHz | 2100mA | 1700mA | 0.140Ω |
| DFE252012PD-4R7M□ | — | 4.7μH ±20% | 1MHz | 1900mA | 1400mA | 0.200Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Absolute maximum voltage: 20V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 30%. (The ambient reference temperature is 20°C.)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 20°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)

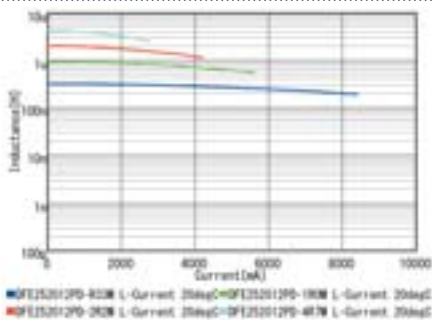

Temperature Rise Characteristics (Typ.)

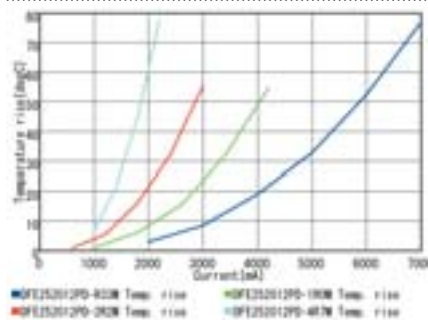

Inductance-Frequency Characteristics (Typ.)

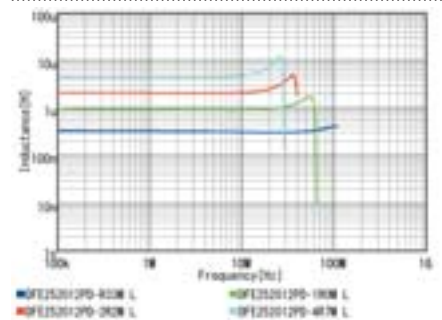


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

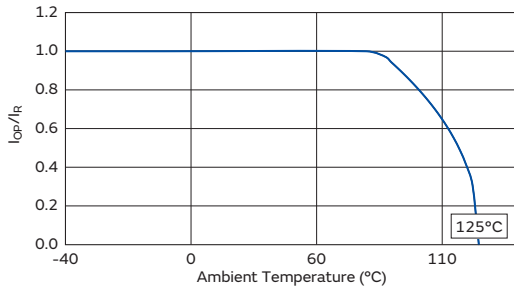

Inductors for Power Lines

DFEG7030D Series 2726 (7066) inch (mm)

Appearance/Dimensions

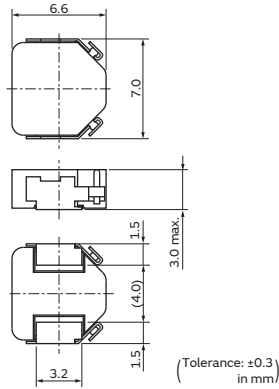

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (I _{sat})* | Rated Current (I _{temp})* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|------------------------------------|-------------------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | DFEG7030D-1R0M□ | 1.0μH ±20% | 0.1MHz | 9000mA | 9100mA | 0.0099Ω |
| — | DFEG7030D-1R5M□ | 1.5μH ±20% | 0.1MHz | 7300mA | 7600mA | 0.0150Ω |
| — | DFEG7030D-2R2M□ | 2.2μH ±20% | 0.1MHz | 6900mA | 7100mA | 0.0180Ω |
| — | DFEG7030D-3R3M□ | 3.3μH ±20% | 0.1MHz | 5300mA | 5400mA | 0.0290Ω |
| — | DFEG7030D-4R7M□ | 4.7μH ±20% | 0.1MHz | 4200mA | 4200mA | 0.0410Ω |
| — | DFEG7030D-5R6M□ | 5.6μH ±20% | 0.1MHz | 4100mA | 3800mA | 0.0540Ω |
| — | DFEG7030D-6R8M□ | 6.8μH ±20% | 0.1MHz | 3900mA | 3500mA | 0.0590Ω |
| — | DFEG7030D-8R2M□ | 8.2μH ±20% | 0.1MHz | 3200mA | 3100mA | 0.0780Ω |
| — | DFEG7030D-100M□ | 10μH ±20% | 0.1MHz | 3200mA | 3000mA | 0.0820Ω |
| — | DFEG7030D-150M□ | 15μH ±20% | 0.1MHz | 2400mA | 2200mA | 0.1470Ω |
| — | DFEG7030D-220M□ | 22μH ±20% | 0.1MHz | 2000mA | 1900mA | 0.1980Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Absolute maximum voltage: 50V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*I_{sat}: Rated Current based on Inductance change


*I_{temp}: Rated Current based on Temperature rise

Rated current (I_{sat}) is specified when the decrease of the initial inductance value at 20%. (The ambient reference temperature is 25°C.)


Rated current (I_{temp}) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)

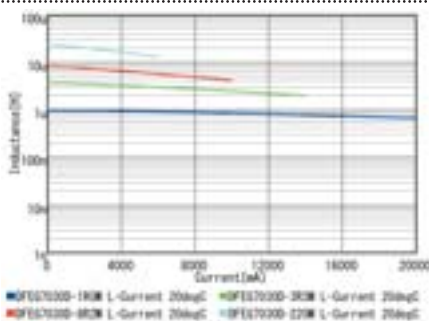

Temperature Rise Characteristics (Typ.)

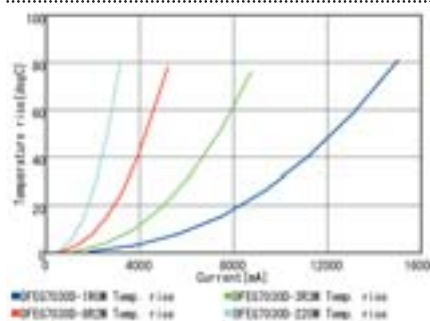

Inductance-Frequency Characteristics (Typ.)

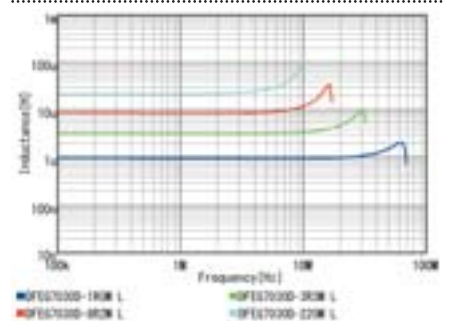


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

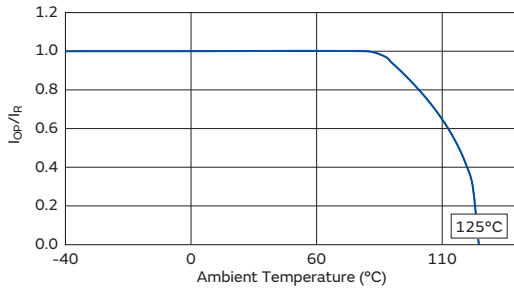

Inductors for Power Lines

DFEH7030D Series 2726 (7066) inch (mm)

Appearance/Dimensions

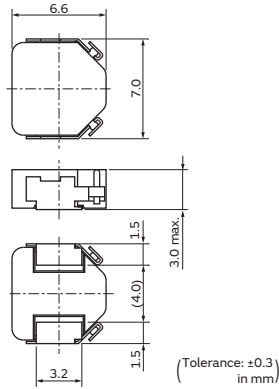

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (I _{sat})* | Rated Current (I _{temp})* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|------------------------------------|-------------------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | DFEH7030D-1R0M□ | 1.0μH ±20% | 0.1MHz | 9000mA | 9100mA | 0.0099Ω |
| — | DFEH7030D-1R5M□ | 1.5μH ±20% | 0.1MHz | 7300mA | 7600mA | 0.0150Ω |
| — | DFEH7030D-2R2M□ | 2.2μH ±20% | 0.1MHz | 6900mA | 7100mA | 0.0180Ω |
| — | DFEH7030D-3R3M□ | 3.3μH ±20% | 0.1MHz | 5300mA | 5400mA | 0.0290Ω |
| — | DFEH7030D-4R7M□ | 4.7μH ±20% | 0.1MHz | 4200mA | 4200mA | 0.0410Ω |
| — | DFEH7030D-5R6M□ | 5.6μH ±20% | 0.1MHz | 4100mA | 3800mA | 0.0540Ω |
| — | DFEH7030D-6R8M□ | 6.8μH ±20% | 0.1MHz | 3900mA | 3500mA | 0.0590Ω |
| — | DFEH7030D-8R2M□ | 8.2μH ±20% | 0.1MHz | 3200mA | 3100mA | 0.0780Ω |
| — | DFEH7030D-100M□ | 10μH ±20% | 0.1MHz | 3200mA | 3000mA | 0.0820Ω |
| — | DFEH7030D-150M□ | 15μH ±20% | 0.1MHz | 2400mA | 2200mA | 0.1470Ω |
| — | DFEH7030D-220M□ | 22μH ±20% | 0.1MHz | 2000mA | 1900mA | 0.1980Ω |

Operating temp.range (Self-temp.rise included): -40 to 155°C

Absolute maximum voltage: 50V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*I_{sat}: Rated Current based on Inductance change


*I_{temp}: Rated Current based on Temperature rise

Rated current (I_{sat}) is specified when the decrease of the initial inductance value at 20%. (The ambient reference temperature is 25°C.)


Rated current (I_{temp}) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)

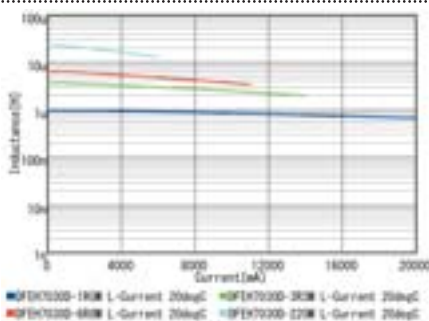

Temperature Rise Characteristics (Typ.)

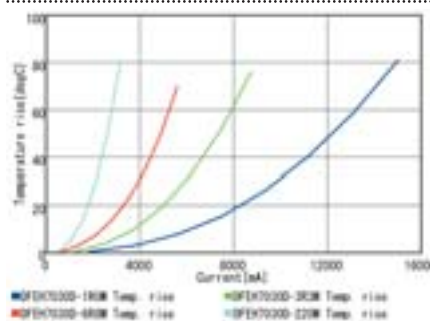

Inductance-Frequency Characteristics (Typ.)

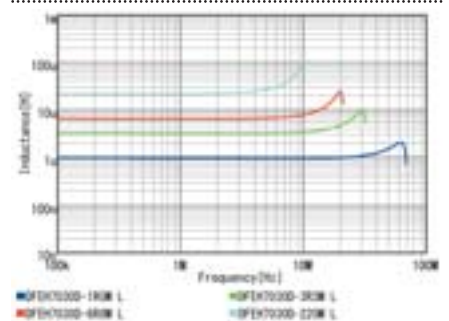


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

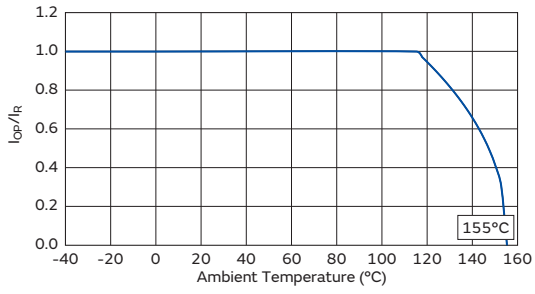

Inductors for Power Lines

DFEG10040D Series 4339 (109100) inch (mm)

Appearance/Dimensions

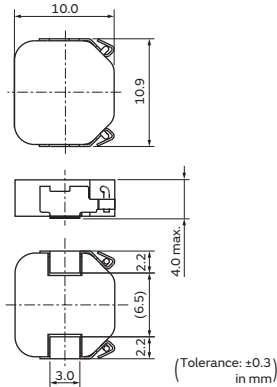

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | DFEG10040D-1R0M□ | 1.0μH ±20% | 0.1MHz | 18000mA | 17000mA | 0.0035Ω |
| — | DFEG10040D-1R5M□ | 1.5μH ±20% | 0.1MHz | 14000mA | 14000mA | 0.0050Ω |
| — | DFEG10040D-2R2M□ | 2.2μH ±20% | 0.1MHz | 11000mA | 12000mA | 0.0075Ω |
| — | DFEG10040D-3R3M□ | 3.3μH ±20% | 0.1MHz | 10000mA | 10000mA | 0.0120Ω |
| — | DFEG10040D-4R7M□ | 4.7μH ±20% | 0.1MHz | 7300mA | 8800mA | 0.0160Ω |
| — | DFEG10040D-5R6M□ | 5.6μH ±20% | 0.1MHz | 6900mA | 8000mA | 0.0180Ω |
| — | DFEG10040D-6R8M□ | 6.8μH ±20% | 0.1MHz | 6500mA | 6400mA | 0.0230Ω |
| — | DFEG10040D-8R2M□ | 8.2μH ±20% | 0.1MHz | 5600mA | 5900mA | 0.0290Ω |
| — | DFEG10040D-100M□ | 10μH ±20% | 0.1MHz | 5500mA | 5700mA | 0.0330Ω |
| — | DFEG10040D-150M□ | 15μH ±20% | 0.1MHz | 4400mA | 5200mA | 0.0470Ω |
| — | DFEG10040D-220M□ | 22μH ±20% | 0.1MHz | 4000mA | 3800mA | 0.0700Ω |
| — | DFEG10040D-330M□ | 33μH ±20% | 0.1MHz | 3000mA | 3300mA | 0.1070Ω |
| — | DFEG10040D-470M□ | 47μH ±20% | 0.1MHz | 2900mA | 2500mA | 0.1640Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Absolute maximum voltage: 50V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 20%. (The ambient reference temperature is 25°C.)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)



Temperature Rise Characteristics (Typ.)

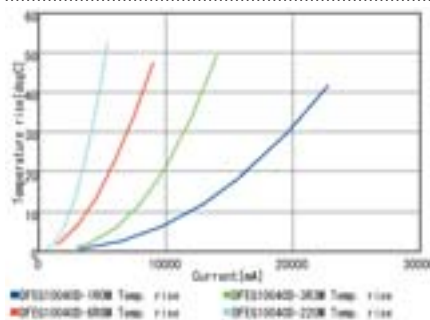

Inductance-Frequency Characteristics (Typ.)

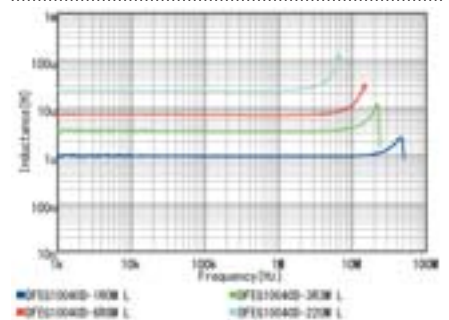


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

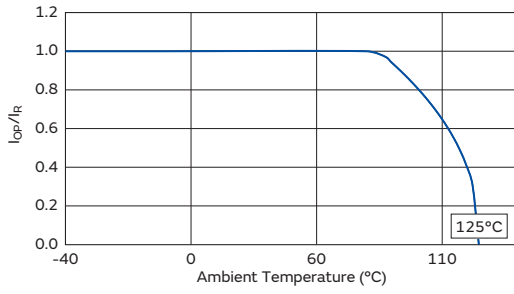

Inductors for Power Lines

DFEH10040D Series 4339 (109100) inch (mm)

Appearance/Dimensions

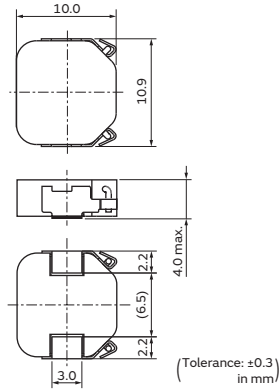

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | DFEH10040D-1R0M□ | 1.0μH ±20% | 0.1MHz | 18000mA | 17000mA | 0.0035Ω |
| — | DFEH10040D-1R5M□ | 1.5μH ±20% | 0.1MHz | 14000mA | 14000mA | 0.0050Ω |
| — | DFEH10040D-2R2M□ | 2.2μH ±20% | 0.1MHz | 11000mA | 12000mA | 0.0075Ω |
| — | DFEH10040D-3R3M□ | 3.3μH ±20% | 0.1MHz | 10000mA | 10000mA | 0.0120Ω |
| — | DFEH10040D-4R7M□ | 4.7μH ±20% | 0.1MHz | 7300mA | 8800mA | 0.0160Ω |
| — | DFEH10040D-5R6M□ | 5.6μH ±20% | 0.1MHz | 6900mA | 8000mA | 0.0180Ω |
| — | DFEH10040D-6R8M□ | 6.8μH ±20% | 0.1MHz | 6500mA | 6400mA | 0.0230Ω |
| — | DFEH10040D-8R2M□ | 8.2μH ±20% | 0.1MHz | 5600mA | 5900mA | 0.0290Ω |
| — | DFEH10040D-100M□ | 10μH ±20% | 0.1MHz | 5500mA | 5700mA | 0.0330Ω |
| — | DFEH10040D-150M□ | 15μH ±20% | 0.1MHz | 4400mA | 5200mA | 0.0470Ω |
| — | DFEH10040D-220M□ | 22μH ±20% | 0.1MHz | 4000mA | 3800mA | 0.0700Ω |
| — | DFEH10040D-330M□ | 33μH ±20% | 0.1MHz | 3000mA | 3300mA | 0.1070Ω |
| — | DFEH10040D-470M□ | 47μH ±20% | 0.1MHz | 2900mA | 2500mA | 0.1640Ω |

Operating temp.range (Self-temp.rise included): -40 to 155°C

Absolute maximum voltage: 50V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 20%. (The ambient reference temperature is 25°C.)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)



Temperature Rise Characteristics (Typ.)

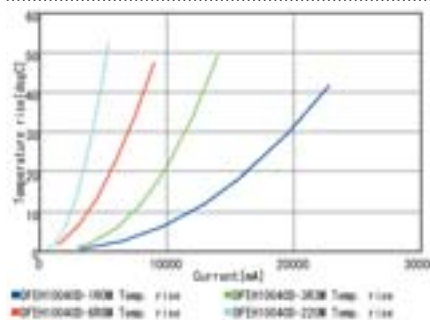

Inductance-Frequency Characteristics (Typ.)

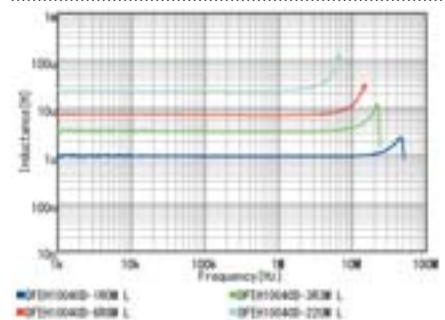


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

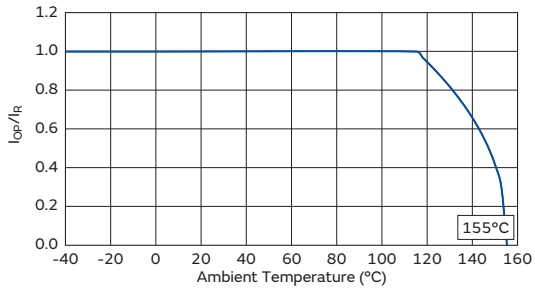

Inductors for Power Lines

DFEG12060D Series 5150 (130126) inch (mm)

Appearance/Dimensions

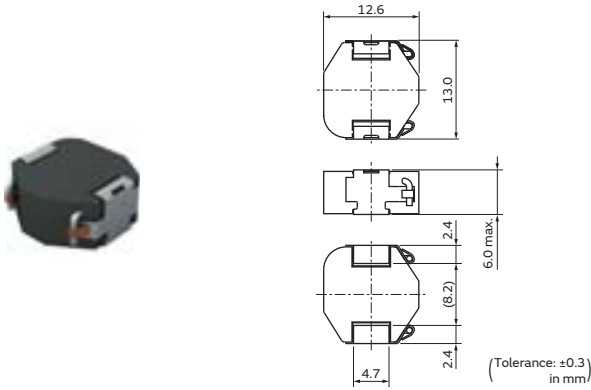

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | DFEG12060D-1R0M□ | 1.0μH ±20% | 0.1MHz | 19000mA | 20000mA | 0.0029Ω |
| — | DFEG12060D-1R5M□ | 1.5μH ±20% | 0.1MHz | 17000mA | 17000mA | 0.0036Ω |
| — | DFEG12060D-2R2M□ | 2.2μH ±20% | 0.1MHz | 16000mA | 16000mA | 0.0044Ω |
| — | DFEG12060D-3R3M□ | 3.3μH ±20% | 0.1MHz | 14000mA | 13000mA | 0.0063Ω |
| — | DFEG12060D-4R7M□ | 4.7μH ±20% | 0.1MHz | 11000mA | 10000mA | 0.0110Ω |
| — | DFEG12060D-5R6M□ | 5.6μH ±20% | 0.1MHz | 10000mA | 10000mA | 0.0110Ω |
| — | DFEG12060D-6R8M□ | 6.8μH ±20% | 0.1MHz | 8300mA | 9000mA | 0.0140Ω |
| — | DFEG12060D-8R2M□ | 8.2μH ±20% | 0.1MHz | 8300mA | 8000mA | 0.0170Ω |
| — | DFEG12060D-100M□ | 10μH ±20% | 0.1MHz | 6600mA | 7900mA | 0.0200Ω |
| — | DFEG12060D-150M□ | 15μH ±20% | 0.1MHz | 5600mA | 6600mA | 0.0280Ω |
| — | DFEG12060D-220M□ | 22μH ±20% | 0.1MHz | 4900mA | 6000mA | 0.0350Ω |
| — | DFEG12060D-330M□ | 33μH ±20% | 0.1MHz | 3400mA | 4200mA | 0.0540Ω |
| — | DFEG12060D-470M□ | 47μH ±20% | 0.1MHz | 3000mA | 3600mA | 0.0790Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Absolute maximum voltage: 50V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 20%. (The ambient reference temperature is 25°C.)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)



Temperature Rise Characteristics (Typ.)

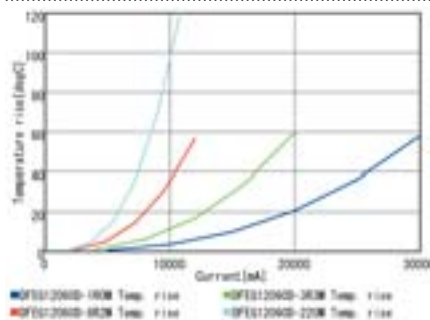

Inductance-Frequency Characteristics (Typ.)

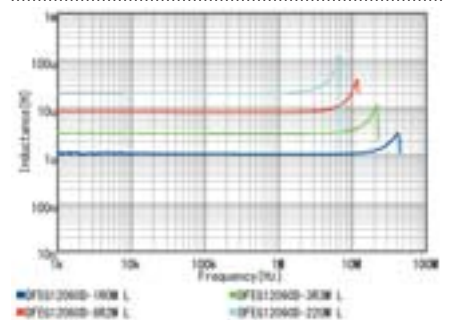


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

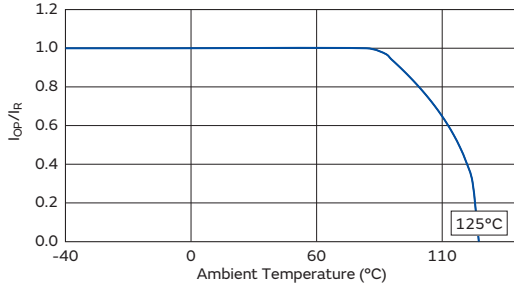

Inductors for Power Lines

DFEH12060D Series 5150 (130126) inch (mm)

Appearance/Dimensions

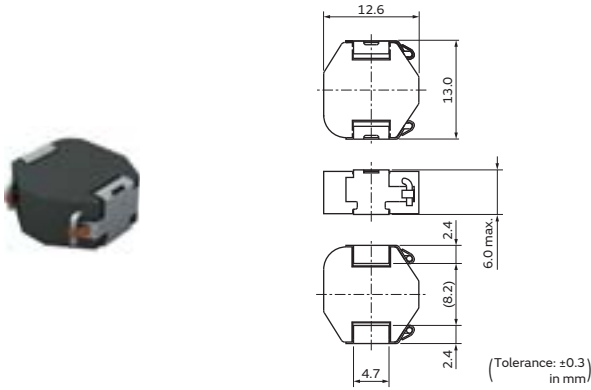

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | DFEH12060D-1R0M□ | 1.0μH ±20% | 0.1MHz | 19000mA | 20000mA | 0.0029Ω |
| — | DFEH12060D-1R5M□ | 1.5μH ±20% | 0.1MHz | 17000mA | 17000mA | 0.0036Ω |
| — | DFEH12060D-2R2M□ | 2.2μH ±20% | 0.1MHz | 16000mA | 16000mA | 0.0044Ω |
| — | DFEH12060D-3R3M□ | 3.3μH ±20% | 0.1MHz | 14000mA | 13000mA | 0.0063Ω |
| — | DFEH12060D-4R7M□ | 4.7μH ±20% | 0.1MHz | 11000mA | 10000mA | 0.0110Ω |
| — | DFEH12060D-5R6M□ | 5.6μH ±20% | 0.1MHz | 10000mA | 10000mA | 0.0110Ω |
| — | DFEH12060D-6R8M□ | 6.8μH ±20% | 0.1MHz | 8300mA | 9000mA | 0.0140Ω |
| — | DFEH12060D-8R2M□ | 8.2μH ±20% | 0.1MHz | 8300mA | 8000mA | 0.0170Ω |
| — | DFEH12060D-100M□ | 10μH ±20% | 0.1MHz | 6600mA | 7900mA | 0.0200Ω |
| — | DFEH12060D-150M□ | 15μH ±20% | 0.1MHz | 5600mA | 6600mA | 0.0280Ω |
| — | DFEH12060D-220M□ | 22μH ±20% | 0.1MHz | 4900mA | 6000mA | 0.0350Ω |
| — | DFEH12060D-330M□ | 33μH ±20% | 0.1MHz | 3400mA | 4200mA | 0.0540Ω |
| — | DFEH12060D-470M□ | 47μH ±20% | 0.1MHz | 3000mA | 3600mA | 0.0790Ω |

Operating temp.range (Self-temp.rise included): -40 to 155°C

Absolute maximum voltage: 50V DC

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Resistance Hitester 3541 (HIOKI) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 20%. (The ambient reference temperature is 25°C.)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C.)

Class of Magnetic Shield: Metal Alloy


Inductance-Current Characteristics (Typ.)

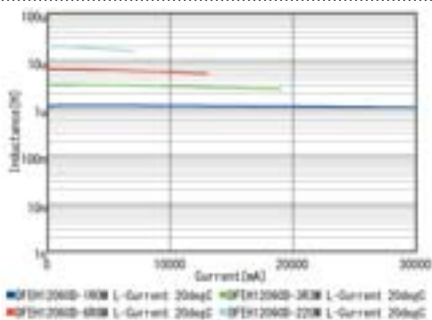

Temperature Rise Characteristics (Typ.)

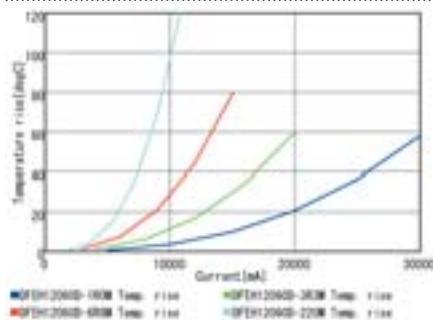

Inductance-Frequency Characteristics (Typ.)

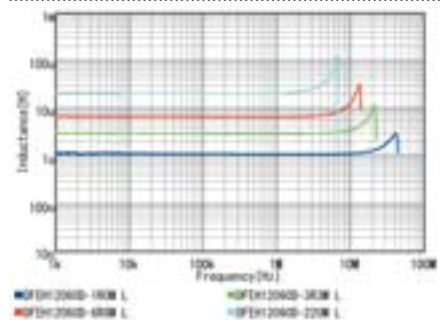


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

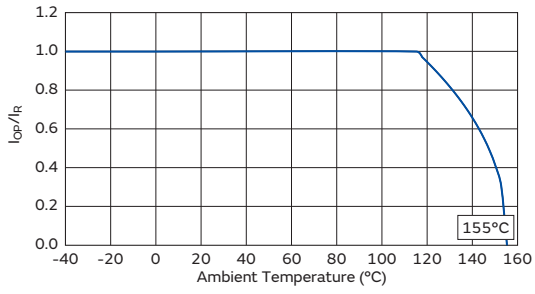

Inductors for Power Lines

LQH2MPZ_GR Series 0806 (2016) inch (mm)

Appearance/Dimensions

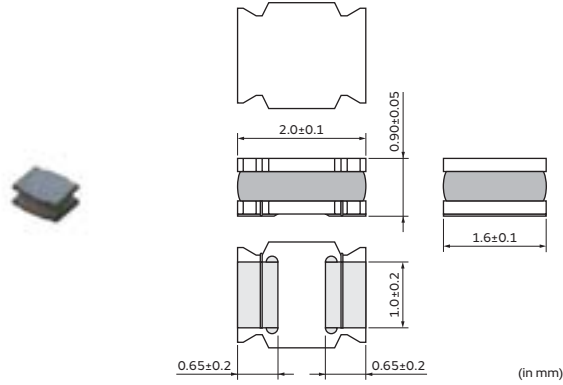

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|--|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH2MPZR33NGR□ | — | 0.33µH ±30% | 1MHz | 2200mA | 1130mA(Ambient temp.85°C) 670mA(Ambient temp.105°C) | 0.15Ω±20% | 130MHz |
| LQH2MPZR47NGR□ | — | 0.47µH ±30% | 1MHz | 1950mA | 1060mA(Ambient temp.85°C) 630mA(Ambient temp.105°C) | 0.18Ω±20% | 120MHz |
| LQH2MPZ1R0NGR□ | — | 1.0µH ±30% | 1MHz | 1550mA | 900mA(Ambient temp.85°C) 540mA(Ambient temp.105°C) | 0.25Ω±20% | 100MHz |
| LQH2MPZ1R5NGR□ | — | 1.5µH ±30% | 1MHz | 1330mA | 790mA(Ambient temp.85°C) 470mA(Ambient temp.105°C) | 0.32Ω±20% | 60MHz |
| LQH2MPZ2R2MGR□ | — | 2.2µH ±20% | 1MHz | 1180mA | 680mA(Ambient temp.85°C) 400mA(Ambient temp.105°C) | 0.39Ω±20% | 50MHz |
| LQH2MPZ3R3MGR□ | — | 3.3µH ±20% | 1MHz | 1020mA | 640mA(Ambient temp.85°C) 380mA(Ambient temp.105°C) | 0.47Ω±20% | 45MHz |
| LQH2MPZ4R7MGR□ | — | 4.7µH ±20% | 1MHz | 870mA | 580mA(Ambient temp.85°C) 340mA(Ambient temp.105°C) | 0.60Ω±20% | 40MHz |
| LQH2MPZ6R8MGR□ | — | 6.8µH ±20% | 1MHz | 730mA | 530mA(Ambient temp.85°C) 310mA(Ambient temp.105°C) | 0.72Ω±20% | 35MHz |
| LQH2MPZ100MGR□ | — | 10µH ±20% | 1MHz | 610mA | 480mA(Ambient temp.85°C) 280mA(Ambient temp.105°C) | 0.88Ω±20% | 30MHz |
| LQH2MPZ150MGR□ | — | 15µH ±20% | 1MHz | 490mA | 340mA(Ambient temp.85°C) 200mA(Ambient temp.105°C) | 1.7Ω±20% | 25MHz |
| LQH2MPZ220MGR□ | — | 22µH ±20% | 1MHz | 410mA | 290mA(Ambient temp.85°C) 170mA(Ambient temp.105°C) | 2.1Ω±20% | 20MHz |
| LQH2MPZ330MGR□ | — | 33µH ±20% | 1MHz | 310mA | 200mA(Ambient temp.85°C) 120mA(Ambient temp.105°C) | 4.3Ω±20% | 15MHz |
| LQH2MPZ470MGR□ | — | 47µH ±20% | 1MHz | 270mA | 180mA(Ambient temp.85°C) 110mA(Ambient temp.105°C) | 5.3Ω±20% | 10MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Ferrite Core

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

*S.R.F.: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85-105°C).

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH2MPZ680MGR□ | — | 68μH ±20% | 1MHz | 230mA | 160mA(Ambient temp.85°C) 100mA(Ambient temp.105°C) | 6.7Ω±20% | 7MHz |
| LQH2MPZ820MGR□ | — | 82μH ±20% | 1MHz | 210mA | 150mA(Ambient temp.85°C) 90mA(Ambient temp.105°C) | 7.3Ω±20% | 5MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C
 Operating temp.range (Self-temp.rise not included): -40 to 105°C
 Class of Magnetic Shield: Ferrite Core

Only for reflow soldering


*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85-105°C).


Inductance-Frequency Characteristics (Typ.)

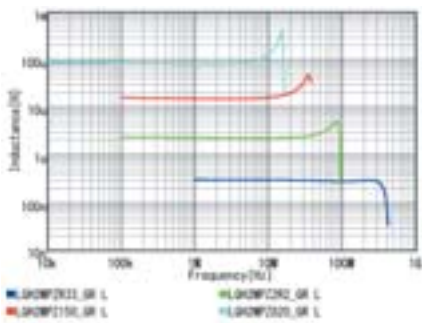

Inductance-Current Characteristics (Typ.)

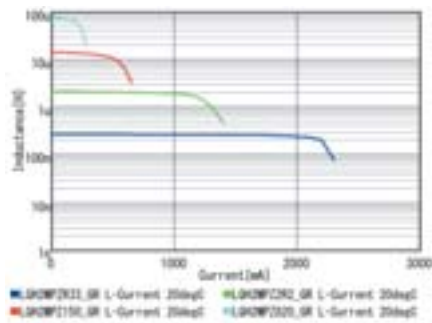


Temperature Rise Characteristics (Typ.)

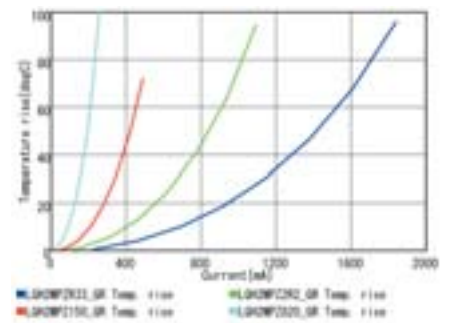

Inductors for Power Lines

LQH2HPZ_DR Series 1008 (2520) inch (mm)

Appearance/Dimensions

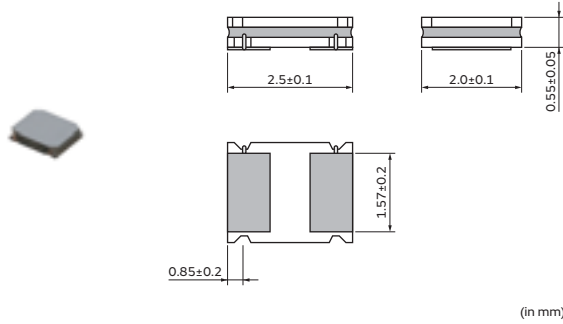

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 4000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH2HPZR47MDR□ | — | 0.47µH ±20% | 1MHz | 1670mA | 1250mA(Ambient temp.85°C) 750mA(Ambient temp.105°C) | 0.14Ω±20% | 120MHz |
| LQH2HPZ1R0MDR□ | — | 1.0µH ±20% | 1MHz | 1370mA | 960mA(Ambient temp.85°C) 580mA(Ambient temp.105°C) | 0.24Ω±20% | 100MHz |
| LQH2HPZ1R5MDR□ | — | 1.5µH ±20% | 1MHz | 1120mA | 900mA(Ambient temp.85°C) 540mA(Ambient temp.105°C) | 0.29Ω±20% | 60MHz |
| LQH2HPZ2R2MDR□ | — | 2.2µH ±20% | 1MHz | 850mA | 820mA(Ambient temp.85°C) 500mA(Ambient temp.105°C) | 0.34Ω±20% | 50MHz |
| LQH2HPZ3R3MDR□ | — | 3.3µH ±20% | 1MHz | 750mA | 730mA(Ambient temp.85°C) 440mA(Ambient temp.105°C) | 0.45Ω±20% | 45MHz |
| LQH2HPZ4R7MDR□ | — | 4.7µH ±20% | 1MHz | 650mA | 650mA(Ambient temp.85°C) 390mA(Ambient temp.105°C) | 0.56Ω±20% | 40MHz |
| LQH2HPZ6R8MDR□ | — | 6.8µH ±20% | 1MHz | 550mA | 490mA(Ambient temp.85°C) 300mA(Ambient temp.105°C) | 1.0Ω±20% | 35MHz |
| LQH2HPZ100MDR□ | — | 10µH ±20% | 1MHz | 420mA | 430mA(Ambient temp.85°C) 260mA(Ambient temp.105°C) | 1.2Ω±20% | 30MHz |
| LQH2HPZ150MDR□ | — | 15µH ±20% | 1MHz | 340mA | 290mA(Ambient temp.85°C) 180mA(Ambient temp.105°C) | 2.5Ω±20% | 25MHz |
| LQH2HPZ220MDR□ | — | 22µH ±20% | 1MHz | 260mA | 270mA(Ambient temp.85°C) 170mA(Ambient temp.105°C) | 3.0Ω±20% | 20MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C
 Operating temp.range (Self-temp.rise not included): -40 to 105°C
 Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85-105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

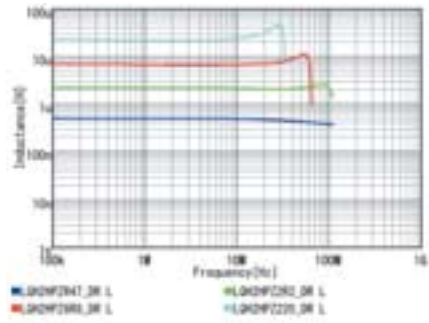

Inductance-Current Characteristics (Typ.)

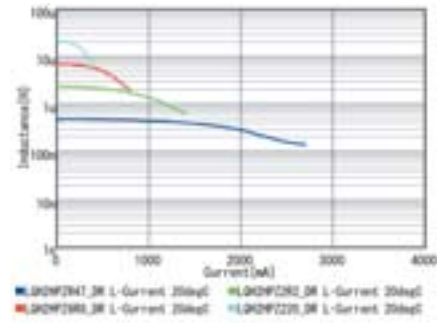

Temperature Rise Characteristics (Typ.)

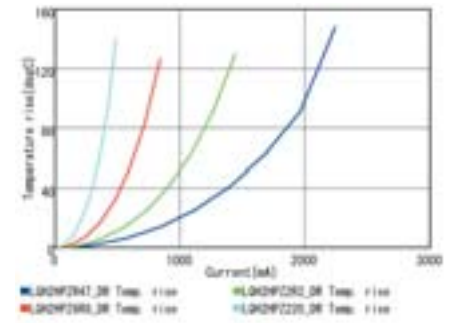


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH2HPZ_GR Series 1008 (2520) inch (mm)

Appearance/Dimensions

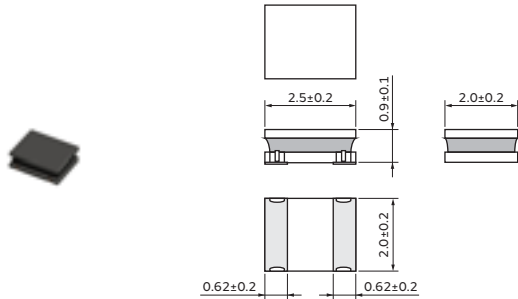

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH2HPZR47MGR□ | — | 0.47μH ±20% | 1MHz | 2900mA | 2520mA(Ambient temp.85°C) 1470mA(Ambient temp.105°C) | 0.045Ω±20% | 120MHz |
| LQH2HPZR68MGR□ | — | 0.68μH ±20% | 1MHz | 2430mA | 2330mA(Ambient temp.85°C) 1350mA(Ambient temp.105°C) | 0.055Ω±20% | 110MHz |
| LQH2HPZ1R0MGR□ | — | 1.0μH ±20% | 1MHz | 2130mA | 2100mA(Ambient temp.85°C) 1200mA(Ambient temp.105°C) | 0.068Ω±20% | 100MHz |
| LQH2HPZ1R5MGR□ | — | 1.5μH ±20% | 1MHz | 1700mA | 1850mA(Ambient temp.85°C) 1110mA(Ambient temp.105°C) | 0.087Ω±20% | 90MHz |
| LQH2HPZ2R2MGR□ | — | 2.2μH ±20% | 1MHz | 1550mA | 1470mA(Ambient temp.85°C) 850mA(Ambient temp.105°C) | 0.134Ω±20% | 80MHz |
| LQH2HPZ3R3MGR□ | — | 3.3μH ±20% | 1MHz | 1230mA | 1100mA(Ambient temp.85°C) 660mA(Ambient temp.105°C) | 0.225Ω±20% | 70MHz |
| LQH2HPZ4R7MGR□ | — | 4.7μH ±20% | 1MHz | 1090mA | 1000mA(Ambient temp.85°C) 570mA(Ambient temp.105°C) | 0.300Ω±20% | 50MHz |
| LQH2HPZ6R8MGR□ | — | 6.8μH ±20% | 1MHz | 830mA | 860mA(Ambient temp.85°C) 490mA(Ambient temp.105°C) | 0.395Ω±20% | 40MHz |
| LQH2HPZ100MGR□ | — | 10μH ±20% | 1MHz | 700mA | 710mA(Ambient temp.85°C) 430mA(Ambient temp.105°C) | 0.560Ω±20% | 30MHz |
| LQH2HPZ150MGR□ | — | 15μH ±20% | 1MHz | 570mA | 560mA(Ambient temp.85°C) 310mA(Ambient temp.105°C) | 0.925Ω±20% | 20MHz |
| LQH2HPZ220MGR□ | — | 22μH ±20% | 1MHz | 460mA | 430mA(Ambient temp.85°C) 250mA(Ambient temp.105°C) | 1.360Ω±20% | 15MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°Cmax. (ambient temperature 85 to 105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

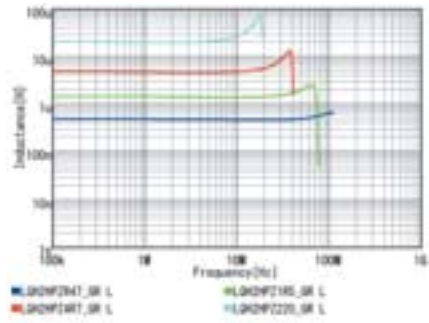

Inductance-Current Characteristics (Typ.)

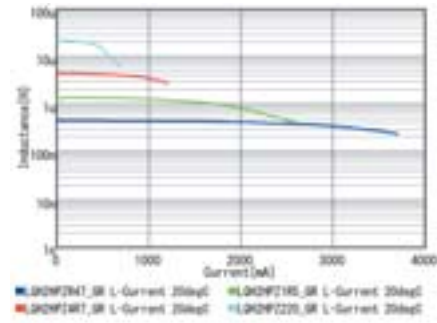

Temperature Rise Characteristics (Typ.)

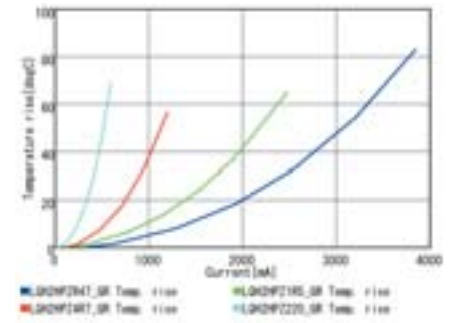


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH2HPZ_JR Series 1008 (2520) inch (mm)

Appearance/Dimensions

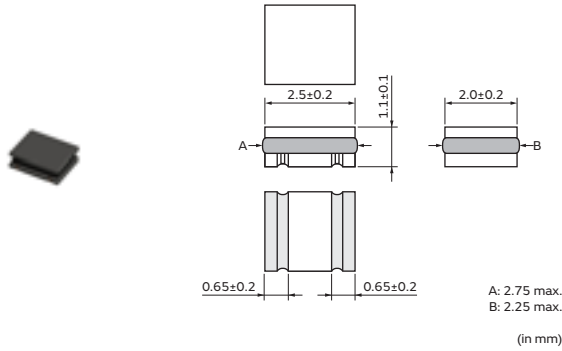

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH2HPZR47NJR□ | — | 0.47μH ±30% | 1MHz | 3500mA | 2750mA(Ambient temp.85°C) 1650mA(Ambient temp.105°C) | 0.031Ω±20% | 190MHz |
| LQH2HPZ1R0NJR□ | — | 1.0μH ±30% | 1MHz | 2600mA | 2400mA(Ambient temp.85°C) 1440mA(Ambient temp.105°C) | 0.048Ω±20% | 120MHz |
| LQH2HPZ1R2NJR□ | — | 1.2μH ±30% | 1MHz | 2450mA | 2070mA(Ambient temp.85°C) 1240mA(Ambient temp.105°C) | 0.055Ω±20% | 100MHz |
| LQH2HPZ1R5NJR□ | — | 1.5μH ±30% | 1MHz | 2200mA | 1810mA(Ambient temp.85°C) 1080mA(Ambient temp.105°C) | 0.075Ω±20% | 95MHz |
| LQH2HPZ2R2MJR□ | — | 2.2μH ±20% | 1MHz | 1700mA | 1650mA(Ambient temp.85°C) 990mA(Ambient temp.105°C) | 0.092Ω±20% | 50MHz |
| LQH2HPZ3R3MJR□ | — | 3.3μH ±20% | 1MHz | 1450mA | 1420mA(Ambient temp.85°C) 850mA(Ambient temp.105°C) | 0.13Ω±20% | 45MHz |
| LQH2HPZ4R7MJR□ | — | 4.7μH ±20% | 1MHz | 1230mA | 1290mA(Ambient temp.85°C) 770mA(Ambient temp.105°C) | 0.17Ω±20% | 40MHz |
| LQH2HPZ6R8MJR□ | — | 6.8μH ±20% | 1MHz | 1050mA | 1000mA(Ambient temp.85°C) 600mA(Ambient temp.105°C) | 0.26Ω±20% | 35MHz |
| LQH2HPZ100MJR□ | — | 10μH ±20% | 1MHz | 830mA | 830mA(Ambient temp.85°C) 490mA(Ambient temp.105°C) | 0.38Ω±20% | 30MHz |
| LQH2HPZ150MJR□ | — | 15μH ±20% | 1MHz | 690mA | 710mA(Ambient temp.85°C) 420mA(Ambient temp.105°C) | 0.55Ω±20% | 20MHz |
| LQH2HPZ220MJR□ | — | 22μH ±20% | 1MHz | 530mA | 540mA(Ambient temp.85°C) 320mA(Ambient temp.105°C) | 0.84Ω±20% | 20MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85-105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

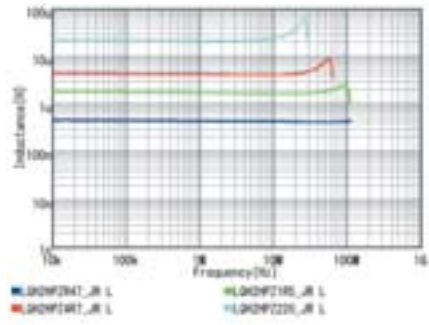

Inductance-Current Characteristics (Typ.)

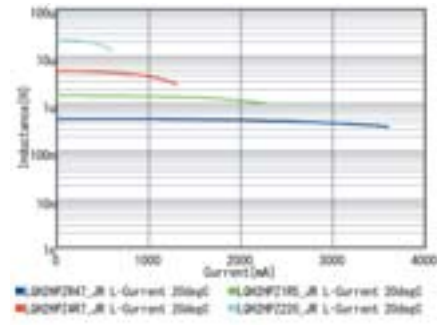


Temperature Rise Characteristics (Typ.)

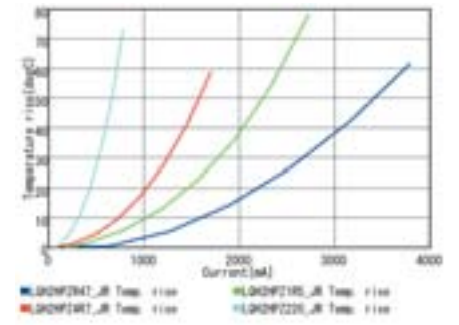

Inductors for Power Lines

LQH32CH_23 Series 1210 (3225) inch (mm)

Appearance/Dimensions

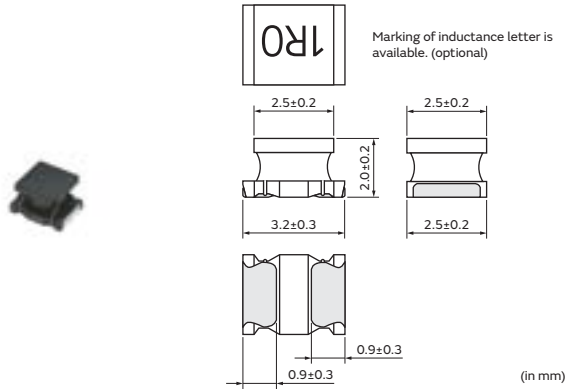

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|--------------|-------------------|------------|---------------------------|---------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | LQH32CH1R0M23□ | 1.0μH ±20% | 1MHz | 800mA | 0.09Ω±30% | 96MHz |
| — | LQH32CH2R2M23□ | 2.2μH ±20% | 1MHz | 600mA | 0.13Ω±30% | 64MHz |
| — | LQH32CH4R7M23□ | 4.7μH ±20% | 1MHz | 450mA | 0.20Ω±30% | 43MHz |
| — | LQH32CH100K23□ | 10μH ±10% | 1MHz | 300mA | 0.44Ω±30% | 26MHz |
| — | LQH32CH220K23□ | 22μH ±10% | 1MHz | 250mA | 0.71Ω±30% | 19MHz |


Operating temp.range (Self-temp.rise not included): -40 to 85°C

Class of Magnetic Shield: No Shield


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.


Inductance-Frequency Characteristics (Typ.)

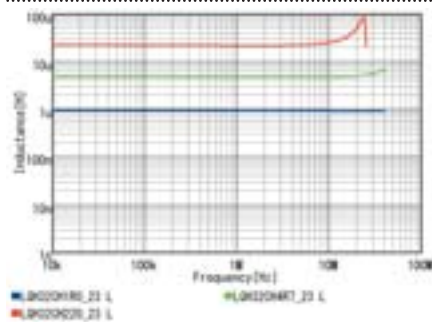

Inductance-Current Characteristics (Typ.)

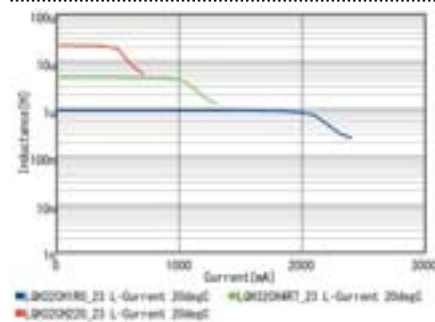


Impedance-Frequency Characteristics (Typ.)

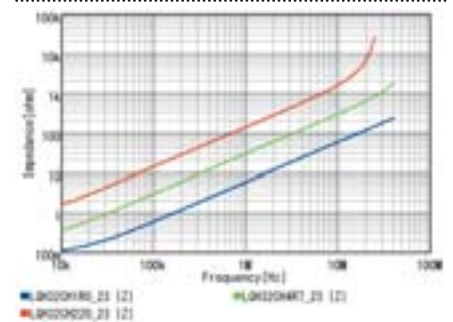

Inductors for Power Lines

LQH32CH_33 Series 1210 (3225) inch (mm)

Appearance/Dimensions

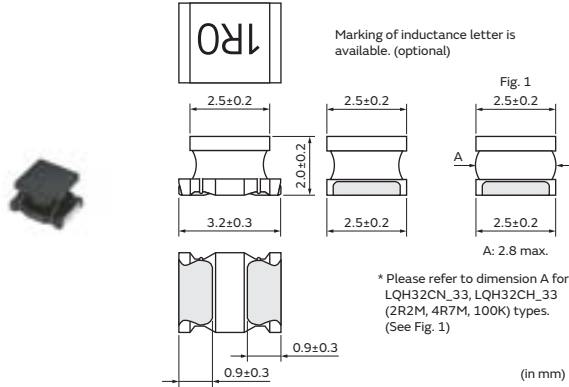

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|--------------|-------------------|-------------|---------------------------|---------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | LQH32CHR15M33□ | 0.15μH ±20% | 1MHz | 1450mA | 0.028Ω±30% | 400MHz |
| — | LQH32CHR27M33□ | 0.27μH ±20% | 1MHz | 1250mA | 0.034Ω±30% | 250MHz |
| — | LQH32CHR47M33□ | 0.47μH ±20% | 1MHz | 1100mA | 0.042Ω±30% | 150MHz |
| — | LQH32CH1R0M33□ | 1.0μH ±20% | 1MHz | 1000mA | 0.060Ω±30% | 100MHz |
| — | LQH32CH2R2M33□ | 2.2μH ±20% | 1MHz | 790mA | 0.097Ω±30% | 64MHz |
| — | LQH32CH4R7M33□ | 4.7μH ±20% | 1MHz | 650mA | 0.15Ω±30% | 43MHz |
| — | LQH32CH100K33□ | 10μH ±10% | 1MHz | 450mA | 0.30Ω±30% | 26MHz |


Operating temp.range (Self-temp.rise not included): -40 to 85°C

Class of Magnetic Shield: No Shield


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.


Inductance-Frequency Characteristics (Typ.)

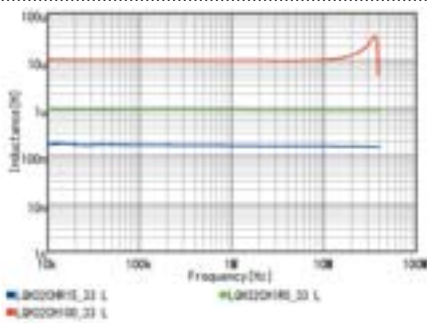

Inductance-Current Characteristics (Typ.)

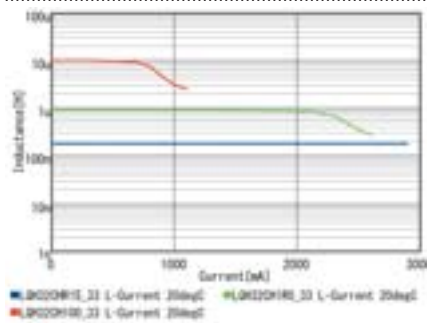


Impedance-Frequency Characteristics (Typ.)

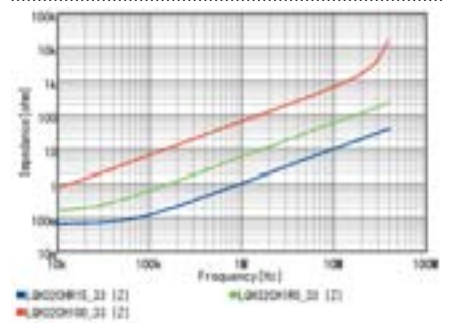

Inductors for Power Lines

LQH32CH_53 Series 1210 (3225) inch (mm)

Appearance/Dimensions

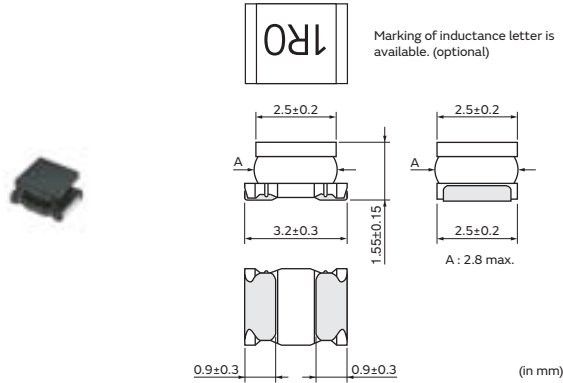

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F.* (min.) |
|--------------|-------------------|------------|---------------------------|---------------|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | LQH32CH1R0M53□ | 1.0μH ±20% | 1MHz | 1000mA | 0.060Ω±30% | 100MHz |
| — | LQH32CH2R2M53□ | 2.2μH ±20% | 1MHz | 790mA | 0.097Ω±30% | 64MHz |
| — | LQH32CH3R3M53□ | 3.3μH ±20% | 1MHz | 710mA | 0.12Ω±30% | 50MHz |
| — | LQH32CH4R7M53□ | 4.7μH ±20% | 1MHz | 650mA | 0.15Ω±30% | 43MHz |
| — | LQH32CH6R8M53□ | 6.8μH ±20% | 1MHz | 540mA | 0.25Ω±30% | 32MHz |
| — | LQH32CH100K53□ | 10μH ±10% | 1MHz | 450mA | 0.30Ω±30% | 26MHz |
| — | LQH32CH150K53□ | 15μH ±10% | 1MHz | 300mA | 0.58Ω±30% | 26MHz |
| — | LQH32CH220K53□ | 22μH ±10% | 1MHz | 250mA | 0.71Ω±30% | 19MHz |


Operating temp.range (Self-temp.rise not included): -40 to 85°C

Class of Magnetic Shield: No Shield


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.


Inductance-Frequency Characteristics (Typ.)

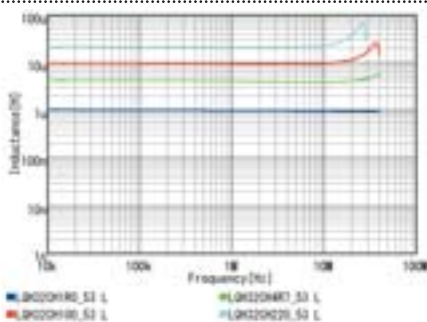

Inductance-Current Characteristics (Typ.)

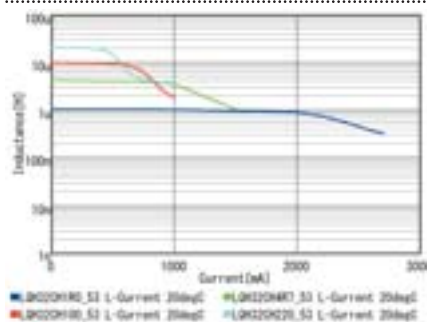


Impedance-Frequency Characteristics (Typ.)

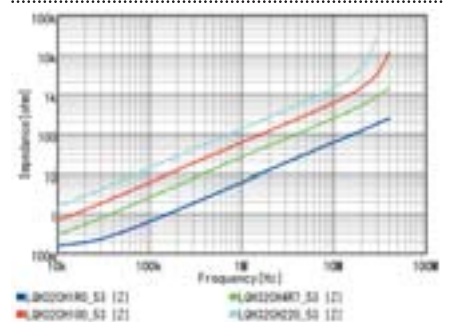

Inductors for Power Lines

LQH32DZ_23 Series 1210 (3225) inch (mm)

Appearance/Dimensions

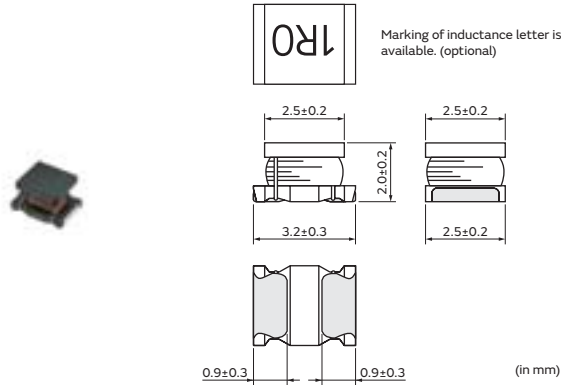

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQH32DZ1R0M23□ | — | 1.0μH ±20% | 1MHz | 800mA | 0.09Ω±30% | 96MHz |
| LQH32DZ2R2M23□ | — | 2.2μH ±20% | 1MHz | 600mA | 0.13Ω±30% | 64MHz |
| LQH32DZ3R3M23□ | — | 3.3μH ±20% | 1MHz | 530mA | 0.20Ω±30% | 50MHz |
| LQH32DZ4R7M23□ | — | 4.7μH ±20% | 1MHz | 450mA | 0.20Ω±30% | 43MHz |
| LQH32DZ100K23□ | — | 10μH ±10% | 1MHz | 300mA | 0.44Ω±30% | 26MHz |
| LQH32DZ220K23□ | — | 22μH ±10% | 1MHz | 250mA | 0.71Ω±30% | 19MHz |
| LQH32DZ390K23□ | — | 39μH ±10% | 1MHz | 200mA | 1.2Ω±30% | 16MHz |
| LQH32DZ470K23□ | — | 47μH ±10% | 1MHz | 170mA | 1.3Ω±30% | 15MHz |
| LQH32DZ680K23□ | — | 68μH ±10% | 1MHz | 130mA | 2.2Ω±30% | 12MHz |
| LQH32DZ101K23□ | — | 100μH ±10% | 1MHz | 100mA | 3.5Ω±30% | 10MHz |
| LQH32DZ151K23□ | — | 150μH ±10% | 1MHz | 80mA | 5.1Ω±30% | 8.0MHz |
| LQH32DZ221K23□ | — | 220μH ±10% | 1MHz | 70mA | 8.4Ω±30% | 6.8MHz |
| LQH32DZ331K23□ | — | 330μH ±10% | 1MHz | 60mA | 10.0Ω±30% | 5.6MHz |
| LQH32DZ391K23□ | — | 390μH ±10% | 1MHz | 60mA | 12.4Ω±30% | 5MHz |
| LQH32DZ471K23□ | — | 470μH ±10% | 1kHz | 60mA | 14.1Ω±30% | 5MHz |

Operating temp.range: -40 to 105°C


Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.


Inductance-Frequency Characteristics (Typ.)

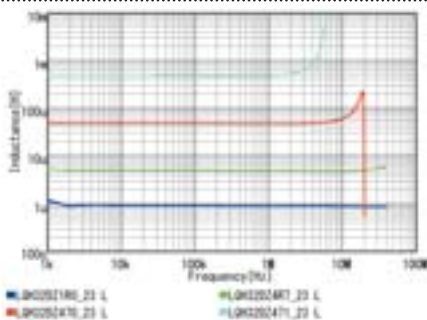

Inductance-Current Characteristics (Typ.)

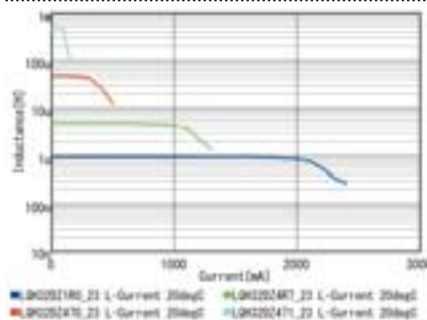

Impedance-Frequency Characteristics (Typ.)

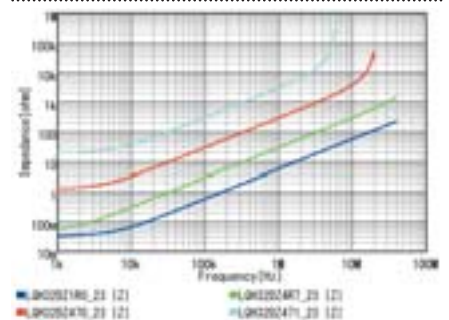


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH32DZ_53 Series 1210 (3225) inch (mm)

Appearance/Dimensions

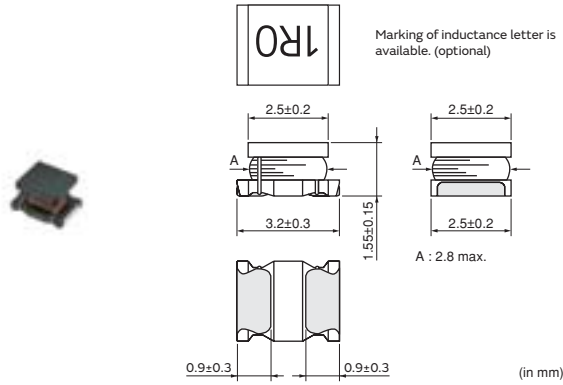

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQH32DZ1R0M53□ | — | 1.0μH ±20% | 1MHz | 1000mA | 0.060Ω±30% | 100MHz |
| LQH32DZ2R2M53□ | — | 2.2μH ±20% | 1MHz | 790mA | 0.097Ω±30% | 64MHz |
| LQH32DZ3R3M53□ | — | 3.3μH ±20% | 1MHz | 710mA | 0.12Ω±30% | 50MHz |
| LQH32DZ4R7M53□ | — | 4.7μH ±20% | 1MHz | 650mA | 0.15Ω±30% | 43MHz |
| LQH32DZ6R8M53□ | — | 6.8μH ±20% | 1MHz | 540mA | 0.25Ω±30% | 32MHz |
| LQH32DZ100K53□ | — | 10μH ±10% | 1MHz | 450mA | 0.30Ω±30% | 26MHz |
| LQH32DZ150K53□ | — | 15μH ±10% | 1MHz | 300mA | 0.58Ω±30% | 26MHz |
| LQH32DZ220K53□ | — | 22μH ±10% | 1MHz | 250mA | 0.71Ω±30% | 19MHz |
| LQH32DZ330K53□ | — | 33μH ±10% | 1MHz | 200mA | 1.1Ω±30% | 17MHz |
| LQH32DZ470K53□ | — | 47μH ±10% | 1MHz | 170mA | 1.3Ω±30% | 15MHz |
| LQH32DZ680K53□ | — | 68μH ±10% | 1MHz | 130mA | 2.2Ω±30% | 12MHz |
| LQH32DZ101K53□ | — | 100μH ±10% | 1MHz | 100mA | 3.5Ω±30% | 10MHz |

Operating temp.range: -40 to 105°C


Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.


Inductance-Frequency Characteristics (Typ.)

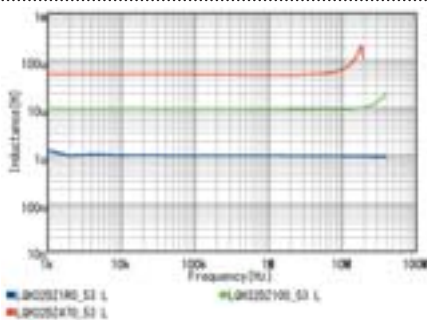

Inductance-Current Characteristics (Typ.)

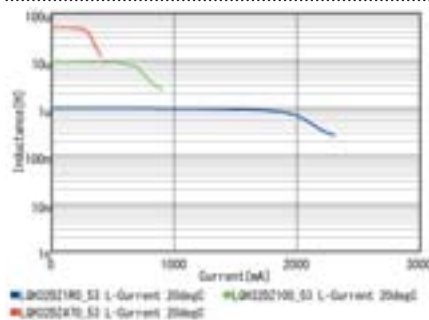


Impedance-Frequency Characteristics (Typ.)

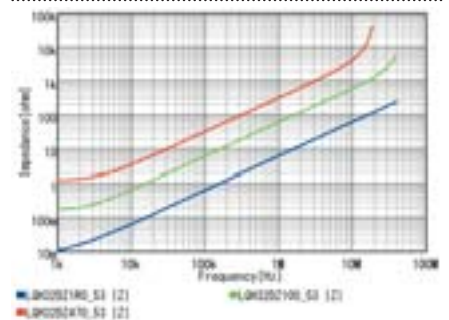

Inductors for Power Lines

LQH32PZ_N0/LQH32PH_N0 Series 1210 (3225) inch (mm)

Appearance/Dimensions

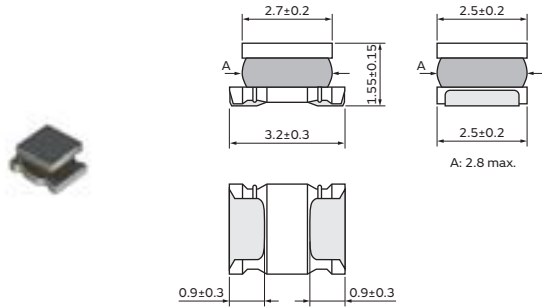

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (I _{sat})* | Rated Current (I _{temp})* | DC Resistance | S.R.F.* (min.) |
|-----------------|-------------------|-------------|---------------------------|------------------------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH32PZR47NNO□ | LQH32PHR47NNO□ | 0.47μH ±30% | 1MHz | 3400mA | 2550mA(Ambient temp.85°C) 1600mA(Ambient temp.105°C) | 0.030Ω±20% | 100MHz |
| LQH32PZ1R0NNO□ | LQH32PH1R0NNO□ | 1.0μH ±30% | 1MHz | 2300mA | 2050mA(Ambient temp.85°C) 1320mA(Ambient temp.105°C) | 0.045Ω±20% | 100MHz |
| LQH32PZ1R5NNO□ | LQH32PH1R5NNO□ | 1.5μH ±30% | 1MHz | 1750mA | 1750mA(Ambient temp.85°C) 1010mA(Ambient temp.105°C) | 0.057Ω±20% | 70MHz |
| LQH32PZ2R2NNO□ | LQH32PH2R2NNO□ | 2.2μH ±30% | 1MHz | 1550mA | 1600mA(Ambient temp.85°C) 970mA(Ambient temp.105°C) | 0.076Ω±20% | 70MHz |
| LQH32PZ3R3NNO□ | LQH32PH3R3NNO□ | 3.3μH ±30% | 1MHz | 1250mA | 1200mA(Ambient temp.85°C) 670mA(Ambient temp.105°C) | 0.12Ω±20% | 50MHz |
| LQH32PZ4R7NNO□ | LQH32PH4R7NNO□ | 4.7μH ±30% | 1MHz | 1000mA | 1000mA(Ambient temp.85°C) 530mA(Ambient temp.105°C) | 0.18Ω±20% | 40MHz |
| LQH32PZ6R8NNO□ | LQH32PH6R8NNO□ | 6.8μH ±30% | 1MHz | 850mA | 850mA(Ambient temp.85°C) 510mA(Ambient temp.105°C) | 0.24Ω±20% | 40MHz |
| LQH32PZ100MNNO□ | LQH32PH100MNNO□ | 10μH ±20% | 1MHz | 750mA | 700mA(Ambient temp.85°C) 380mA(Ambient temp.105°C) | 0.38Ω±20% | 30MHz |
| LQH32PZ150MNNO□ | — | 15μH ±20% | 1MHz | 600mA | 520mA(Ambient temp.85°C) 320mA(Ambient temp.105°C) | 0.57Ω±20% | 20MHz |
| LQH32PZ220MNNO□ | — | 22μH ±20% | 1MHz | 500mA | 450mA(Ambient temp.85°C) 240mA(Ambient temp.105°C) | 0.81Ω±20% | 20MHz |
| LQH32PZ330MNNO□ | — | 33μH ±20% | 1MHz | 380mA | 390mA(Ambient temp.85°C) 190mA(Ambient temp.105°C) | 1.15Ω±20% | 13MHz |
| LQH32PZ470MNNO□ | — | 47μH ±20% | 1MHz | 330mA | 310mA(Ambient temp.85°C) 140mA(Ambient temp.105°C) | 1.78Ω±20% | 11MHz |
| LQH32PZ680MNNO□ | — | 68μH ±20% | 1MHz | 280mA | 275mA(Ambient temp.85°C) 120mA(Ambient temp.105°C) | 2.28Ω±20% | 11MHz |
| LQH32PZ101MNNO□ | — | 100μH ±20% | 1MHz | 180mA | 250mA(Ambient temp.85°C) 110mA(Ambient temp.105°C) | 2.70Ω±20% | 8MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*I_{sat}: Rated Current based on Inductance change

*I_{temp}: Rated Current based on Temperature rise

*S.R.F.: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH32PZ121MNO□ | — | 120μH ±20% | 1MHz | 170mA | 200mA(Ambient temp.85°C) 80mA(Ambient temp.105°C) | 4.38Ω±20% | 8MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C
 Operating temp.range (Self-temp.rise not included): -40 to 105°C
 Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering


*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.


Inductance-Frequency Characteristics (Typ.)

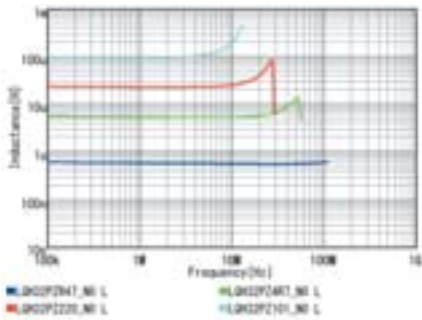

Inductance-Current Characteristics (Typ.)

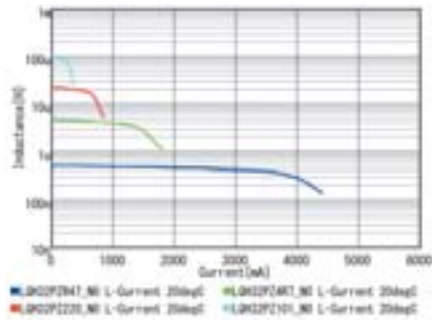


Temperature Rise Characteristics (Typ.)

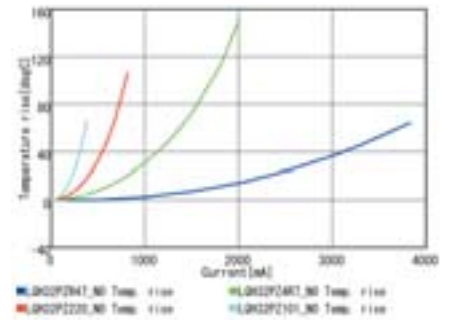

Inductors for Power Lines

LQH32PZ_NC/LQH32PH_NC Series 1210 (3225) inch (mm)

Appearance/Dimensions

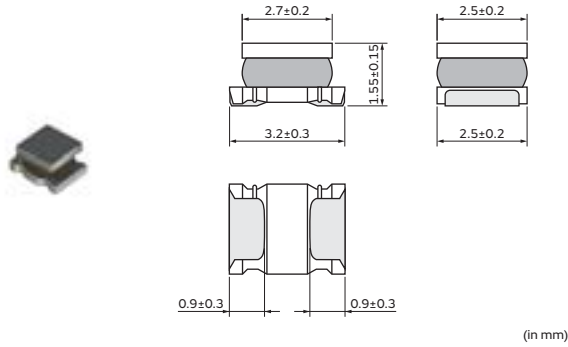

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH32PZR47NNC□ | LQH32PHR47NNC□ | 0.47µH ±30% | 1MHz | 4400mA | 2900mA(Ambient temp.85°C) 1490mA(Ambient temp.105°C) | 0.024Ω±20% | 100MHz |
| LQH32PZ1R0NNC□ | LQH32PH1R0NNC□ | 1.0µH ±30% | 1MHz | 3000mA | 2500mA(Ambient temp.85°C) 1380mA(Ambient temp.105°C) | 0.036Ω±20% | 100MHz |
| LQH32PZ1R5NNC□ | LQH32PH1R5NNC□ | 1.5µH ±30% | 1MHz | 2600mA | 2100mA(Ambient temp.85°C) 1110mA(Ambient temp.105°C) | 0.053Ω±20% | 70MHz |
| LQH32PZ2R2NNC□ | LQH32PH2R2NNC□ | 2.2µH ±30% | 1MHz | 2000mA | 1850mA(Ambient temp.85°C) 910mA(Ambient temp.105°C) | 0.064Ω±20% | 70MHz |
| LQH32PZ3R3NNC□ | LQH32PH3R3NNC□ | 3.3µH ±30% | 1MHz | 1900mA | 1550mA(Ambient temp.85°C) 800mA(Ambient temp.105°C) | 0.100Ω±20% | 50MHz |
| LQH32PZ4R7NNC□ | LQH32PH4R7NNC□ | 4.7µH ±30% | 1MHz | 1600mA | 1200mA(Ambient temp.85°C) 610mA(Ambient temp.105°C) | 0.155Ω±20% | 40MHz |
| LQH32PZ6R8NNC□ | LQH32PH6R8NNC□ | 6.8µH ±30% | 1MHz | 1300mA | 1100mA(Ambient temp.85°C) 550mA(Ambient temp.105°C) | 0.220Ω±20% | 40MHz |
| LQH32PZ100MNC□ | LQH32PH100MNC□ | 10µH ±20% | 1MHz | 1000mA | 900mA(Ambient temp.85°C) 450mA(Ambient temp.105°C) | 0.295Ω±20% | 30MHz |
| LQH32PZ150MNC□ | LQH32PH150MNC□ | 15µH ±20% | 1MHz | 800mA | 700mA(Ambient temp.85°C) 330mA(Ambient temp.105°C) | 0.475Ω±20% | 20MHz |
| LQH32PZ220MNC□ | LQH32PH220MNC□ | 22µH ±20% | 1MHz | 650mA | 550mA(Ambient temp.85°C) 270mA(Ambient temp.105°C) | 0.685Ω±20% | 20MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C
 Operating temp.range (Self-temp.rise not included): -40 to 105°C
 Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

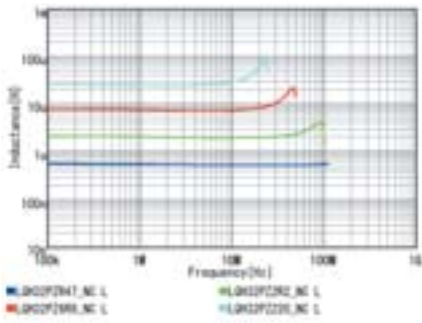

Inductance-Current Characteristics (Typ.)

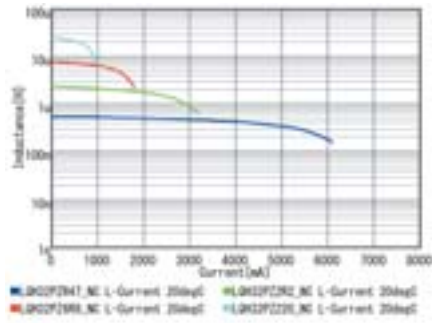

Temperature Rise Characteristics (Typ.)

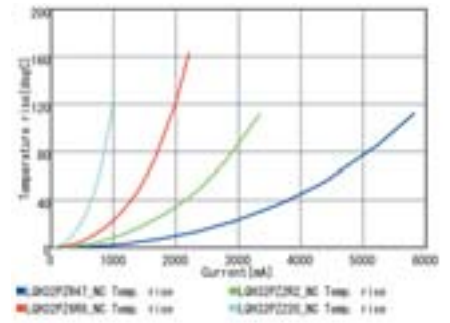


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH3NPZ_GR Series 1212 (3030) inch (mm)

Appearance/Dimensions

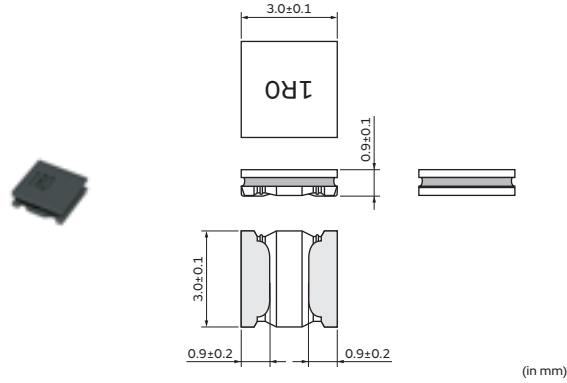

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH3NPZR47NGR□ | — | 0.47µH ±30% | 1MHz | 2820mA | 2540mA(Ambient temp.85°C) 1520mA(Ambient temp.105°C) | 0.047Ω±20% | 180MHz |
| LQH3NPZ1R0MGR□ | — | 1.0µH ±20% | 1MHz | 1700mA | 2080mA(Ambient temp.85°C) 1240mA(Ambient temp.105°C) | 0.062Ω±20% | 100MHz |
| LQH3NPZ1R5MGR□ | — | 1.5µH ±20% | 1MHz | 1400mA | 2040mA(Ambient temp.85°C) 1220mA(Ambient temp.105°C) | 0.074Ω±20% | 80MHz |
| LQH3NPZ2R2MGR□ | — | 2.2µH ±20% | 1MHz | 1180mA | 1730mA(Ambient temp.85°C) 1030mA(Ambient temp.105°C) | 0.087Ω±20% | 50MHz |
| LQH3NPZ3R3MGR□ | — | 3.3µH ±20% | 1MHz | 1050mA | 1580mA(Ambient temp.85°C) 940mA(Ambient temp.105°C) | 0.12Ω±20% | 30MHz |
| LQH3NPZ4R7MGR□ | — | 4.7µH ±20% | 1MHz | 850mA | 1520mA(Ambient temp.85°C) 910mA(Ambient temp.105°C) | 0.14Ω±20% | 27MHz |
| LQH3NPZ6R8MGR□ | — | 6.8µH ±20% | 1MHz | 720mA | 1140mA(Ambient temp.85°C) 680mA(Ambient temp.105°C) | 0.23Ω±20% | 25MHz |
| LQH3NPZ100MGR□ | — | 10µH ±20% | 1MHz | 570mA | 1120mA(Ambient temp.85°C) 670mA(Ambient temp.105°C) | 0.28Ω±20% | 20MHz |
| LQH3NPZ150MGR□ | — | 15µH ±20% | 1MHz | 480mA | 900mA(Ambient temp.85°C) 540mA(Ambient temp.105°C) | 0.39Ω±20% | 15MHz |
| LQH3NPZ220MGR□ | — | 22µH ±20% | 1MHz | 390mA | 750mA(Ambient temp.85°C) 450mA(Ambient temp.105°C) | 0.53Ω±20% | 10MHz |
| LQH3NPZ330MGR□ | — | 33µH ±20% | 1MHz | 320mA | 600mA(Ambient temp.85°C) 360mA(Ambient temp.105°C) | 0.86Ω±20% | 8MHz |
| LQH3NPZ470MGR□ | — | 47µH ±20% | 1MHz | 260mA | 460mA(Ambient temp.85°C) 270mA(Ambient temp.105°C) | 1.4Ω±20% | 5MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85 to 105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

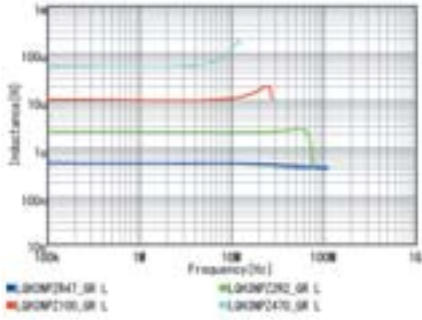

Inductance-Current Characteristics (Typ.)

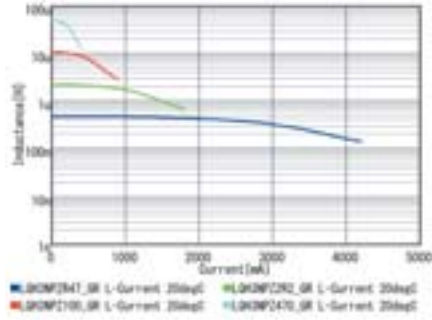

Temperature Rise Characteristics (Typ.)

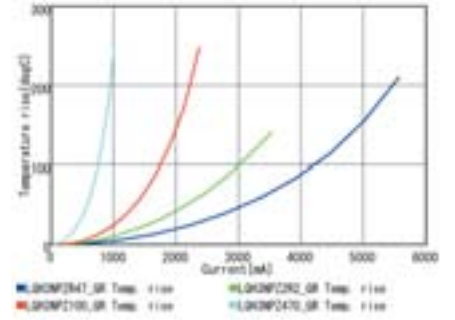


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH3NPZ_JR Series 1212 (3030) inch (mm)

Appearance/Dimensions

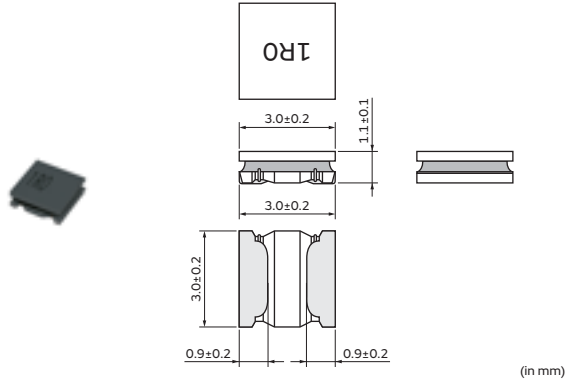

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (I _{sat})* | Rated Current (I _{temp})* | DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|-------------|---------------------------|------------------------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH3NPZR68NJR□ | — | 0.68μH ±30% | 1MHz | 2700mA | 2860mA(Ambient temp.85°C) 1280mA(Ambient temp.105°C) | 0.032Ω±20% | 130MHz |
| LQH3NPZ1R0MJR□ | — | 1.0μH ±20% | 1MHz | 2250mA | 2780mA(Ambient temp.85°C) 1230mA(Ambient temp.105°C) | 0.040Ω±20% | 100MHz |
| LQH3NPZ1R5MJR□ | — | 1.5μH ±20% | 1MHz | 1950mA | 2510mA(Ambient temp.85°C) 1100mA(Ambient temp.105°C) | 0.049Ω±20% | 60MHz |
| LQH3NPZ2R2MJR□ | — | 2.2μH ±20% | 1MHz | 1800mA | 2200mA(Ambient temp.85°C) 980mA(Ambient temp.105°C) | 0.068Ω±20% | 45MHz |
| LQH3NPZ3R3MJR□ | — | 3.3μH ±20% | 1MHz | 1350mA | 1700mA(Ambient temp.85°C) 750mA(Ambient temp.105°C) | 0.095Ω±20% | 45MHz |
| LQH3NPZ4R7MJR□ | — | 4.7μH ±20% | 1MHz | 1180mA | 1580mA(Ambient temp.85°C) 710mA(Ambient temp.105°C) | 0.12Ω±20% | 40MHz |
| LQH3NPZ6R8MJR□ | — | 6.8μH ±20% | 1MHz | 970mA | 1360mA(Ambient temp.85°C) 610mA(Ambient temp.105°C) | 0.18Ω±20% | 35MHz |
| LQH3NPZ100MJR□ | — | 10μH ±20% | 1MHz | 810mA | 1200mA(Ambient temp.85°C) 530mA(Ambient temp.105°C) | 0.24Ω±20% | 30MHz |
| LQH3NPZ150MJR□ | — | 15μH ±20% | 1MHz | 650mA | 870mA(Ambient temp.85°C) 370mA(Ambient temp.105°C) | 0.38Ω±20% | 25MHz |
| LQH3NPZ220MJR□ | — | 22μH ±20% | 1MHz | 520mA | 800mA(Ambient temp.85°C) 350mA(Ambient temp.105°C) | 0.50Ω±20% | 20MHz |
| LQH3NPZ330MJR□ | — | 33μH ±20% | 1MHz | 420mA | 630mA(Ambient temp.85°C) 280mA(Ambient temp.105°C) | 0.79Ω±20% | 15MHz |
| LQH3NPZ470MJR□ | — | 47μH ±20% | 1MHz | 360mA | 570mA(Ambient temp.85°C) 240mA(Ambient temp.105°C) | 1.0Ω±20% | 10MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*I_{sat}: Rated Current based on Inductance change

*I_{temp}: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85°C to 105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

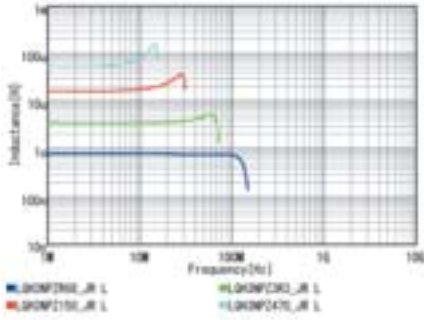

Inductance-Current Characteristics (Typ.)

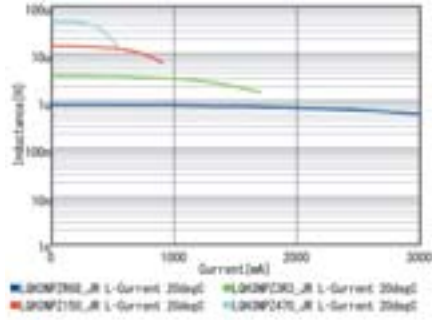

Temperature Rise Characteristics (Typ.)

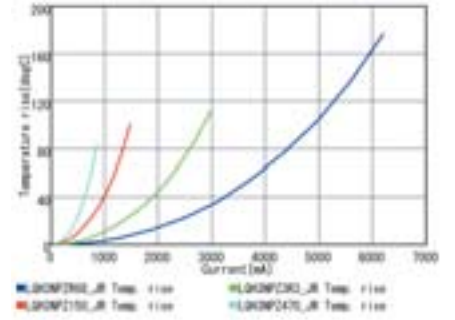

Inductors for Power Lines


Inductors for General Circuits

RF Inductors

Inductors for Power Lines

LQH3NPZ_ME Series 1212 (3030) inch (mm)

Appearance/Dimensions

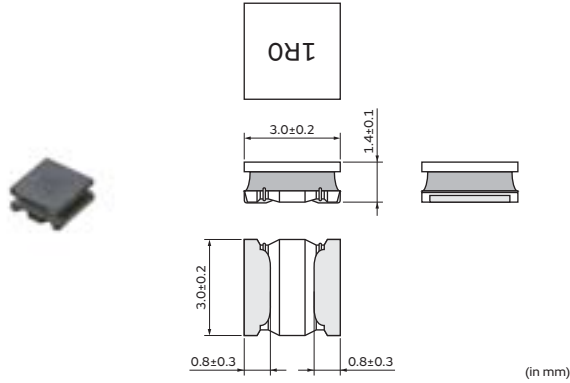

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (I _{sat})* | Rated Current (I _{temp})* | DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|------------------------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH3NPZ1R0MME□ | — | 1.0μH ±20% | 1MHz | 2350mA | 3000mA(Ambient temp.85°C) 1600mA(Ambient temp.105°C) | 0.025Ω±20% | 100MHz |
| LQH3NPZ2R2MME□ | — | 2.2μH ±20% | 1MHz | 1800mA | 2100mA(Ambient temp.85°C) 1220mA(Ambient temp.105°C) | 0.065Ω±20% | 60MHz |
| LQH3NPZ3R3MME□ | — | 3.3μH ±20% | 1MHz | 1520mA | 1900mA(Ambient temp.85°C) 1150mA(Ambient temp.105°C) | 0.084Ω±20% | 55MHz |
| LQH3NPZ4R7MME□ | — | 4.7μH ±20% | 1MHz | 1300mA | 1700mA(Ambient temp.85°C) 1000mA(Ambient temp.105°C) | 0.10Ω±20% | 40MHz |
| LQH3NPZ6R8MME□ | — | 6.8μH ±20% | 1MHz | 1040mA | 1450mA(Ambient temp.85°C) 900mA(Ambient temp.105°C) | 0.14Ω±20% | 30MHz |
| LQH3NPZ100MME□ | — | 10μH ±20% | 1MHz | 810mA | 1280mA(Ambient temp.85°C) 800mA(Ambient temp.105°C) | 0.19Ω±20% | 20MHz |
| LQH3NPZ150MME□ | — | 15μH ±20% | 1MHz | 660mA | 1020mA(Ambient temp.85°C) 620mA(Ambient temp.105°C) | 0.29Ω±20% | 15MHz |
| LQH3NPZ220MME□ | — | 22μH ±20% | 1MHz | 570mA | 860mA(Ambient temp.85°C) 540mA(Ambient temp.105°C) | 0.40Ω±20% | 10MHz |
| LQH3NPZ330MME□ | — | 33μH ±20% | 1MHz | 440mA | 760mA(Ambient temp.85°C) 460mA(Ambient temp.105°C) | 0.55Ω±20% | 8MHz |
| LQH3NPZ470MME□ | — | 47μH ±20% | 1MHz | 380mA | 610mA(Ambient temp.85°C) 380mA(Ambient temp.105°C) | 0.82Ω±20% | 5MHz |
| LQH3NPZ560MME□ | — | 56μH ±20% | 1MHz | 350mA | 500mA(Ambient temp.85°C) 320mA(Ambient temp.105°C) | 1.0Ω±20% | 5MHz |
| LQH3NPZ680MME□ | — | 68μH ±20% | 1MHz | 310mA | 470mA(Ambient temp.85°C) 300mA(Ambient temp.105°C) | 1.15Ω±20% | 5MHz |
| LQH3NPZ101MME□ | — | 100μH ±20% | 1MHz | 260mA | 430mA(Ambient temp.85°C) 270mA(Ambient temp.105°C) | 1.59Ω±20% | 3MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*I_{sat}: Rated Current based on Inductance change

*I_{temp}: Rated Current based on Temperature rise


*S.R.F.: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C max. (ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max. (ambient temperature 85°C to 105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

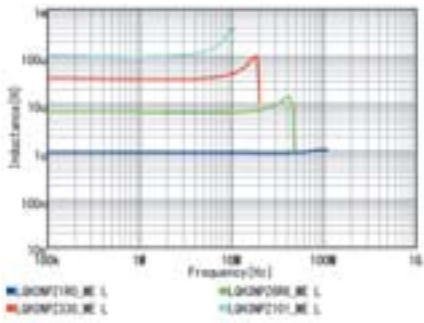

Inductance-Current Characteristics (Typ.)

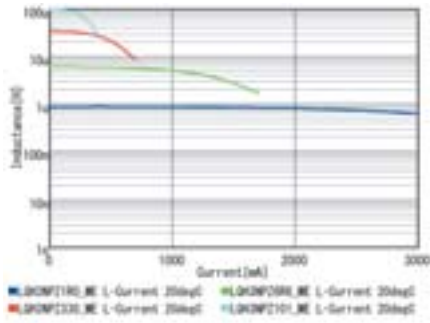

Temperature Rise Characteristics (Typ.)

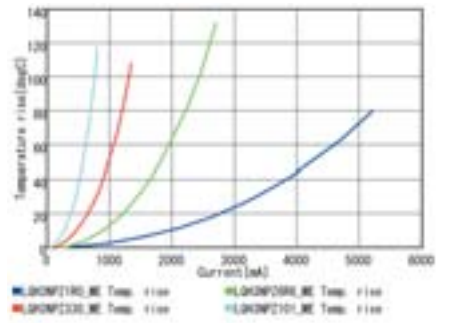


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH44PZ_GR Series 1515 (4040) inch (mm)

Appearance/Dimensions

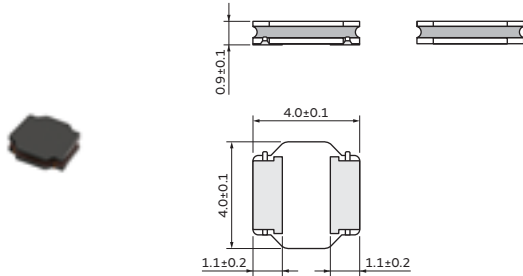

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 4500 |
| L | ø180mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (I _{sat})* | Rated Current (I _{temp})* | DC Resistance | S.R.F.* (min.) |
|-----------------|-------------------|-------------|---------------------------|------------------------------------|---|---------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH44PZR68NGR□ | — | 0.68μH ±30% | 1MHz | 2400mA | 2500mA(Ambient temp.85°C) 1500mA(Ambient temp.105°C) | 0.043Ω±20% | 54MHz |
| LQH44PZR2R2NGR□ | — | 2.2μH ±30% | 1MHz | 1600mA | 2000mA(Ambient temp.85°C) 1200mA(Ambient temp.105°C) | 0.074Ω±20% | 45MHz |
| LQH44PZR3R3NGR□ | — | 3.3μH ±30% | 1MHz | 1500mA | 1700mA(Ambient temp.85°C) 1000mA(Ambient temp.105°C) | 0.11Ω±20% | 25MHz |
| LQH44PZR4R7MGR□ | — | 4.7μH ±20% | 1MHz | 1200mA | 1600mA(Ambient temp.85°C) 960mA(Ambient temp.105°C) | 0.13Ω±20% | 17MHz |
| LQH44PZR6R8MGR□ | — | 6.8μH ±20% | 1MHz | 850mA | 1400mA(Ambient temp.85°C) 840mA(Ambient temp.105°C) | 0.17Ω±20% | 15MHz |
| LQH44PZ100MGR□ | — | 10μH ±20% | 1MHz | 800mA | 1100mA(Ambient temp.85°C) 660mA(Ambient temp.105°C) | 0.27Ω±20% | 13MHz |
| LQH44PZ150MGR□ | — | 15μH ±20% | 1MHz | 640mA | 900mA(Ambient temp.85°C) 540mA(Ambient temp.105°C) | 0.42Ω±20% | 10MHz |
| LQH44PZ220MGR□ | — | 22μH ±20% | 1MHz | 500mA | 750mA(Ambient temp.85°C) 450mA(Ambient temp.105°C) | 0.57Ω±20% | 8MHz |
| LQH44PZ330MGR□ | — | 33μH ±20% | 1MHz | 400mA | 480mA(Ambient temp.85°C) 280mA(Ambient temp.105°C) | 1.4Ω±20% | 6MHz |
| LQH44PZ470MGR□ | — | 47μH ±20% | 1MHz | 360mA | 410mA(Ambient temp.85°C) 240mA(Ambient temp.105°C) | 1.7Ω±20% | 6MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*I_{sat}: Rated Current based on Inductance change

*I_{temp}: Rated Current based on Temperature rise


*S.R.F.: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C. When rated current is applied to the products, the self-temperature rise shall be limited to 40°C Max(ambient temperature 85°C). When rated current is applied to the products, the self-temperature rise shall be limited to 20°C max(ambient temperature 85-105°C).


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

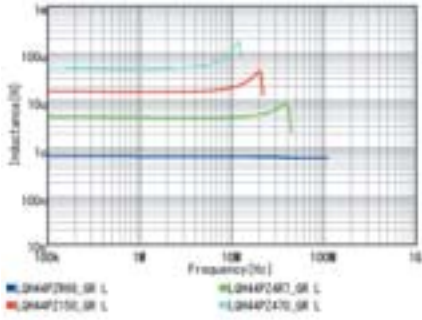

Inductance-Current Characteristics (Typ.)

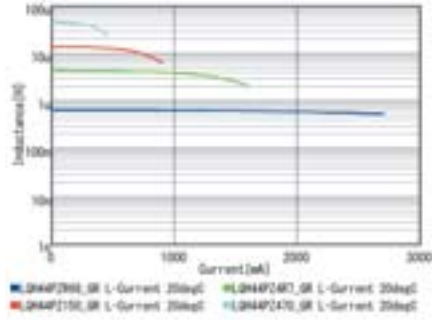

Temperature Rise Characteristics (Typ.)

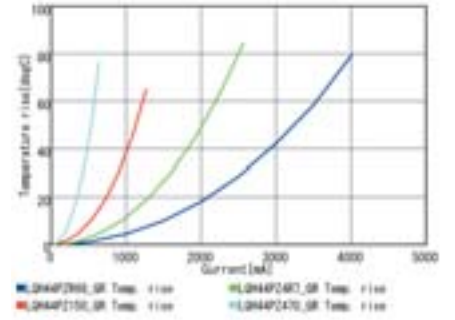


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH43PZ_26/LQH43PH_26 Series 1812 (4532) inch (mm)

Appearance/Dimensions

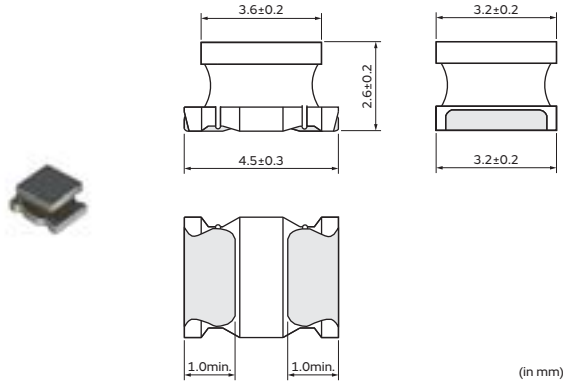

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 2500 |
| L | ø180mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH43PZ1R0N26□ | LQH43PH1R0N26□ | 1.0μH ±30% | 1MHz | 3400mA | 3300mA(Ambient temp.85°C) 1410mA(Ambient temp.105°C) | 0.026Ω±20% | 100MHz |
| LQH43PZ2R2M26□ | LQH43PH2R2M26□ | 2.2μH ±20% | 1MHz | 2300mA | 2500mA(Ambient temp.85°C) 1120mA(Ambient temp.105°C) | 0.042Ω±20% | 45MHz |
| LQH43PZ3R3M26□ | LQH43PH3R3M26□ | 3.3μH ±20% | 1MHz | 1800mA | 2100mA(Ambient temp.85°C) 1000mA(Ambient temp.105°C) | 0.052Ω±20% | 40MHz |
| LQH43PZ4R7M26□ | LQH43PH4R7M26□ | 4.7μH ±20% | 1MHz | 1400mA | 1600mA(Ambient temp.85°C) 780mA(Ambient temp.105°C) | 0.075Ω±20% | 35MHz |
| LQH43PZ6R8M26□ | LQH43PH6R8M26□ | 6.8μH ±20% | 1MHz | 1200mA | 1400mA(Ambient temp.85°C) 760mA(Ambient temp.105°C) | 0.098Ω±20% | 30MHz |
| LQH43PZ8R2M26□ | LQH43PH8R2M26□ | 8.2μH ±20% | 1MHz | 1100mA | 1300mA(Ambient temp.85°C) 670mA(Ambient temp.105°C) | 0.128Ω±20% | 25MHz |
| LQH43PZ100M26□ | LQH43PH100M26□ | 10μH ±20% | 1MHz | 1050mA | 1170mA(Ambient temp.85°C) 620mA(Ambient temp.105°C) | 0.147Ω±20% | 20MHz |
| LQH43PZ220M26□ | LQH43PH220M26□ | 22μH ±20% | 1MHz | 700mA | 780mA(Ambient temp.85°C) 400mA(Ambient temp.105°C) | 0.327Ω±20% | 15MHz |
| LQH43PZ470M26□ | LQH43PH470M26□ | 47μH ±20% | 1MHz | 470mA | 520mA(Ambient temp.85°C) 280mA(Ambient temp.105°C) | 0.718Ω±20% | 8MHz |
| LQH43PZ101M26□ | LQH43PH101M26□ | 100μH ±20% | 1MHz | 320mA | 320mA(Ambient temp.85°C) 180mA(Ambient temp.105°C) | 1.538Ω±20% | 4MHz |
| LQH43PZ151M26□ | LQH43PH151M26□ | 150μH ±20% | 1MHz | 280mA | 260mA(Ambient temp.85°C) 140mA(Ambient temp.105°C) | 2.362Ω±20% | 3MHz |
| LQH43PZ221M26□ | LQH43PH221M26□ | 220μH ±20% | 1MHz | 220mA | 240mA(Ambient temp.85°C) 130mA(Ambient temp.105°C) | 2.900Ω±20% | 2MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C
 Operating temp.range (Self-temp.rise not included): -40 to 105°C
 Class of Magnetic Shield: Magnetic Resin
 Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of nominal inductance value. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

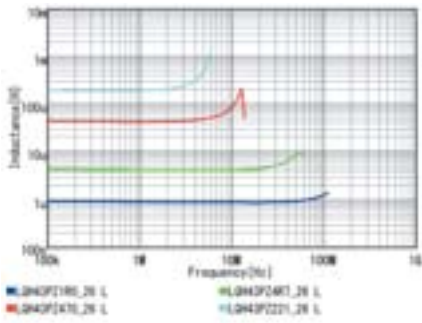

Inductance-Current Characteristics (Typ.)

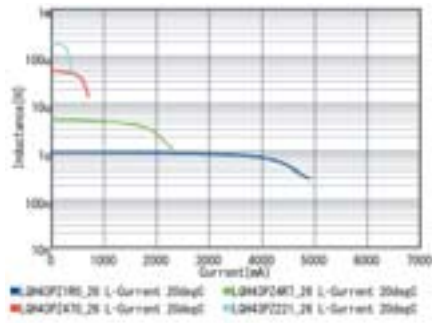

Temperature Rise Characteristics (Typ.)

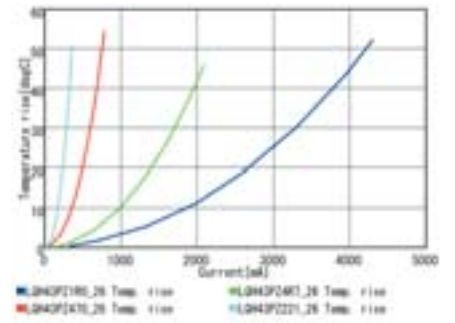


Inductors for Power Lines
 Inductors for General Circuits
 RF Inductors

Inductors for Power Lines

LQH5BPZ_T0 Series 2020 (5050) inch (mm)

Appearance/Dimensions

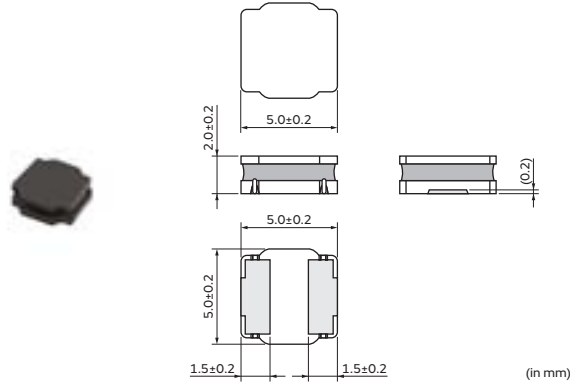

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 3000 |
| L | ø180mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|-----------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH5BPZR47NT0□ | — | 0.47μH ±30% | 100kHz | 7.7A | 4.0A(Ambient temp.85°C) 2.05A(Ambient temp.105°C) | 0.012Ω±20% | 220MHz |
| LQH5BPZ1R0NT0□ | — | 1.0μH ±30% | 100kHz | 5.8A | 3.1A(Ambient temp.85°C) 1.68A(Ambient temp.105°C) | 0.019Ω±20% | 90MHz |
| LQH5BPZ1R2NT0□ | — | 1.2μH ±30% | 100kHz | 5.4A | 3.1A(Ambient temp.85°C) 1.68A(Ambient temp.105°C) | 0.019Ω±20% | 90MHz |
| LQH5BPZ1R5NT0□ | — | 1.5μH ±30% | 100kHz | 5.0A | 3.0A(Ambient temp.85°C) 1.63A(Ambient temp.105°C) | 0.024Ω±20% | 70MHz |
| LQH5BPZ2R2NT0□ | — | 2.2μH ±30% | 100kHz | 4.0A | 2.6A(Ambient temp.85°C) 1.37A(Ambient temp.105°C) | 0.030Ω±20% | 55MHz |
| LQH5BPZ2R7NT0□ | — | 2.7μH ±30% | 100kHz | 3.8A | 2.5A(Ambient temp.85°C) 1.23A(Ambient temp.105°C) | 0.035Ω±20% | 50MHz |
| LQH5BPZ3R3NT0□ | — | 3.3μH ±30% | 100kHz | 3.5A | 2.3A(Ambient temp.85°C) 1.21A(Ambient temp.105°C) | 0.044Ω±20% | 40MHz |
| LQH5BPZ4R7NT0□ | — | 4.7μH ±30% | 100kHz | 3.0A | 2.0A(Ambient temp.85°C) 1.09A(Ambient temp.105°C) | 0.058Ω±20% | 40MHz |
| LQH5BPZ6R8NT0□ | — | 6.8μH ±30% | 100kHz | 2.5A | 1.65A(Ambient temp.85°C) 0.96A(Ambient temp.105°C) | 0.083Ω±20% | 30MHz |
| LQH5BPZ100MT0□ | — | 10μH ±20% | 100kHz | 2.0A | 1.60A(Ambient temp.85°C) 0.87A(Ambient temp.105°C) | 0.106Ω±20% | 25MHz |
| LQH5BPZ150MT0□ | — | 15μH ±20% | 100kHz | 1.6A | 1.20A(Ambient temp.85°C) 0.62A(Ambient temp.105°C) | 0.187Ω±20% | 18MHz |
| LQH5BPZ220MT0□ | — | 22μH ±20% | 100kHz | 1.4A | 1.05A(Ambient temp.85°C) 0.55A(Ambient temp.105°C) | 0.259Ω±20% | 15MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 105°C

Class of Magnetic Shield: Magnetic Resin

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, inductance will be within ±30% of initial inductance value. When rated current is applied to the products, self-temperature rise shall be limited to 40°C max. Keep the temperature (ambient temperature plus self-generation of heat) under 125°C.


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

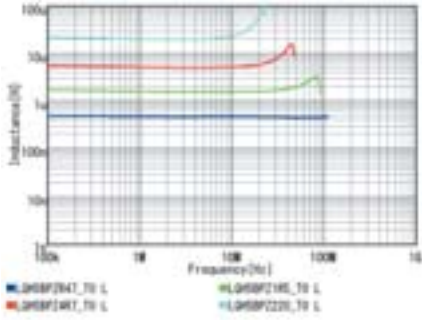

Inductance-Current Characteristics (Typ.)

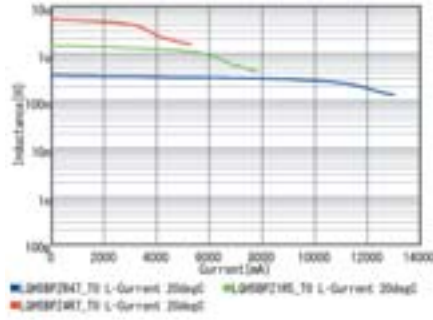

Temperature Rise Characteristics (Typ.)

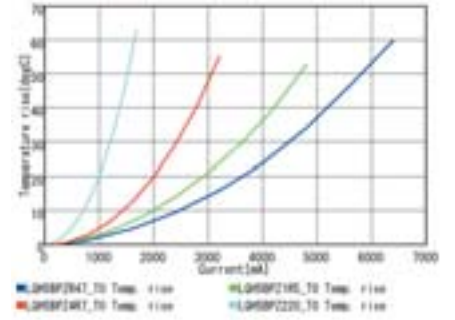

Inductors for Power Lines


Inductors for General Circuits

RF Inductors

Inductors for Power Lines

MBH6045C High Current Series 2424 (6262) inch (mm)

Appearance/Dimensions

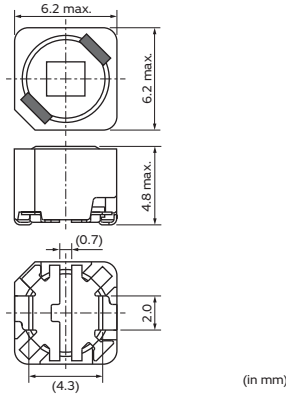

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH6045C-1R5NA□ | 1.5μH ±30% | 0.1MHz | 6300mA | 4300mA | 0.017Ω±30% |
| — | MBH6045C-3R3NA□ | 3.3μH ±30% | 0.1MHz | 4100mA | 3400mA | 0.024Ω±30% |
| — | MBH6045C-4R7NA□ | 4.7μH ±30% | 0.1MHz | 3300mA | 2800mA | 0.029Ω±30% |
| — | MBH6045C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 2700mA | 2100mA | 0.051Ω±30% |
| — | MBH6045C-100MA□ | 10μH ±20% | 0.1MHz | 2300mA | 2000mA | 0.063Ω±20% |
| — | MBH6045C-150MA□ | 15μH ±20% | 0.1MHz | 1800mA | 1500mA | 0.099Ω±20% |
| — | MBH6045C-220MA□ | 22μH ±20% | 0.1MHz | 1500mA | 1200mA | 0.139Ω±20% |
| — | MBH6045C-330MA□ | 33μH ±20% | 0.1MHz | 1200mA | 1100mA | 0.178Ω±20% |
| — | MBH6045C-470MA□ | 47μH ±20% | 0.1MHz | 1100mA | 1000mA | 0.256Ω±20% |
| — | MBH6045C-680MA□ | 68μH ±20% | 0.1MHz | 900mA | 840mA | 0.347Ω±20% |
| — | MBH6045C-101MA□ | 100μH ±20% | 0.1MHz | 710mA | 700mA | 0.487Ω±20% |
| — | MBH6045C-151MA□ | 150μH ±20% | 0.1MHz | 580mA | 510mA | 0.772Ω±20% |
| — | MBH6045C-221MA□ | 220μH ±20% | 0.1MHz | 470mA | 480mA | 1.080Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Inductance-Current Characteristics (Typ.)

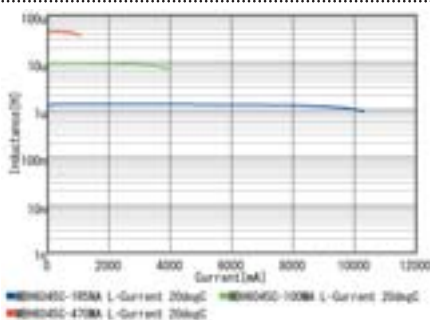

Temperature Rise Characteristics (Typ.)

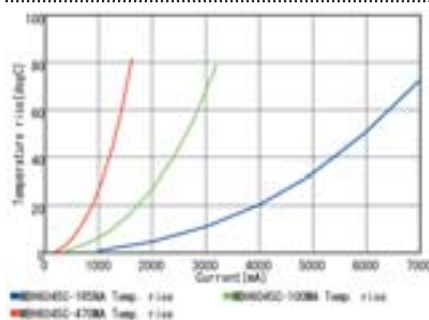

Inductance-Frequency Characteristics (Typ.)

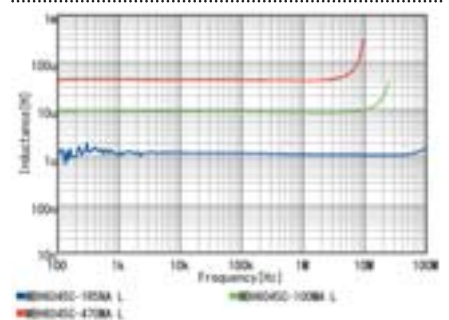


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature
(derating curve).


Derating of Rated Current

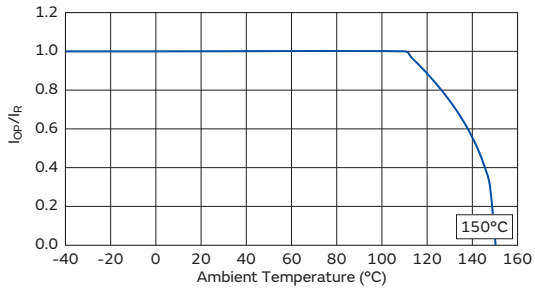

Inductors for Power Lines

MBH6045C Low Rdc Series 2424 (6262) inch (mm)

Appearance/Dimensions

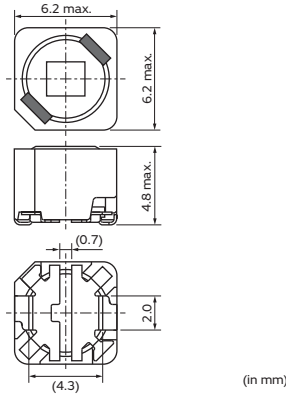

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH6045C-1R0ND□ | 1.0μH ±30% | 0.1MHz | 4400mA | 4400mA | 0.014Ω±30% |
| — | MBH6045C-1R5NB□ | 1.5μH ±30% | 0.1MHz | 3500mA | 4400mA | 0.015Ω±30% |
| — | MBH6045C-3R3NB□ | 3.3μH ±30% | 0.1MHz | 2300mA | 3500mA | 0.019Ω±30% |
| — | MBH6045C-4R7NB□ | 4.7μH ±30% | 0.1MHz | 2000mA | 3200mA | 0.023Ω±30% |
| — | MBH6045C-6R8NB□ | 6.8μH ±30% | 0.1MHz | 1600mA | 2600mA | 0.027Ω±30% |
| — | MBH6045C-100MB□ | 10μH ±20% | 0.1MHz | 1200mA | 2500mA | 0.038Ω±20% |
| — | MBH6045C-150MB□ | 15μH ±20% | 0.1MHz | 900mA | 2100mA | 0.055Ω±20% |
| — | MBH6045C-220MB□ | 22μH ±20% | 0.1MHz | 900mA | 1700mA | 0.078Ω±20% |
| — | MBH6045C-330MB□ | 33μH ±20% | 0.1MHz | 700mA | 1500mA | 0.103Ω±20% |
| — | MBH6045C-470MB□ | 47μH ±20% | 0.1MHz | 560mA | 1100mA | 0.130Ω±20% |
| — | MBH6045C-680MB□ | 68μH ±20% | 0.1MHz | 480mA | 940mA | 0.215Ω±20% |
| — | MBH6045C-101MB□ | 100μH ±20% | 0.1MHz | 400mA | 830mA | 0.340Ω±20% |
| — | MBH6045C-151MB□ | 150μH ±20% | 0.1MHz | 320mA | 710mA | 0.480Ω±20% |
| — | MBH6045C-221MB□ | 220μH ±20% | 0.1MHz | 260mA | 560mA | 0.780Ω±20% |
| — | MBH6045C-331MB□ | 330μH ±20% | 0.1MHz | 230mA | 480mA | 0.970Ω±20% |
| — | MBH6045C-471MB□ | 470μH ±20% | 0.1MHz | 180mA | 410mA | 1.420Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Current Characteristics (Typ.)

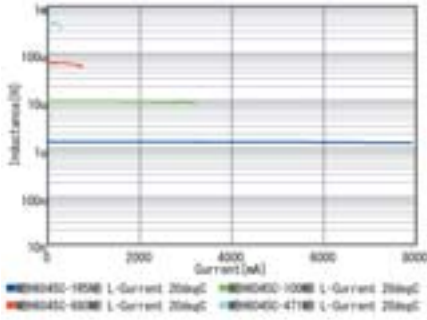

Temperature Rise Characteristics (Typ.)

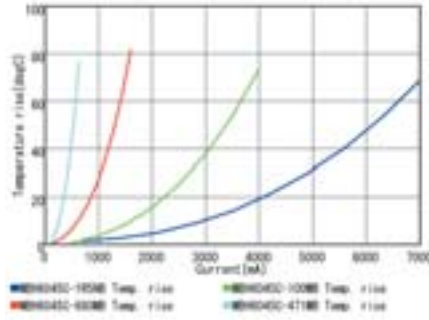


Inductance-Frequency Characteristics (Typ.)

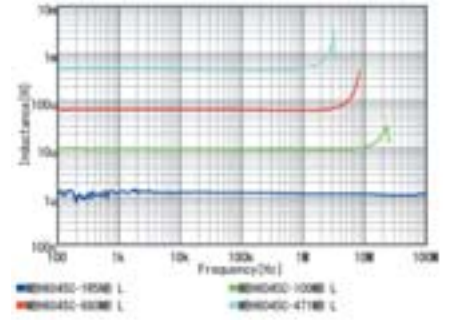

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

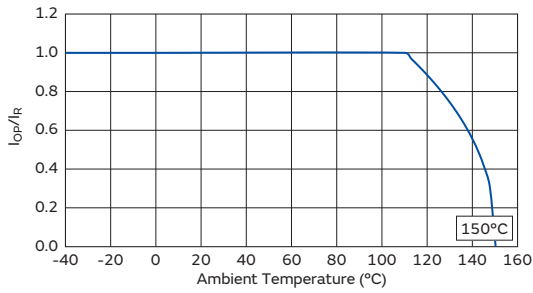

Inductors for Power Lines

MDH6045C High Current Series 2524 (6360) inch (mm)

Appearance/Dimensions

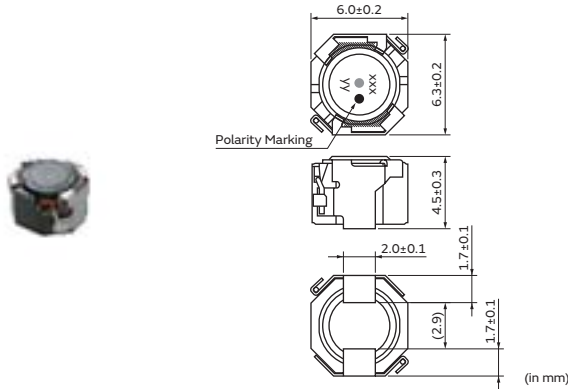

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MDH6045C-1R0NA□ | 1.0μH ±30% | 0.1MHz | 5800mA | 3900mA | 0.011Ω±30% |
| — | MDH6045C-1R5NA□ | 1.5μH ±30% | 0.1MHz | 5000mA | 3600mA | 0.013Ω±30% |
| — | MDH6045C-2R2NA□ | 2.2μH ±30% | 0.1MHz | 4200mA | 3400mA | 0.015Ω±30% |
| — | MDH6045C-3R3NA□ | 3.3μH ±30% | 0.1MHz | 3600mA | 3000mA | 0.019Ω±30% |
| — | MDH6045C-4R7NA□ | 4.7μH ±30% | 0.1MHz | 2900mA | 2700mA | 0.023Ω±30% |
| — | MDH6045C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 2500mA | 2500mA | 0.027Ω±30% |
| — | MDH6045C-100MA□ | 10μH ±20% | 0.1MHz | 2000mA | 1900mA | 0.040Ω±30% |
| — | MDH6045C-150MA□ | 15μH ±20% | 0.1MHz | 1600mA | 1700mA | 0.060Ω±30% |
| — | MDH6045C-220MA□ | 22μH ±20% | 0.1MHz | 1400mA | 1400mA | 0.082Ω±30% |
| — | MDH6045C-330MA□ | 33μH ±20% | 0.1MHz | 1000mA | 1200mA | 0.130Ω±30% |
| — | MDH6045C-470MA□ | 47μH ±20% | 0.1MHz | 880mA | 1000mA | 0.160Ω±30% |
| — | MDH6045C-680MA□ | 68μH ±20% | 0.1MHz | 720mA | 800mA | 0.220Ω±30% |
| — | MDH6045C-101MA□ | 100μH ±20% | 0.1MHz | 600mA | 640mA | 0.340Ω±30% |
| — | MDH6045C-151MA□ | 150μH ±20% | 0.1MHz | 520mA | 540mA | 0.520Ω±30% |
| — | MDH6045C-221MA□ | 220μH ±20% | 0.1MHz | 400mA | 440mA | 0.720Ω±30% |

Operating temp.range (Self-temp.rise included): -55 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

The saturation allowable DC current value is specified when the decrease of the nominal Inductance value at 30%. (The ambient reference temperature is 20°C)


Rated Current (Based on Temperature rise) is specified when temperature of the inductor on our PCB for test purpose is raised 40°C by DC current. (The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Current Characteristics (Typ.)

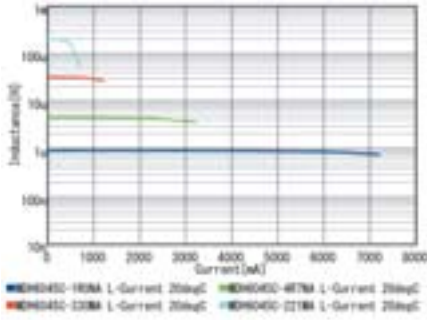

Temperature Rise Characteristics (Typ.)

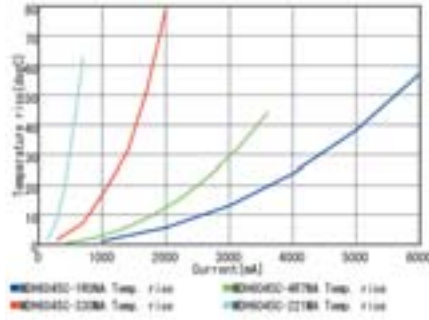


Inductance-Frequency Characteristics (Typ.)

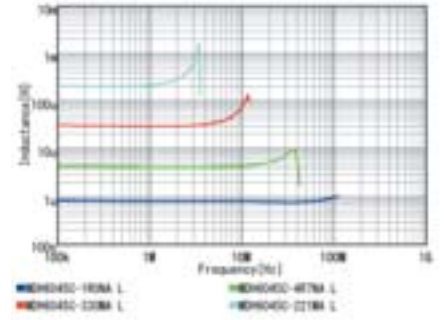

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

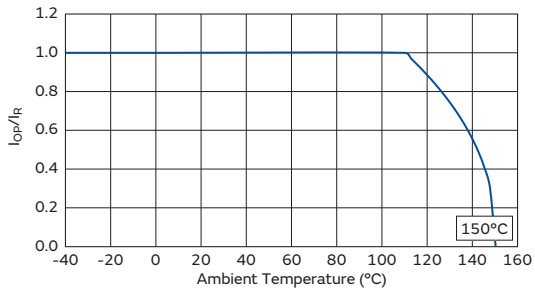

Inductors for Power Lines

MDH6045C Low Rdc Series 2524 (6360) inch (mm)

Appearance/Dimensions

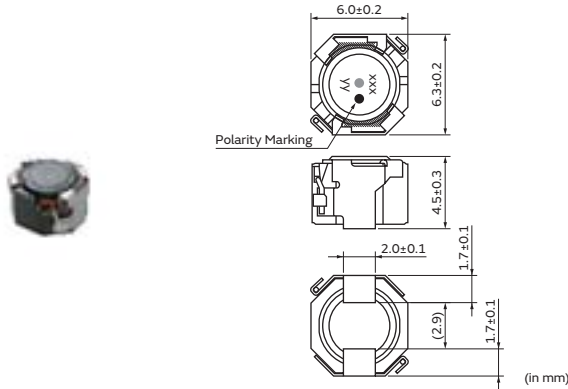

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MDH6045C-1R2NB□ | 1.2μH ±30% | 0.1MHz | 5500mA | 3800mA | 0.011Ω±30% |
| — | MDH6045C-100MB□ | 10μH ±20% | 0.1MHz | 1800mA | 2000mA | 0.038Ω±30% |
| — | MDH6045C-150MB□ | 15μH ±20% | 0.1MHz | 1400mA | 1800mA | 0.055Ω±30% |
| — | MDH6045C-220MB□ | 22μH ±20% | 0.1MHz | 1200mA | 1400mA | 0.080Ω±30% |
| — | MDH6045C-330MB□ | 33μH ±20% | 0.1MHz | 960mA | 1300mA | 0.105Ω±30% |
| — | MDH6045C-470MB□ | 47μH ±20% | 0.1MHz | 760mA | 1100mA | 0.130Ω±30% |
| — | MDH6045C-680MB□ | 68μH ±20% | 0.1MHz | 680mA | 840mA | 0.200Ω±30% |
| — | MDH6045C-101MB□ | 100μH ±20% | 0.1MHz | 560mA | 680mA | 0.340Ω±30% |
| — | MDH6045C-151MB□ | 150μH ±20% | 0.1MHz | 440mA | 580mA | 0.500Ω±30% |
| — | MDH6045C-221MB□ | 220μH ±20% | 0.1MHz | 360mA | 480mA | 0.700Ω±30% |
| — | MDH6045C-331MB□ | 330μH ±20% | 0.1MHz | 300mA | 380mA | 0.970Ω±30% |
| — | MDH6045C-471MB□ | 470μH ±20% | 0.1MHz | 240mA | 340mA | 1.450Ω±30% |

Operating temp.range (Self-temp.rise included): -55 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

The saturation allowable DC current value is specified when the decrease of the nominal Inductance value at 30%.(The ambient reference temperature is 20°C)


Rated Current (Based on Temperature rise) is specified when temperature of the inductor on our PCB for test purpose is raised 40°C by DC current.(The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core


Inductance-Current Characteristics (Typ.)

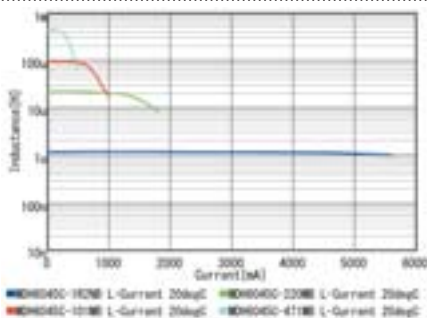

Temperature Rise Characteristics (Typ.)

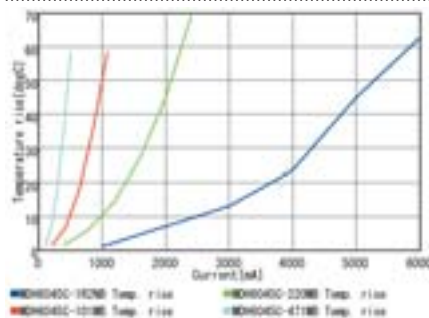

Inductance-Frequency Characteristics (Typ.)

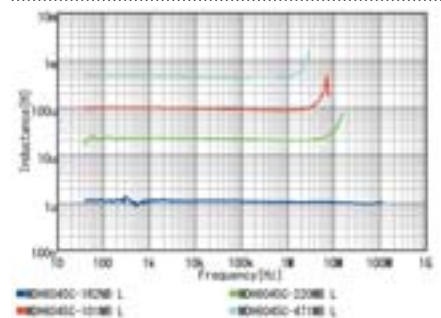

Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature
(derating curve).


Derating of Rated Current



Inductors for Power Lines

MBH7045C High Current Series 2828 (7272) inch (mm)

Appearance/Dimensions

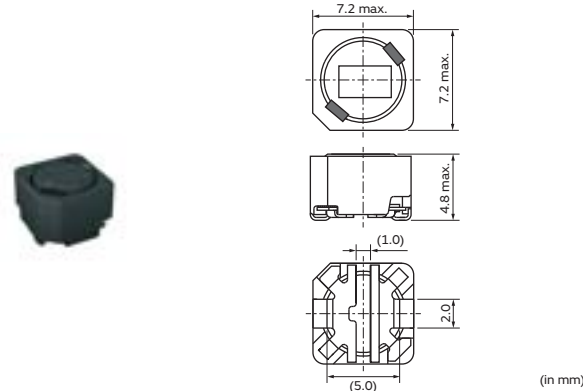

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH7045C-2R2NB□ | 2.2μH ±30% | 0.1MHz | 4600mA | 3500mA | 0.0155Ω±20% |
| — | MBH7045C-3R3NB□ | 3.3μH ±30% | 0.1MHz | 3300mA | 3400mA | 0.021Ω±20% |
| — | MBH7045C-4R7NB□ | 4.7μH ±30% | 0.1MHz | 3000mA | 2900mA | 0.024Ω±20% |
| — | MBH7045C-6R8NB□ | 6.8μH ±30% | 0.1MHz | 2400mA | 2800mA | 0.029Ω±20% |
| — | MBH7045C-100MB□ | 10μH ±20% | 0.1MHz | 2000mA | 2700mA | 0.036Ω±20% |
| — | MBH7045C-150MB□ | 15μH ±20% | 0.1MHz | 1600mA | 2100mA | 0.054Ω±20% |
| — | MBH7045C-220MB□ | 22μH ±20% | 0.1MHz | 1400mA | 1800mA | 0.070Ω±20% |
| — | MBH7045C-330MB□ | 33μH ±20% | 0.1MHz | 1100mA | 1500mA | 0.105Ω±20% |
| — | MBH7045C-470MB□ | 47μH ±20% | 0.1MHz | 900mA | 1100mA | 0.150Ω±20% |
| — | MBH7045C-680MB□ | 68μH ±20% | 0.1MHz | 750mA | 1000mA | 0.210Ω±20% |
| — | MBH7045C-101MB□ | 100μH ±20% | 0.1MHz | 630mA | 840mA | 0.310Ω±20% |
| — | MBH7045C-151MB□ | 150μH ±20% | 0.1MHz | 510mA | 670mA | 0.460Ω±20% |
| — | MBH7045C-221MB□ | 220μH ±20% | 0.1MHz | 400mA | 550mA | 0.690Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Inductance-Current Characteristics (Typ.)

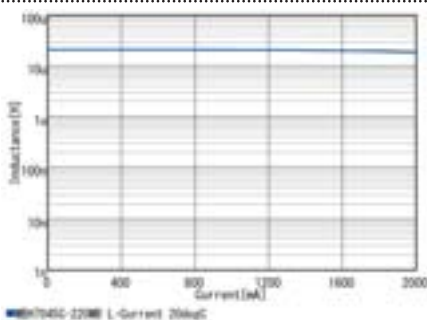

Temperature Rise Characteristics (Typ.)

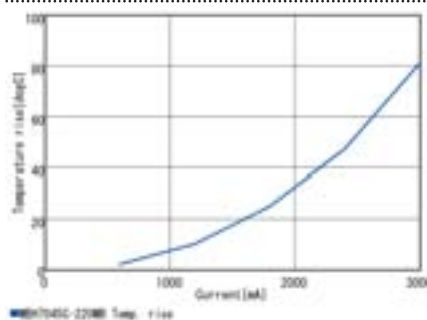

Inductance-Frequency Characteristics (Typ.)

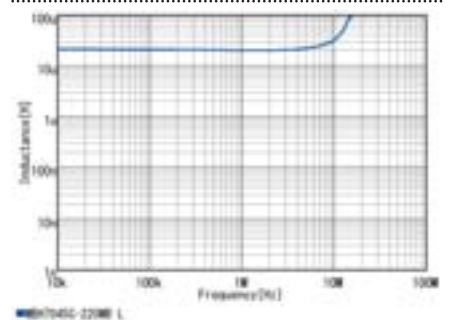


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature
(derating curve).


Derating of Rated Current

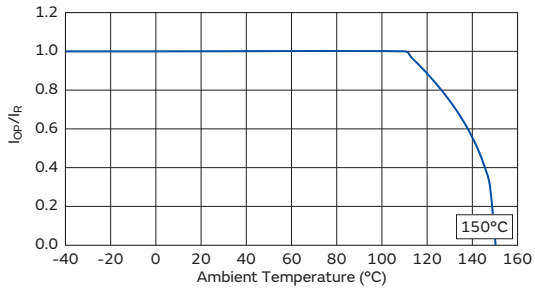

Inductors for Power Lines

MBH7045C Low Rdc Series 2828 (7272) inch (mm)

Appearance/Dimensions

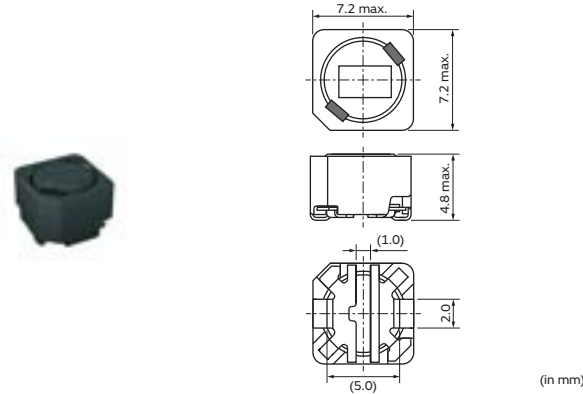

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|-------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH7045C-3R3NA□ | 3.3μH ±30% | 0.1MHz | 2500mA | 3500mA | 0.019Ω±20% |
| — | MBH7045C-4R7NA□ | 4.7μH ±30% | 0.1MHz | 2000mA | 3200mA | 0.023Ω±20% |
| — | MBH7045C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 1700mA | 2700mA | 0.028Ω±20% |
| — | MBH7045C-100MA□ | 10μH ±20% | 0.1MHz | 1300mA | 2500mA | 0.036Ω±20% |
| — | MBH7045C-150MA□ | 15μH ±20% | 0.1MHz | 1100mA | 2100mA | 0.052Ω±20% |
| — | MBH7045C-220MA□ | 22μH ±20% | 0.1MHz | 1000mA | 1900mA | 0.061Ω±20% |
| — | MBH7045C-330MA□ | 33μH ±20% | 0.1MHz | 800mA | 1400mA | 0.096Ω±20% |
| — | MBH7045C-470MA□ | 47μH ±20% | 0.1MHz | 700mA | 1300mA | 0.125Ω±20% |
| — | MBH7045C-680MA□ | 68μH ±20% | 0.1MHz | 590mA | 1100mA | 0.175Ω±20% |
| — | MBH7045C-101MA□ | 100μH ±20% | 0.1MHz | 480mA | 1000mA | 0.250Ω±20% |
| — | MBH7045C-151MA□ | 150μH ±20% | 0.1MHz | 390mA | 790mA | 0.340Ω±20% |
| — | MBH7045C-221MA□ | 220μH ±20% | 0.1MHz | 340mA | 650mA | 0.520Ω±20% |
| — | MBH7045C-331MA□ | 330μH ±20% | 0.1MHz | 250mA | 540mA | 0.740Ω±20% |
| — | MBH7045C-471MA□ | 470μH ±20% | 0.1MHz | 220mA | 430mA | 1.050Ω±20% |
| — | MBH7045C-681MA□ | 680μH ±20% | 0.1MHz | 200mA | 360mA | 1.480Ω±20% |
| — | MBH7045C-102MA□ | 1000μH ±20% | 0.1MHz | 140mA | 310mA | 2.280Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Current Characteristics (Typ.)

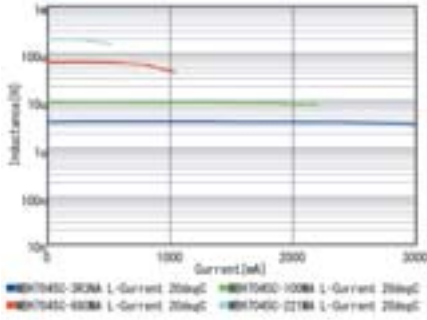

Temperature Rise Characteristics (Typ.)

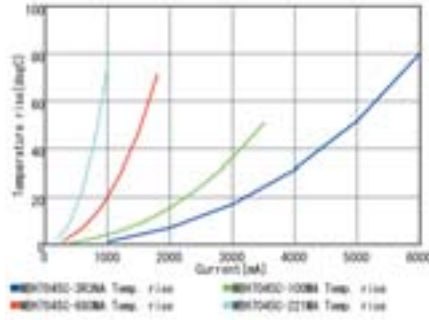

Inductance-Frequency Characteristics (Typ.)

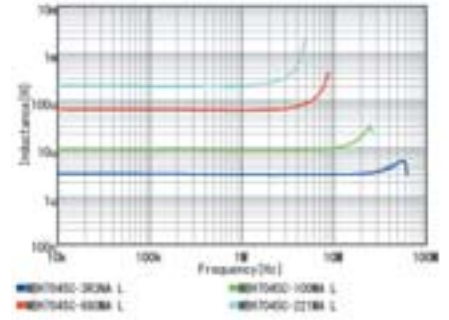

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current



Inductors for Power Lines

MDH7045C Series 2928 (7470) inch (mm)

Appearance/Dimensions

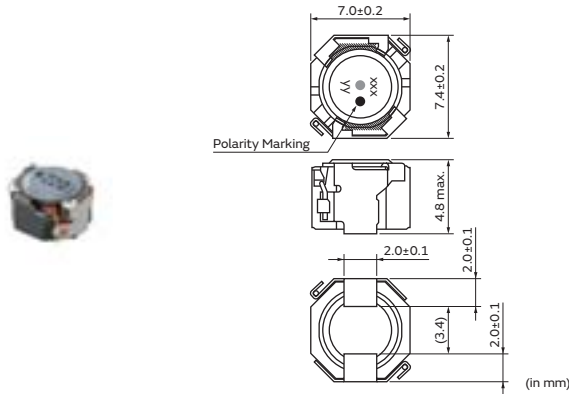

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MDH7045C-1R0NB□ | 1.0μH ±30% | 0.1MHz | 8800mA | 4700mA | 0.009Ω±30% |
| — | MDH7045C-1R5NB□ | 1.5μH ±30% | 0.1MHz | 7100mA | 4300mA | 0.010Ω±30% |
| — | MDH7045C-2R2NB□ | 2.2μH ±30% | 0.1MHz | 5800mA | 4100mA | 0.013Ω±30% |
| — | MDH7045C-3R3NB□ | 3.3μH ±30% | 0.1MHz | 5000mA | 3400mA | 0.016Ω±30% |
| — | MDH7045C-4R7NB□ | 4.7μH ±30% | 0.1MHz | 4200mA | 3000mA | 0.018Ω±30% |
| — | MDH7045C-6R8NB□ | 6.8μH ±30% | 0.1MHz | 3400mA | 2800mA | 0.022Ω±30% |
| — | MDH7045C-100MA□ | 10μH ±20% | 0.1MHz | 2500mA | 2600mA | 0.033Ω±30% |
| — | MDH7045C-150MA□ | 15μH ±20% | 0.1MHz | 2000mA | 1800mA | 0.055Ω±30% |
| — | MDH7045C-220MA□ | 22μH ±20% | 0.1MHz | 1600mA | 1700mA | 0.069Ω±30% |
| — | MDH7045C-330MA□ | 33μH ±20% | 0.1MHz | 1400mA | 1300mA | 0.097Ω±30% |
| — | MDH7045C-470MA□ | 47μH ±20% | 0.1MHz | 1100mA | 1100mA | 0.13Ω±30% |
| — | MDH7045C-680MA□ | 68μH ±20% | 0.1MHz | 960mA | 880mA | 0.20Ω±30% |
| — | MDH7045C-101MA□ | 100μH ±20% | 0.1MHz | 750mA | 800mA | 0.29Ω±30% |
| — | MDH7045C-151MA□ | 150μH ±20% | 0.1MHz | 640mA | 600mA | 0.43Ω±30% |
| — | MDH7045C-221MA□ | 220μH ±20% | 0.1MHz | 530mA | 510mA | 0.55Ω±30% |
| — | MDH7045C-331MA□ | 330μH ±20% | 0.1MHz | 420mA | 490mA | 0.80Ω±30% |
| — | MDH7045C-471MA□ | 470μH ±20% | 0.1MHz | 360mA | 350mA | 1.20Ω±30% |

Operating temp.range (Self-temp.rise included): -55 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

The saturation allowable DC current value is specified when the decrease of the nominal Inductance value at 30%.(The ambient reference temperature is 20°C)


Rated Current (Based on Temperature rise) is specified when temperature of the inductor on our PCB for test purpose is raised 40°C by DC current.(The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Current Characteristics (Typ.)

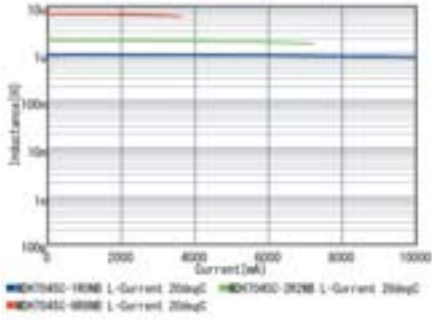

Temperature Rise Characteristics (Typ.)

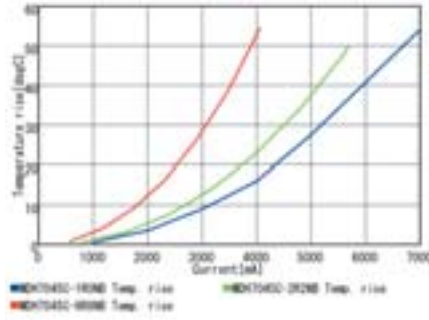


Inductance-Frequency Characteristics (Typ.)

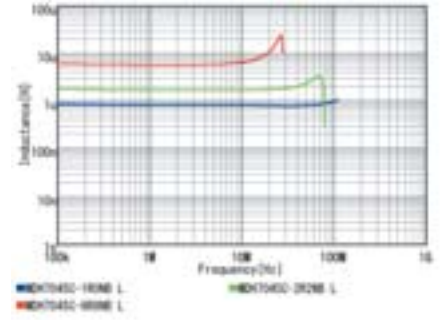

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

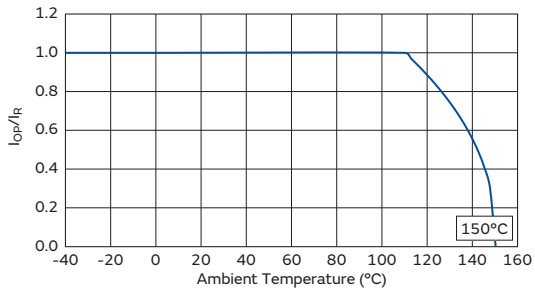

Inductors for Power Lines

MDH10060C Series 4039 (101100) inch (mm)

Appearance/Dimensions

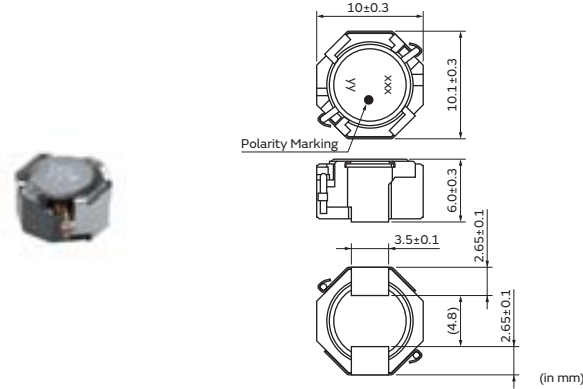

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MDH10060C-4R7NA□ | 4.7μH ±30% | 0.1MHz | 5900mA | 4900mA | 0.010Ω±30% |
| — | MDH10060C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 5000mA | 4300mA | 0.013Ω±30% |
| — | MDH10060C-100MA□ | 10μH ±20% | 0.1MHz | 4100mA | 3800mA | 0.017Ω±30% |
| — | MDH10060C-150MA□ | 15μH ±20% | 0.1MHz | 3400mA | 3100mA | 0.027Ω±30% |
| — | MDH10060C-220MA□ | 22μH ±20% | 0.1MHz | 2800mA | 2700mA | 0.040Ω±30% |
| — | MDH10060C-330MA□ | 33μH ±20% | 0.1MHz | 2200mA | 2200mA | 0.061Ω±30% |
| — | MDH10060C-470MA□ | 47μH ±20% | 0.1MHz | 1900mA | 2000mA | 0.074Ω±30% |
| — | MDH10060C-680MA□ | 68μH ±20% | 0.1MHz | 1600mA | 1700mA | 0.091Ω±30% |
| — | MDH10060C-101MA□ | 100μH ±20% | 0.1MHz | 1300mA | 1300mA | 0.150Ω±30% |
| — | MDH10060C-151MA□ | 150μH ±20% | 0.1MHz | 1000mA | 1000mA | 0.240Ω±30% |
| — | MDH10060C-221MA□ | 220μH ±20% | 0.1MHz | 880mA | 880mA | 0.350Ω±30% |
| — | MDH10060C-331MA□ | 330μH ±20% | 0.1MHz | 720mA | 720mA | 0.480Ω±30% |
| — | MDH10060C-471MA□ | 470μH ±20% | 0.1MHz | 560mA | 560mA | 0.750Ω±30% |

Operating temp.range (Self-temp.rise included): -55 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

The saturation allowable DC current value is specified when the decrease of the nominal Inductance value at 30%.(The ambient reference temperature is 20°C)


Rated Current (Based on Temperature rise) is specified when temperature of the inductor on our PCB for test purpose is raised 40°C by DC current.(The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core


Inductance-Current Characteristics (Typ.)

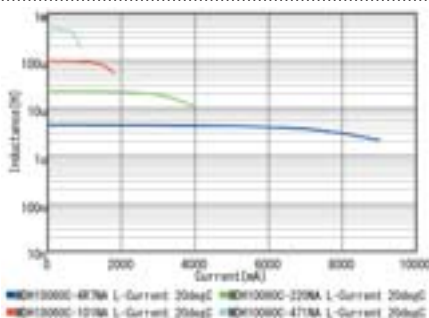

Temperature Rise Characteristics (Typ.)

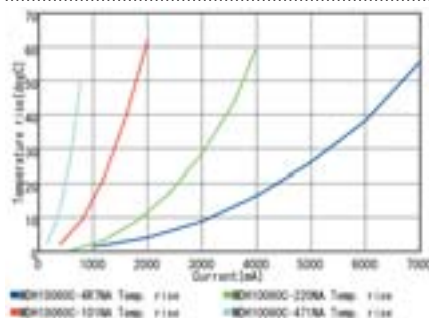

Inductance-Frequency Characteristics (Typ.)

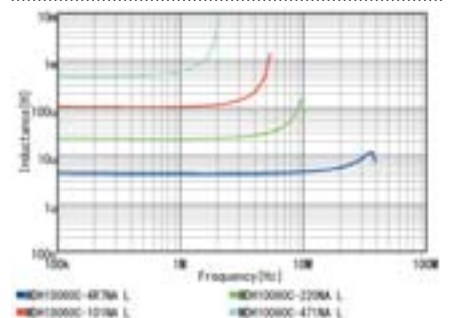

Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature
(derating curve).

Derating of Rated Current



Inductors for Power Lines


Inductors for General Circuits

RF Inductors

Inductors for Power Lines

MBH10145C Series 4141 (104104) inch (mm)

Appearance/Dimensions

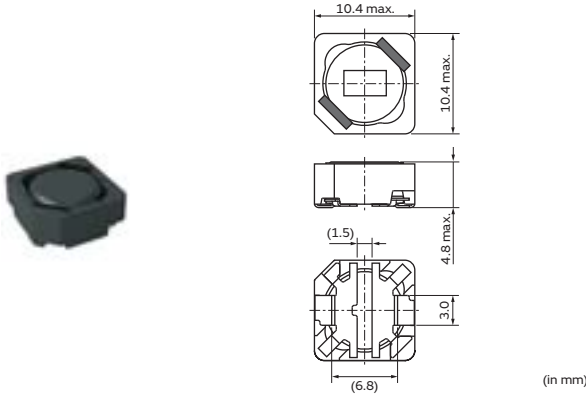

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|-------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH10145C-3R3NA□ | 3.3μH ±30% | 0.1MHz | 4900mA | 4300mA | 0.017Ω±20% |
| — | MBH10145C-5R6NA□ | 5.6μH ±30% | 0.1MHz | 4100mA | 3700mA | 0.022Ω±20% |
| — | MBH10145C-100MA□ | 10μH ±20% | 0.1MHz | 3100mA | 3000mA | 0.037Ω±20% |
| — | MBH10145C-150MA□ | 15μH ±20% | 0.1MHz | 2600mA | 2500mA | 0.048Ω±20% |
| — | MBH10145C-220MA□ | 22μH ±20% | 0.1MHz | 2200mA | 2300mA | 0.060Ω±20% |
| — | MBH10145C-330MA□ | 33μH ±20% | 0.1MHz | 1700mA | 2100mA | 0.082Ω±20% |
| — | MBH10145C-470MA□ | 47μH ±20% | 0.1MHz | 1600mA | 1700mA | 0.100Ω±20% |
| — | MBH10145C-680MA□ | 68μH ±20% | 0.1MHz | 1200mA | 1500mA | 0.140Ω±20% |
| — | MBH10145C-101MA□ | 100μH ±20% | 0.1MHz | 980mA | 1200mA | 0.200Ω±20% |
| — | MBH10145C-151MA□ | 150μH ±20% | 0.1MHz | 750mA | 930mA | 0.350Ω±20% |
| — | MBH10145C-221MA□ | 220μH ±20% | 0.1MHz | 680mA | 850mA | 0.470Ω±20% |
| — | MBH10145C-331MA□ | 330μH ±20% | 0.1MHz | 560mA | 730mA | 0.680Ω±20% |
| — | MBH10145C-471MA□ | 470μH ±20% | 0.1MHz | 450mA | 560mA | 1.030Ω±20% |
| — | MBH10145C-681MA□ | 680μH ±20% | 0.1MHz | 380mA | 480mA | 1.600Ω±20% |
| — | MBH10145C-102MA□ | 1000μH ±20% | 0.1MHz | 300mA | 350mA | 2.800Ω±20% |
| — | MBH10145C-152MA□ | 1500μH ±20% | 0.1MHz | 260mA | 330mA | 3.400Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Current Characteristics (Typ.)

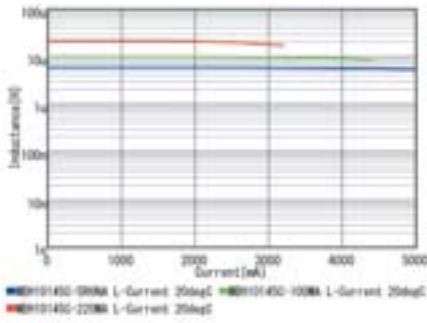

Temperature Rise Characteristics (Typ.)

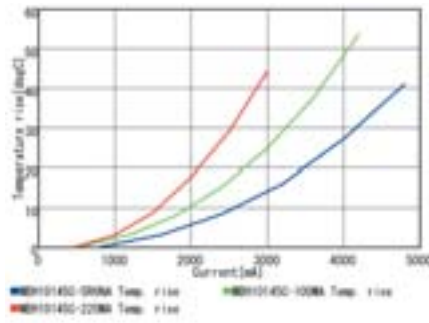


Inductance-Frequency Characteristics (Typ.)

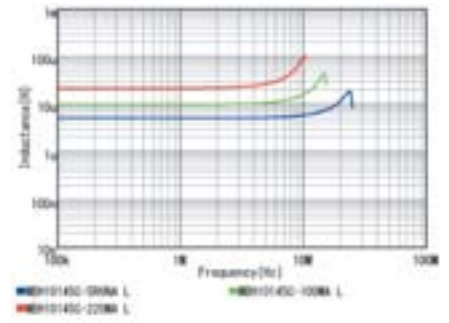

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current

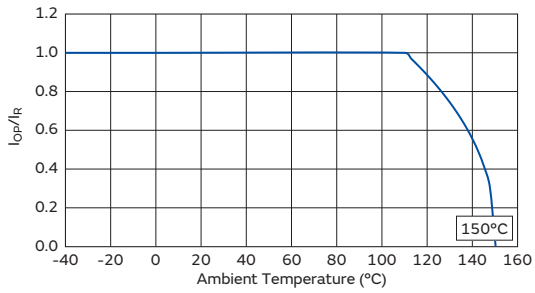

Inductors for Power Lines

MBH12282C Series 4949 (125125) inch (mm)

Appearance/Dimensions

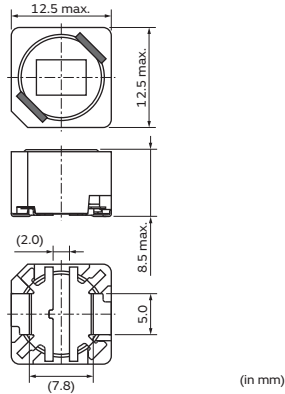

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 300 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|-------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH12282C-2RONA□ | 2.0μH ±30% | 0.1MHz | 1300mA | 730mA | 0.0091Ω±20% |
| — | MBH12282C-3R9NA□ | 3.9μH ±30% | 0.1MHz | 910mA | 620mA | 0.012Ω±20% |
| — | MBH12282C-4R7NA□ | 4.7μH ±30% | 0.1MHz | 790mA | 590mA | 0.013Ω±20% |
| — | MBH12282C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 700mA | 570mA | 0.015Ω±20% |
| — | MBH12282C-100MA□ | 10μH ±20% | 0.1MHz | 570mA | 530mA | 0.019Ω±20% |
| — | MBH12282C-150MA□ | 15μH ±20% | 0.1MHz | 440mA | 470mA | 0.021Ω±20% |
| — | MBH12282C-220MA□ | 22μH ±20% | 0.1MHz | 380mA | 400mA | 0.029Ω±20% |
| — | MBH12282C-330MA□ | 33μH ±20% | 0.1MHz | 300mA | 300mA | 0.047Ω±20% |
| — | MBH12282C-470MA□ | 47μH ±20% | 0.1MHz | 250mA | 260mA | 0.066Ω±20% |
| — | MBH12282C-680MA□ | 68μH ±20% | 0.1MHz | 210mA | 220mA | 0.083Ω±20% |
| — | MBH12282C-820MA□ | 82μH ±20% | 0.1MHz | 190mA | 220mA | 0.091Ω±20% |
| — | MBH12282C-101MA□ | 100μH ±20% | 0.1MHz | 170mA | 190mA | 0.110Ω±20% |
| — | MBH12282C-151MA□ | 150μH ±20% | 0.1MHz | 140mA | 160mA | 0.160Ω±20% |
| — | MBH12282C-221MA□ | 220μH ±20% | 0.1MHz | 110mA | 120mA | 0.250Ω±20% |
| — | MBH12282C-331MA□ | 330μH ±20% | 0.1MHz | 90mA | 110mA | 0.350Ω±20% |
| — | MBH12282C-471MA□ | 470μH ±20% | 0.1MHz | 84mA | 93mA | 0.460Ω±20% |
| — | MBH12282C-681MA□ | 680μH ±20% | 0.1MHz | 66mA | 76mA | 0.720Ω±20% |
| — | MBH12282C-102MA□ | 1000μH ±20% | 0.1MHz | 56mA | 59mA | 1.050Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Current Characteristics (Typ.)

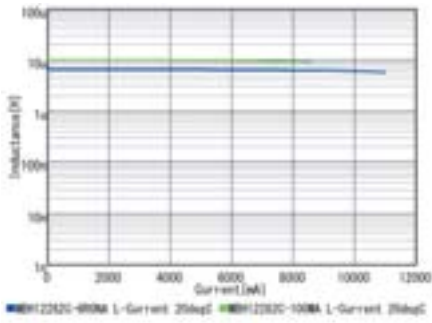

Temperature Rise Characteristics (Typ.)

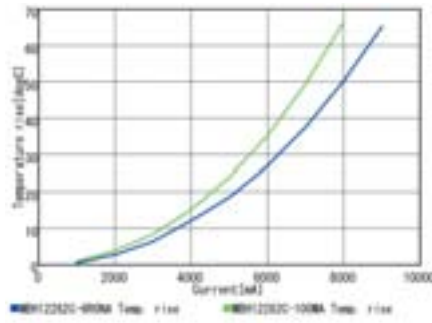

Inductance-Frequency Characteristics (Typ.)

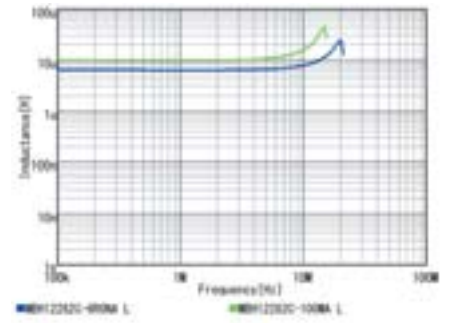

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature (derating curve).


Derating of Rated Current



Inductors for Power Lines

MDH12577C Series 5049 (128125) inch (mm)

Appearance/Dimensions

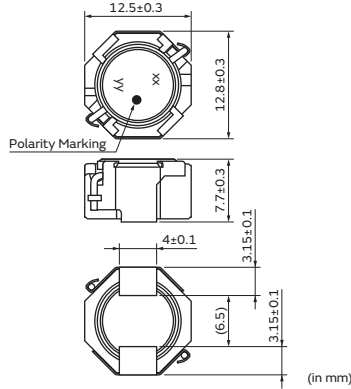

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 300 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MDH12577C-4R7NA□ | 4.7μH ±30% | 0.1MHz | 1100mA | 5400mA | 0.009Ω±30% |
| — | MDH12577C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 8600mA | 4800mA | 0.012Ω±30% |
| — | MDH12577C-100MA□ | 10μH ±20% | 0.1MHz | 7700mA | 4700mA | 0.014Ω±30% |
| — | MDH12577C-150MA□ | 15μH ±20% | 0.1MHz | 5700mA | 3600mA | 0.022Ω±30% |
| — | MDH12577C-220MA□ | 22μH ±20% | 0.1MHz | 4900mA | 3000mA | 0.033Ω±30% |
| — | MDH12577C-330MA□ | 33μH ±20% | 0.1MHz | 4000mA | 2700mA | 0.039Ω±30% |
| — | MDH12577C-470MA□ | 47μH ±20% | 0.1MHz | 3400mA | 2100mA | 0.066Ω±30% |
| — | MDH12577C-680MA□ | 68μH ±20% | 0.1MHz | 2800mA | 1800mA | 0.090Ω±30% |
| — | MDH12577C-101MA□ | 100μH ±20% | 0.1MHz | 2300mA | 1600mA | 0.108Ω±30% |
| — | MDH12577C-151MA□ | 150μH ±20% | 0.1MHz | 1900mA | 1400mA | 0.17Ω±30% |
| — | MDH12577C-221MA□ | 220μH ±20% | 0.1MHz | 1500mA | 1100mA | 0.25Ω±30% |
| — | MDH12577C-331MA□ | 330μH ±20% | 0.1MHz | 1300mA | 900mA | 0.41Ω±30% |
| — | MDH12577C-471MA□ | 470μH ±20% | 0.1MHz | 1000mA | 700mA | 0.54Ω±30% |

Operating temp.range (Self-temp.rise included): -55 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

The saturation allowable DC current value is specified when the decrease of the nominal Inductance value at 30%. (The ambient reference temperature is 20°C)


Rated Current (Based on Temperature rise) is specified when temperature of the inductor on our PCB for test purpose is raised 40°C by DC current. (The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core


Inductance-Current Characteristics (Typ.)

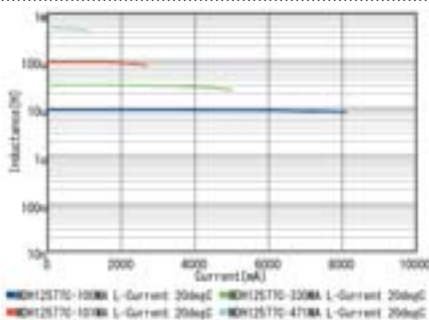

Temperature Rise Characteristics (Typ.)

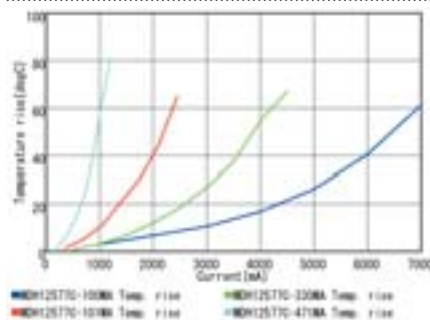

Inductance-Frequency Characteristics (Typ.)

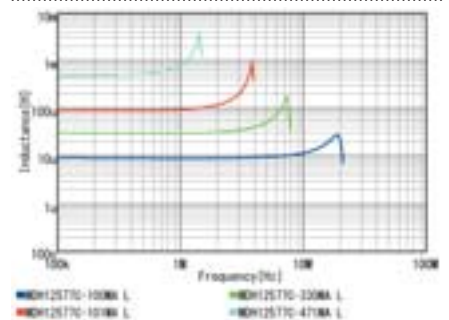


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature
(derating curve).


Derating of Rated Current

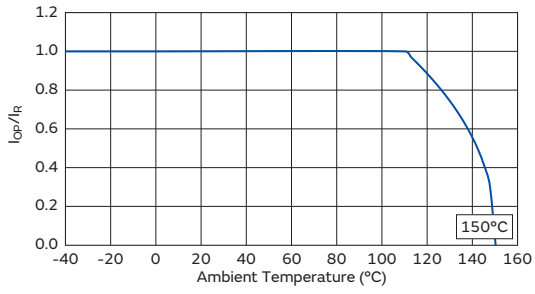

Inductors for Power Lines

MBH12575C Series 5050 (128128) inch (mm)

Appearance/Dimensions

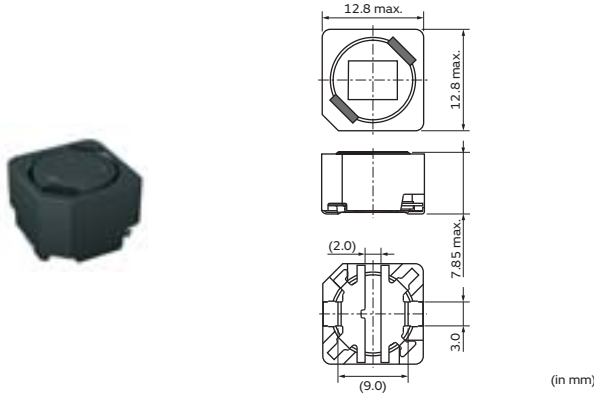

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 300 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| — | MBH12575C-2R7NA□ | 2.7μH ±30% | 0.1MHz | 1000mA | 7100mA | 0.010Ω±20% |
| — | MBH12575C-3R9NA□ | 3.9μH ±30% | 0.1MHz | 8000mA | 6500mA | 0.011Ω±20% |
| — | MBH12575C-5R6NA□ | 5.6μH ±30% | 0.1MHz | 7000mA | 6000mA | 0.012Ω±20% |
| — | MBH12575C-6R8NA□ | 6.8μH ±30% | 0.1MHz | 5900mA | 5600mA | 0.014Ω±20% |
| — | MBH12575C-100MA□ | 10μH ±20% | 0.1MHz | 4900mA | 5200mA | 0.016Ω±20% |
| — | MBH12575C-150MA□ | 15μH ±20% | 0.1MHz | 3800mA | 4700mA | 0.019Ω±20% |
| — | MBH12575C-220MA□ | 22μH ±20% | 0.1MHz | 3100mA | 4000mA | 0.027Ω±20% |
| — | MBH12575C-330MA□ | 33μH ±20% | 0.1MHz | 2800mA | 3400mA | 0.040Ω±20% |
| — | MBH12575C-470MA□ | 47μH ±20% | 0.1MHz | 2100mA | 2700mA | 0.053Ω±20% |
| — | MBH12575C-680MA□ | 68μH ±20% | 0.1MHz | 1700mA | 2100mA | 0.077Ω±20% |
| — | MBH12575C-101MA□ | 100μH ±20% | 0.1MHz | 1500mA | 1700mA | 0.120Ω±20% |
| — | MBH12575C-151MA□ | 150μH ±20% | 0.1MHz | 1300mA | 1400mA | 0.170Ω±20% |
| — | MBH12575C-221MA□ | 220μH ±20% | 0.1MHz | 1000mA | 1200mA | 0.250Ω±20% |

Operating temp.range (Self-temp.rise included): -40 to 150°C

Inductance:

Measured with an LCR meter 4284A (Keysight) or equivalent.

RDC:

Measured with a Digital Multimeter TR6871 (Advantest) or equivalent.

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 10%. (The ambient reference temperature is 25°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 25°C)

Class of Magnetic Shield: Ferrite Core


Inductance-Current Characteristics (Typ.)

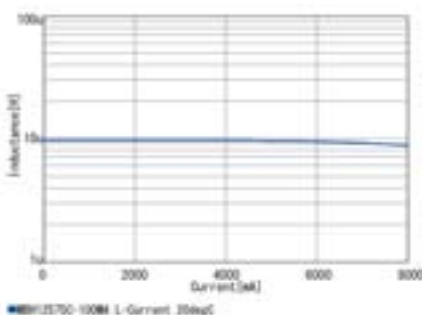

Temperature Rise Characteristics (Typ.)

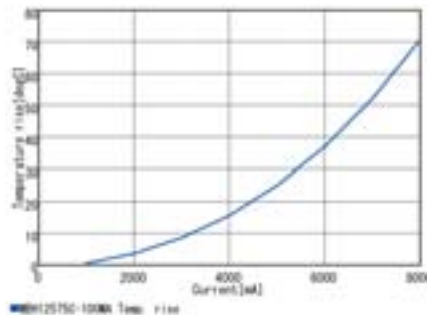

Inductance-Frequency Characteristics (Typ.)

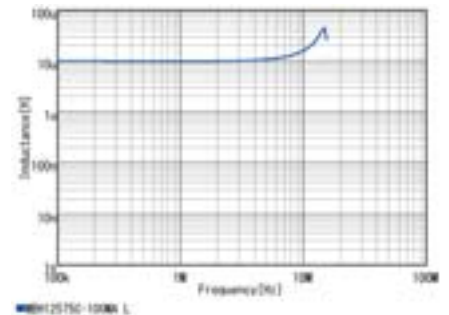

Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

Max. current (DC, AC) as function of ambient temperature
(derating curve).

Derating of Rated Current



Inductors for Power Lines


Inductors for General Circuits

RF Inductors

Inductors for Power Lines

LQM18PZ_CH Series 0603 (1608) inch (mm)

Appearance/Dimensions

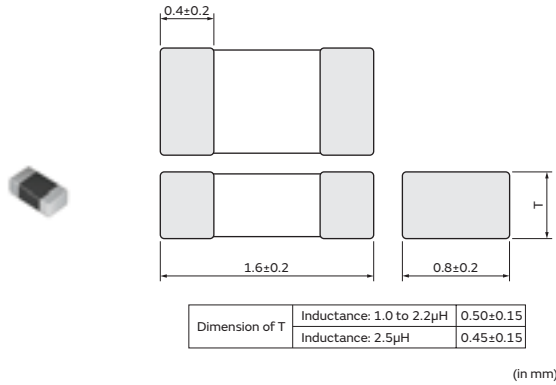

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|---|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQM18PZ1R0MCH□ | — | 1.0μH ±20% | 1MHz | 600mA | 950mA(Ambient temp.85°C) 650mA(Ambient temp.125°C) | 0.29Ω | 80MHz |
| LQM18PZ2R2MCH□ | — | 2.2μH ±20% | 1MHz | 200mA | 750mA(Ambient temp.85°C) 500mA(Ambient temp.125°C) | 0.48Ω | 50MHz |
| LQM18PZ2R5NCH□ | — | 2.5μH ±30% | 1MHz | 100mA | 900mA(Ambient temp.85°C) 640mA(Ambient temp.125°C) | 0.30Ω | 50MHz |

Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core

Only for reflow soldering


*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM18PZ_CH series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, Inductance will be within ±30% of initial Inductance value range. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°Cmax.


Inductance-Frequency Characteristics (Typ.)

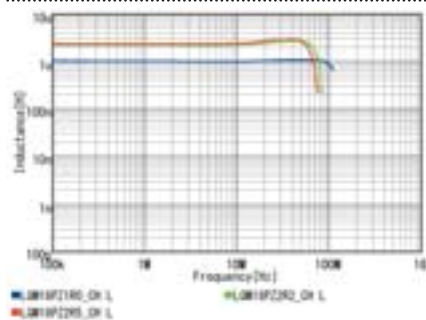

Inductance-Current Characteristics (Typ.)

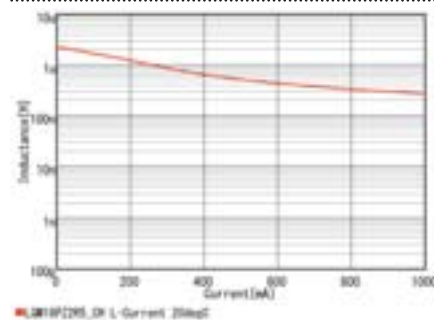

Temperature Rise Characteristics (Typ.)

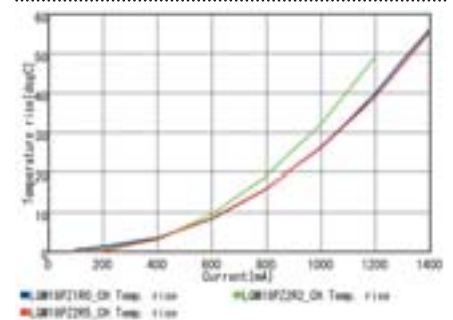

Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.
Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current



Inductors for Power Lines

LQM18PZ_DH Series 0603 (1608) inch (mm)

Appearance/Dimensions

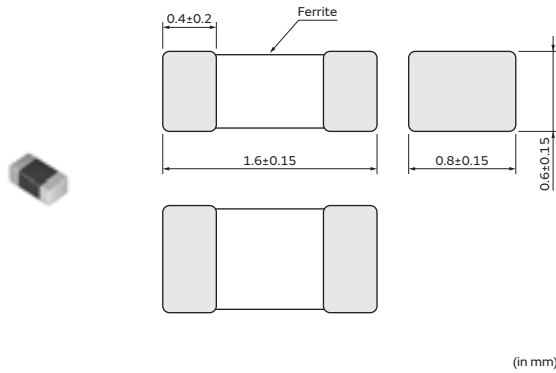

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ∅180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|---|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQM18PZ2R2MDH□ | — | 2.2μH ±20% | 1MHz | 250mA | 650mA(Ambient temp.85°C) 450mA(Ambient temp.125°C) | 0.47Ω | 80MHz |

Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core

Only for reflow soldering


*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM18PZ_DH series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, Inductance will be within ±30% of initial Inductance value range. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°Cmax.


Inductance-Frequency Characteristics (Typ.)

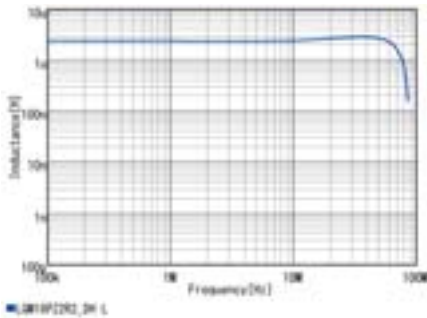

Inductance-Current Characteristics (Typ.)

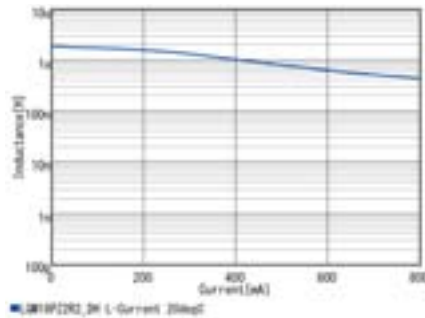

Temperature Rise Characteristics (Typ.)

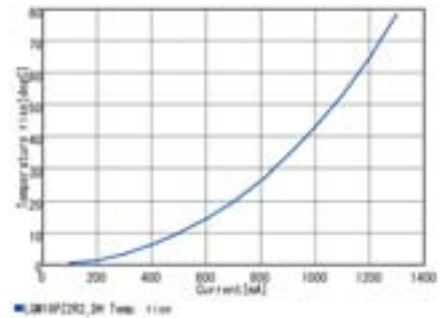


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

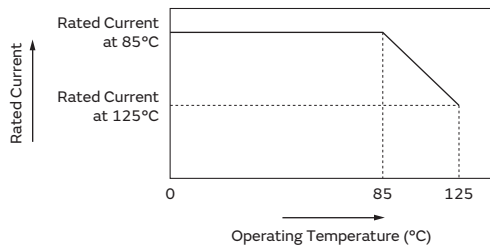

Inductors for Power Lines

LQM18PZ_FH Series 0603 (1608) inch (mm)

Appearance/Dimensions

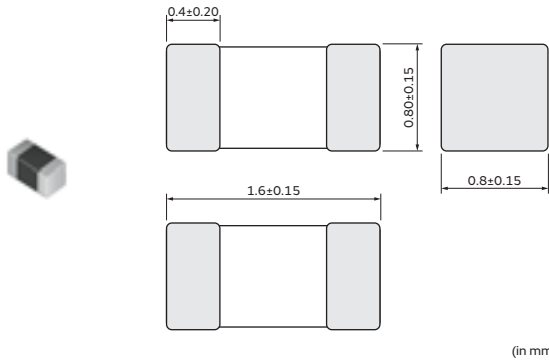

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|---|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQM18PZ2R2MFH□ | — | 2.2μH ±20% | 1MHz | 300mA | 700mA(Ambient temp.85°C) 500mA(Ambient temp.125°C) | 0.47Ω | 80MHz |

Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core

Only for reflow soldering


*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM18PZ_FH series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, Inductance will be within ±30% of initial Inductance value range. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°Cmax.


Inductance-Frequency Characteristics (Typ.)

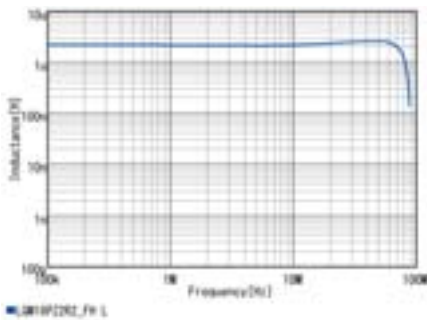

Inductance-Current Characteristics (Typ.)

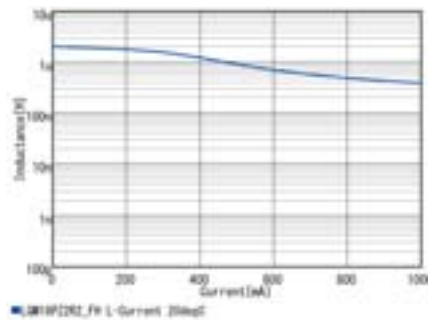

Temperature Rise Characteristics (Typ.)

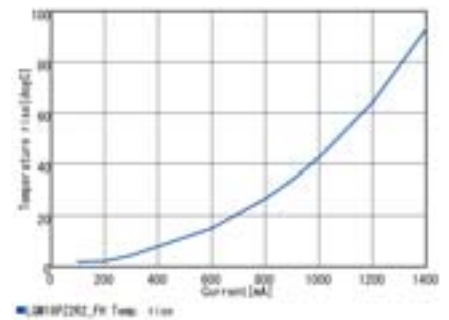


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

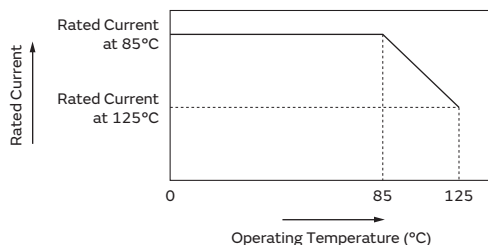

Inductors for Power Lines

LQM21PZ_C0 Series 0805 (2012) inch (mm)

Appearance/Dimensions

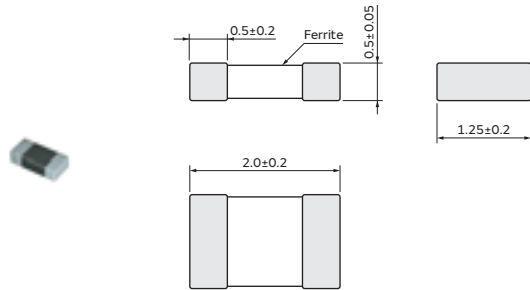

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM21PZR47MC0□ | — | 0.47μH ±20% | 1MHz | 1.1A(Ambient temp.85°C) 0.82A(Ambient temp.125°C) | 0.12Ω±25% | 100MHz |
| LQM21PZ1R0MC0□ | — | 1.0μH ±20% | 1MHz | 0.8A(Ambient temp.85°C) 0.60A(Ambient temp.125°C) | 0.19Ω±25% | 90MHz |
| LQM21PZ1R5MC0□ | — | 1.5μH ±20% | 1MHz | 0.7A(Ambient temp.85°C) 0.52A(Ambient temp.125°C) | 0.26Ω±25% | 70MHz |
| LQM21PZ2R2MC0□ | — | 2.2μH ±20% | 1MHz | 0.6A(Ambient temp.85°C) 0.45A(Ambient temp.125°C) | 0.34Ω±25% | 50MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

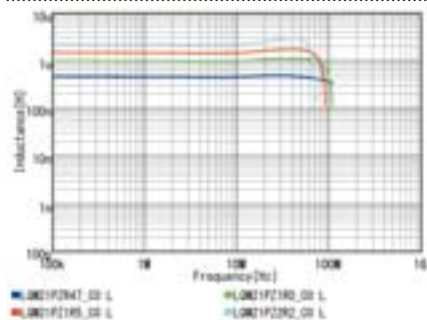

Inductance-Current Characteristics (Typ.)

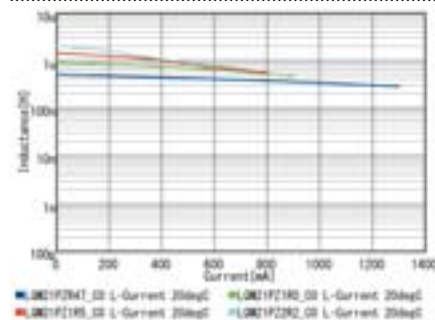

Temperature Rise Characteristics (Typ.)

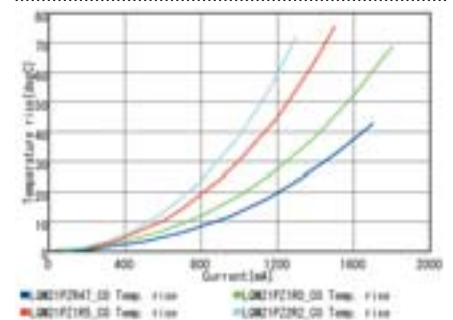


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.
Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

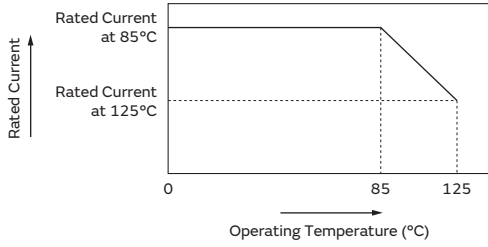

Inductors for Power Lines

LQM21PZ_G0 Series 0805 (2012) inch (mm)

Appearance/Dimensions

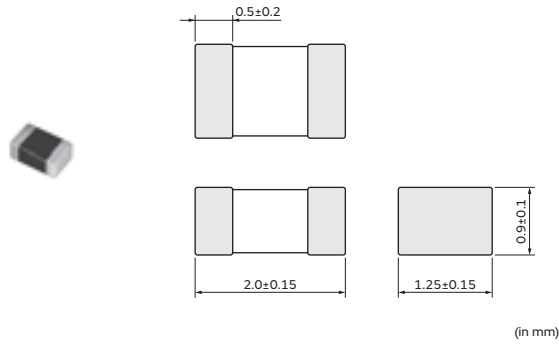

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM21PZR47MG0□ | — | 0.47μH ±20% | 1MHz | 1.3A(Ambient temp.85°C) 0.95A(Ambient temp.125°C) | 0.075Ω(typ.) | 100MHz |
| LQM21PZR54MG0□ | — | 0.54μH ±20% | 1MHz | 1.3A(Ambient temp.85°C) 0.95A(Ambient temp.125°C) | 0.075Ω(typ.) | 100MHz |
| LQM21PZ3R3MG0□ | — | 3.3μH ±20% | 1MHz | 0.8A(Ambient temp.85°C) 0.55A(Ambient temp.125°C) | 0.165Ω(typ.) | 30MHz |
| LQM21PZ3R3NG0□ | — | 3.3μH ±30% | 1MHz | 0.8A(Ambient temp.85°C) 0.55A(Ambient temp.125°C) | 0.165Ω(typ.) | 30MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM21P_G0 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

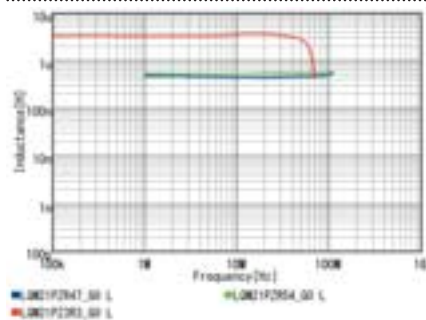

Inductance-Current Characteristics (Typ.)

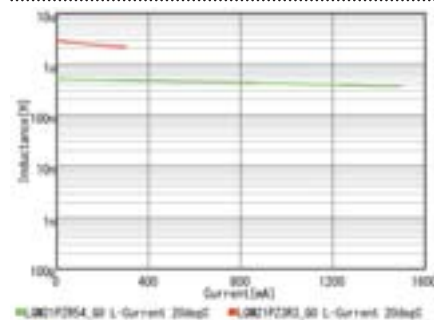

Temperature Rise Characteristics (Typ.)

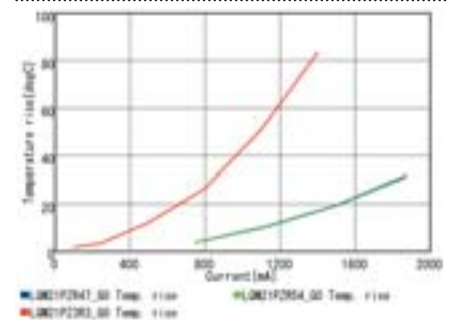


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.
Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

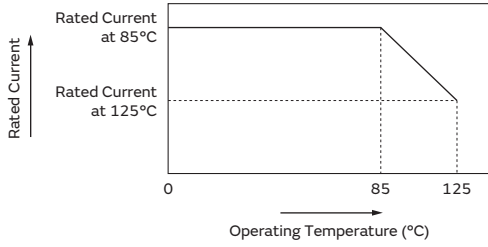

Inductors for Power Lines

LQM21PZ_GC/LQM21PH_GC Series 0805 (2012) inch (mm)

Appearance/Dimensions

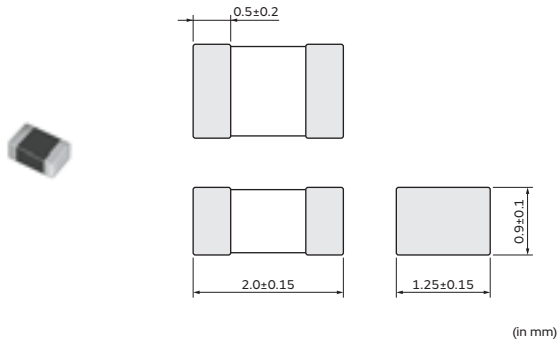

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM21PZ1R0NGC□ | — | 1.0μH ±30% | 1MHz | 0.9A(Ambient temp.85°C) 0.65A(Ambient temp.125°C) | 0.10Ω±25% | 50MHz |
| — | LQM21PH2R2MGC□ | 2.2μH ±20% | 1MHz | 0.8A(Ambient temp.85°C) 0.6A(Ambient temp.125°C) | 0.23Ω±25% | 40MHz |
| LQM21PZ2R2NGC□ | LQM21PH2R2NGC□ | 2.2μH ±30% | 1MHz | 0.8A(Ambient temp.85°C) 0.6A(Ambient temp.125°C) | 0.23Ω±25% | 40MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM21P_GC series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

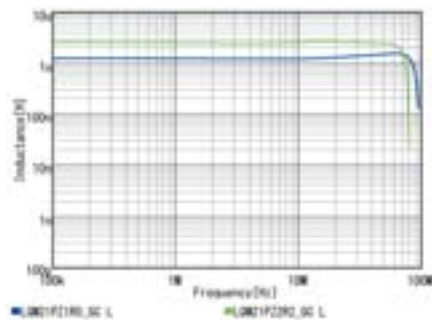

Inductance-Current Characteristics (Typ.)

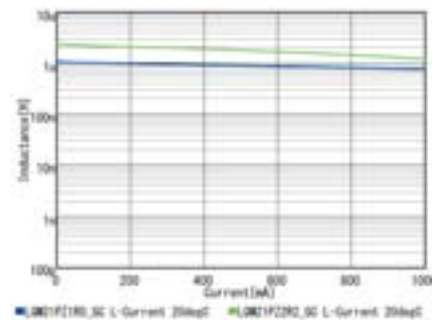

Temperature Rise Characteristics (Typ.)

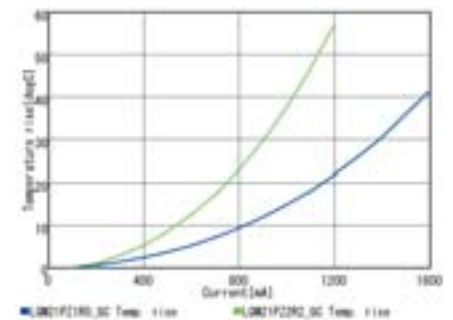

Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.
Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current



Inductors for Power Lines

LQM21PZ_GR Series 0805 (2012) inch (mm)

Appearance/Dimensions

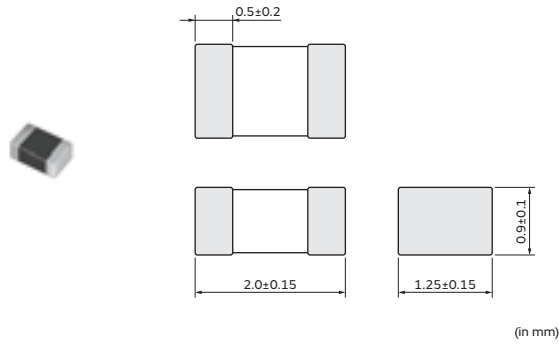

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM21PZ1R0NGR□ | — | 1.0μH ±30% | 1MHz | 1.3A(Ambient temp.85°C) 0.95A(Ambient temp.125°C) | 0.066Ω±25% | 50MHz |
| LQM21PZ3R3MGR□ | — | 3.3μH ±20% | 1MHz | 1.0A(Ambient temp.85°C) 0.75A(Ambient temp.125°C) | 0.15Ω±25% | 30MHz |
| LQM21PZ3R3NGR□ | — | 3.3μH ±30% | 1MHz | 1.0A(Ambient temp.85°C) 0.75A(Ambient temp.125°C) | 0.15Ω±25% | 30MHz |
| LQM21PZ4R7MGR□ | — | 4.7μH ±20% | 1MHz | 0.8A(Ambient temp.85°C) 0.6A(Ambient temp.125°C) | 0.23Ω±25% | 30MHz |
| LQM21PZ4R7NGR□ | — | 4.7μH ±30% | 1MHz | 0.8A(Ambient temp.85°C) 0.6A(Ambient temp.125°C) | 0.23Ω±25% | 30MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

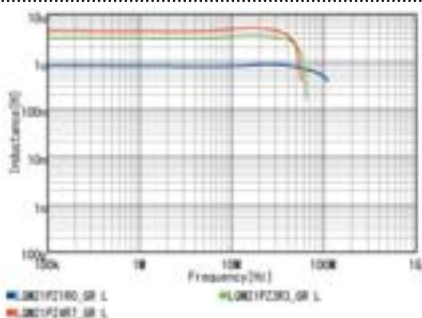

Inductance-Current Characteristics (Typ.)

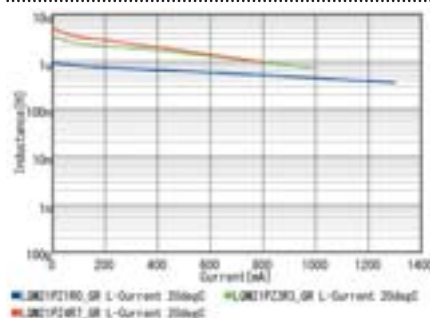

Temperature Rise Characteristics (Typ.)

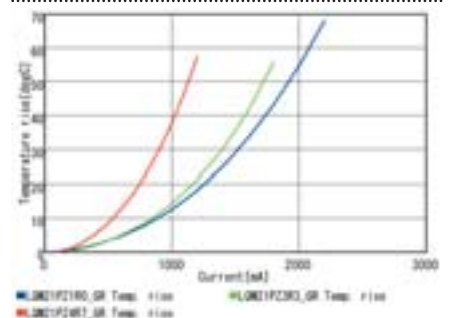


Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.
Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

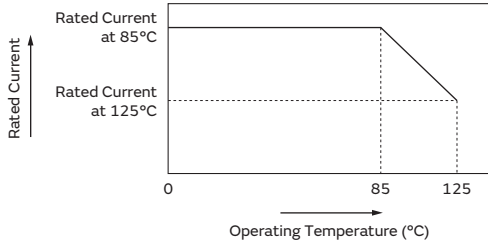

Inductors for Power Lines

LQM2MPZ_GO Series 0806 (2016) inch (mm)

Appearance/Dimensions

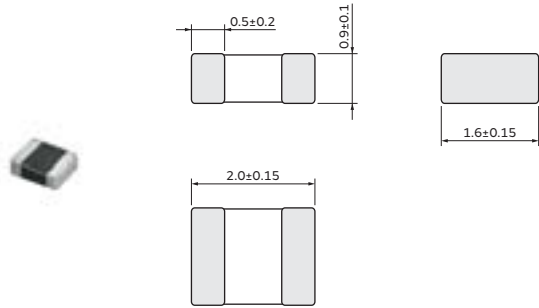

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM2MPZR47MG0□ | — | 0.47μH ±20% | 1MHz | 1.6A(Ambient temp.85°C) 1.2A(Ambient temp.125°C) | 0.060Ω(typ.) | 100MHz |
| LQM2MPZR47NG0□ | — | 0.47μH ±30% | 1MHz | 1.6A(Ambient temp.85°C) 1.2A(Ambient temp.125°C) | 0.060Ω(typ.) | 100MHz |
| LQM2MPZ1R0NG0□ | — | 1.0μH ±30% | 1MHz | 1.4A(Ambient temp.85°C) 1.0A(Ambient temp.125°C) | 0.085Ω(typ.) | 60MHz |
| LQM2MPZ1R5MG0□ | — | 1.5μH ±20% | 1MHz | 1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C) | 0.11Ω(typ.) | 50MHz |
| LQM2MPZ1R5NG0□ | — | 1.5μH ±30% | 1MHz | 1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C) | 0.11Ω(typ.) | 50MHz |
| LQM2MPZ2R2MG0□ | — | 2.2μH ±20% | 1MHz | 1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C) | 0.11Ω(typ.) | 40MHz |
| LQM2MPZ2R2NG0□ | — | 2.2μH ±30% | 1MHz | 1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C) | 0.11Ω(typ.) | 40MHz |
| LQM2MPZ3R3NG0□ | — | 3.3μH ±30% | 1MHz | 1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C) | 0.12Ω(typ.) | 30MHz |
| LQM2MPZ4R7MG0□ | — | 4.7μH ±20% | 1MHz | 1.1A(Ambient temp.85°C) 0.8A(Ambient temp.125°C) | 0.14Ω(typ.) | 20MHz |
| LQM2MPZ4R7NG0□ | — | 4.7μH ±30% | 1MHz | 1.1A(Ambient temp.85°C) 0.8A(Ambient temp.125°C) | 0.14Ω(typ.) | 20MHz |

Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM2MPN_GO series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Continued on the following page. ↗

Continued from the preceding page. ↘


Inductance-Frequency Characteristics (Typ.)

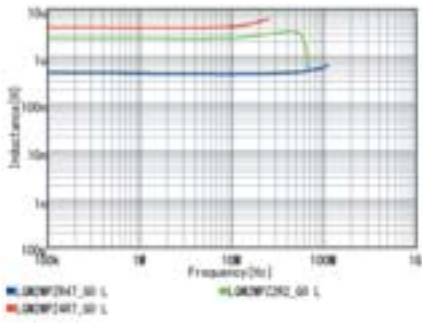

Inductance-Current Characteristics (Typ.)

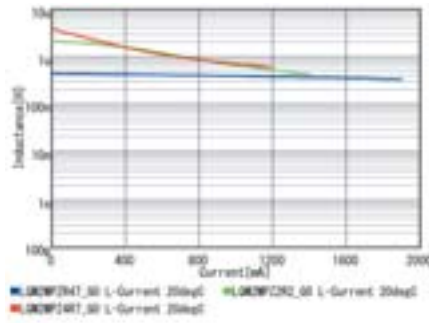


Temperature Rise Characteristics (Typ.)

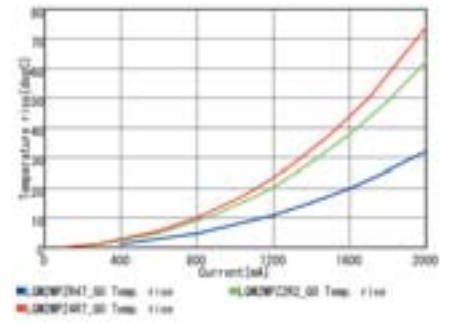

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

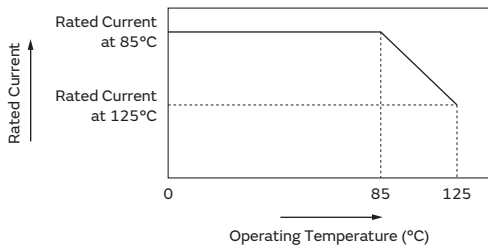

Inductors for Power Lines

LQM2MPZ_JH Series 0806 (2016) inch (mm)

Appearance/Dimensions

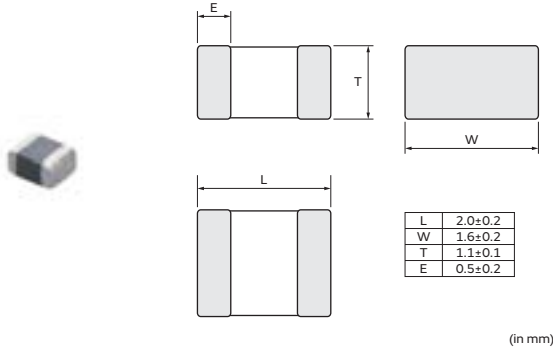

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|-----------------------|---|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQM2MPZR10MJH□ | — | 0.1μH ±20% | 1MHz | 4000mA | 4000mA(Ambient temp.85°C) 3000mA(Ambient temp.125°C) | 0.019Ω | 200MHz |

Operating temp.range: -55 to 125°C
 Class of Magnetic Shield: Ferrite Core


*Isat: Rated Current based on Inductance change

*Itemp: Rated Current based on Temperature rise


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM2MPZ_JH series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, inductance will be within ±30% of initial inductance value range. When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°Cmax.


Inductance-Frequency Characteristics (Typ.)

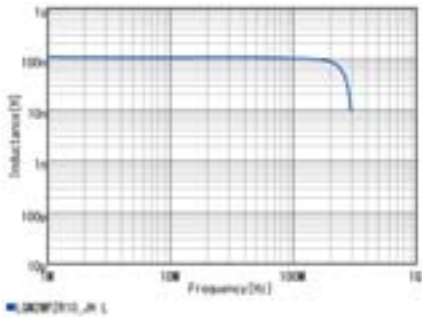

Inductance-Current Characteristics (Typ.)

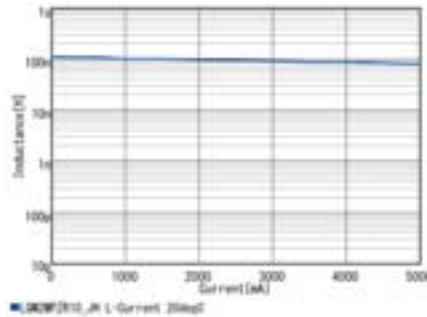

Temperature Rise Characteristics (Typ.)

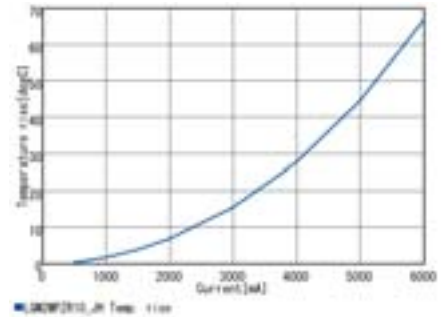


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

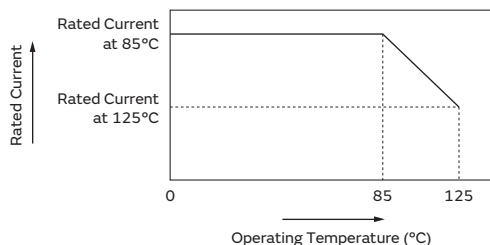

Inductors for Power Lines

LQM2HPZ_E0 Series 1008 (2520) inch (mm)

Appearance/Dimensions

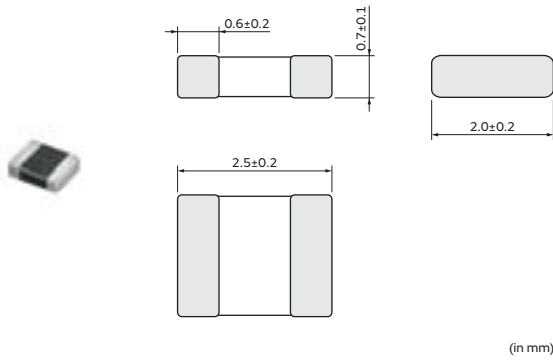

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |


Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM2HPZR56ME0□ | — | 0.56μH ±20% | 1MHz | 1.5A(Ambient temp.85°C) 1.1A(Ambient temp.125°C) | 0.06Ω±25% | 70MHz |


Operating temp.range: -55 to 125°C
 Class of Magnetic Shield: Ferrite Core
 *S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

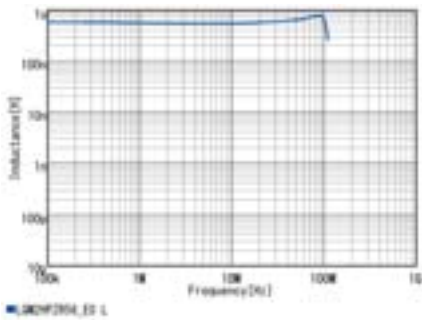

Inductance-Current Characteristics (Typ.)

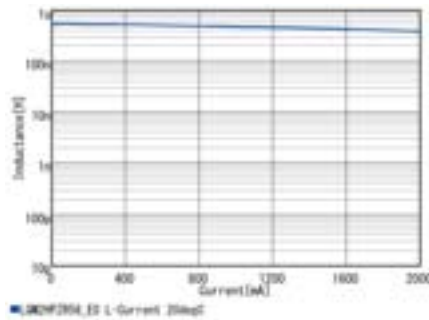


Temperature Rise Characteristics (Typ.)

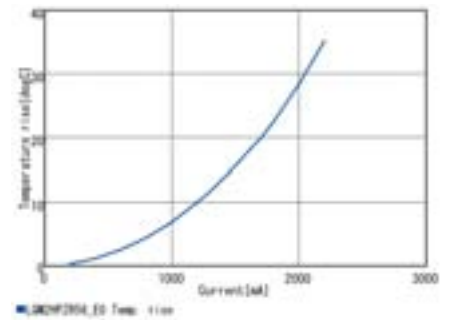

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

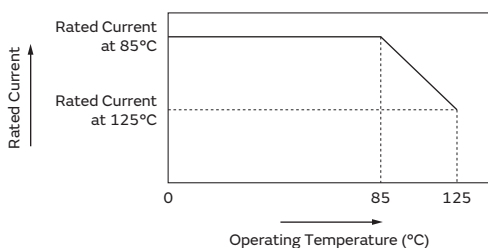

Inductors for Power Lines

LQM2HPZ_G0 Series 1008 (2520) inch (mm)

Appearance/Dimensions

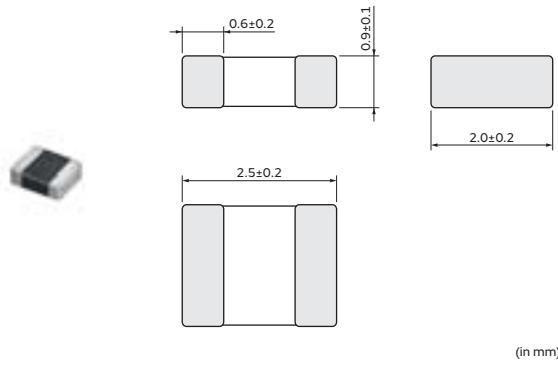

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|-------------|---------------------------|--|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM2HPZR47MG0□ | — | 0.47μH ±20% | 1MHz | 1.8A(Ambient temp.85°C) 1.3A(Ambient temp.125°C) | 0.040Ω(typ.) | 100MHz |
| LQM2HPZ1R0MG0□ | — | 1.0μH ±20% | 1MHz | 1.6A(Ambient temp.85°C) 1.2A(Ambient temp.125°C) | 0.055Ω(typ.) | 60MHz |
| LQM2HPZ1R5MG0□ | — | 1.5μH ±20% | 1MHz | 1.5A(Ambient temp.85°C) 1.1A(Ambient temp.125°C) | 0.070Ω(typ.) | 50MHz |
| LQM2HPZ2R2MG0□ | — | 2.2μH ±20% | 1MHz | 1.3A(Ambient temp.85°C) 0.97A(Ambient temp.125°C) | 0.080Ω(typ.) | 40MHz |
| LQM2HPZ3R3MG0□ | — | 3.3μH ±20% | 1MHz | 1.2A(Ambient temp.85°C) 0.9A(Ambient temp.125°C) | 0.10Ω(typ.) | 30MHz |
| LQM2HPZ4R7MG0□ | — | 4.7μH ±20% | 1MHz | 1.1A(Ambient temp.85°C) 0.82A(Ambient temp.125°C) | 0.11Ω(typ.) | 25MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQM2HP_G0 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

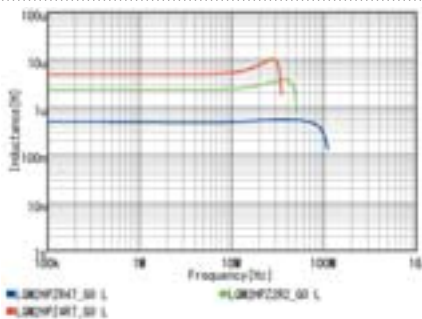

Inductance-Current Characteristics (Typ.)

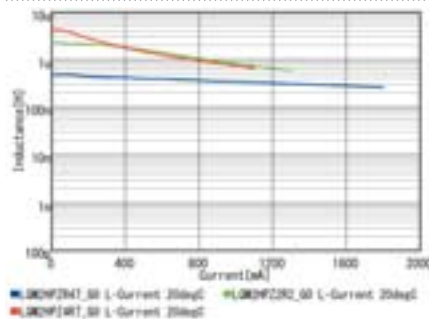

Temperature Rise Characteristics (Typ.)

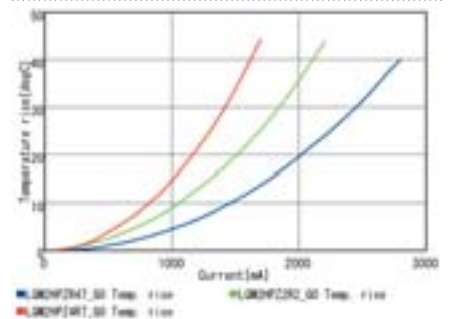

Continued on the following page. ↗

Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.
Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current



Inductors for Power Lines

LQM2HPZ_GC Series 1008 (2520) inch (mm)

Appearance/Dimensions

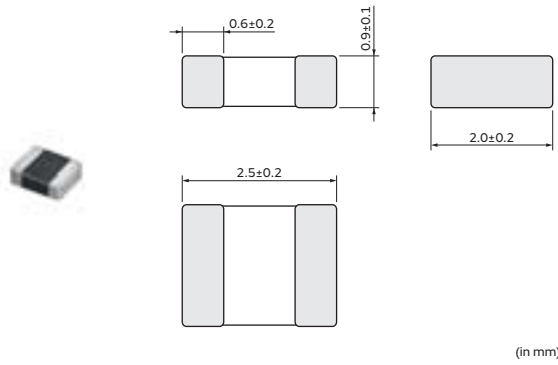

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM2HPZ1R0MGC□ | — | 1.0μH ±20% | 1MHz | 1.5A(Ambient temp.85℃) 1.1A(Ambient temp.125℃) | 0.08Ω±25% | 50MHz |
| LQM2HPZ3R3MGC□ | — | 3.3μH ±20% | 1MHz | 1A(Ambient temp.85℃) 0.75A(Ambient temp.125℃) | 0.16Ω±25% | 30MHz |
| LQM2HPZ4R7MGC□ | — | 4.7μH ±20% | 1MHz | 0.8A(Ambient temp.85℃) 0.6A(Ambient temp.125℃) | 0.18Ω±25% | 25MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

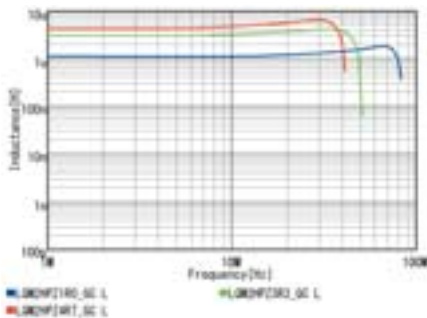

Inductance-Current Characteristics (Typ.)

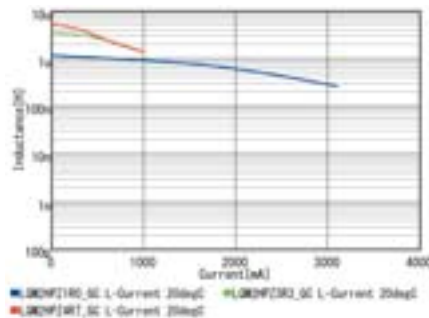

Temperature Rise Characteristics (Typ.)

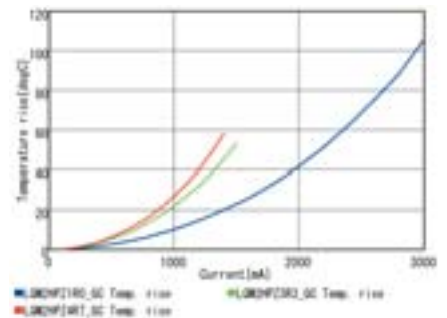


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

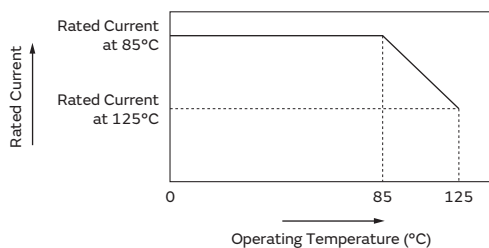

Inductors for Power Lines

LQM2HPZ_GS Series 1008 (2520) inch (mm)

Appearance/Dimensions

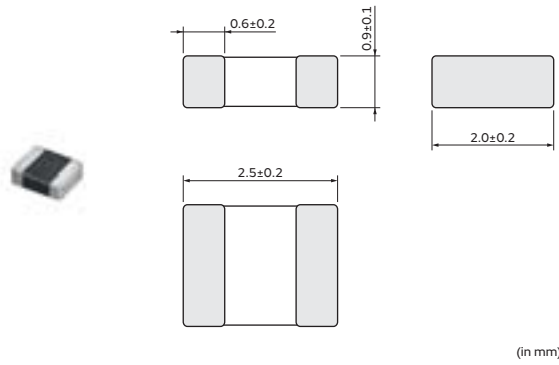

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM2HPZ2R2MGS□ | — | 2.2μH ±20% | 1MHz | 1.1A(Ambient temp.85°C) 0.82A(Ambient temp.125°C) | 0.18Ω±25% | 40MHz |
| LQM2HPZ3R3MGS□ | — | 3.3μH ±20% | 1MHz | 1.05A(Ambient temp.85°C) 0.78A(Ambient temp.125°C) | 0.21Ω±25% | 20MHz |
| LQM2HPZ4R7MGS□ | — | 4.7μH ±20% | 1MHz | 1A(Ambient temp.85°C) 0.75A(Ambient temp.125°C) | 0.25Ω±25% | 20MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.


Inductance-Frequency Characteristics (Typ.)

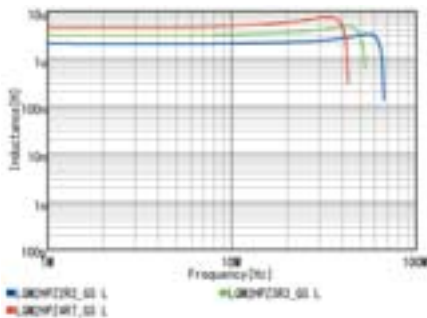

Inductance-Current Characteristics (Typ.)

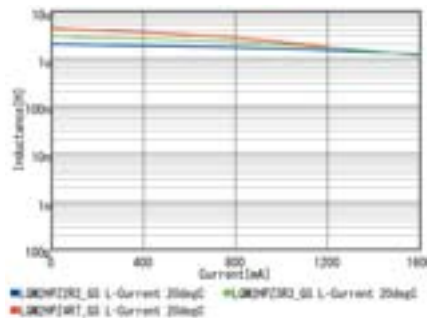

Temperature Rise Characteristics (Typ.)

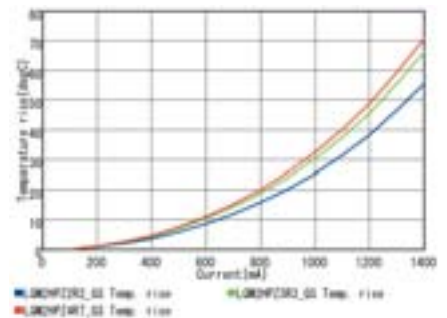


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

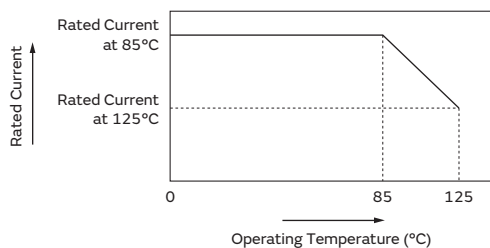

Inductors for Power Lines

LQM2HPZ_J0 Series 1008 (2520) inch (mm)

Appearance/Dimensions

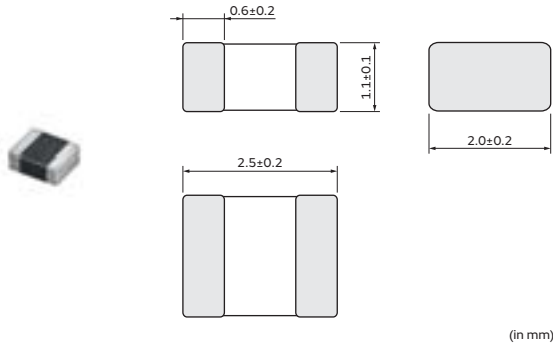

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| L | ø180mm Embossed Taping | 3000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQM2HPZ1R0MJ0□ | — | 1.0μH ±20% | 1MHz | 1.5A(Ambient temp.85°C) 1.1A(Ambient temp.125°C) | 0.09Ω±25% | 70MHz |
| LQM2HPZ2R2MJ0□ | — | 2.2μH ±20% | 1MHz | 1A(Ambient temp.85°C) 0.75A(Ambient temp.125°C) | 0.12Ω±25% | 40MHz |
| LQM2HPZ3R3MJ0□ | — | 3.3μH ±20% | 1MHz | 1A(Ambient temp.85°C) 0.75A(Ambient temp.125°C) | 0.12Ω±25% | 30MHz |


Operating temp.range: -55 to 125°C

Class of Magnetic Shield: Ferrite Core


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°Cmax.


Inductance-Frequency Characteristics (Typ.)

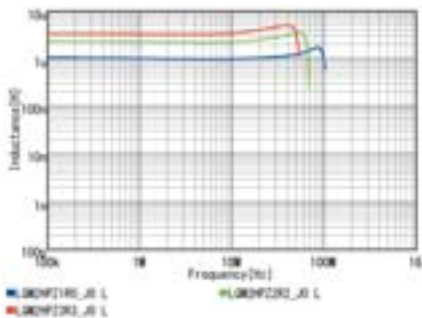

Inductance-Current Characteristics (Typ.)

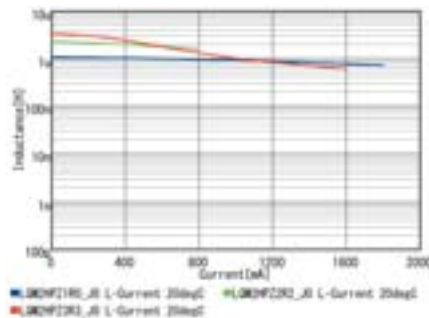

Temperature Rise Characteristics (Typ.)

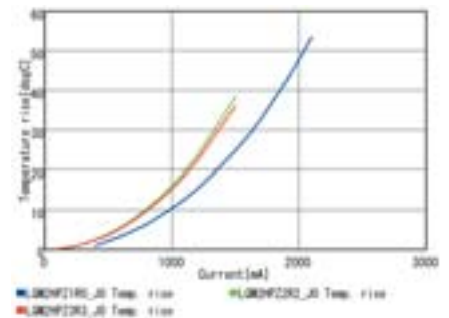


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.

Derating of Rated Current

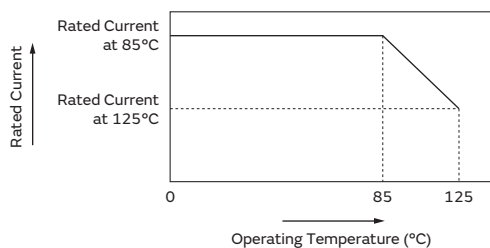

Inductors for Power Lines (LQ Series) ⚠Caution/Notice

⚠Caution

Rating

1. About the Rated Current

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

For the usage of powertrain and safety be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

2. About Excessive Surge Current

Surge current (pulse current or rush current) greater than the specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise.

Please contact us in advance in case of applying the surge current.

Notice

Storage and Operating Condition

<Operating Environment>

Do not use products in chemical atmosphere such as chlorine gas, acid or sulfide gas.

<Storage Requirements>

1. Storage Period

LQM series should be used within 6 months; the other products should be used within 12 months.

Check solderability if this period is exceeded.

2. Storage Conditions

(1) Store products in a warehouse in compliance with the following conditions:

Temperature: -10 to +40°C.

Humidity: 15 to 85% (relative humidity)

Do not subject products to rapid changes in temperature and humidity.

Do not store them in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas.

This will prevent electrode oxidation, which causes poor solderability and possible corrosion of inductors.

(2) Do not store products in bulk packaging to prevent collision among inductors, which causes core chipping and wire breakage.

(3) Store products on pallets to protect from humidity, dust, etc.

(4) Avoid heat shock, vibration, direct sunlight, etc.

Handling

This item is designed to have sufficient strength, but handle with care to avoid chipping or breaking its ceramic structure.

LQH_C/D/P series

- To prevent breaking the wire, avoid touching with sharp material, such as tweezers or the bristles of a cleaning brush, to the wire wound portion of this product.
- To prevent breaking the core, avoid applying excessive mechanical shock to products mounted on the board.
- Temperature may rise up to max. 40°C when applying the rated current to Inductors for Power Lines. Be careful of the temperature rating of the circuit board and components around the chip Inductors.

LQM series

- There is the possibility that magnetism may change the inductance value. Do not use a magnet or tweezers with magnetism when handling chip inductors. (The tip of the tweezers should be molded with resin or pottery.)
- When the excessive current over rated current is applied, it may cause the inductance value to change due to magnetism.

<Transportation>

Do not apply excessive vibration or mechanical shock to products.

<Resin Coating>

When coating products with resin, the relatively high resin curing stress may change inductance values. For exterior coating, select resin carefully so that electrical and mechanical performance of the product is not affected. Prior to use, please evaluate reliability with the product mounted in your application set.

Continued on the following page. ↗

Inductors for Power Lines (LQ Series) ⚠Caution/Notice

Continued from the preceding page. ↘

(LQH series)

An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating conditions, etc. Some resins containing impurities or chloride may possibly generate chlorine by hydrolysis under some operating conditions, causing corrosion of the inductor wire and leading to an open circuit.

<Rated Current>

(LQH2HP_JR Series-LQH44P_GR Series)

Inductance will be more than the value, which is 30% down from minimum rated Inductance value.

(Other LQH_P Series)

Inductance will be within $\pm 30\%$ of nominal Inductance value.

▪ Based on Temperature Rise

For LQH_P series, rated current is set to keep temperature rise caused by self heating 40°C or less. For other Inductors for Power Lines, please refer to individual specifications.

<Handling of a Substrate>

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting the substrate when cropping the substrate, inserting and removing a connector from the substrate, or tightening a screw to the substrate.

Excessive mechanical stress may cause cracking in the Product.



Inductors for Power Lines (except for LQ Series) ⚠️Caution/Notice

⚠️Caution

Rating

1. About the Rated Current

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

2. About Excessive Surge Current

Surge current (pulse current or rush current) greater than the specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise. Please contact us in advance in case of applying the surge current.

Notice

Precaution for Application

(1) The part must be pre-heated before soldering if reflow is applied.

The difference between pre-heat temperature and soldering temperature must be within 150°C.

(2) If a soldering iron is applied, the soldering process must be completed within 3 seconds at a soldering temperature lower than 350°C.

The tip of the soldering iron must not touch the terminal electrode in this process.

(3) Terminals should not be handled with fingers. This is to prevent deterioration in solderability.

(4) Soldering using a soldering iron must be done only once for each part.

(5) PPCB mount: this part must be handled with care to minimize any physical stress to the part at the board assembly process.

(6) To minimize the influence to the part, the thickness of PCB, land dimension, and the amount of solder must be evaluated carefully by individual application.

(7) If a washing process is applied, please make sure there is no problem with operating.

(8) Products should not be dropped on the floor. This is to prevent damage to the products.

(9) Although electrical performance is satisfactory, audible noises may be made if audio frequency ingredient is contained in current.

Before using, please make sure there aren't any problem with operating.

Handling

○Storage and Handling Requirements

(1) Storage period

Use the products within 6 months after delivered.

Solderability should be checked if this period is exceeded.

(2) Storage conditions

• Products should be stored in the warehouse on the following conditions.

Temperature: -10 to 40°C

Humidity: 15 to 85% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

• Products should not be stored on bulk packaging condition to prevent the chipping of the core and the breaking of winding wire caused by the collision between the products.

• Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

• Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

(3) Handling Condition

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

○Resin coating

The inductance value may change and/or it may affect on the product's performance due to high cure-stress of resin to be used for coating / molding products. So please pay your careful attention when you select resin. In prior to use, please make the reliability evaluation with the product mounted in your application set.

Continued on the following page. ↗

Inductors for Power Lines (except for LQ Series) ⚠Caution/Notice

Continued from the preceding page. ↘

○Metal alloy inductor product*

Metal alloy inductor product* employs a core with low insulation resistance, pay strict attention when use it

- a) Do not make any through holes and copper pattern under the coil. except a copper pattern to the electrode.
- b) Design/mount any components not to contact this product.

Metal alloy inductor product*...

DFE201612P_D, DFE252012P_D, DFEG7030D,
DFEH7030D, DFEG10040D, DFEH10040D,
DFEG12060D, DFEH12060D

○Temperature Rise

Temperature rise of power choke coil depends on the installation condition in end products.

It shall be confirmed in the actual end product that temperature rise of power choke coil is in the limit specified temperature class

Inductors for Power Lines Soldering and Mounting

1. Standard Land Pattern Dimensions

A high Q value is achieved when the PCB electrode land pattern is designed so that it does not project beyond the chip Inductors (chip coils) electrode.

■ Land Pattern + Solder Resist □ Land Pattern □ Solder Resist
 (in mm)








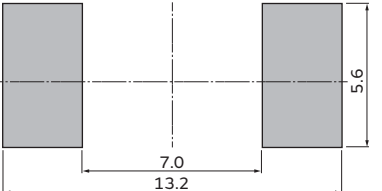
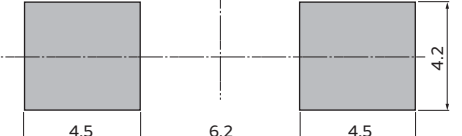

| Series | Standard Land Dimensions | | | | |
|---|--------------------------|-------------------------------|--|------------------|-----|
| | Part Number | a | b | c | |
| LQM18P LQM21P LQM2MP LQM2HP LQH2MP LQH31H LQH32P LQH44P_GR LQH5BP | | LQM18P | 0.7 | 1.8-2.0 | 0.7 |
| | | LQM21P | 1.2 | 3.0-4.0 | 1.0 |
| | | LQM2MP | 0.8 | 2.4 | 1.8 |
| | | LQM2HP | 1.6 | 3.0 | 1.5 |
| | | LQH2MP | 0.8 | 2.6 | 1.0 |
| | | LQH31H | 1.0 | 4.5 | 1.5 |
| | | LQH32P | 1.3 | 3.8 | 2.0 |
| | | LQH44P_GR | 1.5 | 4.4 | 2.7 |
| | | LQH5BP | 1.8 | 5.5 | 4.1 |
| | | LQH2HP | LQH2HP_DR | LQH2HP_GR/JR | |
| LQH32C LQH32D | For Reflow | For Flow (LQH32C_23 only) | *Applicable to flow soldering (LQH32C_23 only) | | |
| LQH3NP | | | | | |
| LQH43P | | | | | |
| DFE252012P_D | | | | | |
| DFEG7030D DFEH7030D | | | | | |
| DFEG10040D DFEH10040D | | | | | |

Attention should be paid to potential magnetic coupling effects when using the Inductors (coils) as a resonator.

Continued on the following page. ↗

Inductors for Power Lines Soldering and Mounting

Continued from the preceding page. ↘
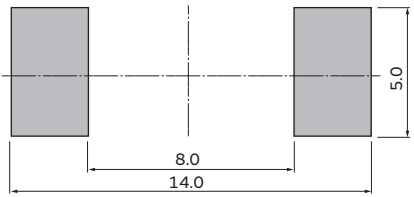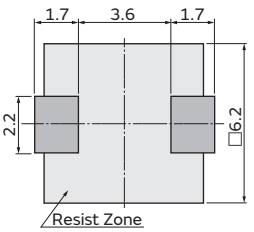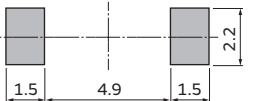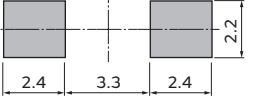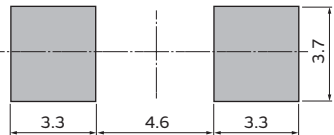
| Series | Standard Land Dimensions |
|--|---|
| DFEG12060D DFEH12060D |  |
| MBH6045C |  |
| MDH6045C |  |
| MBH7045C |  |
| MDH7045C |  |
| MDH10060C |  |
| MBH10145C |  |
| MBH12282C |  |
| MDH12577C |  |
| MBH12575C |  |

Attention should be paid to potential magnetic coupling effects when using the Inductors (coils) as a resonator.

Continued on the following page. ↗

Inductors for Power Lines Soldering and Mounting

Continued from the preceding page. ↘

2. Standard Soldering Conditions

(1) Soldering method

Chip Inductors (Chip coils) can be flow or reflow soldered.

Please contact Murata regarding other soldering methods.

As for LQM18P/ LQH2HP/2MP/32D/3NP/32P/43P/ 44P/5BP series, please use reflow soldering.

Solder: Use Sn-3.0Ag-0.5Cu solder.


Flux: Use rosin-based flux, but not strongly acidic flux (with chlorine content exceeding 0.2wt%).

Do not use water-soluble flux.

For additional mounting methods, please contact Murata.


(2) Soldering profile

● Flow Soldering profile (Sn-3.0Ag-0.5Cu solder)

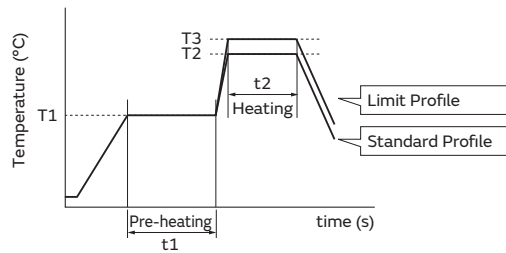

| Series | Pre-heating | | Standard Profile | | | Limit Profile | | |
|----------------|-------------|------------|------------------|------------|---------------|---------------|------------|---------------|
| | Temp. (T1) | Time. (t1) | Temp. (T2) | Time. (t2) | Cycle of flow | Temp. (T3) | Time. (t2) | Cycle of flow |
| LQM21P/2MP/2HP | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 2 times max. |
| LQH32C | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 1 time |

● Reflow Soldering profile (LQ Series) (Sn-3.0Ag-0.5Cu solder)

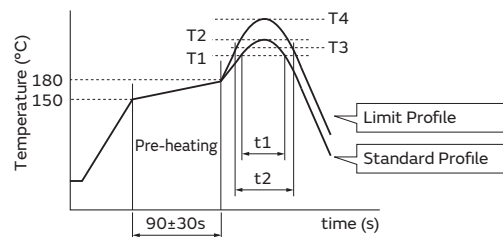


| Series | Standard Profile | | | | Limit Profile | | | |
|--|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Temp. (T1) | Time. (t1) | Peak temperature (T2) | Cycle of reflow | Temp. (T3) | Time. (t2) | Peak temperature (T4) | Cycle of reflow |
| LQM18P/21P/2MP/2HP LQH2HP/2MP LQH32D LQH3NP/32P/43P/44P/5BP | 220°C | 30 to 60s | 245±3°C | 2 times max. | 230°C | 60s max. | 260°C/10s | 2 times max. |
| LQH32C | 220°C | 30 to 60s | 245±3°C | 2 times max. | 230°C | 60s max. | 260°C/10s | 1 time |

Continued on the following page. ↗

Inductors for Power Lines Soldering and Mounting

Continued from the preceding page. ↘

●Reflow Soldering profile (except for LQ Series) (Sn-3.0Ag-0.5Cu solder)

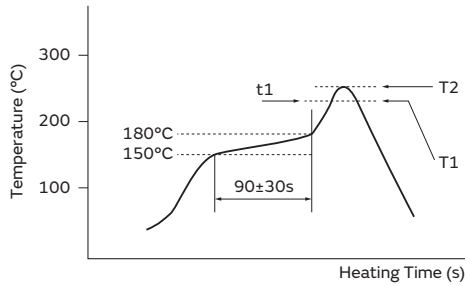

*Reflow Times: 2 times max.
 *We recommend an infrared ray as the heat source of the reflow bath.
 However halogen lamp should not be used; the side heat would be beyond the range of resistance heat, so we do not recommend it.

| Series | Heating | | Peak Temperature (T2) | Cycle of Flow |
|---|------------|-----------|-----------------------|---------------|
| | Temp. (T1) | Time (t1) | | |
| DFE252012P_D MBH6045C MDH6045C MBH7045C MDH7045C MDH10060C MBH10145C MBH12282C MDH12577C MBH12575C | 230°C | 20 to 40s | 250+5/-0°C | 2 times max. |
| DFEG7030D DFEH7030D DFEG10040D DFEH10040D DFEG12060D DFEH12060D | 230°C | 20 to 40s | 255+5/-0°C | 2 times max. |

(3) Reworking with Soldering Iron

Preheating at 150°C for 1 minute is required. Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

Soldering iron power output: 80W max.

Temperature of soldering iron tip
 : 350°C (except for LQH5BP)
 : 380°C (LQH5BP only)

Diameter of soldering iron end: 3.0mm max.

Soldering time: within 3 s

Please keep the fix time with the soldering iron within 2 times.
 (except for LQH2HP_GR, LQH2MP)

Please keep the fix time with the soldering iron within only once. (LQH2HP_GR, LQH2MP only)


3. Mounting Instructions

(1) Land Pattern Dimensions

Large lands reduce Q of the mounted chip. Also, large protruding land areas (bordered by lines having dimensions 'c' and 'd' shown) cause floating and electrode leaching.

(2) Land Pattern Designing (LQH series)

Please follow the recommended patterns. Otherwise, their performance, which includes electrical performance or solderability, may be affected, or result in "position shift" in the soldering process.

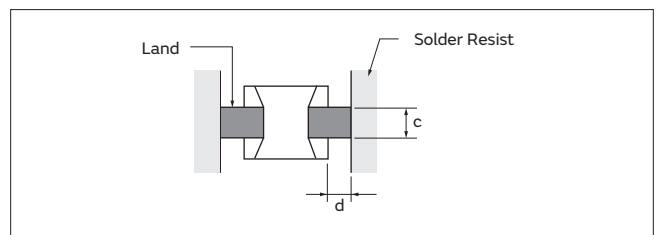


Continued on the following page. ↗

Inductors for Power Lines Soldering and Mounting

Continued from the preceding page. ↘



(3) Magnetic Coupling

Since some chip inductors (chip coils) are constructed like an open magnetic circuit, narrow spacing between inductors (coils) may cause magnetic coupling. LQM and LQH_P series have a magnetically shielded structure. The structure makes their coupling coefficient smaller than that of conventional chip inductors (chip coils).

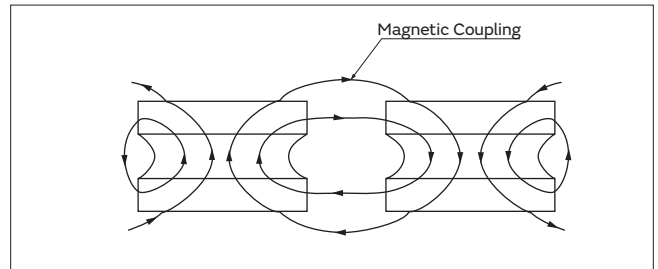

(4) PCB Warping

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

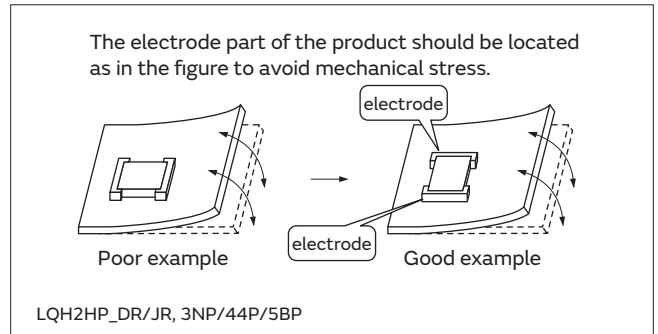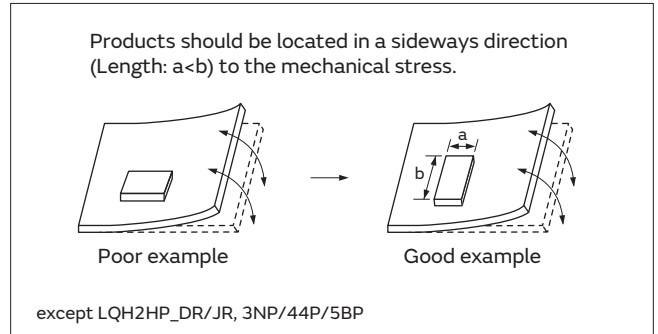


(5) Amount of Solder Paste

Excessive solder causes electrode corrosion, while insufficient solder causes low electrode bonding strength. Adjust the amount of solder paste as shown on the right so that solder is applied.


Guideline of solder paste thickness

- LQM, LQH2HP/2MP/3NP/32P/43P/44P/5BP: 100 to 150 μ m
- LQH31H/32C/32D, LQH43N: 200 to 300 μ m

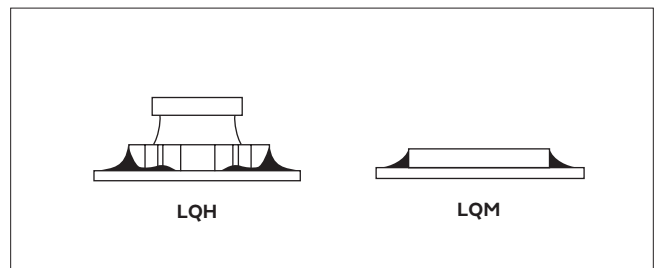

(6) Amount of Adhesive

If too much adhesive is applied, then it may overflow into the land or termination areas and yield poor solderability. In contrast, if insufficient adhesive is applied, or if the adhesive is not sufficiently hardened, then the chip may become detached during flow soldering. Apply the adhesive in accordance with the conditions shown in the chart.

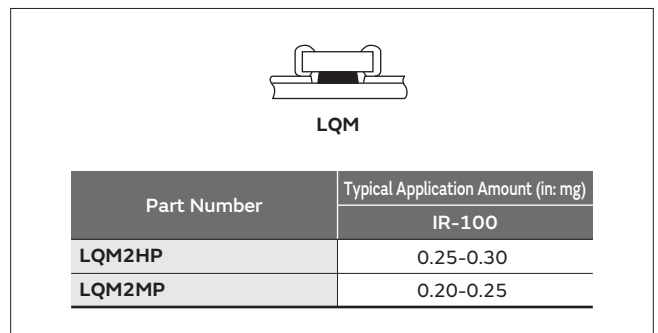

Continued on the following page. ↗

Inductors for Power Lines Soldering and Mounting

Continued from the preceding page. ↘

4. Cleaning

The following conditions should be observed when cleaning chip inductors (chip coils):

(1) Cleaning Temperature: 60°C max. (40°C max. for alcohol cleaning agents)

(2) Ultrasonic

Output: 20W/l max.

Duration: 5 minutes max.

Frequency: 28 to 40kHz

Care should be taken not to cause resonance of the PCB and mounted products.

(3) Cleaning agent

The following cleaning agents have been tested on individual components. Evaluation in complete assembly should be done prior to production.

(a) Alcohol cleaning agents

Isopropyl alcohol (IPA)

(b) Aqueous cleaning agents

Pine Alpha ST-100S


(4) Ensure that flux residue is completely removed.

Component should be thoroughly dried after aqueous agents have been removed with deionized water.

For additional cleaning methods, please contact Murata.

Inductors for Power Lines Packaging

Minimum Quantity and 8mm Width Taping Dimensions (1)

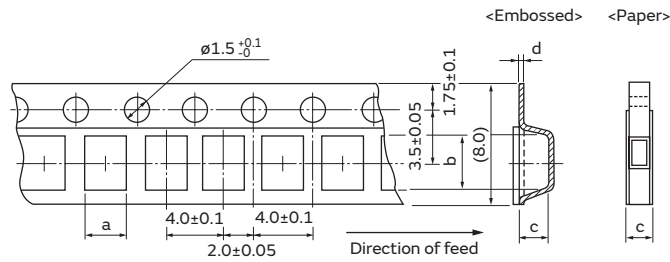

Dimension of the cavity of embossed tape is measured at the bottom side.

Paper Tape

| Part Number | Dimensions | | Total Thickness of Tape c | Packaging Code (Minimum Qty. [pcs.]) | | |
|-------------|------------|------|------------------------------|--------------------------------------|-------------|----------|
| | a | b | | ø180mm reel | ø330mm reel | Bulk |
| LQM18P_CH | 1.1 | 1.9 | 0.95 max. | D (4000) | - | B (1000) |
| LQM18P_DH | 1.05 | 1.85 | 1.05 max. | D (4000) | - | B (1000) |
| LQM18P_FH | 1.05 | 1.85 | 1.15 max. | D (4000) | - | B (1000) |
| LQM21P_C0 | 1.45 | 2.25 | 0.8 max. | D (4000) | - | B (1000) |
| LQM21P_G | 1.45 | 2.25 | 1.1 max. | D (4000) | - | B (1000) |

Embossed Tape

| Part Number | Dimensions (c: Depth of Cavity) | | | | Packaging Code (Minimum Qty. [pcs.]) | | |
|--------------|---------------------------------|------|------|------|--------------------------------------|-------------|----------|
| | a | b | c | d | ø180mm reel | ø330mm reel | Bulk |
| LQH2HP_DR | 2.3 | 2.8 | 0.7 | 0.25 | L (4000) | - | - |
| LQH2HP_GR | 2.3 | 2.8 | 1.1 | 0.25 | L (3000) | - | - |
| LQH2HP_JR | 2.3 | 2.8 | 1.3 | 0.25 | L (2000) | - | - |
| LQH2MP_GR | 1.9 | 2.3 | 1.05 | 0.25 | L (3000) | - | - |
| LQH32C_33/23 | 2.9 | 3.6 | 2.1 | 0.2 | L (2000) | K (7500) | B (500) |
| LQH32C_53 | 2.9 | 3.6 | 1.7 | 0.2 | L (2000) | K (7500) | B (500) |
| LQH32D_23 | 2.9 | 3.6 | 2.1 | 0.2 | L (2000) | K (7500) | - |
| LQH32D_53 | 2.9 | 3.6 | 1.7 | 0.2 | L (2000) | K (7500) | - |
| LQH32P | 2.9 | 3.6 | 1.7 | 0.2 | L (2000) | K (7500) | - |
| LQM2HP_E0 | 2.3 | 2.8 | 0.9 | 0.25 | L (3000) | - | B (1000) |
| LQM2HP_G | 2.3 | 2.8 | 1.1 | 0.25 | L (3000) | - | B (1000) |
| LQM2HP_J0 | 2.25 | 2.75 | 1.3 | 0.25 | L (3000) | - | B (1000) |
| LQM2MP_G0 | 1.85 | 2.25 | 1.1 | 0.25 | L (3000) | - | B (1000) |
| LQM2MP_JH | 1.9 | 2.4 | 1.3 | 0.25 | L (3000) | - | B (1000) |


(in mm)

Continued on the following page. ↗

Inductors for Power Lines Packaging

Continued from the preceding page. ↘

Minimum Quantity and 8mm Width Taping Dimensions (2)

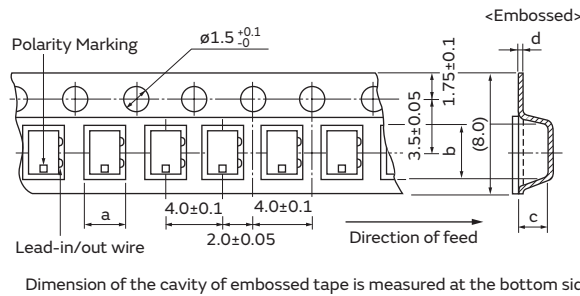


Embossed Tape

| Part Number | Dimensions (c: Depth of Cavity) | | | | Packaging Code (Minimum Qty. [pcs.]) | | |
|--------------|---------------------------------|-----|-----|-----|--------------------------------------|-------------|------|
| | a | b | c | d | φ180mm reel | φ330mm reel | Bulk |
| LQH3NP_GR | 3.3 | 3.3 | 1.1 | 0.3 | L (3000) | - | - |
| LQH3NP_JR/ME | 3.3 | 3.3 | 1.6 | 0.2 | L (2000) | - | - |

(in mm)

Minimum Quantity and 12mm Width Embossed Taping Dimensions

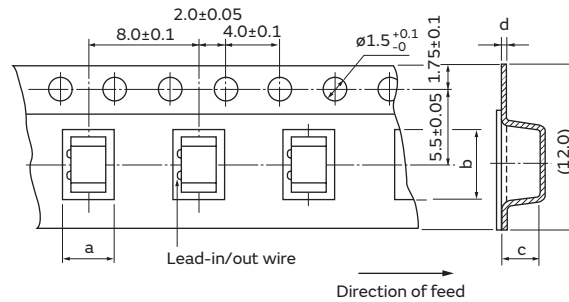

Embossed Tape

| Part Number | Dimensions (c: Depth of Cavity) | | | | Packaging Code (Minimum Qty. [pcs.]) | | |
|-------------|---------------------------------|-----|-----|-----|--------------------------------------|-------------|------|
| | a | b | c | d | φ180mm reel | φ330mm reel | Bulk |
| LQH43P | 3.6 | 4.9 | 2.7 | 0.3 | L (500) | K (2500) | - |
| LQH44P_GR | 4.3 | 4.3 | 1.4 | 0.3 | L (1000) | K (4500) | - |
| LQH5BP | 5.3 | 5.3 | 2.4 | 0.3 | L (500) | K (3000) | - |


(in mm)

Continued on the following page. ↗

Inductors for Power Lines Packaging

Continued from the preceding page. ↘

Tape and Reel Dimensions

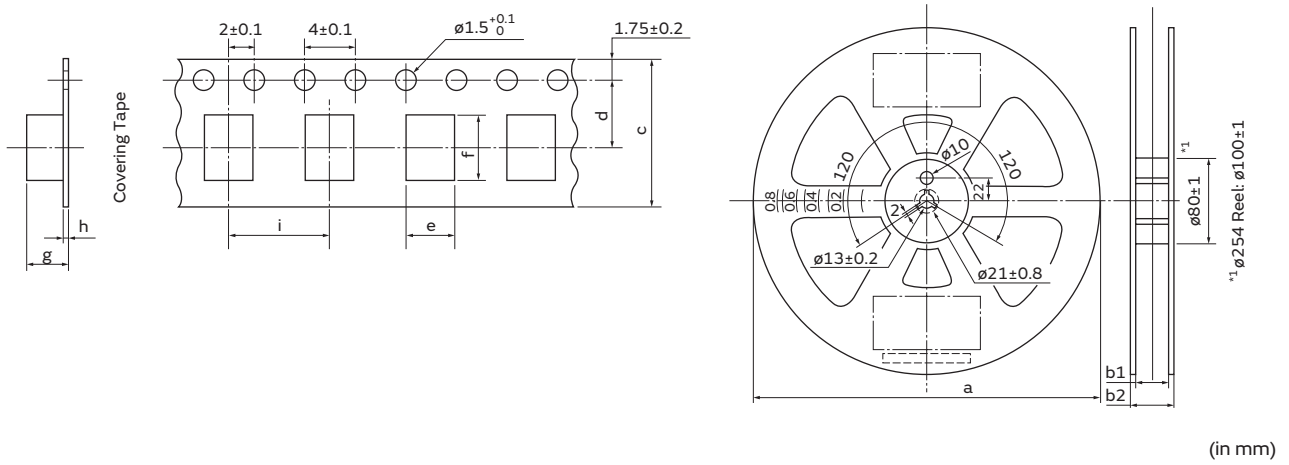

Surface Mounting Type, Reel/Tape List

| Series | Reel Size (mm) | | | Tape Size (mm) | | | | | | | Q'ty 1 Reel |
|--------------|----------------|----------|--------|----------------|----------|----------|----------|---------|-----------|----------|----------------|
| | a | b1 | b2 | c | d | e | f | g | h | i | |
| DFE252012P_D | ø180 | 9.0±0.3 | 11.4±1 | 8.0±0.2 | 3.5±0.05 | 2.20±0.1 | 2.75±0.1 | 1.3±0.1 | 0.25±0.05 | 4.0±0.1 | 3000 |
| DFEG7030D | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 7.1±0.1 | 7.8±0.1 | 3.3±0.1 | 0.4±0.05 | 12.0±0.1 | 1000 |
| DFEH7030D | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 7.1±0.1 | 7.8±0.1 | 3.3±0.1 | 0.4±0.05 | 12.0±0.1 | 1000 |
| DFEG10040D | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 10.5±0.1 | 12.1±0.1 | 4.3±0.1 | 0.4±0.05 | 16.0±0.1 | 500 |
| DFEH10040D | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 10.5±0.1 | 12.1±0.1 | 4.3±0.1 | 0.4±0.05 | 16.0±0.1 | 500 |
| DFEG12060D | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 13.2±0.1 | 13.3±0.1 | 6.4±0.1 | 0.4±0.05 | 16.0±0.1 | 500 |
| DFEH12060D | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 13.2±0.1 | 13.3±0.1 | 6.4±0.1 | 0.4±0.05 | 16.0±0.1 | 500 |
| MBH6045C | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 6.3±0.1 | 6.3±0.1 | 5.1±0.1 | 0.4±0.1 | 12.0±0.1 | 1000 |
| MDH6045C | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 6.3±0.1 | 6.3±0.1 | 5.1±0.1 | 0.4±0.1 | 12.0±0.1 | 1000 |
| MBH7045C | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 7.3±0.1 | 7.3±0.1 | 4.9±0.1 | 0.4±0.05 | 12.0±0.1 | 1000 |
| MDH7045C | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 7.7±0.1 | 7.4±0.1 | 5.3±0.1 | 0.4±0.1 | 12.0±0.1 | 1000 |
| MDH10060C | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.1 | 11.5±0.1 | 10.5±0.1 | 10.4±0.1 | 6.4±0.1 | 0.5±0.1 | 16.0±0.1 | 500 |
| MBH10145C | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 10.5±0.1 | 10.5±0.1 | 4.9±0.1 | 0.4±0.1 | 16.0±0.1 | 500 |
| MBH12282C | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 12.6±0.1 | 12.6±0.1 | 8.6±0.1 | 0.5±0.1 | 16.0±0.1 | 300 |
| MDH12577C | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.1 | 11.5±0.1 | 13.2±0.1 | 12.9±0.1 | 8.2±0.1 | 0.5±0.05 | 16.0±0.1 | 300 |
| MBH12575C | ø330 | 25.5±0.5 | 29.5±1 | 24.0±0.3 | 11.5±0.1 | 12.9±0.1 | 12.9±0.1 | 8.0±0.1 | 0.5±0.1 | 16.0±0.1 | 300 |

● Part Numbering

Inductors for General Circuits for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|---|---|-----|---|---|---|---|
| LQ | H | 43 | N | Z | 4R7 | M | 0 | 3 | L |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|-----------------------------|
| LQ | Chip Inductors (Chip Coils) |

② Structure

| Code | Structure |
|------|--------------------------------|
| H | Wire Wound Type (Ferrite Core) |

③ Dimensions (LxW)

| Code | Nominal Dimensions (LxW) | Size Code (in inch) |
|------|--------------------------|---------------------|
| 32 | 3.2x2.5mm | 1210 |
| 43 | 4.5x3.2mm | 1812 |

④ Applications and Characteristics

| Code | Applications and Characteristics |
|------|----------------------------------|
| N | for Resonant Circuit |

⑤ Category

| Code | Category | |
|------|------------|-------------------|
| H | Automotive | Powertrain/Safety |
| Z | Automotive | Infotainment |

⑥ Inductance

Expressed by three-digit alphanumerics. The unit is micro-henry (μH). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures. If there is a decimal point, it is expressed by the capital letter "R". In this case, all figures are significant digits. If inductance is less than $0.1\mu\text{H}$, the inductance code is expressed by a combination of two figures and the capital letter "N", and the unit of inductance is nano-henry (nH). The capital letter "N" indicates the unit of "nH", and also expresses a decimal point. In this case, all figures are significant digits. For those products whose inductance values are specified using three designated digits, these values may be indicated using the closest two digits instead.

⑦ Inductance Tolerance

| Code | Inductance Tolerance |
|------|----------------------|
| J | $\pm 5\%$ |
| K | $\pm 10\%$ |
| M | $\pm 20\%$ |

⑧ Features

| Code | Features |
|------|---------------|
| 0/2 | Standard Type |

⑨ Electrode

•Lead (Pb) Free

| Code | Electrode |
|------|-----------|
| 3 | LF Solder |


⑩ Packaging

| Code | Packaging |
|------|---|
| K | Embossed Taping ($\phi 330\text{mm}$ Reel) |
| L | Embossed Taping ($\phi 180\text{mm}$ Reel) |

Inductors for General Circuits

LQH32NZ_23/LQH32NH_23 Series 1210 (3225) inch (mm)

Appearance/Dimensions

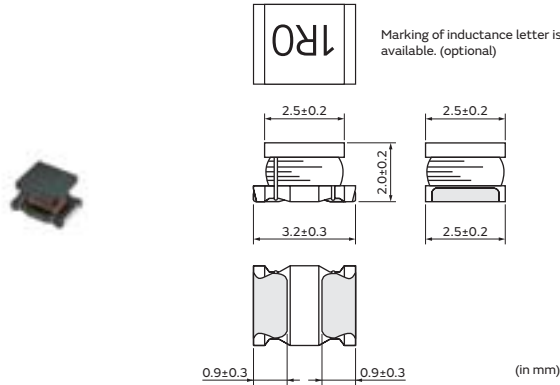

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Q (min.) | Rated Current | Max. of DC Resistance* | DC Resistance* | S.R.F* (min.) |
|----------------|-------------------|------------|----------|---------------|------------------------|----------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH32NZ1R0K23□ | — | 1.0μH ±10% | 20 | 445mA | 0.5Ω | — | 100MHz |
| — | LQH32NH1R0M23□ | 1.0μH ±20% | 25 | 780mA | — | 0.06Ω±20% | 100MHz |
| — | LQH32NH1R2J23□ | 1.2μH ±5% | 25 | 720mA | — | 0.07Ω±20% | 90MHz |
| LQH32NZ1R2K23□ | — | 1.2μH ±10% | 20 | 425mA | 0.6Ω | — | 100MHz |
| — | LQH32NH1R5J23□ | 1.5μH ±5% | 25 | 675mA | — | 0.08Ω±20% | 85MHz |
| LQH32NZ1R5K23□ | — | 1.5μH ±10% | 20 | 400mA | 0.6Ω | — | 75MHz |
| — | LQH32NH1R8J23□ | 1.8μH ±5% | 25 | 635mA | — | 0.09Ω±20% | 80MHz |
| LQH32NZ1R8K23□ | — | 1.8μH ±10% | 20 | 390mA | 0.7Ω | — | 60MHz |
| — | LQH32NH2R2J23□ | 2.2μH ±5% | 25 | 610mA | — | 0.097Ω±20% | 75MHz |
| LQH32NZ2R2K23□ | — | 2.2μH ±10% | 20 | 370mA | 0.8Ω | — | 50MHz |
| — | LQH32NH2R7J23□ | 2.7μH ±5% | 25 | 495mA | — | 0.15Ω±20% | 70MHz |
| LQH32NZ2R7K23□ | — | 2.7μH ±10% | 20 | 320mA | 0.9Ω | — | 43MHz |
| — | LQH32NH3R3J23□ | 3.3μH ±5% | 25 | 425mA | — | 0.20Ω±20% | 65MHz |
| LQH32NZ3R3K23□ | — | 3.3μH ±10% | 20 | 300mA | 1.0Ω | — | 38MHz |
| — | LQH32NH3R9J23□ | 3.9μH ±5% | 25 | 510mA | — | 0.14Ω±20% | 60MHz |
| LQH32NZ3R9K23□ | — | 3.9μH ±10% | 20 | 290mA | 1.1Ω | — | 35MHz |
| — | LQH32NH4R7J23□ | 4.7μH ±5% | 25 | 420mA | — | 0.21Ω±20% | 55MHz |
| LQH32NZ4R7K23□ | — | 4.7μH ±10% | 20 | 270mA | 1.2Ω | — | 31MHz |
| — | LQH32NH5R6J23□ | 5.6μH ±5% | 25 | 335mA | — | 0.32Ω±20% | 50MHz |
| LQH32NZ5R6K23□ | — | 5.6μH ±10% | 20 | 250mA | 1.3Ω | — | 28MHz |
| — | LQH32NH6R8J23□ | 6.8μH ±5% | 25 | 315mA | — | 0.36Ω±20% | 45MHz |
| LQH32NZ6R8K23□ | — | 6.8μH ±10% | 20 | 240mA | 1.5Ω | — | 25MHz |
| — | LQH32NH8R2J23□ | 8.2μH ±5% | 25 | 300mA | — | 0.40Ω±20% | 40MHz |
| LQH32NZ8R2K23□ | — | 8.2μH ±10% | 20 | 225mA | 1.6Ω | — | 23MHz |
| LQH32NZ100J23□ | LQH32NH100J23□ | 10μH ±5% | 35 | 190mA/325mA | 1.8Ω | 0.34Ω±20% | 20MHz/35MHz |
| LQH32NZ120J23□ | LQH32NH120J23□ | 12μH ±5% | 35 | 180mA/270mA | 2.0Ω | 0.50Ω±20% | 18MHz/30MHz |
| LQH32NZ150J23□ | LQH32NH150J23□ | 15μH ±5% | 35 | 170mA/270mA | 2.2Ω | 0.50Ω±20% | 16MHz/25MHz |

Operating temp.range (LQH32NZ_23 series): -40 to 105°C

Operating temp.range (LQH32NH_23 series): -40 to 125°C

Inductance Test Frequency: 1MHz (1.0μH to 390μH), 1kHz (470μH to 560μH)

Q Test Frequency: 1MHz (1.0μH to 82μH), 796kHz (100μH to 560μH)

*Max. of DC Resistance: LQH32NZ_23 series

*DC Resistance: LQH32NH_23 series

Class of Magnetic Shield: No Shield

Only for reflow soldering

*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Q (min.) | Rated Current | Max. of DC Resistance* | DC Resistance* | S.R.F* (min.) |
|----------------|-------------------|------------|----------|---------------|------------------------|----------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | |
| LQH32NZ180J23□ | LQH32NH180J23□ | 18μH ±5% | 35 | 165mA/235mA | 2.5Ω | 0.64Ω±20% | 15MHz/25MHz |
| LQH32NZ220J23□ | LQH32NH220J23□ | 22μH ±5% | 35 | 150mA/220mA | 2.8Ω | 0.74Ω±20% | 14MHz/20MHz |
| LQH32NZ270J23□ | LQH32NH270J23□ | 27μH ±5% | 35 | 125mA/190mA | 3.1Ω | 1.00Ω±20% | 13MHz/20MHz |
| LQH32NZ330J23□ | LQH32NH330J23□ | 33μH ±5% | 40 | 115mA/175mA | 3.5Ω | 1.14Ω±20% | 12MHz/20MHz |
| LQH32NZ390J23□ | LQH32NH390J23□ | 39μH ±5% | 40 | 110mA/170mA | 3.9Ω | 1.27Ω±20% | 11MHz/16MHz |
| LQH32NZ470J23□ | LQH32NH470J23□ | 47μH ±5% | 40 | 100mA/155mA | 4.3Ω | 1.46Ω±20% | 11MHz/15MHz |
| LQH32NZ560J23□ | LQH32NH560J23□ | 56μH ±5% | 40 | 85mA/130mA | 4.9Ω | 2.00Ω±20% | 10MHz/13MHz |
| LQH32NZ680J23□ | LQH32NH680J23□ | 68μH ±5% | 40 | 80mA/125mA | 5.5Ω | 2.25Ω±20% | 9.0MHz/12MHz |
| LQH32NZ820J23□ | LQH32NH820J23□ | 82μH ±5% | 40 | 70mA/100mA | 6.2Ω | 3.25Ω±20% | 8.5MHz/11MHz |
| LQH32NZ101J23□ | LQH32NH101J23□ | 100μH ±5% | 40 | 80mA/95mA | 7.0Ω | 3.65Ω±20% | 8.0MHz/10MHz |
| LQH32NZ121J23□ | LQH32NH121J23□ | 120μH ±5% | 40 | 75mA/85mA | 8.0Ω | 4.20Ω±20% | 7.5MHz/10MHz |
| LQH32NZ151J23□ | LQH32NH151J23□ | 150μH ±5% | 40 | 70mA/80mA | 9.3Ω | 4.85Ω±20% | 7.0MHz/8.0MHz |
| LQH32NZ181J23□ | LQH32NH181J23□ | 180μH ±5% | 40 | 65mA/60mA | 10.2Ω | 7.60Ω±20% | 6.0MHz |
| LQH32NZ221J23□ | LQH32NH221J23□ | 220μH ±5% | 40 | 65mA/60mA | 11.8Ω | 8.45Ω±20% | 5.5MHz |
| LQH32NZ271J23□ | LQH32NH271J23□ | 270μH ±5% | 40/50 | 65mA/55mA | 12.5Ω | 9.70Ω±20% | 5.0MHz |
| LQH32NZ331J23□ | LQH32NH331J23□ | 330μH ±5% | 40/50 | 65mA/50mA | 13.0Ω | 11.0Ω±20% | 5.0MHz |
| LQH32NZ391J23□ | LQH32NH391J23□ | 390μH ±5% | 50 | 50mA/45mA | 22.0Ω | 12.4Ω±20% | 5.0MHz |
| LQH32NZ471J23□ | LQH32NH471J23□ | 470μH ±5% | 50 | 45mA/40mA | 25.0Ω | 14.1Ω±20% | 5.0MHz |
| — | LQH32NH561J23□ | 560μH ±5% | 50 | 40mA | — | 14.6Ω±20% | 4.0MHz |

Operating temp.range (LQH32NZ_23 series): -40 to 105°C

Operating temp.range (LQH32NH_23 series): -40 to 125°C

Inductance Test Frequency: 1MHz (1.0μH to 390μH), 1kHz (470μH to 560μH)

Q Test Frequency: 1MHz (1.0μH to 82μH), 796kHz (100μH to 560μH)

*Max. of DC Resistance: LQH32NZ_23 series

*DC Resistance: LQH32NH_23 series


Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.

Inductance-Frequency Characteristics (Typ.)

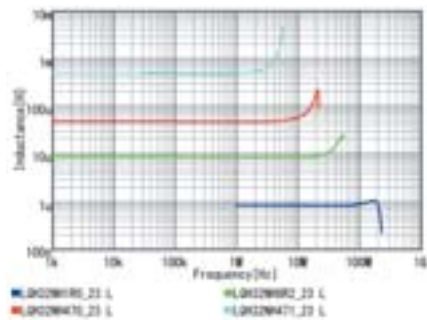


Q-Frequency Characteristics (Typ.)

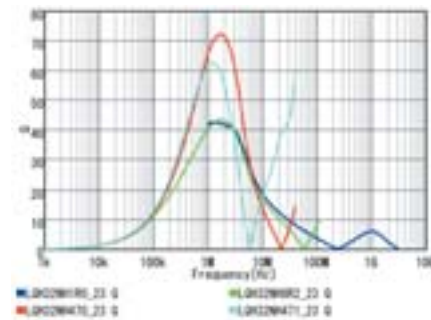

Inductors for General Circuits

LQH43NZ_03 Series 1812 (4532) inch (mm)

Appearance/Dimensions

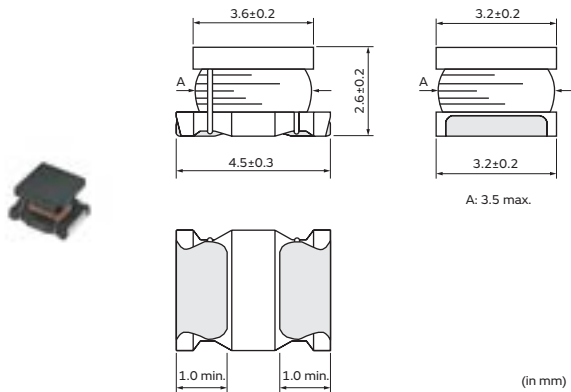

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 2500 |
| L | ø180mm Embossed Taping | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQH43NZ1R0M03□ | — | 1.0μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.20Ω | 120MHz |
| LQH43NZ1R2M03□ | — | 1.2μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.20Ω | 100MHz |
| LQH43NZ1R5M03□ | — | 1.5μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.30Ω | 85MHz |
| LQH43NZ1R8M03□ | — | 1.8μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.30Ω | 75MHz |
| LQH43NZ2R2M03□ | — | 2.2μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.30Ω | 62MHz |
| LQH43NZ2R7M03□ | — | 2.7μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.32Ω | 53MHz |
| LQH43NZ3R3M03□ | — | 3.3μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.35Ω | 47MHz |
| LQH43NZ3R9M03□ | — | 3.9μH ±20% | 1MHz | 20 | 1MHz | 500mA | 0.38Ω | 41MHz |
| LQH43NZ4R7K03□ | — | 4.7μH ±10% | 1MHz | 30 | 1MHz | 500mA | 0.40Ω | 38MHz |
| LQH43NZ4R7M03□ | — | 4.7μH ±20% | 1MHz | 30 | 1MHz | 500mA | 0.40Ω | 38MHz |
| LQH43NZ5R6K03□ | — | 5.6μH ±10% | 1MHz | 30 | 1MHz | 500mA | 0.47Ω | 33MHz |
| LQH43NZ5R6M03□ | — | 5.6μH ±20% | 1MHz | 30 | 1MHz | 500mA | 0.47Ω | 33MHz |
| LQH43NZ6R8K03□ | — | 6.8μH ±10% | 1MHz | 30 | 1MHz | 450mA | 0.50Ω | 31MHz |
| LQH43NZ6R8M03□ | — | 6.8μH ±20% | 1MHz | 30 | 1MHz | 450mA | 0.50Ω | 31MHz |
| LQH43NZ8R2K03□ | — | 8.2μH ±10% | 1MHz | 30 | 1MHz | 450mA | 0.56Ω | 27MHz |
| LQH43NZ8R2M03□ | — | 8.2μH ±20% | 1MHz | 30 | 1MHz | 450mA | 0.56Ω | 27MHz |
| LQH43NZ100J03□ | — | 10μH ±5% | 1MHz | 35 | 1MHz | 400mA | 0.56Ω | 23MHz |
| LQH43NZ100K03□ | — | 10μH ±10% | 1MHz | 35 | 1MHz | 400mA | 0.56Ω | 23MHz |
| LQH43NZ120J03□ | — | 12μH ±5% | 1MHz | 35 | 1MHz | 380mA | 0.62Ω | 21MHz |
| LQH43NZ120K03□ | — | 12μH ±10% | 1MHz | 35 | 1MHz | 380mA | 0.62Ω | 21MHz |
| LQH43NZ150J03□ | — | 15μH ±5% | 1MHz | 35 | 1MHz | 360mA | 0.73Ω | 19MHz |
| LQH43NZ150K03□ | — | 15μH ±10% | 1MHz | 35 | 1MHz | 360mA | 0.73Ω | 19MHz |
| LQH43NZ180J03□ | — | 18μH ±5% | 1MHz | 35 | 1MHz | 340mA | 0.82Ω | 17MHz |
| LQH43NZ180K03□ | — | 18μH ±10% | 1MHz | 35 | 1MHz | 340mA | 0.82Ω | 17MHz |
| LQH43NZ220J03□ | — | 22μH ±5% | 1MHz | 35 | 1MHz | 320mA | 0.94Ω | 15MHz |
| LQH43NZ220K03□ | — | 22μH ±10% | 1MHz | 35 | 1MHz | 320mA | 0.94Ω | 15MHz |
| LQH43NZ270J03□ | — | 27μH ±5% | 1MHz | 35 | 1MHz | 300mA | 1.1Ω | 14MHz |
| LQH43NZ270K03□ | — | 27μH ±10% | 1MHz | 35 | 1MHz | 300mA | 1.1Ω | 14MHz |
| LQH43NZ330J03□ | — | 33μH ±5% | 1MHz | 35 | 1MHz | 270mA | 1.2Ω | 12MHz |
| LQH43NZ330K03□ | — | 33μH ±10% | 1MHz | 35 | 1MHz | 270mA | 1.2Ω | 12MHz |
| LQH43NZ390J03□ | — | 39μH ±5% | 1MHz | 35 | 1MHz | 240mA | 1.4Ω | 11MHz |

Operating temp.range: -40 to 105°C

Class of Magnetic Shield: No Shield

Only for reflow soldering

*S.R.F: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|-------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQH43NZ390K03□ | — | 39μH ±10% | 1MHz | 35 | 1MHz | 240mA | 1.4Ω | 11MHz |
| LQH43NZ470J03□ | — | 47μH ±5% | 1MHz | 35 | 1MHz | 220mA | 1.5Ω | 10MHz |
| LQH43NZ470K03□ | — | 47μH ±10% | 1MHz | 35 | 1MHz | 220mA | 1.5Ω | 10MHz |
| LQH43NZ560J03□ | — | 56μH ±5% | 1MHz | 35 | 1MHz | 200mA | 1.7Ω | 9.3MHz |
| LQH43NZ560K03□ | — | 56μH ±10% | 1MHz | 35 | 1MHz | 200mA | 1.7Ω | 9.3MHz |
| LQH43NZ680J03□ | — | 68μH ±5% | 1MHz | 35 | 1MHz | 180mA | 1.9Ω | 8.4MHz |
| LQH43NZ680K03□ | — | 68μH ±10% | 1MHz | 35 | 1MHz | 180mA | 1.9Ω | 8.4MHz |
| LQH43NZ820J03□ | — | 82μH ±5% | 1MHz | 35 | 1MHz | 170mA | 2.2Ω | 7.5MHz |
| LQH43NZ820K03□ | — | 82μH ±10% | 1MHz | 35 | 1MHz | 170mA | 2.2Ω | 7.5MHz |
| LQH43NZ101J03□ | — | 100μH ±5% | 1MHz | 40 | 796kHz | 160mA | 2.5Ω | 6.8MHz |
| LQH43NZ101K03□ | — | 100μH ±10% | 1MHz | 40 | 796kHz | 160mA | 2.5Ω | 6.8MHz |
| LQH43NZ121J03□ | — | 120μH ±5% | 1MHz | 40 | 796kHz | 150mA | 3.0Ω | 6.2MHz |
| LQH43NZ121K03□ | — | 120μH ±10% | 1MHz | 40 | 796kHz | 150mA | 3.0Ω | 6.2MHz |
| LQH43NZ151J03□ | — | 150μH ±5% | 1MHz | 40 | 796kHz | 130mA | 3.7Ω | 5.5MHz |
| LQH43NZ151K03□ | — | 150μH ±10% | 1MHz | 40 | 796kHz | 130mA | 3.7Ω | 5.5MHz |
| LQH43NZ181J03□ | — | 180μH ±5% | 1MHz | 40 | 796kHz | 120mA | 4.5Ω | 5.0MHz |
| LQH43NZ181K03□ | — | 180μH ±10% | 1MHz | 40 | 796kHz | 120mA | 4.5Ω | 5.0MHz |
| LQH43NZ221J03□ | — | 220μH ±5% | 1MHz | 40 | 796kHz | 110mA | 5.4Ω | 4.5MHz |
| LQH43NZ221K03□ | — | 220μH ±10% | 1MHz | 40 | 796kHz | 110mA | 5.4Ω | 4.5MHz |
| LQH43NZ271J03□ | — | 270μH ±5% | 1MHz | 40 | 796kHz | 100mA | 6.8Ω | 4.0MHz |
| LQH43NZ271K03□ | — | 270μH ±10% | 1MHz | 40 | 796kHz | 100mA | 6.8Ω | 4.0MHz |
| LQH43NZ331J03□ | — | 330μH ±5% | 1MHz | 40 | 796kHz | 95mA | 8.2Ω | 3.6MHz |
| LQH43NZ331K03□ | — | 330μH ±10% | 1MHz | 40 | 796kHz | 95mA | 8.2Ω | 3.6MHz |
| LQH43NZ391J03□ | — | 390μH ±5% | 1MHz | 40 | 796kHz | 90mA | 9.7Ω | 3.3MHz |
| LQH43NZ391K03□ | — | 390μH ±10% | 1MHz | 40 | 796kHz | 90mA | 9.7Ω | 3.3MHz |
| LQH43NZ471J03□ | — | 470μH ±5% | 1kHz | 40 | 796kHz | 80mA | 11.8Ω | 3.0MHz |
| LQH43NZ471K03□ | — | 470μH ±10% | 1kHz | 40 | 796kHz | 80mA | 11.8Ω | 3.0MHz |
| LQH43NZ561J03□ | — | 560μH ±5% | 1kHz | 40 | 796kHz | 70mA | 14.5Ω | 2.7MHz |
| LQH43NZ561K03□ | — | 560μH ±10% | 1kHz | 40 | 796kHz | 70mA | 14.5Ω | 2.7MHz |
| LQH43NZ681J03□ | — | 680μH ±5% | 1kHz | 40 | 796kHz | 65mA | 17.0Ω | 2.5MHz |
| LQH43NZ681K03□ | — | 680μH ±10% | 1kHz | 40 | 796kHz | 65mA | 17.0Ω | 2.5MHz |
| LQH43NZ821J03□ | — | 820μH ±5% | 1kHz | 40 | 796kHz | 60mA | 20.5Ω | 2.2MHz |
| LQH43NZ821K03□ | — | 820μH ±10% | 1kHz | 40 | 796kHz | 60mA | 20.5Ω | 2.2MHz |
| LQH43NZ102J03□ | — | 1000μH ±5% | 1kHz | 40 | 252kHz | 50mA | 25.0Ω | 2.0MHz |
| LQH43NZ102K03□ | — | 1000μH ±10% | 1kHz | 40 | 252kHz | 50mA | 25.0Ω | 2.0MHz |
| LQH43NZ122J03□ | — | 1200μH ±5% | 1kHz | 40 | 252kHz | 45mA | 30.0Ω | 1.8MHz |
| LQH43NZ122K03□ | — | 1200μH ±10% | 1kHz | 40 | 252kHz | 45mA | 30.0Ω | 1.8MHz |
| LQH43NZ152J03□ | — | 1500μH ±5% | 1kHz | 40 | 252kHz | 40mA | 37.0Ω | 1.6MHz |
| LQH43NZ152K03□ | — | 1500μH ±10% | 1kHz | 40 | 252kHz | 40mA | 37.0Ω | 1.6MHz |
| LQH43NZ182J03□ | — | 1800μH ±5% | 1kHz | 40 | 252kHz | 35mA | 45.0Ω | 1.5MHz |
| LQH43NZ182K03□ | — | 1800μH ±10% | 1kHz | 40 | 252kHz | 35mA | 45.0Ω | 1.5MHz |
| LQH43NZ222J03□ | — | 2200μH ±5% | 1kHz | 40 | 252kHz | 30mA | 50.0Ω | 1.3MHz |
| LQH43NZ222K03□ | — | 2200μH ±10% | 1kHz | 40 | 252kHz | 30mA | 50.0Ω | 1.3MHz |
| LQH43NZ242J03□ | — | 2400μH ±5% | 1kHz | 40 | 252kHz | 25mA | 53.0Ω | 1.2MHz |
| LQH43NZ242K03□ | — | 2400μH ±10% | 1kHz | 40 | 252kHz | 25mA | 53.0Ω | 1.2MHz |

Operating temp.range: -40 to 105°C

Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F.: Self Resonant Frequency

When rated current is applied to the products, self-temperature rise shall be limited to 20°C max and inductance will be within ±10% of initial inductance value.


Continued on the following page. ↗

Continued from the preceding page. ↘

Inductance-Frequency Characteristics (Typ.)

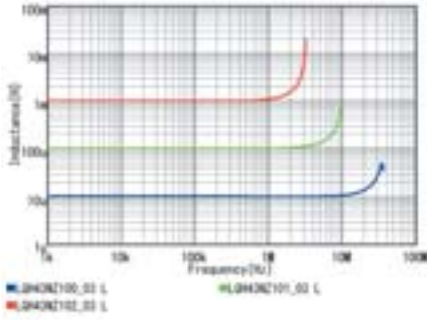


Q-Frequency Characteristics (Typ.)

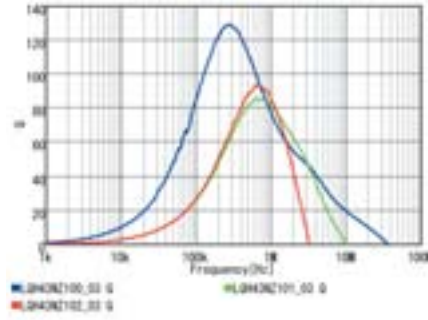

Inductors for General Circuits

HEAWS Series 4241 (107104) inch (mm)

Appearance/Dimensions

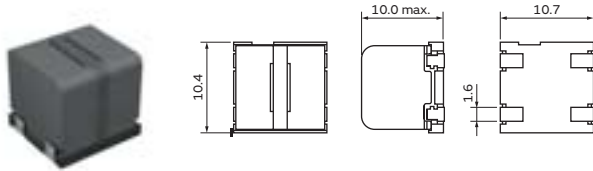

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 250 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| 1211EA-1004□ | — | 10μH ±20% | 0.1MHz | 5000mA | 2800mA | 0.025Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 85°C

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 25%. (The ambient reference temperature is 20°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core

Inductance-Current Characteristics (Typ.)

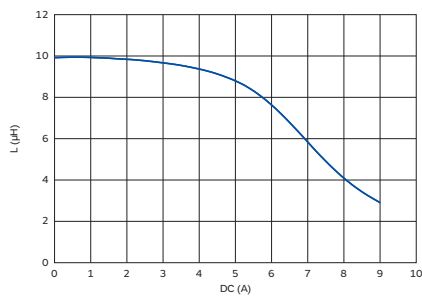


Temperature Rise Characteristics (Typ.)

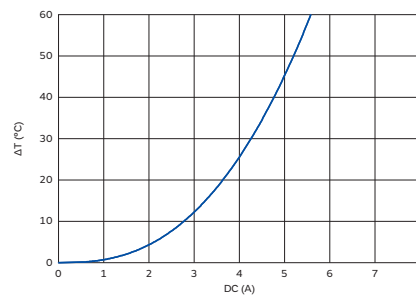

Inductors for General Circuits

HEAW Series 5551 (140130) inch (mm)

Appearance/Dimensions

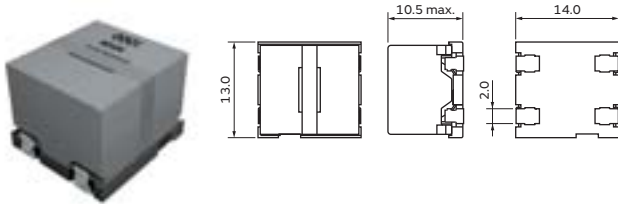

(in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 200 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current (Isat)* | Rated Current (Itemp)* | Max. of DC Resistance |
|--------------|-------------------|------------|---------------------------|-----------------------|------------------------|-----------------------|
| Infotainment | Powertrain/Safety | | | | | |
| 1155EA-0001□ | — | 10μH ±20% | 0.1MHz | 7200mA | 3000mA | 0.025Ω |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Operating temp.range (Self-temp.rise not included): -40 to 85°C

Only for reflow soldering

*Isat: Rated Current based on Inductance change


*Itemp: Rated Current based on Temperature rise

Rated current (Isat) is specified when the decrease of the initial inductance value at 25%. (The ambient reference temperature is 20°C)


Rated current (Itemp) is specified when temperature of inductor the is raised 40°C by DC current. (The ambient reference temperature is 20°C)

Class of Magnetic Shield: Ferrite Core

Inductance-Current Characteristics (Typ.)

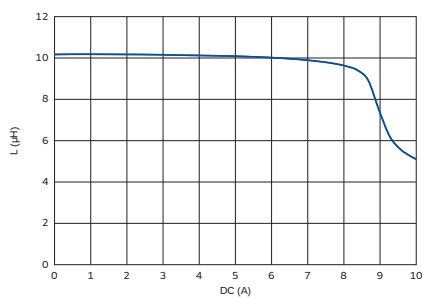


Temperature Rise Characteristics (Typ.)

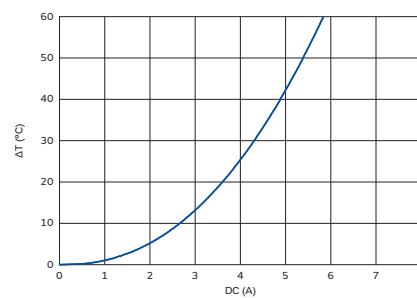

Inductors for General Circuits

Surface mount variable coil 5CCEG Series 2222 (5656) inch (mm)

Appearance/Dimensions

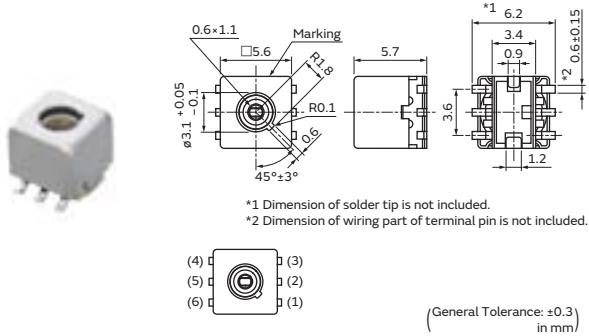

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 750 |

Features

- 6.5×5.9×6.0(H) mm MAX.
- Supported inductance range: 0.05 to 2.7μH
- High reliability that conforms to automotive standards
- Operating temperature range: -40°C to +85°C

Applications

- Ideal for use as RF matching transformers for car tuners


Rated Value (□: packaging code)

| Winding Connection (Bottom View) | Part Number | | Test Frequency (MHz) | Resonance Capacitor Range (pF) |
|-------------------------------------|-------------------|-------------------|-------------------------|-----------------------------------|
| | Infotainment | Powertrain/Safety | | |
| | #A1313AN-0001GGH□ | — | 100 | 11.4 +3/-3% |
| | #A1313AN-0002GRG□ | — | 100 | 11.4 +5/-2% |
| | #A1313AN-0003GRG□ | — | 100 | 11.4 +2/-4% |
| | #A1313AN-0004GGH□ | — | 100 | 11.7 +3/-3% |

Inductors for General Circuits

Surface mount variable coil FSDVA Series 2323 (5858) inch (mm)

Appearance/Dimensions

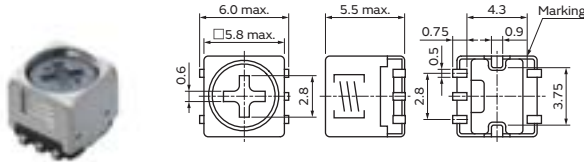

(General Tolerance: ±0.2 in mm)

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| =P3 | ø330mm Embossed Taping | 1000 |

Features

- 5.8×5.8×5.5(H) mm MAX.
- Supported inductance range: 0.1 to 52mH (1 to 7 mH for corner sensor applications)
- Resistant to mechanical stress
- Operating temperature range
 Up to 20 mH (-40°C to +105°C)
 20 mH or more (-40°C to +85°C)
- Various reliability conditions guaranteed for 1,000 hours (evaluation performed up to 3,000 hours)
- Lead coplanarity guaranteed within 0.1 mm

Rated Value (□: packaging code)

| Winding Connection (Bottom View) | Part Number | | Test Frequency (kHz) | Inductance Range (mH) | Unloaded Q |
|-------------------------------------|-------------------|-------------------|-------------------------|--------------------------|------------|
| | Infotainment | Powertrain/Safety | | | |
| | N1342BCA-0004UG□ | — | 252 | 4.4 ±3% | 25 min |
| | N1342DEA-0008BQE□ | — | 252 | 2.5 ±5% | 25 min |

| Winding Connection (Bottom View) | Part Number | | Test Frequency (kHz) | Inductance Tolerance (mH) | Unloaded Q |
|-------------------------------------|-----------------|-------------------|-------------------------|------------------------------|------------|
| | Infotainment | Powertrain/Safety | | | |
| | N1342AAA-0001Z□ | — | 79.6 | 52 ±7% | 10 min |

Inductors for General Circuits (LQ Series) ⚠️Caution/Notice

⚠️Caution

Rating

1. About the Rated Current

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

For the usage of powertrain and safety be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

2. About Excessive Surge Current

Surge current (pulse current or rush current) greater than the specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise.

Please contact us in advance in case of applying the surge current.

Notice

Storage and Operating Condition

<Operating Environment>

Do not use products in chemical atmosphere such as chlorine gas, acid or sulfide gas.

<Storage Requirements>

1. Storage Period

Products should be used within 12 months.
Check solderability if this period is exceeded.

2. Storage Conditions

- (1) Store products in a warehouse in compliance with the following conditions:
Temperature: -10 to +40 degrees C.
Humidity: 15 to 85% (relative humidity)

Do not subject products to rapid changes in temperature and humidity.

Do not store them in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas.
This will prevent electrode oxidation, which causes poor solderability and possible corrosion of inductors.

- (2) Do not store products in bulk packaging to prevent collision among inductors, which causes core chipping and wire breakage.
- (3) Store products on pallets to protect from humidity, dust, etc.
- (4) Avoid heat shock, vibration, direct sunlight, etc.

Handling

This item is designed to have sufficient strength, but handle with care to avoid chipping or breaking its ceramic structure.

LQH series

- To prevent breaking the wire, avoid touching with sharp material, such as tweezers or the bristles of a cleaning brush, to the wire wound portion of this product.
- To prevent breaking the core, avoid applying excessive mechanical shock to products mounted on the board.

<Transportation>

Do not apply excessive vibration or mechanical shock to products.

<Resin Coating>

When coating products with resin, the relatively high resin curing stress may change inductance values.
For exterior coating, select resin carefully so that electrical and mechanical performance of the product is not affected. Prior to use, please evaluate reliability with the product mounted in your application set.

(LQH series)


An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating conditions, etc. Some resins containing impurities or chloride may possibly generate chlorine by hydrolysis under some operating conditions, causing corrosion of the inductor wire and leading to an open circuit.

<Handling of a Substrate>


After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting the substrate when cropping the substrate, inserting and removing a connector from the substrate, or tightening a screw to the substrate.

Excessive mechanical stress may cause cracking in the Product.

Bending



Twisting



Inductors for General (except for LQ Series) ⚠️Caution/Notice

⚠️Caution

Rating

1. About the Rated Current

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

Be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

2. About Excessive Surge Current

Surge current (pulse current or rush current) greater than the specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise. Please contact us in advance in case of applying the surge current.

Notice

Precaution for Application

(1) The part must be pre-heated before soldering if reflow is applied.

The difference between pre-heat temperature and soldering temperature must be within 150°C.

(2) If a soldering iron is applied, the soldering process must be completed within 3 seconds at a soldering temperature lower than 350°C.

The tip of the soldering iron must not touch the terminal electrode in this process.

(3) Terminals should not be handled with fingers. This is to prevent deterioration in solderability.

(4) Soldering using a soldering iron must be done only once for each part.

(5) PCB mount: this part must be handled with care to minimize any physical stress to the part at the board assembly process.

(6) To minimize the influence to the part, the thickness of PCB, land dimension, and the amount of solder must be evaluated carefully by individual application.

(7) If a washing process is applied, please make sure there is no problem with operating.

(8) Products should not be dropped on the floor. This is to prevent damage to the products.

(9) Although electrical performance is satisfactory, audible noises may be made if audio frequency ingredient is contained in current.

Before using, please make sure there aren't any problem with operating.

Handling

○Storage and Handling Requirements

(1) Storage period

Use the products within 6 months after delivered.

Solderability should be checked if this period is exceeded

(2) Storage conditions

• Products should be stored in the warehouse on the following conditions.

Temperature: -10 to 40°C

Humidity: 15 to 85% relative humidity No rapid change on temperature and humidity

Don't keep products in corrosive gases such as sulfur, chlorine gas or acid, or it may cause oxidization of electrode, resulting in poor solderability.

• Products should not be stored on bulk packaging condition to prevent the chipping of the core and the breaking of winding wire caused by the collision between the products.

• Products should be stored on the palette for the prevention of the influence from humidity, dust and so on.

• Products should be stored in the warehouse without heat shock, vibration, direct sunlight and so on.

(3) Handling Condition

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.

Inductors for General Circuits Soldering and Mounting

1. Standard Land Pattern Dimensions

A high Q value is achieved when the PCB electrode land pattern is designed so that it does not project beyond the chip Inductors (chip coils) electrode.

■ Land Pattern + Solder Resist ■ Land Pattern □ Solder Resist (in mm)

| Series | Standard Land Dimensions |
|--------|--------------------------|
| LQH32N | |
| LQH43N | |
| HEAWS | |
| HEAW | |
| 5CCEG | |
| FSDVA | |

Attention should be paid to potential magnetic coupling effects when using the Inductors (coils) as a resonator.

Continued on the following page. ↗

Inductors for General Circuits Soldering and Mounting

Continued from the preceding page. ↘

2. Standard Soldering Conditions

(1) Soldering method

Chip Inductors (Chip coils) can be reflow soldered.

Please contact Murata regarding other soldering methods.

Solder: Use Sn-3.0Ag-0.5Cu solder.


Flux: Use rosin-based flux, but not strongly acidic flux (with chlorine content exceeding 0.2wt%).

Do not use water-soluble flux.

For additional mounting methods, please contact Murata.

(2) Soldering profile

● Reflow Soldering profile (LQ Series) (Sn-3.0Ag-0.5Cu solder)

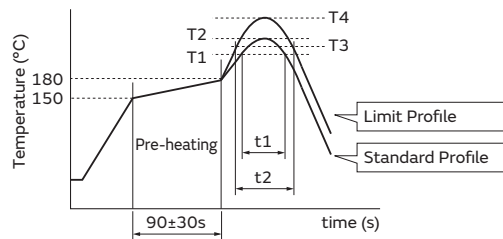

| Series | Standard Profile | | | | Limit Profile | | | |
|------------|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak temperature (T2) | Cycle of reflow | Heating | | Peak temperature (T4) | Cycle of reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| LQH32N/43N | 220°C | 30 to 60s | 245±3°C | 2 times max. | 230°C | 60s max. | 260°C/10s | 2 times max. |


Continued on the following page. ↗

Inductors for General Circuits Soldering and Mounting

Continued from the preceding page. ↘


● Reflow Soldering profile (except for LQ Series) (Sn-3.0Ag-0.5Cu solder)

HEAWS HEAW

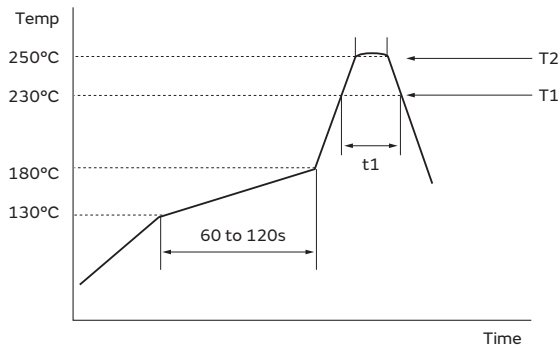

*Preheat: Temperature 130 to 180°C, Time 60 to 120 sec

FSDVA 5CCEG

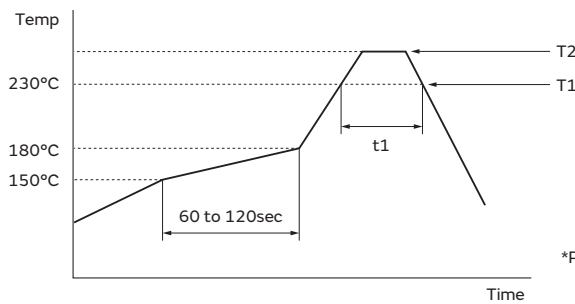

*Preheat: Temperature 150 to 180°C, Time 60 to 120 sec

| Series | Heating | | Peak Temperature (T2) | Cycle of Reflow |
|----------------|------------|-----------|-----------------------|-----------------|
| | Temp. (T1) | Time (t1) | | |
| HEAWS HEAW | 230°C | 60s | 250 (+10/-0)°C/10s | 2 times max. |
| FSDVA 5CCEG | 230°C | 40 to 60s | 260°C/3s or 250°C/10s | 2 times max. |

(3) Reworking with Soldering Iron (LQ Series)

Preheating at 150°C for 1 minute is required. Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

- Soldering iron power output: 80W max.
- Temperature of soldering iron tip: 350°C
- Diameter of soldering iron end: 3.0mm max.
- Soldering time: within 3 s

Please keep the fix time with the soldering iron within 2 times

Reworking with Soldering Iron (HEAWS/HEAW Series)

- Temperature of soldering iron tip: 390°C
- Soldering time: within 3±1 s

Reworking with Soldering Iron (FSDVA/5CCEG Series)

Apply reflow soldering conditions when using soldering iron and for rework.

Especially be careful not to overheat the tip of the soldering iron.

- Temperature of soldering iron tip: 360°C
- Soldering time: within 3±1 s

Please keep the fix time with the soldering iron within 1 times.

Continued on the following page. ↗


Inductors for General Circuits Soldering and Mounting

Continued from the preceding page. ↘

3. Mounting Instructions

(1) Land Pattern Dimensions

Large lands reduce Q of the mounted chip. Also, large protruding land areas (bordered by lines having dimensions 'c' and 'd' shown) cause floating and electrode leaching.

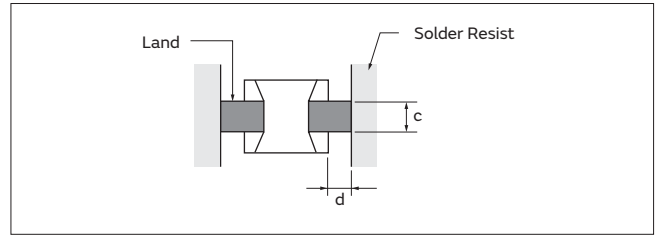


(2) Land Pattern Designing (LQH series)

Please follow the recommended patterns. Otherwise, their performance, which includes electrical performance or solderability, may be affected, or result in "position shift" in the soldering process.



(3) Magnetic Coupling

Since some chip inductors (chip coils) are constructed like an open magnetic circuit, narrow spacing between inductors (coils) may cause magnetic coupling.

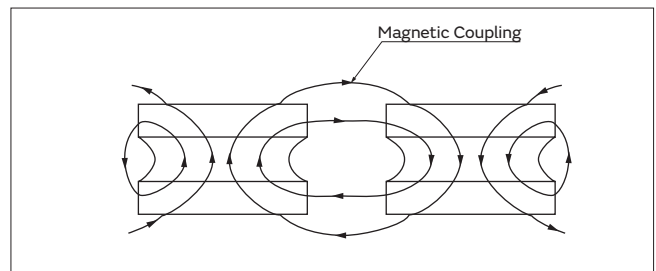

(4) PCB Warping

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

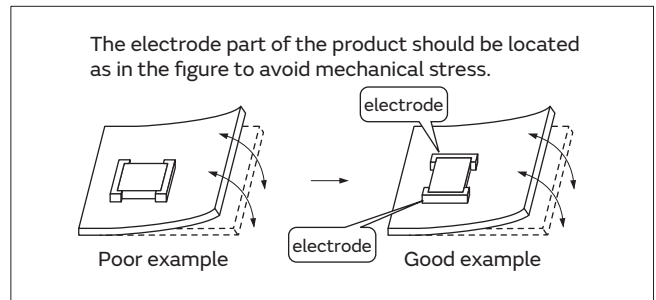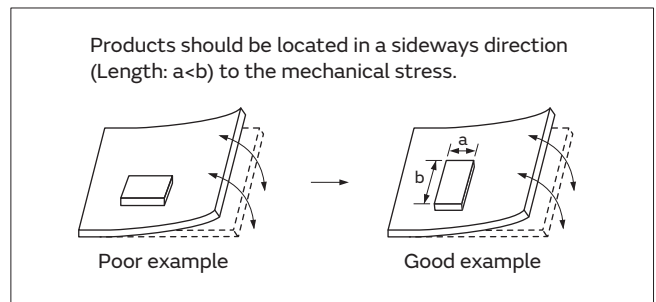

(5) Amount of Solder Paste

Excessive solder causes electrode corrosion, while insufficient solder causes low electrode bonding strength. Adjust the amount of solder paste as shown on the right so that solder is applied.


Guideline of solder paste thickness

LQH32N: 100 to 150 μ m

LQH43N: 200 to 300 μ m

5CCEG: 200 μ m

FSDVA: 150 to 200 μ m

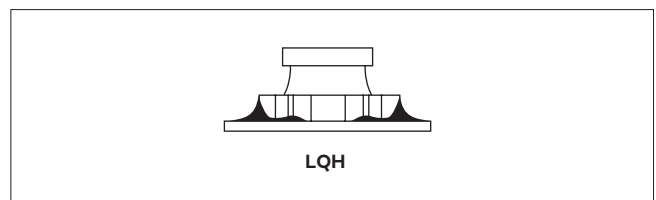

Continued on the following page. ↗

Inductors for General Circuits Soldering and Mounting

Continued from the preceding page. ↘

4. Cleaning

The following conditions should be observed when cleaning chip inductors (chip coils):

(1) Cleaning Temperature: 60°C max. (40°C max. for alcohol cleaning agents)

(2) Ultrasonic

Output: 20W/l max.

Duration: 5 minutes max.

Frequency: 28 to 40kHz

Care should be taken not to cause resonance of the PCB and mounted products.

(3) Cleaning agent

The following cleaning agents have been tested on individual components. Evaluation in complete assembly should be done prior to production.

(a) Alcohol cleaning agents

Isopropyl alcohol (IPA)

(b) Aqueous cleaning agents

Pine Alpha ST-100S


(4) Ensure that flux residue is completely removed.

Component should be thoroughly dried after aqueous agents have been removed with deionized water.

For additional cleaning methods, please contact Murata.

Inductors for General Circuits Packaging

Minimum Quantity and 8mm Width Taping Dimensions

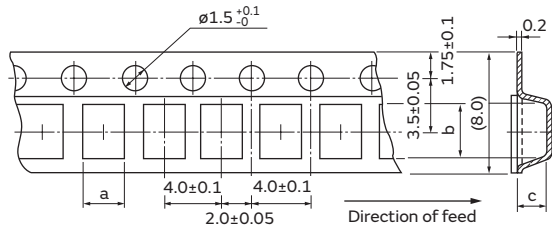


Dimension of the cavity of embossed tape is measured at the bottom side.

Embossed Tape

| Part Number | Dimensions | | Depth of Cavity | Packaging Code (Minimum Qty. [pcs.]) | | |
|-------------|------------|-----|-----------------|--------------------------------------|-------------|-------------|
| | a | b | | c | ø180mm reel | ø330mm reel |
| LQH32N | 2.9 | 3.6 | 2.1 | L (2000) | K (7500) | - |

(in mm)

Minimum Quantity and 12mm Width Embossed Taping Dimensions

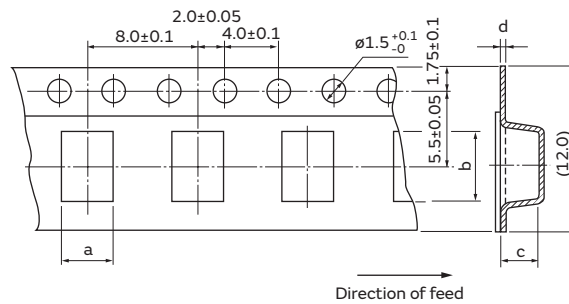

Dimension of the cavity of embossed tape is measured at the bottom side.

Embossed Tape

| Part Number | Dimensions (c: Depth of Cavity) | | | | Packaging Code (Minimum Qty. [pcs.]) | | |
|-------------|---------------------------------|-----|-----|-----|--------------------------------------|-------------|------|
| | a | b | c | d | ø180mm reel | ø330mm reel | Bulk |
| LQH43N | 3.6 | 4.9 | 2.7 | 0.3 | L (500) | K (2500) | - |

(in mm)


Continued on the following page. ↗

Inductors for General Circuits Packaging

Continued from the preceding page. ↘

Taping for Automatic Insertion of SMT Coils

Tape and Reel Dimensions

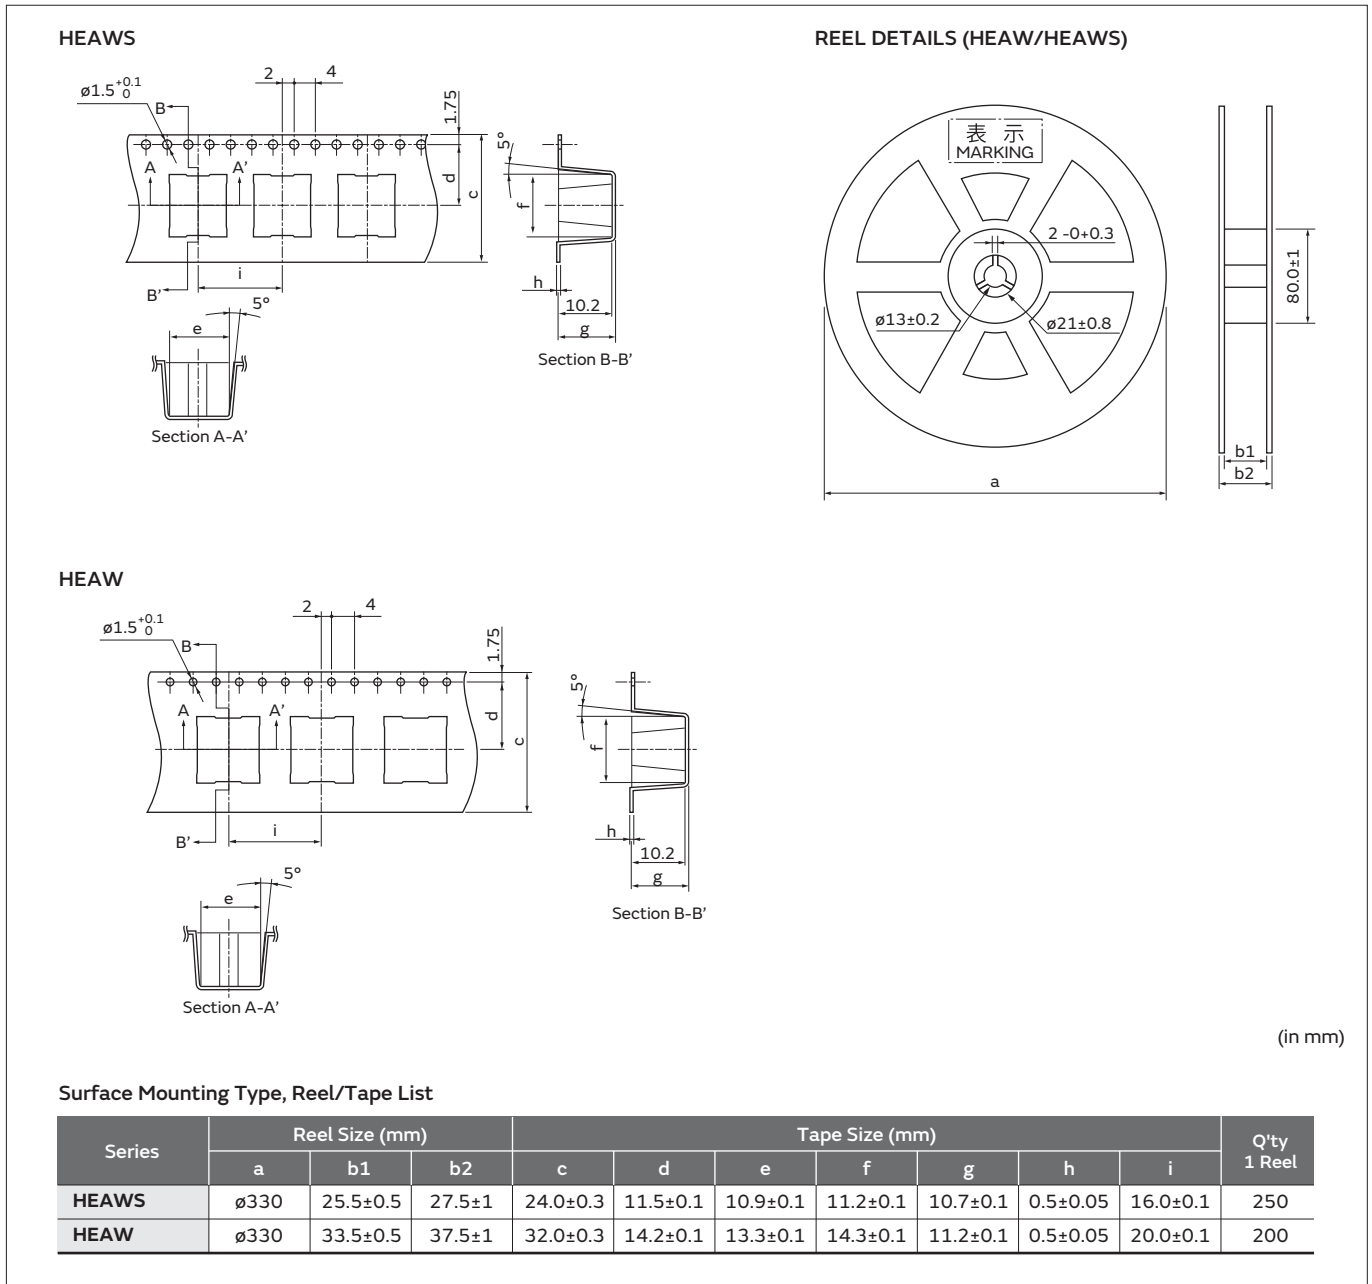


Continued on the following page. ↗

Inductors for General Circuits Packaging


Continued from the preceding page. ↘

Tape and Reel Dimensions


5CCEG

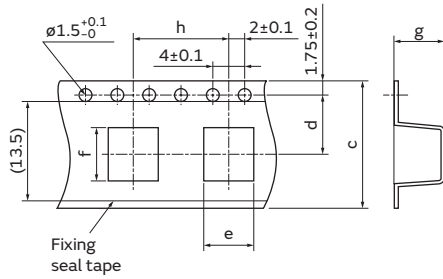

REEL DETAILS (5CCEG, FSDVA)

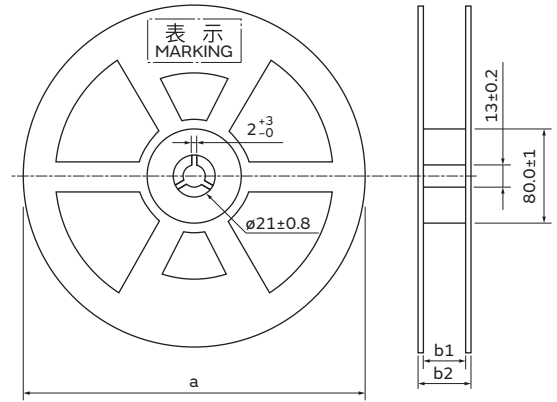

FSDVA

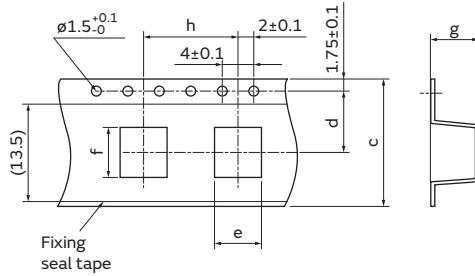

(in mm)

Surface Mounting Type, Reel/Tape List

| Series | Reel Size (mm) | | | Tape Size (mm) | | | | | | Q'ty 1 Reel |
|--------|----------------|----------|--------|----------------|---------|---------|---------|---------|--------|----------------|
| | a | b1 | b2 | c | d | e | f | g | h | |
| 5CCEG | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.4 | 7.5±0.2 | 6.2±0.2 | 6.6±0.2 | 6.2±0.2 | 12±0.2 | 750 |
| FSDVA | ø330 | 17.5±0.5 | 21.5±1 | 16.0±0.3 | 7.5±0.1 | 6.0±0.2 | 6.2±0.2 | 5.9±0.2 | 12±0.1 | 1,000 |

● Part Numbering

RF Inductors for Automotive

(Part Number)

| | | | | | | | | | |
|----|---|----|---|---|-----|---|---|---|---|
| LQ | G | 15 | H | H | 1N0 | S | 0 | 2 | D |
| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ | ⑧ | ⑨ | ⑩ |

① Product ID

| Product ID | |
|------------|-----------------------------|
| LQ | Chip Inductors (Chip Coils) |

② Structure

| Code | Structure |
|------|--|
| G | Multilayer Type (Air-core Inductors (Coils)) |
| H | Wire Wound Type (Ferrite Core) |
| P | Film Type |
| W | Wire Wound Type (Air-core Inductors (Coils)) |

③ Dimensions (LxW)

| Code | Nominal Dimensions (LxW) | Size Code (in inch) |
|------|--------------------------|---------------------|
| 03 | 0.6x0.3mm | 0201 |
| 15 | 1.0x0.5mm | 0402 |
| 18 | 1.6x0.8mm | 0603 |
| 31 | 3.2x1.6mm | 1206 |

④ Applications and Characteristics

| Code | Series | Applications and Characteristics |
|------|--------|---------------------------------------|
| H | LQG | Multilayer Air-core Inductors (Coils) |
| W | | High Q Type |
| T | LQP | Film Type (Low DC Resistance Type) |
| A | LQW | High Q Type (UHF-SHF) |
| C | | for Choke (Coating Type) |
| H | LQH | for High-frequency Resonant Circuit |

⑤ Category

| Code | Series | Category | |
|------|---------|---------------|-------------------|
| N | LQP/LQW | Standard Type | |
| S | LQW | | |
| Z | LQG/LQH | Automotive | Infotainment |
| H | LQG | | Powertrain/Safety |

⑥ Inductance

Expressed by three-digit alphanumerics. The unit is micro-henry (μH). The first and second figures are significant digits, and the third figure expresses the number of zeros that follow the two figures. If there is a decimal point, it is expressed by the capital letter "R." In this case, all figures are significant digits. If inductance is less than $0.1\mu\text{H}$, the inductance code is expressed by a combination of two figures and the capital letter "N," and the unit of inductance is nano-henry (nH). The capital letter "N" indicates the unit of "nH," and also expresses a decimal point. In this case, all figures are significant digits. For those products whose inductance values are specified using three designated digits, these values may be indicated using the closest two digits instead.

⑦ Inductance Tolerance

| Code | Inductance Tolerance |
|------|----------------------|
| B | $\pm 0.1\text{nH}$ |
| C | $\pm 0.2\text{nH}$ |
| D | $\pm 0.5\text{nH}$ |
| G | $\pm 2\%$ |
| H | $\pm 3\%$ |
| J | $\pm 5\%$ |
| K | $\pm 10\%$ |
| S | $\pm 0.3\text{nH}$ |

⑧ Features

| Code | Features | Series |
|------|------------------------------------|-----------------|
| 0 | Standard Type | LQG/LQH/LQP/LQW |
| 1 | High-Q or Low DC Resistance | LQW15A/15C/18A |
| 8 | Low Resistance/ Large Current Type | LQW15A/18A |
| H | Automotive Powertrain/ Safety | LQP03T |
| Z | Automotive Infotainment | LQP03T |

⑨ Electrode

•Lead (Pb) Free

| Code | Electrode | Series |
|------|-------------------------|----------------------|
| 0 | Sn | LQG18H |
| 2 | | LQG15H/LQG15W/LQP03T |
| 3 | LF Solder | LQH |
| Z | Automotive Infotainment | LQW15A/15C/18A/18C |


⑩ Packaging

| Code | Packaging |
|------|--|
| K | Embossed Taping ($\varnothing 330\text{mm}$ Reel) |
| L | Embossed Taping ($\varnothing 180\text{mm}$ Reel) |
| B | Bulk |
| J | Paper Taping ($\varnothing 330\text{mm}$ Reel) |
| D | Paper Taping ($\varnothing 180\text{mm}$ Reel) |

RF Inductors

LQG15HZ_02/LQG15HH_02 Series 0402 (1005) inch (mm)

Appearance/Dimensions

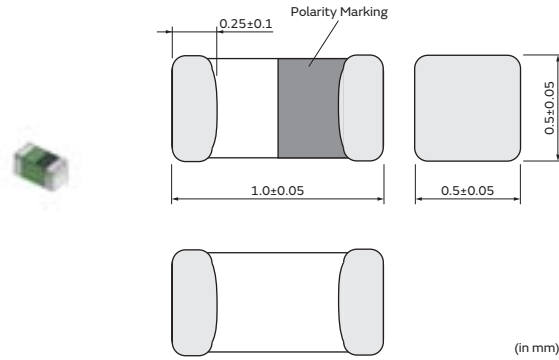

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| J | ø330mm Paper Taping | 50000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15HZ1N0B02□ | LQG15HH1N0B02□ | 1.0nH ±0.1nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 10000MHz |
| LQG15HZ1N0C02□ | LQG15HH1N0C02□ | 1.0nH ±0.2nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 10000MHz |
| LQG15HZ1N0S02□ | LQG15HH1N0S02□ | 1.0nH ±0.3nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 10000MHz |
| LQG15HZ1N1B02□ | LQG15HH1N1B02□ | 1.1nH ±0.1nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N1C02□ | LQG15HH1N1C02□ | 1.1nH ±0.2nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N1S02□ | LQG15HH1N1S02□ | 1.1nH ±0.3nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N2B02□ | LQG15HH1N2B02□ | 1.2nH ±0.1nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N2C02□ | LQG15HH1N2C02□ | 1.2nH ±0.2nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N2S02□ | LQG15HH1N2S02□ | 1.2nH ±0.3nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N3B02□ | LQG15HH1N3B02□ | 1.3nH ±0.1nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N3C02□ | LQG15HH1N3C02□ | 1.3nH ±0.2nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N3S02□ | LQG15HH1N3S02□ | 1.3nH ±0.3nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N5B02□ | LQG15HH1N5B02□ | 1.5nH ±0.1nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N5C02□ | LQG15HH1N5C02□ | 1.5nH ±0.2nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N5S02□ | LQG15HH1N5S02□ | 1.5nH ±0.3nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N6B02□ | LQG15HH1N6B02□ | 1.6nH ±0.1nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N6C02□ | LQG15HH1N6C02□ | 1.6nH ±0.2nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N6S02□ | LQG15HH1N6S02□ | 1.6nH ±0.3nH | 100MHz | 8 | 100MHz | 1000mA | 0.07Ω | 6000MHz |
| LQG15HZ1N8B02□ | LQG15HH1N8B02□ | 1.8nH ±0.1nH | 100MHz | 8 | 100MHz | 950mA | 0.08Ω | 6000MHz |
| LQG15HZ1N8C02□ | LQG15HH1N8C02□ | 1.8nH ±0.2nH | 100MHz | 8 | 100MHz | 950mA | 0.08Ω | 6000MHz |
| LQG15HZ1N8S02□ | LQG15HH1N8S02□ | 1.8nH ±0.3nH | 100MHz | 8 | 100MHz | 950mA | 0.08Ω | 6000MHz |
| LQG15HZ2N0B02□ | LQG15HH2N0B02□ | 2.0nH ±0.1nH | 100MHz | 8 | 100MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15HZ2N0C02□ | LQG15HH2N0C02□ | 2.0nH ±0.2nH | 100MHz | 8 | 100MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15HZ2N0S02□ | LQG15HH2N0S02□ | 2.0nH ±0.3nH | 100MHz | 8 | 100MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15HZ2N2B02□ | LQG15HH2N2B02□ | 2.2nH ±0.1nH | 100MHz | 8 | 100MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15HZ2N2C02□ | LQG15HH2N2C02□ | 2.2nH ±0.2nH | 100MHz | 8 | 100MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15HZ2N2S02□ | LQG15HH2N2S02□ | 2.2nH ±0.3nH | 100MHz | 8 | 100MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15HZ2N4B02□ | LQG15HH2N4B02□ | 2.4nH ±0.1nH | 100MHz | 8 | 100MHz | 850mA | 0.11Ω | 6000MHz |
| LQG15HZ2N4C02□ | LQG15HH2N4C02□ | 2.4nH ±0.2nH | 100MHz | 8 | 100MHz | 850mA | 0.11Ω | 6000MHz |
| LQG15HZ2N4S02□ | LQG15HH2N4S02□ | 2.4nH ±0.3nH | 100MHz | 8 | 100MHz | 850mA | 0.11Ω | 6000MHz |
| LQG15HZ2N7B02□ | LQG15HH2N7B02□ | 2.7nH ±0.1nH | 100MHz | 8 | 100MHz | 800mA | 0.12Ω | 6000MHz |
| LQG15HZ2N7C02□ | LQG15HH2N7C02□ | 2.7nH ±0.2nH | 100MHz | 8 | 100MHz | 800mA | 0.12Ω | 6000MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15HZ2N7S02□ | LQG15HH2N7S02□ | 2.7nH ±0.3nH | 100MHz | 8 | 100MHz | 800mA | 0.12Ω | 6000MHz |
| LQG15HZ3N0B02□ | LQG15HH3N0B02□ | 3.0nH ±0.1nH | 100MHz | 8 | 100MHz | 800mA | 0.125Ω | 6000MHz |
| LQG15HZ3N0C02□ | LQG15HH3N0C02□ | 3.0nH ±0.2nH | 100MHz | 8 | 100MHz | 800mA | 0.125Ω | 6000MHz |
| LQG15HZ3N0S02□ | LQG15HH3N0S02□ | 3.0nH ±0.3nH | 100MHz | 8 | 100MHz | 800mA | 0.125Ω | 6000MHz |
| LQG15HZ3N3B02□ | LQG15HH3N3B02□ | 3.3nH ±0.1nH | 100MHz | 8 | 100MHz | 800mA | 0.125Ω | 6000MHz |
| LQG15HZ3N3C02□ | LQG15HH3N3C02□ | 3.3nH ±0.2nH | 100MHz | 8 | 100MHz | 800mA | 0.125Ω | 6000MHz |
| LQG15HZ3N3S02□ | LQG15HH3N3S02□ | 3.3nH ±0.3nH | 100MHz | 8 | 100MHz | 800mA | 0.125Ω | 6000MHz |
| LQG15HZ3N6B02□ | LQG15HH3N6B02□ | 3.6nH ±0.1nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ3N6C02□ | LQG15HH3N6C02□ | 3.6nH ±0.2nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ3N6S02□ | LQG15HH3N6S02□ | 3.6nH ±0.3nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ3N9B02□ | LQG15HH3N9B02□ | 3.9nH ±0.1nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ3N9C02□ | LQG15HH3N9C02□ | 3.9nH ±0.2nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ3N9S02□ | LQG15HH3N9S02□ | 3.9nH ±0.3nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ4N3B02□ | LQG15HH4N3B02□ | 4.3nH ±0.1nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ4N3C02□ | LQG15HH4N3C02□ | 4.3nH ±0.2nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ4N3S02□ | LQG15HH4N3S02□ | 4.3nH ±0.3nH | 100MHz | 8 | 100MHz | 750mA | 0.14Ω | 6000MHz |
| LQG15HZ4N7B02□ | LQG15HH4N7B02□ | 4.7nH ±0.1nH | 100MHz | 8 | 100MHz | 700mA | 0.16Ω | 6000MHz |
| LQG15HZ4N7C02□ | LQG15HH4N7C02□ | 4.7nH ±0.2nH | 100MHz | 8 | 100MHz | 700mA | 0.16Ω | 6000MHz |
| LQG15HZ4N7S02□ | LQG15HH4N7S02□ | 4.7nH ±0.3nH | 100MHz | 8 | 100MHz | 700mA | 0.16Ω | 6000MHz |
| LQG15HZ5N1B02□ | LQG15HH5N1B02□ | 5.1nH ±0.1nH | 100MHz | 8 | 100MHz | 650mA | 0.18Ω | 5300MHz |
| LQG15HZ5N1C02□ | LQG15HH5N1C02□ | 5.1nH ±0.2nH | 100MHz | 8 | 100MHz | 650mA | 0.18Ω | 5300MHz |
| LQG15HZ5N1S02□ | LQG15HH5N1S02□ | 5.1nH ±0.3nH | 100MHz | 8 | 100MHz | 650mA | 0.18Ω | 5300MHz |
| LQG15HZ5N6B02□ | LQG15HH5N6B02□ | 5.6nH ±0.1nH | 100MHz | 8 | 100MHz | 650mA | 0.18Ω | 4500MHz |
| LQG15HZ5N6C02□ | LQG15HH5N6C02□ | 5.6nH ±0.2nH | 100MHz | 8 | 100MHz | 650mA | 0.18Ω | 4500MHz |
| LQG15HZ5N6S02□ | LQG15HH5N6S02□ | 5.6nH ±0.3nH | 100MHz | 8 | 100MHz | 650mA | 0.18Ω | 4500MHz |
| LQG15HZ6N2B02□ | LQG15HH6N2B02□ | 6.2nH ±0.1nH | 100MHz | 8 | 100MHz | 600mA | 0.20Ω | 4500MHz |
| LQG15HZ6N2C02□ | LQG15HH6N2C02□ | 6.2nH ±0.2nH | 100MHz | 8 | 100MHz | 600mA | 0.20Ω | 4500MHz |
| LQG15HZ6N2S02□ | LQG15HH6N2S02□ | 6.2nH ±0.3nH | 100MHz | 8 | 100MHz | 600mA | 0.20Ω | 4500MHz |
| LQG15HZ6N8G02□ | LQG15HH6N8G02□ | 6.8nH ±2% | 100MHz | 8 | 100MHz | 600mA | 0.22Ω | 4500MHz |
| LQG15HZ6N8H02□ | LQG15HH6N8H02□ | 6.8nH ±3% | 100MHz | 8 | 100MHz | 600mA | 0.22Ω | 4500MHz |
| LQG15HZ6N8J02□ | LQG15HH6N8J02□ | 6.8nH ±5% | 100MHz | 8 | 100MHz | 600mA | 0.22Ω | 4500MHz |
| LQG15HZ7N5G02□ | LQG15HH7N5G02□ | 7.5nH ±2% | 100MHz | 8 | 100MHz | 550mA | 0.24Ω | 4200MHz |
| LQG15HZ7N5H02□ | LQG15HH7N5H02□ | 7.5nH ±3% | 100MHz | 8 | 100MHz | 550mA | 0.24Ω | 4200MHz |
| LQG15HZ7N5J02□ | LQG15HH7N5J02□ | 7.5nH ±5% | 100MHz | 8 | 100MHz | 550mA | 0.24Ω | 4200MHz |
| LQG15HZ8N2G02□ | LQG15HH8N2G02□ | 8.2nH ±2% | 100MHz | 8 | 100MHz | 550mA | 0.24Ω | 3700MHz |
| LQG15HZ8N2H02□ | LQG15HH8N2H02□ | 8.2nH ±3% | 100MHz | 8 | 100MHz | 550mA | 0.24Ω | 3700MHz |
| LQG15HZ8N2J02□ | LQG15HH8N2J02□ | 8.2nH ±5% | 100MHz | 8 | 100MHz | 550mA | 0.24Ω | 3700MHz |
| LQG15HZ9N1G02□ | LQG15HH9N1G02□ | 9.1nH ±2% | 100MHz | 8 | 100MHz | 500mA | 0.26Ω | 3400MHz |
| LQG15HZ9N1H02□ | LQG15HH9N1H02□ | 9.1nH ±3% | 100MHz | 8 | 100MHz | 500mA | 0.26Ω | 3400MHz |
| LQG15HZ9N1J02□ | LQG15HH9N1J02□ | 9.1nH ±5% | 100MHz | 8 | 100MHz | 500mA | 0.26Ω | 3400MHz |
| LQG15HZ10NG02□ | LQG15HH10NG02□ | 10nH ±2% | 100MHz | 8 | 100MHz | 500mA | 0.26Ω | 3400MHz |
| LQG15HZ10NH02□ | LQG15HH10NH02□ | 10nH ±3% | 100MHz | 8 | 100MHz | 500mA | 0.26Ω | 3400MHz |
| LQG15HZ10NJ02□ | LQG15HH10NJ02□ | 10nH ±5% | 100MHz | 8 | 100MHz | 500mA | 0.26Ω | 3400MHz |
| LQG15HZ12NG02□ | LQG15HH12NG02□ | 12nH ±2% | 100MHz | 8 | 100MHz | 500mA | 0.28Ω | 3000MHz |
| LQG15HZ12NH02□ | LQG15HH12NH02□ | 12nH ±3% | 100MHz | 8 | 100MHz | 500mA | 0.28Ω | 3000MHz |
| LQG15HZ12NJ02□ | LQG15HH12NJ02□ | 12nH ±5% | 100MHz | 8 | 100MHz | 500mA | 0.28Ω | 3000MHz |
| LQG15HZ15NG02□ | LQG15HH15NG02□ | 15nH ±2% | 100MHz | 8 | 100MHz | 450mA | 0.32Ω | 2500MHz |
| LQG15HZ15NH02□ | LQG15HH15NH02□ | 15nH ±3% | 100MHz | 8 | 100MHz | 450mA | 0.32Ω | 2500MHz |
| LQG15HZ15NJ02□ | LQG15HH15NJ02□ | 15nH ±5% | 100MHz | 8 | 100MHz | 450mA | 0.32Ω | 2500MHz |
| LQG15HZ18NG02□ | LQG15HH18NG02□ | 18nH ±2% | 100MHz | 8 | 100MHz | 400mA | 0.36Ω | 2200MHz |
| LQG15HZ18NH02□ | LQG15HH18NH02□ | 18nH ±3% | 100MHz | 8 | 100MHz | 400mA | 0.36Ω | 2200MHz |
| LQG15HZ18NJ02□ | LQG15HH18NJ02□ | 18nH ±5% | 100MHz | 8 | 100MHz | 400mA | 0.36Ω | 2200MHz |
| LQG15HZ22NG02□ | LQG15HH22NG02□ | 22nH ±2% | 100MHz | 8 | 100MHz | 350mA | 0.42Ω | 1900MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘


| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15HZ22NH02□ | LQG15HH22NH02□ | 22nH ±3% | 100MHz | 8 | 100MHz | 350mA | 0.42Ω | 1900MHz |
| LQG15HZ22NJ02□ | LQG15HH22NJ02□ | 22nH ±5% | 100MHz | 8 | 100MHz | 350mA | 0.42Ω | 1900MHz |
| LQG15HZ27NG02□ | LQG15HH27NG02□ | 27nH ±2% | 100MHz | 8 | 100MHz | 350mA | 0.46Ω | 1700MHz |
| LQG15HZ27NH02□ | LQG15HH27NH02□ | 27nH ±3% | 100MHz | 8 | 100MHz | 350mA | 0.46Ω | 1700MHz |
| LQG15HZ27NJ02□ | LQG15HH27NJ02□ | 27nH ±5% | 100MHz | 8 | 100MHz | 350mA | 0.46Ω | 1700MHz |
| LQG15HZ33NG02□ | LQG15HH33NG02□ | 33nH ±2% | 100MHz | 8 | 100MHz | 350mA | 0.58Ω | 1600MHz |
| LQG15HZ33NH02□ | LQG15HH33NH02□ | 33nH ±3% | 100MHz | 8 | 100MHz | 350mA | 0.58Ω | 1600MHz |
| LQG15HZ33NJ02□ | LQG15HH33NJ02□ | 33nH ±5% | 100MHz | 8 | 100MHz | 350mA | 0.58Ω | 1600MHz |
| LQG15HZ39NG02□ | LQG15HH39NG02□ | 39nH ±2% | 100MHz | 8 | 100MHz | 300mA | 0.65Ω | 1200MHz |
| LQG15HZ39NH02□ | LQG15HH39NH02□ | 39nH ±3% | 100MHz | 8 | 100MHz | 300mA | 0.65Ω | 1200MHz |
| LQG15HZ39NJ02□ | LQG15HH39NJ02□ | 39nH ±5% | 100MHz | 8 | 100MHz | 300mA | 0.65Ω | 1200MHz |
| LQG15HZ47NG02□ | LQG15HH47NG02□ | 47nH ±2% | 100MHz | 8 | 100MHz | 300mA | 0.72Ω | 1000MHz |
| LQG15HZ47NH02□ | LQG15HH47NH02□ | 47nH ±3% | 100MHz | 8 | 100MHz | 300mA | 0.72Ω | 1000MHz |
| LQG15HZ47NJ02□ | LQG15HH47NJ02□ | 47nH ±5% | 100MHz | 8 | 100MHz | 300mA | 0.72Ω | 1000MHz |
| LQG15HZ56NG02□ | LQG15HH56NG02□ | 56nH ±2% | 100MHz | 8 | 100MHz | 250mA | 0.82Ω | 800MHz |
| LQG15HZ56NH02□ | LQG15HH56NH02□ | 56nH ±3% | 100MHz | 8 | 100MHz | 250mA | 0.82Ω | 800MHz |
| LQG15HZ56NJ02□ | LQG15HH56NJ02□ | 56nH ±5% | 100MHz | 8 | 100MHz | 250mA | 0.82Ω | 800MHz |
| LQG15HZ68NG02□ | LQG15HH68NG02□ | 68nH ±2% | 100MHz | 8 | 100MHz | 250mA | 0.92Ω | 800MHz |
| LQG15HZ68NH02□ | LQG15HH68NH02□ | 68nH ±3% | 100MHz | 8 | 100MHz | 250mA | 0.92Ω | 800MHz |
| LQG15HZ68NJ02□ | LQG15HH68NJ02□ | 68nH ±5% | 100MHz | 8 | 100MHz | 250mA | 0.92Ω | 800MHz |
| LQG15HZ82NG02□ | LQG15HH82NG02□ | 82nH ±2% | 100MHz | 8 | 100MHz | 200mA | 1.20Ω | 700MHz |
| LQG15HZ82NH02□ | LQG15HH82NH02□ | 82nH ±3% | 100MHz | 8 | 100MHz | 200mA | 1.20Ω | 700MHz |
| LQG15HZ82NJ02□ | LQG15HH82NJ02□ | 82nH ±5% | 100MHz | 8 | 100MHz | 200mA | 1.20Ω | 700MHz |
| LQG15HZR10G02□ | LQG15HHR10G02□ | 100nH ±2% | 100MHz | 8 | 100MHz | 200mA | 1.25Ω | 600MHz |
| LQG15HZR10H02□ | LQG15HHR10H02□ | 100nH ±3% | 100MHz | 8 | 100MHz | 200mA | 1.25Ω | 600MHz |
| LQG15HZR10J02□ | LQG15HHR10J02□ | 100nH ±5% | 100MHz | 8 | 100MHz | 200mA | 1.25Ω | 600MHz |
| LQG15HZR12G02□ | LQG15HHR12G02□ | 120nH ±2% | 100MHz | 8 | 100MHz | 200mA | 1.30Ω | 600MHz |
| LQG15HZR12H02□ | LQG15HHR12H02□ | 120nH ±3% | 100MHz | 8 | 100MHz | 200mA | 1.30Ω | 600MHz |
| LQG15HZR12J02□ | LQG15HHR12J02□ | 120nH ±5% | 100MHz | 8 | 100MHz | 200mA | 1.30Ω | 600MHz |
| LQG15HZR15G02□ | LQG15HHR15G02□ | 150nH ±2% | 100MHz | 8 | 100MHz | 150mA | 2.99Ω | 550MHz |
| LQG15HZR15H02□ | LQG15HHR15H02□ | 150nH ±3% | 100MHz | 8 | 100MHz | 150mA | 2.99Ω | 550MHz |
| LQG15HZR15J02□ | LQG15HHR15J02□ | 150nH ±5% | 100MHz | 8 | 100MHz | 150mA | 2.99Ω | 550MHz |
| LQG15HZR18G02□ | LQG15HHR18G02□ | 180nH ±2% | 100MHz | 8 | 100MHz | 150mA | 3.38Ω | 500MHz |
| LQG15HZR18H02□ | LQG15HHR18H02□ | 180nH ±3% | 100MHz | 8 | 100MHz | 150mA | 3.38Ω | 500MHz |
| LQG15HZR18J02□ | LQG15HHR18J02□ | 180nH ±5% | 100MHz | 8 | 100MHz | 150mA | 3.38Ω | 500MHz |
| LQG15HZR22G02□ | LQG15HHR22G02□ | 220nH ±2% | 100MHz | 8 | 100MHz | 120mA | 3.77Ω | 450MHz |
| LQG15HZR22H02□ | LQG15HHR22H02□ | 220nH ±3% | 100MHz | 8 | 100MHz | 120mA | 3.77Ω | 450MHz |
| LQG15HZR22J02□ | LQG15HHR22J02□ | 220nH ±5% | 100MHz | 8 | 100MHz | 120mA | 3.77Ω | 450MHz |
| LQG15HZR27G02□ | LQG15HHR27G02□ | 270nH ±2% | 100MHz | 8 | 100MHz | 110mA | 4.94Ω | 400MHz |
| LQG15HZR27H02□ | LQG15HHR27H02□ | 270nH ±3% | 100MHz | 8 | 100MHz | 110mA | 4.94Ω | 400MHz |
| LQG15HZR27J02□ | LQG15HHR27J02□ | 270nH ±5% | 100MHz | 8 | 100MHz | 110mA | 4.94Ω | 400MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

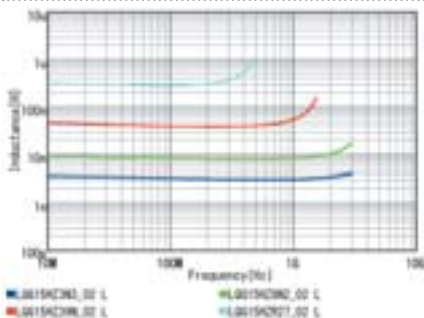


Q-Frequency Characteristics (Typ.)

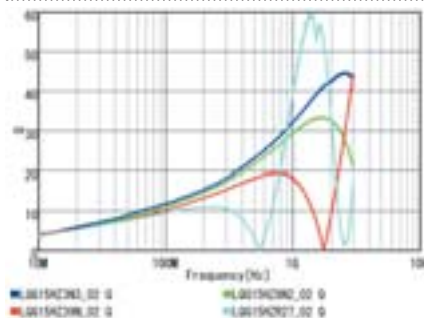

RF Inductors

LQG15WZ_02/LQG15WH_02 Series 0402 (1005) inch (mm)

Appearance/Dimensions

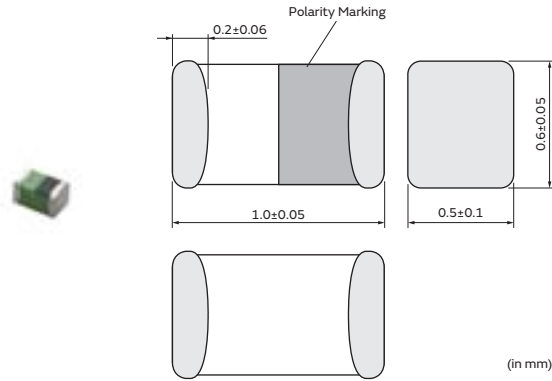

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| J | ø330mm Paper Taping | 40000 |
| B | Packing in Bulk | 100 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15WZ0N7B02□ | LQG15WH0N7B02□ | 0.7nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N7C02□ | LQG15WH0N7C02□ | 0.7nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N7S02□ | LQG15WH0N7S02□ | 0.7nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N8B02□ | LQG15WH0N8B02□ | 0.8nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N8C02□ | LQG15WH0N8C02□ | 0.8nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N8S02□ | LQG15WH0N8S02□ | 0.8nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N9B02□ | LQG15WH0N9B02□ | 0.9nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N9C02□ | LQG15WH0N9C02□ | 0.9nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ0N9S02□ | LQG15WH0N9S02□ | 0.9nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ1N0B02□ | LQG15WH1N0B02□ | 1.0nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ1N0C02□ | LQG15WH1N0C02□ | 1.0nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ1N0S02□ | LQG15WH1N0S02□ | 1.0nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 15000MHz |
| LQG15WZ1N1B02□ | LQG15WH1N1B02□ | 1.1nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 14000MHz |
| LQG15WZ1N1C02□ | LQG15WH1N1C02□ | 1.1nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 14000MHz |
| LQG15WZ1N1S02□ | LQG15WH1N1S02□ | 1.1nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 14000MHz |
| LQG15WZ1N2B02□ | LQG15WH1N2B02□ | 1.2nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 13000MHz |
| LQG15WZ1N2C02□ | LQG15WH1N2C02□ | 1.2nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 13000MHz |
| LQG15WZ1N2S02□ | LQG15WH1N2S02□ | 1.2nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 13000MHz |
| LQG15WZ1N3B02□ | LQG15WH1N3B02□ | 1.3nH ±0.1nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 12000MHz |
| LQG15WZ1N3C02□ | LQG15WH1N3C02□ | 1.3nH ±0.2nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 12000MHz |
| LQG15WZ1N3S02□ | LQG15WH1N3S02□ | 1.3nH ±0.3nH | 100MHz | - | 250MHz | 1200mA | 0.03Ω | 12000MHz |
| LQG15WZ1N4B02□ | LQG15WH1N4B02□ | 1.4nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 12000MHz |
| LQG15WZ1N4C02□ | LQG15WH1N4C02□ | 1.4nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 12000MHz |
| LQG15WZ1N4S02□ | LQG15WH1N4S02□ | 1.4nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 12000MHz |
| LQG15WZ1N5B02□ | LQG15WH1N5B02□ | 1.5nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 11000MHz |
| LQG15WZ1N5C02□ | LQG15WH1N5C02□ | 1.5nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 11000MHz |
| LQG15WZ1N5S02□ | LQG15WH1N5S02□ | 1.5nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 11000MHz |
| LQG15WZ1N6B02□ | LQG15WH1N6B02□ | 1.6nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 10000MHz |
| LQG15WZ1N6C02□ | LQG15WH1N6C02□ | 1.6nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 10000MHz |
| LQG15WZ1N6S02□ | LQG15WH1N6S02□ | 1.6nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 10000MHz |
| LQG15WZ1N7B02□ | LQG15WH1N7B02□ | 1.7nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 10000MHz |
| LQG15WZ1N7C02□ | LQG15WH1N7C02□ | 1.7nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 10000MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15WZ1N7S02□ | LQG15WH1N7S02□ | 1.7nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 10000MHz |
| LQG15WZ1N8B02□ | LQG15WH1N8B02□ | 1.8nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 9000MHz |
| LQG15WZ1N8C02□ | LQG15WH1N8C02□ | 1.8nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 9000MHz |
| LQG15WZ1N8S02□ | LQG15WH1N8S02□ | 1.8nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.04Ω | 9000MHz |
| LQG15WZ1N9B02□ | LQG15WH1N9B02□ | 1.9nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.05Ω | 8000MHz |
| LQG15WZ1N9C02□ | LQG15WH1N9C02□ | 1.9nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.05Ω | 8000MHz |
| LQG15WZ1N9S02□ | LQG15WH1N9S02□ | 1.9nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.05Ω | 8000MHz |
| LQG15WZ2N0B02□ | LQG15WH2N0B02□ | 2.0nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.05Ω | 8000MHz |
| LQG15WZ2N0C02□ | LQG15WH2N0C02□ | 2.0nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.05Ω | 8000MHz |
| LQG15WZ2N0S02□ | LQG15WH2N0S02□ | 2.0nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.05Ω | 8000MHz |
| LQG15WZ2N1B02□ | LQG15WH2N1B02□ | 2.1nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 8000MHz |
| LQG15WZ2N1C02□ | LQG15WH2N1C02□ | 2.1nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 8000MHz |
| LQG15WZ2N1S02□ | LQG15WH2N1S02□ | 2.1nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 8000MHz |
| LQG15WZ2N2B02□ | LQG15WH2N2B02□ | 2.2nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 8000MHz |
| LQG15WZ2N2C02□ | LQG15WH2N2C02□ | 2.2nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 8000MHz |
| LQG15WZ2N2S02□ | LQG15WH2N2S02□ | 2.2nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 8000MHz |
| LQG15WZ2N3B02□ | LQG15WH2N3B02□ | 2.3nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.07Ω | 7000MHz |
| LQG15WZ2N3C02□ | LQG15WH2N3C02□ | 2.3nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.07Ω | 7000MHz |
| LQG15WZ2N3S02□ | LQG15WH2N3S02□ | 2.3nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.07Ω | 7000MHz |
| LQG15WZ2N4B02□ | LQG15WH2N4B02□ | 2.4nH ±0.1nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 6500MHz |
| LQG15WZ2N4C02□ | LQG15WH2N4C02□ | 2.4nH ±0.2nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 6500MHz |
| LQG15WZ2N4S02□ | LQG15WH2N4S02□ | 2.4nH ±0.3nH | 100MHz | 23 | 250MHz | 1000mA | 0.06Ω | 6500MHz |
| LQG15WZ2N5B02□ | LQG15WH2N5B02□ | 2.5nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N5C02□ | LQG15WH2N5C02□ | 2.5nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N5S02□ | LQG15WH2N5S02□ | 2.5nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N6B02□ | LQG15WH2N6B02□ | 2.6nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N6C02□ | LQG15WH2N6C02□ | 2.6nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N6S02□ | LQG15WH2N6S02□ | 2.6nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N7B02□ | LQG15WH2N7B02□ | 2.7nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N7C02□ | LQG15WH2N7C02□ | 2.7nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N7S02□ | LQG15WH2N7S02□ | 2.7nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.07Ω | 6500MHz |
| LQG15WZ2N8B02□ | LQG15WH2N8B02□ | 2.8nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6500MHz |
| LQG15WZ2N8C02□ | LQG15WH2N8C02□ | 2.8nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6500MHz |
| LQG15WZ2N8S02□ | LQG15WH2N8S02□ | 2.8nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6500MHz |
| LQG15WZ2N9B02□ | LQG15WH2N9B02□ | 2.9nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6500MHz |
| LQG15WZ2N9C02□ | LQG15WH2N9C02□ | 2.9nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6500MHz |
| LQG15WZ2N9S02□ | LQG15WH2N9S02□ | 2.9nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6500MHz |
| LQG15WZ3N0B02□ | LQG15WH3N0B02□ | 3.0nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6000MHz |
| LQG15WZ3N0C02□ | LQG15WH3N0C02□ | 3.0nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6000MHz |
| LQG15WZ3N0S02□ | LQG15WH3N0S02□ | 3.0nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6000MHz |
| LQG15WZ3N1B02□ | LQG15WH3N1B02□ | 3.1nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N1C02□ | LQG15WH3N1C02□ | 3.1nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N1S02□ | LQG15WH3N1S02□ | 3.1nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N2B02□ | LQG15WH3N2B02□ | 3.2nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N2C02□ | LQG15WH3N2C02□ | 3.2nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N2S02□ | LQG15WH3N2S02□ | 3.2nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N3B02□ | LQG15WH3N3B02□ | 3.3nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6000MHz |
| LQG15WZ3N3C02□ | LQG15WH3N3C02□ | 3.3nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6000MHz |
| LQG15WZ3N3S02□ | LQG15WH3N3S02□ | 3.3nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.08Ω | 6000MHz |
| LQG15WZ3N4B02□ | LQG15WH3N4B02□ | 3.4nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N4C02□ | LQG15WH3N4C02□ | 3.4nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N4S02□ | LQG15WH3N4S02□ | 3.4nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 6000MHz |
| LQG15WZ3N5B02□ | LQG15WH3N5B02□ | 3.5nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5800MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C
 Only for reflow soldering
 *S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15WZ3N5C02□ | LQG15WH3N5C02□ | 3.5nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5800MHz |
| LQG15WZ3N5S02□ | LQG15WH3N5S02□ | 3.5nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5800MHz |
| LQG15WZ3N6B02□ | LQG15WH3N6B02□ | 3.6nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5500MHz |
| LQG15WZ3N6C02□ | LQG15WH3N6C02□ | 3.6nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5500MHz |
| LQG15WZ3N6S02□ | LQG15WH3N6S02□ | 3.6nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5500MHz |
| LQG15WZ3N7B02□ | LQG15WH3N7B02□ | 3.7nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.10Ω | 5500MHz |
| LQG15WZ3N7C02□ | LQG15WH3N7C02□ | 3.7nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.10Ω | 5500MHz |
| LQG15WZ3N7S02□ | LQG15WH3N7S02□ | 3.7nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.10Ω | 5500MHz |
| LQG15WZ3N8B02□ | LQG15WH3N8B02□ | 3.8nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.10Ω | 5000MHz |
| LQG15WZ3N8C02□ | LQG15WH3N8C02□ | 3.8nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.10Ω | 5000MHz |
| LQG15WZ3N8S02□ | LQG15WH3N8S02□ | 3.8nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.10Ω | 5000MHz |
| LQG15WZ3N9B02□ | LQG15WH3N9B02□ | 3.9nH ±0.1nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5000MHz |
| LQG15WZ3N9C02□ | LQG15WH3N9C02□ | 3.9nH ±0.2nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5000MHz |
| LQG15WZ3N9S02□ | LQG15WH3N9S02□ | 3.9nH ±0.3nH | 100MHz | 23 | 250MHz | 900mA | 0.09Ω | 5000MHz |
| LQG15WZ4N1B02□ | LQG15WH4N1B02□ | 4.1nH ±0.1nH | 100MHz | 23 | 250MHz | 800mA | 0.10Ω | 5000MHz |
| LQG15WZ4N1C02□ | LQG15WH4N1C02□ | 4.1nH ±0.2nH | 100MHz | 23 | 250MHz | 800mA | 0.10Ω | 5000MHz |
| LQG15WZ4N1S02□ | LQG15WH4N1S02□ | 4.1nH ±0.3nH | 100MHz | 23 | 250MHz | 800mA | 0.10Ω | 5000MHz |
| LQG15WZ4N3B02□ | LQG15WH4N3B02□ | 4.3nH ±0.1nH | 100MHz | 23 | 250MHz | 800mA | 0.10Ω | 5000MHz |
| LQG15WZ4N3C02□ | LQG15WH4N3C02□ | 4.3nH ±0.2nH | 100MHz | 23 | 250MHz | 800mA | 0.10Ω | 5000MHz |
| LQG15WZ4N3S02□ | LQG15WH4N3S02□ | 4.3nH ±0.3nH | 100MHz | 23 | 250MHz | 800mA | 0.10Ω | 5000MHz |
| LQG15WZ4N7B02□ | LQG15WH4N7B02□ | 4.7nH ±0.1nH | 100MHz | 23 | 250MHz | 800mA | 0.11Ω | 5000MHz |
| LQG15WZ4N7C02□ | LQG15WH4N7C02□ | 4.7nH ±0.2nH | 100MHz | 23 | 250MHz | 800mA | 0.11Ω | 5000MHz |
| LQG15WZ4N7S02□ | LQG15WH4N7S02□ | 4.7nH ±0.3nH | 100MHz | 23 | 250MHz | 800mA | 0.11Ω | 5000MHz |
| LQG15WZ5N1B02□ | LQG15WH5N1B02□ | 5.1nH ±0.1nH | 100MHz | 23 | 250MHz | 800mA | 0.12Ω | 4500MHz |
| LQG15WZ5N1C02□ | LQG15WH5N1C02□ | 5.1nH ±0.2nH | 100MHz | 23 | 250MHz | 800mA | 0.12Ω | 4500MHz |
| LQG15WZ5N1S02□ | LQG15WH5N1S02□ | 5.1nH ±0.3nH | 100MHz | 23 | 250MHz | 800mA | 0.12Ω | 4500MHz |
| LQG15WZ5N6B02□ | LQG15WH5N6B02□ | 5.6nH ±0.1nH | 100MHz | 23 | 250MHz | 800mA | 0.13Ω | 4500MHz |
| LQG15WZ5N6C02□ | LQG15WH5N6C02□ | 5.6nH ±0.2nH | 100MHz | 23 | 250MHz | 800mA | 0.13Ω | 4500MHz |
| LQG15WZ5N6S02□ | LQG15WH5N6S02□ | 5.6nH ±0.3nH | 100MHz | 23 | 250MHz | 800mA | 0.13Ω | 4500MHz |
| LQG15WZ5N8B02□ | LQG15WH5N8B02□ | 5.8nH ±0.1nH | 100MHz | 23 | 250MHz | 700mA | 0.13Ω | 4000MHz |
| LQG15WZ5N8C02□ | LQG15WH5N8C02□ | 5.8nH ±0.2nH | 100MHz | 23 | 250MHz | 700mA | 0.13Ω | 4000MHz |
| LQG15WZ5N8S02□ | LQG15WH5N8S02□ | 5.8nH ±0.3nH | 100MHz | 23 | 250MHz | 700mA | 0.13Ω | 4000MHz |
| LQG15WZ6N2B02□ | LQG15WH6N2B02□ | 6.2nH ±0.1nH | 100MHz | 23 | 250MHz | 700mA | 0.13Ω | 4000MHz |
| LQG15WZ6N2C02□ | LQG15WH6N2C02□ | 6.2nH ±0.2nH | 100MHz | 23 | 250MHz | 700mA | 0.13Ω | 4000MHz |
| LQG15WZ6N2S02□ | LQG15WH6N2S02□ | 6.2nH ±0.3nH | 100MHz | 23 | 250MHz | 700mA | 0.13Ω | 4000MHz |
| LQG15WZ6N8G02□ | LQG15WH6N8G02□ | 6.8nH ±2% | 100MHz | 23 | 250MHz | 700mA | 0.14Ω | 4000MHz |
| LQG15WZ6N8H02□ | LQG15WH6N8H02□ | 6.8nH ±3% | 100MHz | 23 | 250MHz | 700mA | 0.14Ω | 4000MHz |
| LQG15WZ6N8J02□ | LQG15WH6N8J02□ | 6.8nH ±5% | 100MHz | 23 | 250MHz | 700mA | 0.14Ω | 4000MHz |
| LQG15WZ7N3G02□ | LQG15WH7N3G02□ | 7.3nH ±2% | 100MHz | 23 | 250MHz | 600mA | 0.17Ω | 4000MHz |
| LQG15WZ7N3H02□ | LQG15WH7N3H02□ | 7.3nH ±3% | 100MHz | 23 | 250MHz | 600mA | 0.17Ω | 4000MHz |
| LQG15WZ7N3J02□ | LQG15WH7N3J02□ | 7.3nH ±5% | 100MHz | 23 | 250MHz | 600mA | 0.17Ω | 4000MHz |
| LQG15WZ7N5G02□ | LQG15WH7N5G02□ | 7.5nH ±2% | 100MHz | 23 | 250MHz | 600mA | 0.16Ω | 4000MHz |
| LQG15WZ7N5H02□ | LQG15WH7N5H02□ | 7.5nH ±3% | 100MHz | 23 | 250MHz | 600mA | 0.16Ω | 4000MHz |
| LQG15WZ7N5J02□ | LQG15WH7N5J02□ | 7.5nH ±5% | 100MHz | 23 | 250MHz | 600mA | 0.16Ω | 4000MHz |
| LQG15WZ8N2G02□ | LQG15WH8N2G02□ | 8.2nH ±2% | 100MHz | 23 | 250MHz | 550mA | 0.16Ω | 3600MHz |
| LQG15WZ8N2H02□ | LQG15WH8N2H02□ | 8.2nH ±3% | 100MHz | 23 | 250MHz | 550mA | 0.16Ω | 3600MHz |
| LQG15WZ8N2J02□ | LQG15WH8N2J02□ | 8.2nH ±5% | 100MHz | 23 | 250MHz | 550mA | 0.16Ω | 3600MHz |
| LQG15WZ8N7G02□ | LQG15WH8N7G02□ | 8.7nH ±2% | 100MHz | 23 | 250MHz | 550mA | 0.17Ω | 3500MHz |
| LQG15WZ8N7H02□ | LQG15WH8N7H02□ | 8.7nH ±3% | 100MHz | 23 | 250MHz | 550mA | 0.17Ω | 3500MHz |
| LQG15WZ8N7J02□ | LQG15WH8N7J02□ | 8.7nH ±5% | 100MHz | 23 | 250MHz | 550mA | 0.17Ω | 3500MHz |
| LQG15WZ9N1G02□ | LQG15WH9N1G02□ | 9.1nH ±2% | 100MHz | 23 | 250MHz | 550mA | 0.17Ω | 3400MHz |
| LQG15WZ9N1H02□ | LQG15WH9N1H02□ | 9.1nH ±3% | 100MHz | 23 | 250MHz | 550mA | 0.17Ω | 3400MHz |
| LQG15WZ9N1J02□ | LQG15WH9N1J02□ | 9.1nH ±5% | 100MHz | 23 | 250MHz | 550mA | 0.17Ω | 3400MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15WZ9N5G02□ | LQG15WH9N5G02□ | 9.5nH ±2% | 100MHz | 23 | 250MHz | 500mA | 0.21Ω | 3300MHz |
| LQG15WZ9N5H02□ | LQG15WH9N5H02□ | 9.5nH ±3% | 100MHz | 23 | 250MHz | 500mA | 0.21Ω | 3300MHz |
| LQG15WZ9N5J02□ | LQG15WH9N5J02□ | 9.5nH ±5% | 100MHz | 23 | 250MHz | 500mA | 0.21Ω | 3300MHz |
| LQG15WZ10NG02□ | LQG15WH10NG02□ | 10nH ±2% | 100MHz | 23 | 250MHz | 500mA | 0.19Ω | 3300MHz |
| LQG15WZ10NH02□ | LQG15WH10NH02□ | 10nH ±3% | 100MHz | 23 | 250MHz | 500mA | 0.19Ω | 3300MHz |
| LQG15WZ10NJ02□ | LQG15WH10NJ02□ | 10nH ±5% | 100MHz | 23 | 250MHz | 500mA | 0.19Ω | 3300MHz |
| LQG15WZ11NG02□ | LQG15WH11NG02□ | 11nH ±2% | 100MHz | 23 | 250MHz | 450mA | 0.22Ω | 3000MHz |
| LQG15WZ11NH02□ | LQG15WH11NH02□ | 11nH ±3% | 100MHz | 23 | 250MHz | 450mA | 0.22Ω | 3000MHz |
| LQG15WZ11NJ02□ | LQG15WH11NJ02□ | 11nH ±5% | 100MHz | 23 | 250MHz | 450mA | 0.22Ω | 3000MHz |
| LQG15WZ12NG02□ | LQG15WH12NG02□ | 12nH ±2% | 100MHz | 23 | 250MHz | 450mA | 0.24Ω | 2800MHz |
| LQG15WZ12NH02□ | LQG15WH12NH02□ | 12nH ±3% | 100MHz | 23 | 250MHz | 450mA | 0.24Ω | 2800MHz |
| LQG15WZ12NJ02□ | LQG15WH12NJ02□ | 12nH ±5% | 100MHz | 23 | 250MHz | 450mA | 0.24Ω | 2800MHz |
| LQG15WZ13NG02□ | LQG15WH13NG02□ | 13nH ±2% | 100MHz | 23 | 250MHz | 400mA | 0.26Ω | 2800MHz |
| LQG15WZ13NH02□ | LQG15WH13NH02□ | 13nH ±3% | 100MHz | 23 | 250MHz | 400mA | 0.26Ω | 2800MHz |
| LQG15WZ13NJ02□ | LQG15WH13NJ02□ | 13nH ±5% | 100MHz | 23 | 250MHz | 400mA | 0.26Ω | 2800MHz |
| LQG15WZ15NG02□ | LQG15WH15NG02□ | 15nH ±2% | 100MHz | 23 | 250MHz | 400mA | 0.28Ω | 2300MHz |
| LQG15WZ15NH02□ | LQG15WH15NH02□ | 15nH ±3% | 100MHz | 23 | 250MHz | 400mA | 0.28Ω | 2300MHz |
| LQG15WZ15NJ02□ | LQG15WH15NJ02□ | 15nH ±5% | 100MHz | 23 | 250MHz | 400mA | 0.28Ω | 2300MHz |
| LQG15WZ16NG02□ | LQG15WH16NG02□ | 16nH ±2% | 100MHz | 20 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ16NH02□ | LQG15WH16NH02□ | 16nH ±3% | 100MHz | 20 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ16NJ02□ | LQG15WH16NJ02□ | 16nH ±5% | 100MHz | 20 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ18NG02□ | LQG15WH18NG02□ | 18nH ±2% | 100MHz | 22 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ18NH02□ | LQG15WH18NH02□ | 18nH ±3% | 100MHz | 22 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ18NJ02□ | LQG15WH18NJ02□ | 18nH ±5% | 100MHz | 22 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ19NG02□ | LQG15WH19NG02□ | 19nH ±2% | 100MHz | 20 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ19NH02□ | LQG15WH19NH02□ | 19nH ±3% | 100MHz | 20 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ19NJ02□ | LQG15WH19NJ02□ | 19nH ±5% | 100MHz | 20 | 250MHz | 260mA | 0.8Ω | 2300MHz |
| LQG15WZ20NG02□ | LQG15WH20NG02□ | 20nH ±2% | 100MHz | 20 | 250MHz | 260mA | 1.1Ω | 2100MHz |
| LQG15WZ20NH02□ | LQG15WH20NH02□ | 20nH ±3% | 100MHz | 20 | 250MHz | 260mA | 1.1Ω | 2100MHz |
| LQG15WZ20NJ02□ | LQG15WH20NJ02□ | 20nH ±5% | 100MHz | 20 | 250MHz | 260mA | 1.1Ω | 2100MHz |
| LQG15WZ22NG02□ | LQG15WH22NG02□ | 22nH ±2% | 100MHz | 20 | 250MHz | 230mA | 1.1Ω | 2100MHz |
| LQG15WZ22NH02□ | LQG15WH22NH02□ | 22nH ±3% | 100MHz | 20 | 250MHz | 230mA | 1.1Ω | 2100MHz |
| LQG15WZ22NJ02□ | LQG15WH22NJ02□ | 22nH ±5% | 100MHz | 20 | 250MHz | 230mA | 1.1Ω | 2100MHz |
| LQG15WZ23NG02□ | LQG15WH23NG02□ | 23nH ±2% | 100MHz | 22 | 250MHz | 230mA | 1.1Ω | 2000MHz |
| LQG15WZ23NH02□ | LQG15WH23NH02□ | 23nH ±3% | 100MHz | 22 | 250MHz | 230mA | 1.1Ω | 2000MHz |
| LQG15WZ23NJ02□ | LQG15WH23NJ02□ | 23nH ±5% | 100MHz | 22 | 250MHz | 230mA | 1.1Ω | 2000MHz |
| LQG15WZ24NG02□ | LQG15WH24NG02□ | 24nH ±2% | 100MHz | 20 | 250MHz | 230mA | 1.2Ω | 2000MHz |
| LQG15WZ24NH02□ | LQG15WH24NH02□ | 24nH ±3% | 100MHz | 20 | 250MHz | 230mA | 1.2Ω | 2000MHz |
| LQG15WZ24NJ02□ | LQG15WH24NJ02□ | 24nH ±5% | 100MHz | 20 | 250MHz | 230mA | 1.2Ω | 2000MHz |
| LQG15WZ27NG02□ | LQG15WH27NG02□ | 27nH ±2% | 100MHz | 20 | 250MHz | 230mA | 1.3Ω | 1700MHz |
| LQG15WZ27NH02□ | LQG15WH27NH02□ | 27nH ±3% | 100MHz | 20 | 250MHz | 230mA | 1.3Ω | 1700MHz |
| LQG15WZ27NJ02□ | LQG15WH27NJ02□ | 27nH ±5% | 100MHz | 20 | 250MHz | 230mA | 1.3Ω | 1700MHz |
| LQG15WZ30NG02□ | LQG15WH30NG02□ | 30nH ±2% | 100MHz | 20 | 250MHz | 220mA | 1.3Ω | 1700MHz |
| LQG15WZ30NH02□ | LQG15WH30NH02□ | 30nH ±3% | 100MHz | 20 | 250MHz | 220mA | 1.3Ω | 1700MHz |
| LQG15WZ30NJ02□ | LQG15WH30NJ02□ | 30nH ±5% | 100MHz | 20 | 250MHz | 220mA | 1.3Ω | 1700MHz |
| LQG15WZ33NG02□ | LQG15WH33NG02□ | 33nH ±2% | 100MHz | 20 | 250MHz | 220mA | 1.5Ω | 1600MHz |
| LQG15WZ33NH02□ | LQG15WH33NH02□ | 33nH ±3% | 100MHz | 20 | 250MHz | 220mA | 1.5Ω | 1600MHz |
| LQG15WZ33NJ02□ | LQG15WH33NJ02□ | 33nH ±5% | 100MHz | 20 | 250MHz | 220mA | 1.5Ω | 1600MHz |
| LQG15WZ36NG02□ | LQG15WH36NG02□ | 36nH ±2% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1600MHz |
| LQG15WZ36NH02□ | LQG15WH36NH02□ | 36nH ±3% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1600MHz |
| LQG15WZ36NJ02□ | LQG15WH36NJ02□ | 36nH ±5% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1600MHz |
| LQG15WZ39NG02□ | LQG15WH39NG02□ | 39nH ±2% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1400MHz |
| LQG15WZ39NH02□ | LQG15WH39NH02□ | 39nH ±3% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1400MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C
 Only for reflow soldering
 *S.R.F.: Self Resonant Frequency

Continued on the following page. ↗

Inductors for Power Lines

Inductors for General Circuits

RF Inductors

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQG15WZ39NJ02□ | LQG15WH39NJ02□ | 39nH ±5% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1400MHz |
| LQG15WZ40NG02□ | LQG15WH40NG02□ | 40nH ±2% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1400MHz |
| LQG15WZ40NH02□ | LQG15WH40NH02□ | 40nH ±3% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1400MHz |
| LQG15WZ40NJ02□ | LQG15WH40NJ02□ | 40nH ±5% | 100MHz | 20 | 250MHz | 190mA | 1.5Ω | 1400MHz |
| LQG15WZ43NG02□ | LQG15WH43NG02□ | 43nH ±2% | 100MHz | 22 | 250MHz | 190mA | 1.6Ω | 1400MHz |
| LQG15WZ43NH02□ | LQG15WH43NH02□ | 43nH ±3% | 100MHz | 22 | 250MHz | 190mA | 1.6Ω | 1400MHz |
| LQG15WZ43NJ02□ | LQG15WH43NJ02□ | 43nH ±5% | 100MHz | 22 | 250MHz | 190mA | 1.6Ω | 1400MHz |
| LQG15WZ47NG02□ | LQG15WH47NG02□ | 47nH ±2% | 100MHz | 22 | 250MHz | 190mA | 1.6Ω | 1300MHz |
| LQG15WZ47NH02□ | LQG15WH47NH02□ | 47nH ±3% | 100MHz | 22 | 250MHz | 190mA | 1.6Ω | 1300MHz |
| LQG15WZ47NJ02□ | LQG15WH47NJ02□ | 47nH ±5% | 100MHz | 22 | 250MHz | 190mA | 1.6Ω | 1300MHz |
| LQG15WZ51NG02□ | LQG15WH51NG02□ | 51nH ±2% | 100MHz | 22 | 250MHz | 190mA | 1.8Ω | 1300MHz |
| LQG15WZ51NH02□ | LQG15WH51NH02□ | 51nH ±3% | 100MHz | 22 | 250MHz | 190mA | 1.8Ω | 1300MHz |
| LQG15WZ51NJ02□ | LQG15WH51NJ02□ | 51nH ±5% | 100MHz | 22 | 250MHz | 190mA | 1.8Ω | 1300MHz |
| LQG15WZ56NG02□ | LQG15WH56NG02□ | 56nH ±2% | 100MHz | 22 | 250MHz | 180mA | 1.8Ω | 1200MHz |
| LQG15WZ56NH02□ | LQG15WH56NH02□ | 56nH ±3% | 100MHz | 22 | 250MHz | 180mA | 1.8Ω | 1200MHz |
| LQG15WZ56NJ02□ | LQG15WH56NJ02□ | 56nH ±5% | 100MHz | 22 | 250MHz | 180mA | 1.8Ω | 1200MHz |
| LQG15WZ62NG02□ | LQG15WH62NG02□ | 62nH ±2% | 100MHz | 22 | 250MHz | 180mA | 1.9Ω | 1100MHz |
| LQG15WZ62NH02□ | LQG15WH62NH02□ | 62nH ±3% | 100MHz | 22 | 250MHz | 180mA | 1.9Ω | 1100MHz |
| LQG15WZ62NJ02□ | LQG15WH62NJ02□ | 62nH ±5% | 100MHz | 22 | 250MHz | 180mA | 1.9Ω | 1100MHz |
| LQG15WZ68NG02□ | LQG15WH68NG02□ | 68nH ±2% | 100MHz | 22 | 250MHz | 160mA | 2.0Ω | 1100MHz |
| LQG15WZ68NH02□ | LQG15WH68NH02□ | 68nH ±3% | 100MHz | 22 | 250MHz | 160mA | 2.0Ω | 1100MHz |
| LQG15WZ68NJ02□ | LQG15WH68NJ02□ | 68nH ±5% | 100MHz | 22 | 250MHz | 160mA | 2.0Ω | 1100MHz |
| LQG15WZ72NG02□ | LQG15WH72NG02□ | 72nH ±2% | 100MHz | 22 | 250MHz | 160mA | 2.2Ω | 1100MHz |
| LQG15WZ72NH02□ | LQG15WH72NH02□ | 72nH ±3% | 100MHz | 22 | 250MHz | 160mA | 2.2Ω | 1100MHz |
| LQG15WZ72NJ02□ | LQG15WH72NJ02□ | 72nH ±5% | 100MHz | 22 | 250MHz | 160mA | 2.2Ω | 1100MHz |
| LQG15WZ75NG02□ | LQG15WH75NG02□ | 75nH ±2% | 100MHz | 22 | 250MHz | 160mA | 2.2Ω | 1100MHz |
| LQG15WZ75NH02□ | LQG15WH75NH02□ | 75nH ±3% | 100MHz | 22 | 250MHz | 160mA | 2.2Ω | 1100MHz |
| LQG15WZ75NJ02□ | LQG15WH75NJ02□ | 75nH ±5% | 100MHz | 22 | 250MHz | 160mA | 2.2Ω | 1100MHz |
| LQG15WZ82NG02□ | LQG15WH82NG02□ | 82nH ±2% | 100MHz | 22 | 250MHz | 160mA | 2.3Ω | 900MHz |
| LQG15WZ82NH02□ | LQG15WH82NH02□ | 82nH ±3% | 100MHz | 22 | 250MHz | 160mA | 2.3Ω | 900MHz |
| LQG15WZ82NJ02□ | LQG15WH82NJ02□ | 82nH ±5% | 100MHz | 22 | 250MHz | 160mA | 2.3Ω | 900MHz |
| LQG15WZ91NG02□ | LQG15WH91NG02□ | 91nH ±2% | 100MHz | 23 | 250MHz | 160mA | 2.3Ω | 900MHz |
| LQG15WZ91NH02□ | LQG15WH91NH02□ | 91nH ±3% | 100MHz | 23 | 250MHz | 160mA | 2.3Ω | 900MHz |
| LQG15WZ91NJ02□ | LQG15WH91NJ02□ | 91nH ±5% | 100MHz | 23 | 250MHz | 160mA | 2.3Ω | 900MHz |
| LQG15WZR10G02□ | LQG15WHR10G02□ | 100nH ±2% | 100MHz | 23 | 250MHz | 150mA | 2.5Ω | 900MHz |
| LQG15WZR10H02□ | LQG15WHR10H02□ | 100nH ±3% | 100MHz | 23 | 250MHz | 150mA | 2.5Ω | 900MHz |
| LQG15WZR10J02□ | LQG15WHR10J02□ | 100nH ±5% | 100MHz | 23 | 250MHz | 150mA | 2.5Ω | 900MHz |
| LQG15WZR11G02□ | LQG15WHR11G02□ | 110nH ±2% | 100MHz | 22 | 250MHz | 150mA | 2.7Ω | 800MHz |
| LQG15WZR11H02□ | LQG15WHR11H02□ | 110nH ±3% | 100MHz | 22 | 250MHz | 150mA | 2.7Ω | 800MHz |
| LQG15WZR11J02□ | LQG15WHR11J02□ | 110nH ±5% | 100MHz | 22 | 250MHz | 150mA | 2.7Ω | 800MHz |
| LQG15WZR12G02□ | LQG15WHR12G02□ | 120nH ±2% | 100MHz | 22 | 250MHz | 140mA | 2.7Ω | 800MHz |
| LQG15WZR12H02□ | LQG15WHR12H02□ | 120nH ±3% | 100MHz | 22 | 250MHz | 140mA | 2.7Ω | 800MHz |
| LQG15WZR12J02□ | LQG15WHR12J02□ | 120nH ±5% | 100MHz | 22 | 250MHz | 140mA | 2.7Ω | 800MHz |
| LQG15WZR13G02□ | LQG15WHR13G02□ | 130nH ±2% | 100MHz | 22 | 250MHz | 110mA | 2.9Ω | 800MHz |
| LQG15WZR13H02□ | LQG15WHR13H02□ | 130nH ±3% | 100MHz | 22 | 250MHz | 110mA | 2.9Ω | 800MHz |
| LQG15WZR13J02□ | LQG15WHR13J02□ | 130nH ±5% | 100MHz | 22 | 250MHz | 110mA | 2.9Ω | 800MHz |
| LQG15WZR15G02□ | LQG15WHR15G02□ | 150nH ±2% | 100MHz | 22 | 250MHz | 110mA | 3.0Ω | 800MHz |
| LQG15WZR15H02□ | LQG15WHR15H02□ | 150nH ±3% | 100MHz | 22 | 250MHz | 110mA | 3.0Ω | 800MHz |
| LQG15WZR15J02□ | LQG15WHR15J02□ | 150nH ±5% | 100MHz | 22 | 250MHz | 110mA | 3.0Ω | 800MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗


Inductors for Power Lines

Inductors for General Circuits


RF Inductors

Continued from the preceding page. ↘

Inductance-Frequency Characteristics (Typ.)

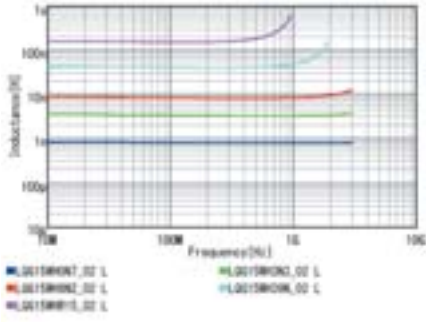

Q-Frequency Characteristics (Typ.)

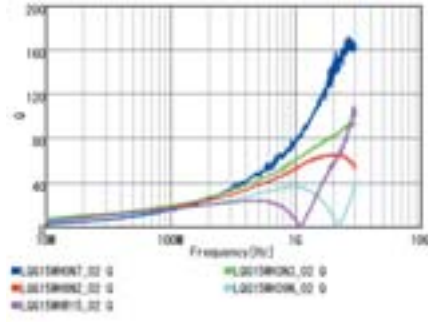

Inductors for Power Lines


Inductors for General Circuits

RF Inductors

RF Inductors

LQG18HH_00 Series 0603 (1608) inch (mm)

Appearance/Dimensions

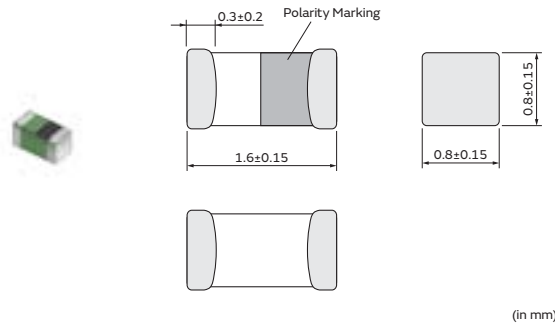

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| J | ø330mm Paper Taping | 10000 |
| B | Packing in Bulk | 1000 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|--------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| — | LQG18HH1N2S00□ | 1.2nH ±0.3nH | 100MHz | 12 | 100MHz | 1100mA | 0.10Ω | 6000MHz |
| — | LQG18HH1N5S00□ | 1.5nH ±0.3nH | 100MHz | 12 | 100MHz | 1100mA | 0.10Ω | 6000MHz |
| — | LQG18HH1N8S00□ | 1.8nH ±0.3nH | 100MHz | 12 | 100MHz | 1100mA | 0.10Ω | 5000MHz |
| — | LQG18HH2N2S00□ | 2.2nH ±0.3nH | 100MHz | 12 | 100MHz | 1100mA | 0.10Ω | 5000MHz |
| — | LQG18HH2N7S00□ | 2.7nH ±0.3nH | 100MHz | 12 | 100MHz | 1000mA | 0.13Ω | 4000MHz |
| — | LQG18HH3N3S00□ | 3.3nH ±0.3nH | 100MHz | 12 | 100MHz | 900mA | 0.14Ω | 4000MHz |
| — | LQG18HH3N9S00□ | 3.9nH ±0.3nH | 100MHz | 12 | 100MHz | 900mA | 0.15Ω | 3000MHz |
| — | LQG18HH4N7S00□ | 4.7nH ±0.3nH | 100MHz | 12 | 100MHz | 800mA | 0.16Ω | 3000MHz |
| — | LQG18HH5N6S00□ | 5.6nH ±0.3nH | 100MHz | 12 | 100MHz | 800mA | 0.17Ω | 3000MHz |
| — | LQG18HH6N2S00□ | 6.2nH ±0.3nH | 100MHz | 12 | 100MHz | 800mA | 0.18Ω | 2800MHz |
| — | LQG18HH6N8J00□ | 6.8nH ±5% | 100MHz | 12 | 100MHz | 800mA | 0.18Ω | 2800MHz |
| — | LQG18HH8N2J00□ | 8.2nH ±5% | 100MHz | 12 | 100MHz | 800mA | 0.20Ω | 2600MHz |
| — | LQG18HH10NJ00□ | 10nH ±5% | 100MHz | 12 | 100MHz | 700mA | 0.25Ω | 2400MHz |
| — | LQG18HH12NJ00□ | 12nH ±5% | 100MHz | 12 | 100MHz | 600mA | 0.30Ω | 2200MHz |
| — | LQG18HH15NJ00□ | 15nH ±5% | 100MHz | 12 | 100MHz | 600mA | 0.35Ω | 1800MHz |
| — | LQG18HH18NJ00□ | 18nH ±5% | 100MHz | 12 | 100MHz | 600mA | 0.35Ω | 1800MHz |
| — | LQG18HH22NJ00□ | 22nH ±5% | 100MHz | 12 | 100MHz | 500mA | 0.50Ω | 1600MHz |
| — | LQG18HH27NJ00□ | 27nH ±5% | 100MHz | 12 | 100MHz | 500mA | 0.54Ω | 1400MHz |
| — | LQG18HH33NJ00□ | 33nH ±5% | 100MHz | 12 | 100MHz | 500mA | 0.54Ω | 1200MHz |
| — | LQG18HH39NJ00□ | 39nH ±5% | 100MHz | 12 | 100MHz | 400mA | 0.60Ω | 1000MHz |
| — | LQG18HH47NJ00□ | 47nH ±5% | 100MHz | 12 | 100MHz | 400mA | 0.70Ω | 900MHz |
| — | LQG18HH56NJ00□ | 56nH ±5% | 100MHz | 12 | 100MHz | 400mA | 0.70Ω | 800MHz |
| — | LQG18HH68NJ00□ | 68nH ±5% | 100MHz | 12 | 100MHz | 400mA | 0.80Ω | 800MHz |
| — | LQG18HH82NJ00□ | 82nH ±5% | 100MHz | 12 | 100MHz | 300mA | 0.85Ω | 700MHz |
| — | LQG18HHR10J00□ | 100nH ±5% | 100MHz | 12 | 100MHz | 300mA | 0.90Ω | 600MHz |
| — | LQG18HHR12J00□ | 120nH ±5% | 100MHz | 14 | 100MHz | 300mA | 1.10Ω | 550MHz |
| — | LQG18HHR15J00□ | 150nH ±5% | 100MHz | 14 | 100MHz | 300mA | 1.20Ω | 550MHz |
| — | LQG18HHR18J00□ | 180nH ±5% | 100MHz | 14 | 100MHz | 300mA | 1.30Ω | 500MHz |
| — | LQG18HHR22J00□ | 220nH ±5% | 100MHz | 14 | 100MHz | 300mA | 1.50Ω | 450MHz |
| — | LQG18HHR27J00□ | 270nH ±5% | 100MHz | 14 | 100MHz | 200mA | 1.90Ω | 400MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency


Continued on the following page. ↗

Continued from the preceding page. ↘

Inductance-Frequency Characteristics (Typ.)

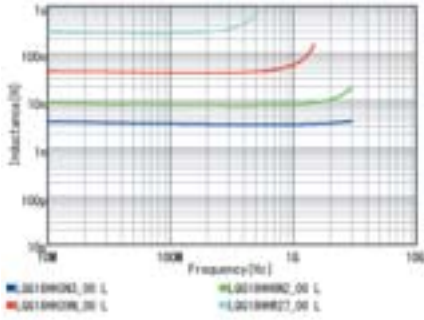


Q-Frequency Characteristics (Typ.)

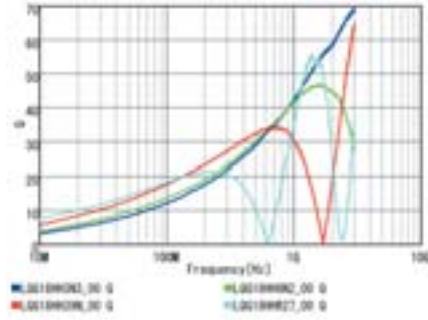

RF Inductors

LQP03TN_Z2 Series 0201 (0603) inch (mm)

Appearance/Dimensions

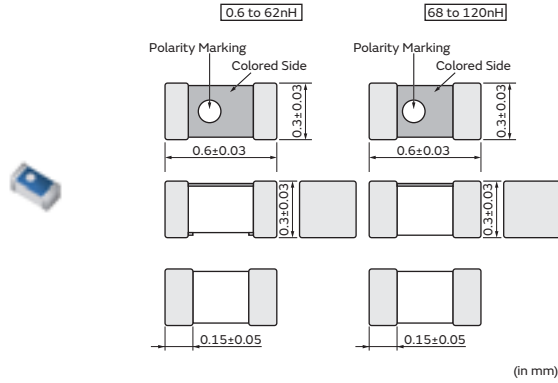

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 15000 |
| J | ø330mm Paper Taping | 50000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQP03TN0N6BZ2□ | — | 0.6nH ±0.1nH | 500MHz | 14 | 500MHz | 850mA | 0.07Ω | 20000MHz |
| LQP03TN0N6CZ2□ | — | 0.6nH ±0.2nH | 500MHz | 14 | 500MHz | 850mA | 0.07Ω | 20000MHz |
| LQP03TN0N7BZ2□ | — | 0.7nH ±0.1nH | 500MHz | 14 | 500MHz | 800mA | 0.08Ω | 20000MHz |
| LQP03TN0N7CZ2□ | — | 0.7nH ±0.2nH | 500MHz | 14 | 500MHz | 800mA | 0.08Ω | 20000MHz |
| LQP03TN0N8BZ2□ | — | 0.8nH ±0.1nH | 500MHz | 14 | 500MHz | 800mA | 0.08Ω | 18000MHz |
| LQP03TN0N8CZ2□ | — | 0.8nH ±0.2nH | 500MHz | 14 | 500MHz | 800mA | 0.08Ω | 18000MHz |
| LQP03TN0N9BZ2□ | — | 0.9nH ±0.1nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 18000MHz |
| LQP03TN0N9CZ2□ | — | 0.9nH ±0.2nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 18000MHz |
| LQP03TN1N0BZ2□ | — | 1.0nH ±0.1nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 17000MHz |
| LQP03TN1N0CZ2□ | — | 1.0nH ±0.2nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 17000MHz |
| LQP03TN1N1BZ2□ | — | 1.1nH ±0.1nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 17000MHz |
| LQP03TN1N1CZ2□ | — | 1.1nH ±0.2nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 17000MHz |
| LQP03TN1N2BZ2□ | — | 1.2nH ±0.1nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 17000MHz |
| LQP03TN1N2CZ2□ | — | 1.2nH ±0.2nH | 500MHz | 14 | 500MHz | 750mA | 0.10Ω | 17000MHz |
| LQP03TN1N3BZ2□ | — | 1.3nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 17000MHz |
| LQP03TN1N3CZ2□ | — | 1.3nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 17000MHz |
| LQP03TN1N4BZ2□ | — | 1.4nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 16000MHz |
| LQP03TN1N4CZ2□ | — | 1.4nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 16000MHz |
| LQP03TN1N5BZ2□ | — | 1.5nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N5CZ2□ | — | 1.5nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N6BZ2□ | — | 1.6nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N6CZ2□ | — | 1.6nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N7BZ2□ | — | 1.7nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N7CZ2□ | — | 1.7nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N8BZ2□ | — | 1.8nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N8CZ2□ | — | 1.8nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 15000MHz |
| LQP03TN1N9BZ2□ | — | 1.9nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 12500MHz |
| LQP03TN1N9CZ2□ | — | 1.9nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 12500MHz |
| LQP03TN2N0BZ2□ | — | 2.0nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 12500MHz |
| LQP03TN2N0CZ2□ | — | 2.0nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 12500MHz |
| LQP03TN2N1BZ2□ | — | 2.1nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 11000MHz |
| LQP03TN2N1CZ2□ | — | 2.1nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 11000MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQP03TN2N2BZ2□ | — | 2.2nH ±0.1nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 11000MHz |
| LQP03TN2N2CZ2□ | — | 2.2nH ±0.2nH | 500MHz | 14 | 500MHz | 600mA | 0.15Ω | 11000MHz |
| LQP03TN2N3BZ2□ | — | 2.3nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N3CZ2□ | — | 2.3nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N4BZ2□ | — | 2.4nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N4CZ2□ | — | 2.4nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N5BZ2□ | — | 2.5nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N5CZ2□ | — | 2.5nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N6BZ2□ | — | 2.6nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N6CZ2□ | — | 2.6nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N7BZ2□ | — | 2.7nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N7CZ2□ | — | 2.7nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 10000MHz |
| LQP03TN2N8BZ2□ | — | 2.8nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 9500MHz |
| LQP03TN2N8CZ2□ | — | 2.8nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 9500MHz |
| LQP03TN2N9BZ2□ | — | 2.9nH ±0.1nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 9500MHz |
| LQP03TN2N9CZ2□ | — | 2.9nH ±0.2nH | 500MHz | 14 | 500MHz | 500mA | 0.20Ω | 9500MHz |
| LQP03TN3N0BZ2□ | — | 3.0nH ±0.1nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 9500MHz |
| LQP03TN3N0CZ2□ | — | 3.0nH ±0.2nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 9500MHz |
| LQP03TN3N1BZ2□ | — | 3.1nH ±0.1nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 8000MHz |
| LQP03TN3N1CZ2□ | — | 3.1nH ±0.2nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 8000MHz |
| LQP03TN3N2BZ2□ | — | 3.2nH ±0.1nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 8000MHz |
| LQP03TN3N2CZ2□ | — | 3.2nH ±0.2nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 8000MHz |
| LQP03TN3N3BZ2□ | — | 3.3nH ±0.1nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 8000MHz |
| LQP03TN3N3CZ2□ | — | 3.3nH ±0.2nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 8000MHz |
| LQP03TN3N4BZ2□ | — | 3.4nH ±0.1nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 7000MHz |
| LQP03TN3N4CZ2□ | — | 3.4nH ±0.2nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 7000MHz |
| LQP03TN3N5BZ2□ | — | 3.5nH ±0.1nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 7000MHz |
| LQP03TN3N5CZ2□ | — | 3.5nH ±0.2nH | 500MHz | 14 | 500MHz | 450mA | 0.25Ω | 7000MHz |
| LQP03TN3N6BZ2□ | — | 3.6nH ±0.1nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 6000MHz |
| LQP03TN3N6CZ2□ | — | 3.6nH ±0.2nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 6000MHz |
| LQP03TN3N7BZ2□ | — | 3.7nH ±0.1nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 6000MHz |
| LQP03TN3N7CZ2□ | — | 3.7nH ±0.2nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 6000MHz |
| LQP03TN3N8BZ2□ | — | 3.8nH ±0.1nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 6000MHz |
| LQP03TN3N8CZ2□ | — | 3.8nH ±0.2nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 6000MHz |
| LQP03TN3N9BZ2□ | — | 3.9nH ±0.1nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 5700MHz |
| LQP03TN3N9CZ2□ | — | 3.9nH ±0.2nH | 500MHz | 14 | 500MHz | 400mA | 0.30Ω | 5700MHz |
| LQP03TN4N0BZ2□ | — | 4.0nH ±0.1nH | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N0CZ2□ | — | 4.0nH ±0.2nH | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N1BZ2□ | — | 4.1nH ±0.1nH | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N1CZ2□ | — | 4.1nH ±0.2nH | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N2BZ2□ | — | 4.2nH ±0.1nH | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N2CZ2□ | — | 4.2nH ±0.2nH | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N3HZ2□ | — | 4.3nH ±3% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N3JZ2□ | — | 4.3nH ±5% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 5300MHz |
| LQP03TN4N7HZ2□ | — | 4.7nH ±3% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 4400MHz |
| LQP03TN4N7JZ2□ | — | 4.7nH ±5% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 4400MHz |
| LQP03TN5N1HZ2□ | — | 5.1nH ±3% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 4200MHz |
| LQP03TN5N1JZ2□ | — | 5.1nH ±5% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 4200MHz |
| LQP03TN5N6HZ2□ | — | 5.6nH ±3% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 4000MHz |
| LQP03TN5N6JZ2□ | — | 5.6nH ±5% | 500MHz | 14 | 500MHz | 350mA | 0.40Ω | 4000MHz |
| LQP03TN6N2HZ2□ | — | 6.2nH ±3% | 500MHz | 14 | 500MHz | 300mA | 0.60Ω | 4000MHz |
| LQP03TN6N2JZ2□ | — | 6.2nH ±5% | 500MHz | 14 | 500MHz | 300mA | 0.60Ω | 4000MHz |
| LQP03TN6N8HZ2□ | — | 6.8nH ±3% | 500MHz | 14 | 500MHz | 300mA | 0.60Ω | 3900MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F.: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQP03TN6N8JZ2□ | — | 6.8nH ±5% | 500MHz | 14 | 500MHz | 300mA | 0.60Ω | 3900MHz |
| LQP03TN7N5HZ2□ | — | 7.5nH ±3% | 500MHz | 14 | 500MHz | 300mA | 0.60Ω | 3700MHz |
| LQP03TN7N5JZ2□ | — | 7.5nH ±5% | 500MHz | 14 | 500MHz | 300mA | 0.60Ω | 3700MHz |
| LQP03TN8N2HZ2□ | — | 8.2nH ±3% | 500MHz | 14 | 500MHz | 250mA | 0.70Ω | 3600MHz |
| LQP03TN8N2JZ2□ | — | 8.2nH ±5% | 500MHz | 14 | 500MHz | 250mA | 0.70Ω | 3600MHz |
| LQP03TN9N1HZ2□ | — | 9.1nH ±3% | 500MHz | 14 | 500MHz | 250mA | 0.70Ω | 3300MHz |
| LQP03TN9N1JZ2□ | — | 9.1nH ±5% | 500MHz | 14 | 500MHz | 250mA | 0.70Ω | 3300MHz |
| LQP03TN10NHZ2□ | — | 10nH ±3% | 500MHz | 14 | 500MHz | 250mA | 0.70Ω | 3200MHz |
| LQP03TN10NJZ2□ | — | 10nH ±5% | 500MHz | 14 | 500MHz | 250mA | 0.70Ω | 3200MHz |
| LQP03TN11NHZ2□ | — | 11nH ±3% | 500MHz | 14 | 500MHz | 250mA | 0.80Ω | 2900MHz |
| LQP03TN11NJZ2□ | — | 11nH ±5% | 500MHz | 14 | 500MHz | 250mA | 0.80Ω | 2900MHz |
| LQP03TN12NHZ2□ | — | 12nH ±3% | 500MHz | 12 | 500MHz | 250mA | 0.70Ω | 2900MHz |
| LQP03TN12NJZ2□ | — | 12nH ±5% | 500MHz | 12 | 500MHz | 250mA | 0.70Ω | 2900MHz |
| LQP03TN13NHZ2□ | — | 13nH ±3% | 500MHz | 12 | 500MHz | 250mA | 0.80Ω | 2600MHz |
| LQP03TN13NJZ2□ | — | 13nH ±5% | 500MHz | 12 | 500MHz | 250mA | 0.80Ω | 2600MHz |
| LQP03TN15NHZ2□ | — | 15nH ±3% | 500MHz | 12 | 500MHz | 250mA | 0.70Ω | 2600MHz |
| LQP03TN15NJZ2□ | — | 15nH ±5% | 500MHz | 12 | 500MHz | 250mA | 0.70Ω | 2600MHz |
| LQP03TN16NHZ2□ | — | 16nH ±3% | 500MHz | 12 | 500MHz | 200mA | 0.95Ω | 2200MHz |
| LQP03TN16NJZ2□ | — | 16nH ±5% | 500MHz | 12 | 500MHz | 200mA | 0.95Ω | 2200MHz |
| LQP03TN18NHZ2□ | — | 18nH ±3% | 500MHz | 12 | 500MHz | 200mA | 0.80Ω | 2200MHz |
| LQP03TN18NJZ2□ | — | 18nH ±5% | 500MHz | 12 | 500MHz | 200mA | 0.80Ω | 2200MHz |
| LQP03TN20NHZ2□ | — | 20nH ±3% | 500MHz | 12 | 500MHz | 150mA | 2.30Ω | 2200MHz |
| LQP03TN20NJZ2□ | — | 20nH ±5% | 500MHz | 12 | 500MHz | 150mA | 2.30Ω | 2200MHz |
| LQP03TN22NHZ2□ | — | 22nH ±3% | 500MHz | 12 | 500MHz | 150mA | 1.90Ω | 2200MHz |
| LQP03TN22NJZ2□ | — | 22nH ±5% | 500MHz | 12 | 500MHz | 150mA | 1.90Ω | 2200MHz |
| LQP03TN24NHZ2□ | — | 24nH ±3% | 500MHz | 12 | 500MHz | 140mA | 2.30Ω | 2000MHz |
| LQP03TN24NJZ2□ | — | 24nH ±5% | 500MHz | 12 | 500MHz | 140mA | 2.30Ω | 2000MHz |
| LQP03TN27NHZ2□ | — | 27nH ±3% | 500MHz | 12 | 500MHz | 140mA | 2.30Ω | 2000MHz |
| LQP03TN27NJZ2□ | — | 27nH ±5% | 500MHz | 12 | 500MHz | 140mA | 2.30Ω | 2000MHz |
| LQP03TN30NHZ2□ | — | 30nH ±3% | 500MHz | 9 | 500MHz | 120mA | 2.95Ω | 1700MHz |
| LQP03TN30NJZ2□ | — | 30nH ±5% | 500MHz | 9 | 500MHz | 120mA | 2.95Ω | 1700MHz |
| LQP03TN33NHZ2□ | — | 33nH ±3% | 300MHz | 9 | 300MHz | 120mA | 2.95Ω | 1700MHz |
| LQP03TN33NJZ2□ | — | 33nH ±5% | 300MHz | 9 | 300MHz | 120mA | 2.95Ω | 1700MHz |
| LQP03TN36NHZ2□ | — | 36nH ±3% | 300MHz | 9 | 300MHz | 120mA | 3.00Ω | 1500MHz |
| LQP03TN36NJZ2□ | — | 36nH ±5% | 300MHz | 9 | 300MHz | 120mA | 3.00Ω | 1500MHz |
| LQP03TN39NHZ2□ | — | 39nH ±3% | 300MHz | 9 | 300MHz | 120mA | 3.00Ω | 1500MHz |
| LQP03TN39NJZ2□ | — | 39nH ±5% | 300MHz | 9 | 300MHz | 120mA | 3.00Ω | 1500MHz |
| LQP03TN43NHZ2□ | — | 43nH ±3% | 300MHz | 9 | 300MHz | 100mA | 3.60Ω | 1300MHz |
| LQP03TN43NJZ2□ | — | 43nH ±5% | 300MHz | 9 | 300MHz | 100mA | 3.60Ω | 1300MHz |
| LQP03TN47NHZ2□ | — | 47nH ±3% | 300MHz | 9 | 300MHz | 100mA | 3.60Ω | 1300MHz |
| LQP03TN47NJZ2□ | — | 47nH ±5% | 300MHz | 9 | 300MHz | 100mA | 3.60Ω | 1300MHz |
| LQP03TN51NHZ2□ | — | 51nH ±3% | 300MHz | 9 | 300MHz | 100mA | 3.90Ω | 1200MHz |
| LQP03TN51NJZ2□ | — | 51nH ±5% | 300MHz | 9 | 300MHz | 100mA | 3.90Ω | 1200MHz |
| LQP03TN56NHZ2□ | — | 56nH ±3% | 300MHz | 9 | 300MHz | 100mA | 3.90Ω | 1200MHz |
| LQP03TN56NJZ2□ | — | 56nH ±5% | 300MHz | 9 | 300MHz | 100mA | 3.90Ω | 1200MHz |
| LQP03TN62NHZ2□ | — | 62nH ±3% | 300MHz | 8 | 300MHz | 100mA | 8Ω | 1100MHz |
| LQP03TN62NJZ2□ | — | 62nH ±5% | 300MHz | 8 | 300MHz | 100mA | 8Ω | 1100MHz |
| LQP03TN68NHZ2□ | — | 68nH ±3% | 300MHz | 8 | 300MHz | 100mA | 8Ω | 1100MHz |
| LQP03TN68NJZ2□ | — | 68nH ±5% | 300MHz | 8 | 300MHz | 100mA | 8Ω | 1100MHz |
| LQP03TN75NHZ2□ | — | 75nH ±3% | 300MHz | 8 | 300MHz | 100mA | 10Ω | 1000MHz |
| LQP03TN75NJZ2□ | — | 75nH ±5% | 300MHz | 8 | 300MHz | 100mA | 10Ω | 1000MHz |
| LQP03TN82NHZ2□ | — | 82nH ±3% | 300MHz | 8 | 300MHz | 100mA | 10Ω | 1000MHz |
| LQP03TN82NJZ2□ | — | 82nH ±5% | 300MHz | 8 | 300MHz | 100mA | 10Ω | 1000MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘


| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQP03TN91NHZ2□ | — | 91nH ±3% | 300MHz | 8 | 300MHz | 80mA | 10Ω | 900MHz |
| LQP03TN91NJZ2□ | — | 91nH ±5% | 300MHz | 8 | 300MHz | 80mA | 10Ω | 900MHz |
| LQP03TNR10HZ2□ | — | 100nH ±3% | 300MHz | 8 | 300MHz | 80mA | 10Ω | 900MHz |
| LQP03TNR10JZ2□ | — | 100nH ±5% | 300MHz | 8 | 300MHz | 80mA | 10Ω | 900MHz |
| LQP03TNR11HZ2□ | — | 110nH ±3% | 300MHz | 8 | 300MHz | 80mA | 12Ω | 800MHz |
| LQP03TNR11JZ2□ | — | 110nH ±5% | 300MHz | 8 | 300MHz | 80mA | 12Ω | 800MHz |
| LQP03TNR12HZ2□ | — | 120nH ±3% | 300MHz | 8 | 300MHz | 80mA | 12Ω | 800MHz |
| LQP03TNR12JZ2□ | — | 120nH ±5% | 300MHz | 8 | 300MHz | 80mA | 12Ω | 800MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

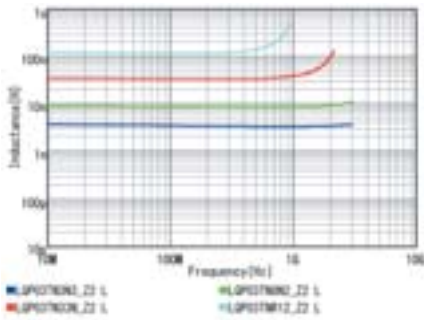


Q-Frequency Characteristics (Typ.)

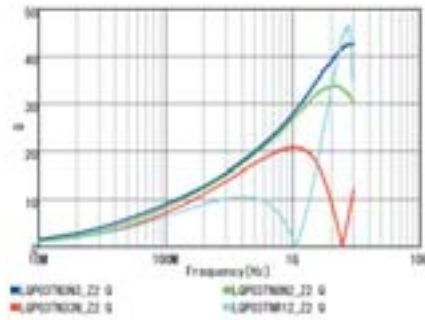

RF Inductors

LQW15AN_0Z Series 0402 (1005) inch (mm)

Appearance/Dimensions

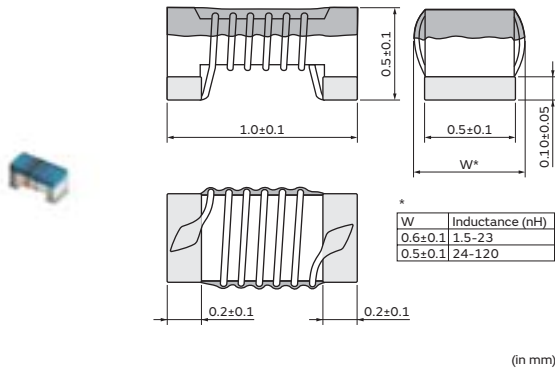

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN1N5B0Z□ | — | 1.5nH ±0.1nH | 100MHz | 10 | 250MHz | 1000mA | 0.03Ω | 18.0GHz |
| LQW15AN1N5C0Z□ | — | 1.5nH ±0.2nH | 100MHz | 10 | 250MHz | 1000mA | 0.03Ω | 18.0GHz |
| LQW15AN1N5D0Z□ | — | 1.5nH ±0.5nH | 100MHz | 10 | 250MHz | 1000mA | 0.03Ω | 18.0GHz |
| LQW15AN1N6C0Z□ | — | 1.6nH ±0.2nH | 100MHz | 10 | 250MHz | 750mA | 0.07Ω | 17.0GHz |
| LQW15AN1N6D0Z□ | — | 1.6nH ±0.5nH | 100MHz | 10 | 250MHz | 750mA | 0.07Ω | 17.0GHz |
| LQW15AN1N7C0Z□ | — | 1.7nH ±0.2nH | 100MHz | 10 | 250MHz | 640mA | 0.10Ω | 17.0GHz |
| LQW15AN1N7D0Z□ | — | 1.7nH ±0.5nH | 100MHz | 10 | 250MHz | 640mA | 0.10Ω | 17.0GHz |
| LQW15AN1N8C0Z□ | — | 1.8nH ±0.2nH | 100MHz | 10 | 250MHz | 460mA | 0.16Ω | 16.0GHz |
| LQW15AN1N8D0Z□ | — | 1.8nH ±0.5nH | 100MHz | 10 | 250MHz | 460mA | 0.16Ω | 16.0GHz |
| LQW15AN2N4B0Z□ | — | 2.4nH ±0.1nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N4C0Z□ | — | 2.4nH ±0.2nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N4D0Z□ | — | 2.4nH ±0.5nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N5B0Z□ | — | 2.5nH ±0.1nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N5C0Z□ | — | 2.5nH ±0.2nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N5D0Z□ | — | 2.5nH ±0.5nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N6B0Z□ | — | 2.6nH ±0.1nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N6C0Z□ | — | 2.6nH ±0.2nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N6D0Z□ | — | 2.6nH ±0.5nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N7B0Z□ | — | 2.7nH ±0.1nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N7C0Z□ | — | 2.7nH ±0.2nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N7D0Z□ | — | 2.7nH ±0.5nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N8B0Z□ | — | 2.8nH ±0.1nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N8C0Z□ | — | 2.8nH ±0.2nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N8D0Z□ | — | 2.8nH ±0.5nH | 100MHz | 20 | 250MHz | 850mA | 0.05Ω | 15.0GHz |
| LQW15AN2N9B0Z□ | — | 2.9nH ±0.1nH | 100MHz | 20 | 250MHz | 750mA | 0.07Ω | 15.0GHz |
| LQW15AN2N9C0Z□ | — | 2.9nH ±0.2nH | 100MHz | 20 | 250MHz | 750mA | 0.07Ω | 15.0GHz |
| LQW15AN2N9D0Z□ | — | 2.9nH ±0.5nH | 100MHz | 20 | 250MHz | 750mA | 0.07Ω | 15.0GHz |
| LQW15AN3N0B0Z□ | — | 3.0nH ±0.1nH | 100MHz | 20 | 250MHz | 750mA | 0.07Ω | 15.0GHz |
| LQW15AN3N0C0Z□ | — | 3.0nH ±0.2nH | 100MHz | 20 | 250MHz | 750mA | 0.07Ω | 15.0GHz |
| LQW15AN3N0D0Z□ | — | 3.0nH ±0.5nH | 100MHz | 20 | 250MHz | 750mA | 0.07Ω | 15.0GHz |
| LQW15AN3N1B0Z□ | — | 3.1nH ±0.1nH | 100MHz | 20 | 250MHz | 570mA | 0.13Ω | 14.0GHz |
| LQW15AN3N1C0Z□ | — | 3.1nH ±0.2nH | 100MHz | 20 | 250MHz | 570mA | 0.13Ω | 14.0GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN3N1D0Z□ | — | 3.1nH ±0.5nH | 100MHz | 20 | 250MHz | 570mA | 0.13Ω | 14.0GHz |
| LQW15AN3N2B0Z□ | — | 3.2nH ±0.1nH | 100MHz | 15 | 250MHz | 500mA | 0.17Ω | 14.0GHz |
| LQW15AN3N2C0Z□ | — | 3.2nH ±0.2nH | 100MHz | 15 | 250MHz | 500mA | 0.17Ω | 14.0GHz |
| LQW15AN3N2D0Z□ | — | 3.2nH ±0.5nH | 100MHz | 15 | 250MHz | 500mA | 0.17Ω | 14.0GHz |
| LQW15AN3N9B0Z□ | — | 3.9nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN3N9C0Z□ | — | 3.9nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN3N9D0Z□ | — | 3.9nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N1B0Z□ | — | 4.1nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N1C0Z□ | — | 4.1nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N1D0Z□ | — | 4.1nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N3B0Z□ | — | 4.3nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N3C0Z□ | — | 4.3nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N3D0Z□ | — | 4.3nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 10.0GHz |
| LQW15AN4N4B0Z□ | — | 4.4nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N4C0Z□ | — | 4.4nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N4D0Z□ | — | 4.4nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N5B0Z□ | — | 4.5nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N5C0Z□ | — | 4.5nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N5D0Z□ | — | 4.5nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N6B0Z□ | — | 4.6nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N6C0Z□ | — | 4.6nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N6D0Z□ | — | 4.6nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N7B0Z□ | — | 4.7nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N7C0Z□ | — | 4.7nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N7D0Z□ | — | 4.7nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N8B0Z□ | — | 4.8nH ±0.1nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N8C0Z□ | — | 4.8nH ±0.2nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N8D0Z□ | — | 4.8nH ±0.5nH | 100MHz | 25 | 250MHz | 750mA | 0.07Ω | 8.0GHz |
| LQW15AN4N9B0Z□ | — | 4.9nH ±0.1nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN4N9C0Z□ | — | 4.9nH ±0.2nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN4N9D0Z□ | — | 4.9nH ±0.5nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N0B0Z□ | — | 5.0nH ±0.1nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N0C0Z□ | — | 5.0nH ±0.2nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N0D0Z□ | — | 5.0nH ±0.5nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N1B0Z□ | — | 5.1nH ±0.1nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N1C0Z□ | — | 5.1nH ±0.2nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N1D0Z□ | — | 5.1nH ±0.5nH | 100MHz | 25 | 250MHz | 600mA | 0.12Ω | 8.0GHz |
| LQW15AN5N8B0Z□ | — | 5.8nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 8.0GHz |
| LQW15AN5N8C0Z□ | — | 5.8nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 8.0GHz |
| LQW15AN5N8D0Z□ | — | 5.8nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 8.0GHz |
| LQW15AN6N2B0Z□ | — | 6.2nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 8.0GHz |
| LQW15AN6N2C0Z□ | — | 6.2nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 8.0GHz |
| LQW15AN6N2D0Z□ | — | 6.2nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 8.0GHz |
| LQW15AN6N3B0Z□ | — | 6.3nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N3C0Z□ | — | 6.3nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N3D0Z□ | — | 6.3nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N4B0Z□ | — | 6.4nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N4C0Z□ | — | 6.4nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N4D0Z□ | — | 6.4nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N5B0Z□ | — | 6.5nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N5C0Z□ | — | 6.5nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N5D0Z□ | — | 6.5nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N6B0Z□ | — | 6.6nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F.: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN6N6C0Z□ | — | 6.6nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N6D0Z□ | — | 6.6nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N7B0Z□ | — | 6.7nH ±0.1nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N7C0Z□ | — | 6.7nH ±0.2nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N7D0Z□ | — | 6.7nH ±0.5nH | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N8G0Z□ | — | 6.8nH ±2% | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N8H0Z□ | — | 6.8nH ±3% | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N8J0Z□ | — | 6.8nH ±5% | 100MHz | 25 | 250MHz | 700mA | 0.09Ω | 6.0GHz |
| LQW15AN6N9G0Z□ | — | 6.9nH ±2% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN6N9H0Z□ | — | 6.9nH ±3% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN6N9J0Z□ | — | 6.9nH ±5% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N0G0Z□ | — | 7.0nH ±2% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N0H0Z□ | — | 7.0nH ±3% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N0J0Z□ | — | 7.0nH ±5% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N1G0Z□ | — | 7.1nH ±2% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N1H0Z□ | — | 7.1nH ±3% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N1J0Z□ | — | 7.1nH ±5% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N2G0Z□ | — | 7.2nH ±2% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N2H0Z□ | — | 7.2nH ±3% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N2J0Z□ | — | 7.2nH ±5% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N3G0Z□ | — | 7.3nH ±2% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N3H0Z□ | — | 7.3nH ±3% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N3J0Z□ | — | 7.3nH ±5% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N5G0Z□ | — | 7.5nH ±2% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N5H0Z□ | — | 7.5nH ±3% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN7N5J0Z□ | — | 7.5nH ±5% | 100MHz | 25 | 250MHz | 570mA | 0.13Ω | 6.0GHz |
| LQW15AN8N2G0Z□ | — | 8.2nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N2H0Z□ | — | 8.2nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N2J0Z□ | — | 8.2nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N6G0Z□ | — | 8.6nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N6H0Z□ | — | 8.6nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N6J0Z□ | — | 8.6nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N7G0Z□ | — | 8.7nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N7H0Z□ | — | 8.7nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N7J0Z□ | — | 8.7nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N8G0Z□ | — | 8.8nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N8H0Z□ | — | 8.8nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N8J0Z□ | — | 8.8nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N9G0Z□ | — | 8.9nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N9H0Z□ | — | 8.9nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN8N9J0Z□ | — | 8.9nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N0G0Z□ | — | 9.0nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N0H0Z□ | — | 9.0nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N0J0Z□ | — | 9.0nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N1G0Z□ | — | 9.1nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N1H0Z□ | — | 9.1nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N1J0Z□ | — | 9.1nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N2G0Z□ | — | 9.2nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N2H0Z□ | — | 9.2nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N2J0Z□ | — | 9.2nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N3G0Z□ | — | 9.3nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N3H0Z□ | — | 9.3nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N3J0Z□ | — | 9.3nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN9N4G0Z□ | — | 9.4nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N4H0Z□ | — | 9.4nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N4J0Z□ | — | 9.4nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N5G0Z□ | — | 9.5nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N5H0Z□ | — | 9.5nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N5J0Z□ | — | 9.5nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N6G0Z□ | — | 9.6nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N6H0Z□ | — | 9.6nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N6J0Z□ | — | 9.6nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N7G0Z□ | — | 9.7nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N7H0Z□ | — | 9.7nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N7J0Z□ | — | 9.7nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N8G0Z□ | — | 9.8nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N8H0Z□ | — | 9.8nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N8J0Z□ | — | 9.8nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N9G0Z□ | — | 9.9nH ±2% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N9H0Z□ | — | 9.9nH ±3% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN9N9J0Z□ | — | 9.9nH ±5% | 100MHz | 25 | 250MHz | 540mA | 0.14Ω | 5.5GHz |
| LQW15AN10NG0Z□ | — | 10nH ±2% | 100MHz | 25 | 250MHz | 500mA | 0.17Ω | 5.5GHz |
| LQW15AN10NH0Z□ | — | 10nH ±3% | 100MHz | 25 | 250MHz | 500mA | 0.17Ω | 5.5GHz |
| LQW15AN10NJ0Z□ | — | 10nH ±5% | 100MHz | 25 | 250MHz | 500mA | 0.17Ω | 5.5GHz |
| LQW15AN11NG0Z□ | — | 11nH ±2% | 100MHz | 30 | 250MHz | 500mA | 0.14Ω | 5.5GHz |
| LQW15AN11NH0Z□ | — | 11nH ±3% | 100MHz | 30 | 250MHz | 500mA | 0.14Ω | 5.5GHz |
| LQW15AN11NJ0Z□ | — | 11nH ±5% | 100MHz | 30 | 250MHz | 500mA | 0.14Ω | 5.5GHz |
| LQW15AN12NG0Z□ | — | 12nH ±2% | 100MHz | 30 | 250MHz | 500mA | 0.14Ω | 5.5GHz |
| LQW15AN12NH0Z□ | — | 12nH ±3% | 100MHz | 30 | 250MHz | 500mA | 0.14Ω | 5.5GHz |
| LQW15AN12NJ0Z□ | — | 12nH ±5% | 100MHz | 30 | 250MHz | 500mA | 0.14Ω | 5.5GHz |
| LQW15AN13NG0Z□ | — | 13nH ±2% | 100MHz | 25 | 250MHz | 430mA | 0.21Ω | 5.0GHz |
| LQW15AN13NH0Z□ | — | 13nH ±3% | 100MHz | 25 | 250MHz | 430mA | 0.21Ω | 5.0GHz |
| LQW15AN13NJ0Z□ | — | 13nH ±5% | 100MHz | 25 | 250MHz | 430mA | 0.21Ω | 5.0GHz |
| LQW15AN15NG0Z□ | — | 15nH ±2% | 100MHz | 30 | 250MHz | 460mA | 0.16Ω | 5.0GHz |
| LQW15AN15NH0Z□ | — | 15nH ±3% | 100MHz | 30 | 250MHz | 460mA | 0.16Ω | 5.0GHz |
| LQW15AN15NJ0Z□ | — | 15nH ±5% | 100MHz | 30 | 250MHz | 460mA | 0.16Ω | 5.0GHz |
| LQW15AN16NG0Z□ | — | 16nH ±2% | 100MHz | 25 | 250MHz | 370mA | 0.24Ω | 4.5GHz |
| LQW15AN16NH0Z□ | — | 16nH ±3% | 100MHz | 25 | 250MHz | 370mA | 0.24Ω | 4.5GHz |
| LQW15AN16NJ0Z□ | — | 16nH ±5% | 100MHz | 25 | 250MHz | 370mA | 0.24Ω | 4.5GHz |
| LQW15AN18NG0Z□ | — | 18nH ±2% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.5GHz |
| LQW15AN18NH0Z□ | — | 18nH ±3% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.5GHz |
| LQW15AN18NJ0Z□ | — | 18nH ±5% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.5GHz |
| LQW15AN19NG0Z□ | — | 19nH ±2% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.5GHz |
| LQW15AN19NH0Z□ | — | 19nH ±3% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.5GHz |
| LQW15AN19NJ0Z□ | — | 19nH ±5% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.5GHz |
| LQW15AN20NG0Z□ | — | 20nH ±2% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.0GHz |
| LQW15AN20NH0Z□ | — | 20nH ±3% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.0GHz |
| LQW15AN20NJ0Z□ | — | 20nH ±5% | 100MHz | 25 | 250MHz | 370mA | 0.27Ω | 4.0GHz |
| LQW15AN22NG0Z□ | — | 22nH ±2% | 100MHz | 25 | 250MHz | 310mA | 0.30Ω | 4.0GHz |
| LQW15AN22NH0Z□ | — | 22nH ±3% | 100MHz | 25 | 250MHz | 310mA | 0.30Ω | 4.0GHz |
| LQW15AN22NJ0Z□ | — | 22nH ±5% | 100MHz | 25 | 250MHz | 310mA | 0.30Ω | 4.0GHz |
| LQW15AN23NG0Z□ | — | 23nH ±2% | 100MHz | 25 | 250MHz | 310mA | 0.30Ω | 3.8GHz |
| LQW15AN23NH0Z□ | — | 23nH ±3% | 100MHz | 25 | 250MHz | 310mA | 0.30Ω | 3.8GHz |
| LQW15AN23NJ0Z□ | — | 23nH ±5% | 100MHz | 25 | 250MHz | 310mA | 0.30Ω | 3.8GHz |
| LQW15AN24NG0Z□ | — | 24nH ±2% | 100MHz | 25 | 250MHz | 280mA | 0.52Ω | 3.5GHz |
| LQW15AN24NH0Z□ | — | 24nH ±3% | 100MHz | 25 | 250MHz | 280mA | 0.52Ω | 3.5GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F.: Self Resonant Frequency

Inductors for Power Lines

Inductors for General Circuits

RF Inductors

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN24NJ0Z□ | — | 24nH ±5% | 100MHz | 25 | 250MHz | 280mA | 0.52Ω | 3.5GHz |
| LQW15AN27NG0Z□ | — | 27nH ±2% | 100MHz | 25 | 250MHz | 280mA | 0.52Ω | 3.5GHz |
| LQW15AN27NH0Z□ | — | 27nH ±3% | 100MHz | 25 | 250MHz | 280mA | 0.52Ω | 3.5GHz |
| LQW15AN27NJ0Z□ | — | 27nH ±5% | 100MHz | 25 | 250MHz | 280mA | 0.52Ω | 3.5GHz |
| LQW15AN30NG0Z□ | — | 30nH ±2% | 100MHz | 25 | 250MHz | 270mA | 0.58Ω | 3.3GHz |
| LQW15AN30NH0Z□ | — | 30nH ±3% | 100MHz | 25 | 250MHz | 270mA | 0.58Ω | 3.3GHz |
| LQW15AN30NJ0Z□ | — | 30nH ±5% | 100MHz | 25 | 250MHz | 270mA | 0.58Ω | 3.3GHz |
| LQW15AN33NG0Z□ | — | 33nH ±2% | 100MHz | 25 | 250MHz | 260mA | 0.63Ω | 3.2GHz |
| LQW15AN33NH0Z□ | — | 33nH ±3% | 100MHz | 25 | 250MHz | 260mA | 0.63Ω | 3.2GHz |
| LQW15AN33NJ0Z□ | — | 33nH ±5% | 100MHz | 25 | 250MHz | 260mA | 0.63Ω | 3.2GHz |
| LQW15AN36NG0Z□ | — | 36nH ±2% | 100MHz | 25 | 250MHz | 260mA | 0.63Ω | 3.1GHz |
| LQW15AN36NH0Z□ | — | 36nH ±3% | 100MHz | 25 | 250MHz | 260mA | 0.63Ω | 3.1GHz |
| LQW15AN36NJ0Z□ | — | 36nH ±5% | 100MHz | 25 | 250MHz | 260mA | 0.63Ω | 3.1GHz |
| LQW15AN39NG0Z□ | — | 39nH ±2% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN39NH0Z□ | — | 39nH ±3% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN39NJ0Z□ | — | 39nH ±5% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN40NG0Z□ | — | 40nH ±2% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN40NH0Z□ | — | 40nH ±3% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN40NJ0Z□ | — | 40nH ±5% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN43NG0Z□ | — | 43nH ±2% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN43NH0Z□ | — | 43nH ±3% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN43NJ0Z□ | — | 43nH ±5% | 100MHz | 25 | 250MHz | 250mA | 0.70Ω | 3.0GHz |
| LQW15AN47NG0Z□ | — | 47nH ±2% | 100MHz | 25 | 200MHz | 210mA | 1.08Ω | 2.9GHz |
| LQW15AN47NH0Z□ | — | 47nH ±3% | 100MHz | 25 | 200MHz | 210mA | 1.08Ω | 2.9GHz |
| LQW15AN47NJ0Z□ | — | 47nH ±5% | 100MHz | 25 | 200MHz | 210mA | 1.08Ω | 2.9GHz |
| LQW15AN51NG0Z□ | — | 51nH ±2% | 100MHz | 25 | 200MHz | 210mA | 1.08Ω | 2.85GHz |
| LQW15AN51NH0Z□ | — | 51nH ±3% | 100MHz | 25 | 200MHz | 210mA | 1.08Ω | 2.85GHz |
| LQW15AN51NJ0Z□ | — | 51nH ±5% | 100MHz | 25 | 200MHz | 210mA | 1.08Ω | 2.85GHz |
| LQW15AN56NG0Z□ | — | 56nH ±2% | 100MHz | 25 | 200MHz | 200mA | 1.17Ω | 2.8GHz |
| LQW15AN56NH0Z□ | — | 56nH ±3% | 100MHz | 25 | 200MHz | 200mA | 1.17Ω | 2.8GHz |
| LQW15AN56NJ0Z□ | — | 56nH ±5% | 100MHz | 25 | 200MHz | 200mA | 1.17Ω | 2.8GHz |
| LQW15AN62NG0Z□ | — | 62nH ±2% | 100MHz | 20 | 200MHz | 145mA | 1.82Ω | 2.6GHz |
| LQW15AN62NH0Z□ | — | 62nH ±3% | 100MHz | 20 | 200MHz | 145mA | 1.82Ω | 2.6GHz |
| LQW15AN62NJ0Z□ | — | 62nH ±5% | 100MHz | 20 | 200MHz | 145mA | 1.82Ω | 2.6GHz |
| LQW15AN68NG0Z□ | — | 68nH ±2% | 100MHz | 20 | 200MHz | 140mA | 1.96Ω | 2.5GHz |
| LQW15AN68NJ0Z□ | — | 68nH ±5% | 100MHz | 20 | 200MHz | 140mA | 1.96Ω | 2.5GHz |
| LQW15AN72NG0Z□ | — | 72nH ±2% | 100MHz | 20 | 150MHz | 135mA | 2.10Ω | 2.5GHz |
| LQW15AN72NJ0Z□ | — | 72nH ±5% | 100MHz | 20 | 150MHz | 135mA | 2.10Ω | 2.5GHz |
| LQW15AN75NG0Z□ | — | 75nH ±2% | 100MHz | 20 | 150MHz | 135mA | 2.10Ω | 2.4GHz |
| LQW15AN75NJ0Z□ | — | 75nH ±5% | 100MHz | 20 | 150MHz | 135mA | 2.10Ω | 2.4GHz |
| LQW15AN82NG0Z□ | — | 82nH ±2% | 100MHz | 20 | 150MHz | 130mA | 2.24Ω | 2.3GHz |
| LQW15AN82NJ0Z□ | — | 82nH ±5% | 100MHz | 20 | 150MHz | 130mA | 2.24Ω | 2.3GHz |
| LQW15AN91NG0Z□ | — | 91nH ±2% | 100MHz | 20 | 150MHz | 125mA | 2.38Ω | 2.1GHz |
| LQW15AN91NJ0Z□ | — | 91nH ±5% | 100MHz | 20 | 150MHz | 125mA | 2.38Ω | 2.1GHz |
| LQW15ANR10J0Z□ | — | 100nH ±5% | 100MHz | 20 | 150MHz | 120mA | 2.52Ω | 1.5GHz |
| LQW15ANR12J0Z□ | — | 120nH ±5% | 100MHz | 20 | 150MHz | 110mA | 2.66Ω | 1.0GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency


Continued on the following page. ↗

Continued from the preceding page. ↘

Inductance-Frequency Characteristics (Typ.)

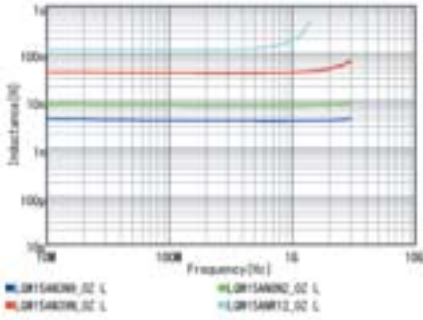


Q-Frequency Characteristics (Typ.)

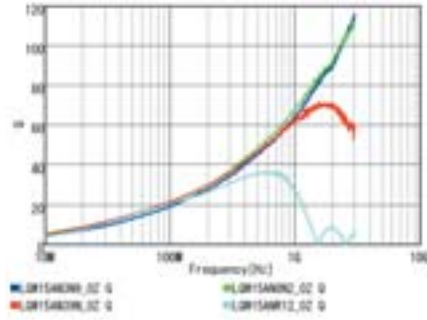

RF Inductors

LQW15AN_1Z Series 0402 (1005) inch (mm)

Appearance/Dimensions

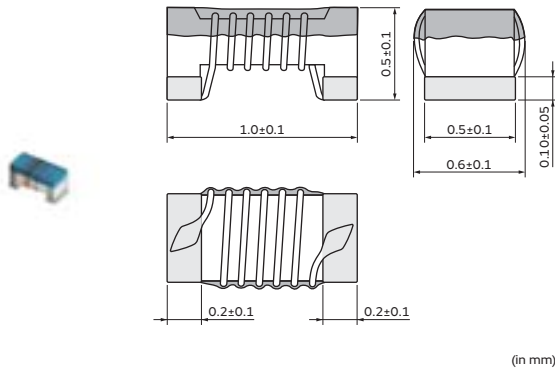

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN1N3C1Z□ | — | 1.3nH ±0.2nH | 100MHz | 20 | 250MHz | 1200mA | 0.017Ω | 16GHz |
| LQW15AN1N3D1Z□ | — | 1.3nH ±0.5nH | 100MHz | 20 | 250MHz | 1200mA | 0.017Ω | 16GHz |
| LQW15AN1N4C1Z□ | — | 1.4nH ±0.2nH | 100MHz | 25 | 250MHz | 1100mA | 0.019Ω | 15GHz |
| LQW15AN1N4D1Z□ | — | 1.4nH ±0.5nH | 100MHz | 25 | 250MHz | 1100mA | 0.019Ω | 15GHz |
| LQW15AN2N2C1Z□ | — | 2.2nH ±0.2nH | 100MHz | 25 | 250MHz | 1000mA | 0.027Ω | 14GHz |
| LQW15AN2N2D1Z□ | — | 2.2nH ±0.5nH | 100MHz | 25 | 250MHz | 1000mA | 0.027Ω | 14GHz |
| LQW15AN2N3C1Z□ | — | 2.3nH ±0.2nH | 100MHz | 25 | 250MHz | 1000mA | 0.027Ω | 14GHz |
| LQW15AN2N3D1Z□ | — | 2.3nH ±0.5nH | 100MHz | 25 | 250MHz | 1000mA | 0.027Ω | 14GHz |
| LQW15AN2N4D1Z□ | — | 2.4nH ±0.5nH | 100MHz | 25 | 250MHz | 1000mA | 0.027Ω | 14GHz |
| LQW15AN3N3D1Z□ | — | 3.3nH ±0.5nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 12GHz |
| LQW15AN3N4C1Z□ | — | 3.4nH ±0.2nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 12GHz |
| LQW15AN3N4D1Z□ | — | 3.4nH ±0.5nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 12GHz |
| LQW15AN3N5C1Z□ | — | 3.5nH ±0.2nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 9.5GHz |
| LQW15AN3N5D1Z□ | — | 3.5nH ±0.5nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 9.5GHz |
| LQW15AN3N6C1Z□ | — | 3.6nH ±0.2nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 9.5GHz |
| LQW15AN3N6D1Z□ | — | 3.6nH ±0.5nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 9.5GHz |
| LQW15AN3N8C1Z□ | — | 3.8nH ±0.2nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 7GHz |
| LQW15AN3N8D1Z□ | — | 3.8nH ±0.5nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 7GHz |
| LQW15AN3N9D1Z□ | — | 3.9nH ±0.5nH | 100MHz | 30 | 250MHz | 900mA | 0.040Ω | 7GHz |
| LQW15AN4N0C1Z□ | — | 4.0nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 6.5GHz |
| LQW15AN4N0D1Z□ | — | 4.0nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 6.5GHz |
| LQW15AN4N2C1Z□ | — | 4.2nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 6.5GHz |
| LQW15AN4N2D1Z□ | — | 4.2nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 6.5GHz |
| LQW15AN4N7D1Z□ | — | 4.7nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N1C1Z□ | — | 5.1nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N1D1Z□ | — | 5.1nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N2C1Z□ | — | 5.2nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N2D1Z□ | — | 5.2nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N3C1Z□ | — | 5.3nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N3D1Z□ | — | 5.3nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N4C1Z□ | — | 5.4nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N4D1Z□ | — | 5.4nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘


| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN5N5C1Z□ | — | 5.5nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N5D1Z□ | — | 5.5nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N6C1Z□ | — | 5.6nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N6D1Z□ | — | 5.6nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N7C1Z□ | — | 5.7nH ±0.2nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N7D1Z□ | — | 5.7nH ±0.5nH | 100MHz | 30 | 250MHz | 800mA | 0.051Ω | 8GHz |
| LQW15AN5N9C1Z□ | — | 5.9nH ±0.2nH | 100MHz | 30 | 250MHz | 760mA | 0.056Ω | 7.7GHz |
| LQW15AN5N9D1Z□ | — | 5.9nH ±0.5nH | 100MHz | 30 | 250MHz | 760mA | 0.056Ω | 7.7GHz |
| LQW15AN6N0C1Z□ | — | 6.0nH ±0.2nH | 100MHz | 30 | 250MHz | 760mA | 0.056Ω | 7.7GHz |
| LQW15AN6N0D1Z□ | — | 6.0nH ±0.5nH | 100MHz | 30 | 250MHz | 760mA | 0.056Ω | 7.7GHz |
| LQW15AN6N1C1Z□ | — | 6.1nH ±0.2nH | 100MHz | 30 | 250MHz | 760mA | 0.056Ω | 7.7GHz |
| LQW15AN6N1D1Z□ | — | 6.1nH ±0.5nH | 100MHz | 30 | 250MHz | 760mA | 0.056Ω | 7.7GHz |
| LQW15AN7N4C1Z□ | — | 7.4nH ±0.2nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N4D1Z□ | — | 7.4nH ±0.5nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N6C1Z□ | — | 7.6nH ±0.2nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N6D1Z□ | — | 7.6nH ±0.5nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N7C1Z□ | — | 7.7nH ±0.2nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N7D1Z□ | — | 7.7nH ±0.5nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N8C1Z□ | — | 7.8nH ±0.2nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N8D1Z□ | — | 7.8nH ±0.5nH | 100MHz | 30 | 250MHz | 750mA | 0.058Ω | 6.8GHz |
| LQW15AN7N9C1Z□ | — | 7.9nH ±0.2nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN7N9D1Z□ | — | 7.9nH ±0.5nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N0C1Z□ | — | 8.0nH ±0.2nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N0D1Z□ | — | 8.0nH ±0.5nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N1C1Z□ | — | 8.1nH ±0.2nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N1D1Z□ | — | 8.1nH ±0.5nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N3C1Z□ | — | 8.3nH ±0.2nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N3D1Z□ | — | 8.3nH ±0.5nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N4C1Z□ | — | 8.4nH ±0.2nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |
| LQW15AN8N4D1Z□ | — | 8.4nH ±0.5nH | 100MHz | 30 | 250MHz | 640mA | 0.079Ω | 7.5GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

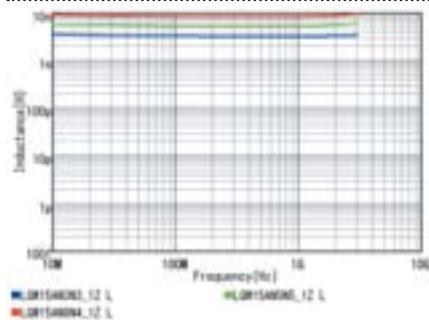


Q-Frequency Characteristics (Typ.)

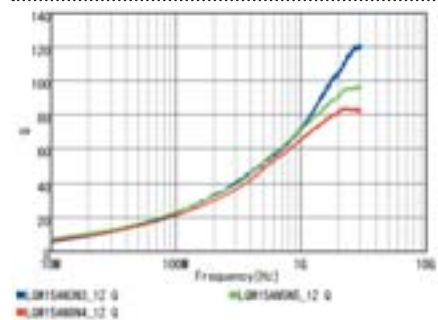

RF Inductors

LQW15AN_8Z Series 0402 (1005) inch (mm)

Appearance/Dimensions

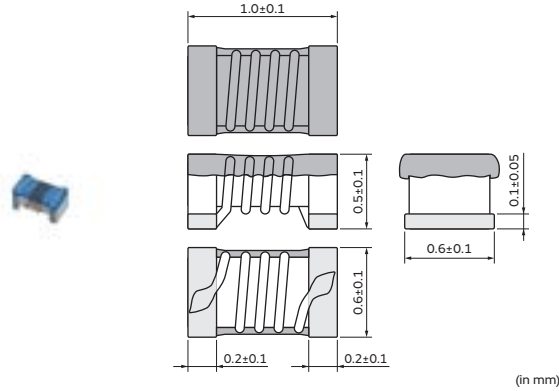

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN1N3C8Z□ | — | 1.3nH ±0.2nH | 100MHz | 20 | 250MHz | 3150mA | 0.012Ω | 18.0GHz |
| LQW15AN1N3D8Z□ | — | 1.3nH ±0.5nH | 100MHz | 20 | 250MHz | 3150mA | 0.012Ω | 18.0GHz |
| LQW15AN1N5C8Z□ | — | 1.5nH ±0.2nH | 100MHz | 20 | 250MHz | 2100mA | 0.028Ω | 18.0GHz |
| LQW15AN1N5D8Z□ | — | 1.5nH ±0.5nH | 100MHz | 20 | 250MHz | 2100mA | 0.028Ω | 18.0GHz |
| LQW15AN1N6C8Z□ | — | 1.6nH ±0.2nH | 100MHz | 20 | 250MHz | 1450mA | 0.045Ω | 18.0GHz |
| LQW15AN1N6D8Z□ | — | 1.6nH ±0.5nH | 100MHz | 20 | 250MHz | 1450mA | 0.045Ω | 18.0GHz |
| LQW15AN1N7C8Z□ | — | 1.7nH ±0.2nH | 100MHz | 20 | 250MHz | 1150mA | 0.065Ω | 18.0GHz |
| LQW15AN1N7D8Z□ | — | 1.7nH ±0.5nH | 100MHz | 20 | 250MHz | 1150mA | 0.065Ω | 18.0GHz |
| LQW15AN2N2B8Z□ | — | 2.2nH ±0.1nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N2C8Z□ | — | 2.2nH ±0.2nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N2D8Z□ | — | 2.2nH ±0.5nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N2G8Z□ | — | 2.2nH ±2% | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N3B8Z□ | — | 2.3nH ±0.1nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N3C8Z□ | — | 2.3nH ±0.2nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N3D8Z□ | — | 2.3nH ±0.5nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N3G8Z□ | — | 2.3nH ±2% | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N4B8Z□ | — | 2.4nH ±0.1nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N4C8Z□ | — | 2.4nH ±0.2nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N4D8Z□ | — | 2.4nH ±0.5nH | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N4G8Z□ | — | 2.4nH ±2% | 100MHz | 30 | 250MHz | 2530mA | 0.022Ω | 15.5GHz |
| LQW15AN2N5B8Z□ | — | 2.5nH ±0.1nH | 100MHz | 30 | 250MHz | 2100mA | 0.030Ω | 15.5GHz |
| LQW15AN2N5C8Z□ | — | 2.5nH ±0.2nH | 100MHz | 30 | 250MHz | 2100mA | 0.030Ω | 15.5GHz |
| LQW15AN2N5D8Z□ | — | 2.5nH ±0.5nH | 100MHz | 30 | 250MHz | 2100mA | 0.030Ω | 15.5GHz |
| LQW15AN2N5G8Z□ | — | 2.5nH ±2% | 100MHz | 30 | 250MHz | 2100mA | 0.030Ω | 15.5GHz |
| LQW15AN2N6B8Z□ | — | 2.6nH ±0.1nH | 100MHz | 30 | 250MHz | 1950mA | 0.035Ω | 14.5GHz |
| LQW15AN2N6C8Z□ | — | 2.6nH ±0.2nH | 100MHz | 30 | 250MHz | 1950mA | 0.035Ω | 14.5GHz |
| LQW15AN2N6D8Z□ | — | 2.6nH ±0.5nH | 100MHz | 30 | 250MHz | 1950mA | 0.035Ω | 14.5GHz |
| LQW15AN2N6G8Z□ | — | 2.6nH ±2% | 100MHz | 30 | 250MHz | 1950mA | 0.035Ω | 14.5GHz |
| LQW15AN2N7B8Z□ | — | 2.7nH ±0.1nH | 100MHz | 28 | 250MHz | 1500mA | 0.047Ω | 14.0GHz |
| LQW15AN2N7C8Z□ | — | 2.7nH ±0.2nH | 100MHz | 28 | 250MHz | 1500mA | 0.047Ω | 14.0GHz |
| LQW15AN2N7D8Z□ | — | 2.7nH ±0.5nH | 100MHz | 28 | 250MHz | 1500mA | 0.047Ω | 14.0GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN2N7G8Z□ | — | 2.7nH ±2% | 100MHz | 28 | 250MHz | 1500mA | 0.047Ω | 14.0GHz |
| LQW15AN2N8B8Z□ | — | 2.8nH ±0.1nH | 100MHz | 27 | 250MHz | 1500mA | 0.047Ω | 13.5GHz |
| LQW15AN2N8C8Z□ | — | 2.8nH ±0.2nH | 100MHz | 27 | 250MHz | 1500mA | 0.047Ω | 13.5GHz |
| LQW15AN2N8D8Z□ | — | 2.8nH ±0.5nH | 100MHz | 27 | 250MHz | 1500mA | 0.047Ω | 13.5GHz |
| LQW15AN2N8G8Z□ | — | 2.8nH ±2% | 100MHz | 27 | 250MHz | 1500mA | 0.047Ω | 13.5GHz |
| LQW15AN2N9B8Z□ | — | 2.9nH ±0.1nH | 100MHz | 25 | 250MHz | 1500mA | 0.047Ω | 12.5GHz |
| LQW15AN2N9C8Z□ | — | 2.9nH ±0.2nH | 100MHz | 25 | 250MHz | 1500mA | 0.047Ω | 12.5GHz |
| LQW15AN2N9D8Z□ | — | 2.9nH ±0.5nH | 100MHz | 25 | 250MHz | 1500mA | 0.047Ω | 12.5GHz |
| LQW15AN2N9G8Z□ | — | 2.9nH ±2% | 100MHz | 25 | 250MHz | 1500mA | 0.047Ω | 12.5GHz |
| LQW15AN3N0B8Z□ | — | 3.0nH ±0.1nH | 100MHz | 20 | 250MHz | 1350mA | 0.063Ω | 12.5GHz |
| LQW15AN3N0C8Z□ | — | 3.0nH ±0.2nH | 100MHz | 20 | 250MHz | 1350mA | 0.063Ω | 12.5GHz |
| LQW15AN3N0D8Z□ | — | 3.0nH ±0.5nH | 100MHz | 20 | 250MHz | 1350mA | 0.063Ω | 12.5GHz |
| LQW15AN3N0G8Z□ | — | 3.0nH ±2% | 100MHz | 20 | 250MHz | 1350mA | 0.063Ω | 12.5GHz |
| LQW15AN3N3B8Z□ | — | 3.3nH ±0.1nH | 100MHz | 30 | 250MHz | 2000mA | 0.030Ω | 14.0GHz |
| LQW15AN3N3C8Z□ | — | 3.3nH ±0.2nH | 100MHz | 30 | 250MHz | 2000mA | 0.030Ω | 14.0GHz |
| LQW15AN3N3D8Z□ | — | 3.3nH ±0.5nH | 100MHz | 30 | 250MHz | 2000mA | 0.030Ω | 14.0GHz |
| LQW15AN3N3G8Z□ | — | 3.3nH ±2% | 100MHz | 30 | 250MHz | 2000mA | 0.030Ω | 14.0GHz |
| LQW15AN3N4B8Z□ | — | 3.4nH ±0.1nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N4C8Z□ | — | 3.4nH ±0.2nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N4D8Z□ | — | 3.4nH ±0.5nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N4G8Z□ | — | 3.4nH ±2% | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N5B8Z□ | — | 3.5nH ±0.1nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N5C8Z□ | — | 3.5nH ±0.2nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N5D8Z□ | — | 3.5nH ±0.5nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N5G8Z□ | — | 3.5nH ±2% | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N6B8Z□ | — | 3.6nH ±0.1nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N6C8Z□ | — | 3.6nH ±0.2nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N6D8Z□ | — | 3.6nH ±0.5nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N6G8Z□ | — | 3.6nH ±2% | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N7B8Z□ | — | 3.7nH ±0.1nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N7C8Z□ | — | 3.7nH ±0.2nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N7D8Z□ | — | 3.7nH ±0.5nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N7G8Z□ | — | 3.7nH ±2% | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N8B8Z□ | — | 3.8nH ±0.1nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N8C8Z□ | — | 3.8nH ±0.2nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N8D8Z□ | — | 3.8nH ±0.5nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N8G8Z□ | — | 3.8nH ±2% | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N9B8Z□ | — | 3.9nH ±0.1nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N9C8Z□ | — | 3.9nH ±0.2nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N9D8Z□ | — | 3.9nH ±0.5nH | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN3N9G8Z□ | — | 3.9nH ±2% | 100MHz | 35 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN4N0B8Z□ | — | 4.0nH ±0.1nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN4N0C8Z□ | — | 4.0nH ±0.2nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN4N0D8Z□ | — | 4.0nH ±0.5nH | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN4N0G8Z□ | — | 4.0nH ±2% | 100MHz | 30 | 250MHz | 1950mA | 0.030Ω | 10.0GHz |
| LQW15AN4N1B8Z□ | — | 4.1nH ±0.1nH | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N1C8Z□ | — | 4.1nH ±0.2nH | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N1D8Z□ | — | 4.1nH ±0.5nH | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N1G8Z□ | — | 4.1nH ±2% | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N2B8Z□ | — | 4.2nH ±0.1nH | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N2C8Z□ | — | 4.2nH ±0.2nH | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN4N2D8Z□ | — | 4.2nH ±0.5nH | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N2G8Z□ | — | 4.2nH ±2% | 100MHz | 30 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N3B8Z□ | — | 4.3nH ±0.1nH | 100MHz | 32 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N3C8Z□ | — | 4.3nH ±0.2nH | 100MHz | 32 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N3D8Z□ | — | 4.3nH ±0.5nH | 100MHz | 32 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N3G8Z□ | — | 4.3nH ±2% | 100MHz | 32 | 250MHz | 1800mA | 0.044Ω | 9.6GHz |
| LQW15AN4N4B8Z□ | — | 4.4nH ±0.1nH | 100MHz | 34 | 250MHz | 1600mA | 0.052Ω | 9.6GHz |
| LQW15AN4N4C8Z□ | — | 4.4nH ±0.2nH | 100MHz | 34 | 250MHz | 1600mA | 0.052Ω | 9.6GHz |
| LQW15AN4N4D8Z□ | — | 4.4nH ±0.5nH | 100MHz | 34 | 250MHz | 1600mA | 0.052Ω | 9.6GHz |
| LQW15AN4N4G8Z□ | — | 4.4nH ±2% | 100MHz | 34 | 250MHz | 1600mA | 0.052Ω | 9.6GHz |
| LQW15AN4N5B8Z□ | — | 4.5nH ±0.1nH | 100MHz | 34 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N5C8Z□ | — | 4.5nH ±0.2nH | 100MHz | 34 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N5D8Z□ | — | 4.5nH ±0.5nH | 100MHz | 34 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N5G8Z□ | — | 4.5nH ±2% | 100MHz | 34 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N6B8Z□ | — | 4.6nH ±0.1nH | 100MHz | 32 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N6C8Z□ | — | 4.6nH ±0.2nH | 100MHz | 32 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N6D8Z□ | — | 4.6nH ±0.5nH | 100MHz | 32 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N6G8Z□ | — | 4.6nH ±2% | 100MHz | 32 | 250MHz | 1450mA | 0.060Ω | 9.6GHz |
| LQW15AN4N7B8Z□ | — | 4.7nH ±0.1nH | 100MHz | 31 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N7C8Z□ | — | 4.7nH ±0.2nH | 100MHz | 31 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N7D8Z□ | — | 4.7nH ±0.5nH | 100MHz | 31 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N7G8Z□ | — | 4.7nH ±2% | 100MHz | 31 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N8B8Z□ | — | 4.8nH ±0.1nH | 100MHz | 30 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N8C8Z□ | — | 4.8nH ±0.2nH | 100MHz | 30 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N8D8Z□ | — | 4.8nH ±0.5nH | 100MHz | 30 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N8G8Z□ | — | 4.8nH ±2% | 100MHz | 30 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N9B8Z□ | — | 4.9nH ±0.1nH | 100MHz | 27 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N9C8Z□ | — | 4.9nH ±0.2nH | 100MHz | 27 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N9D8Z□ | — | 4.9nH ±0.5nH | 100MHz | 27 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN4N9G8Z□ | — | 4.9nH ±2% | 100MHz | 27 | 250MHz | 1200mA | 0.071Ω | 8.0GHz |
| LQW15AN5N0B8Z□ | — | 5.0nH ±0.1nH | 100MHz | 32 | 250MHz | 1770mA | 0.040Ω | 10.0GHz |
| LQW15AN5N0C8Z□ | — | 5.0nH ±0.2nH | 100MHz | 32 | 250MHz | 1770mA | 0.040Ω | 10.0GHz |
| LQW15AN5N0D8Z□ | — | 5.0nH ±0.5nH | 100MHz | 32 | 250MHz | 1770mA | 0.040Ω | 10.0GHz |
| LQW15AN5N0G8Z□ | — | 5.0nH ±2% | 100MHz | 32 | 250MHz | 1770mA | 0.040Ω | 10.0GHz |
| LQW15AN5N1B8Z□ | — | 5.1nH ±0.1nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N1C8Z□ | — | 5.1nH ±0.2nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N1D8Z□ | — | 5.1nH ±0.5nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N1G8Z□ | — | 5.1nH ±2% | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N2B8Z□ | — | 5.2nH ±0.1nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N2C8Z□ | — | 5.2nH ±0.2nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N2D8Z□ | — | 5.2nH ±0.5nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N2G8Z□ | — | 5.2nH ±2% | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N3B8Z□ | — | 5.3nH ±0.1nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N3C8Z□ | — | 5.3nH ±0.2nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N3D8Z□ | — | 5.3nH ±0.5nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N3G8Z□ | — | 5.3nH ±2% | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N4B8Z□ | — | 5.4nH ±0.1nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N4C8Z□ | — | 5.4nH ±0.2nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N4D8Z□ | — | 5.4nH ±0.5nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N4G8Z□ | — | 5.4nH ±2% | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N5B8Z□ | — | 5.5nH ±0.1nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |

Operating temp.range (Self-temp. rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F.: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN5N5C8Z□ | — | 5.5nH ±0.2nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N5D8Z□ | — | 5.5nH ±0.5nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N5G8Z□ | — | 5.5nH ±2% | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N6B8Z□ | — | 5.6nH ±0.1nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N6C8Z□ | — | 5.6nH ±0.2nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N6D8Z□ | — | 5.6nH ±0.5nH | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N6G8Z□ | — | 5.6nH ±2% | 100MHz | 35 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N7B8Z□ | — | 5.7nH ±0.1nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N7C8Z□ | — | 5.7nH ±0.2nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N7D8Z□ | — | 5.7nH ±0.5nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N7G8Z□ | — | 5.7nH ±2% | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N8B8Z□ | — | 5.8nH ±0.1nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N8C8Z□ | — | 5.8nH ±0.2nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N8D8Z□ | — | 5.8nH ±0.5nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N8G8Z□ | — | 5.8nH ±2% | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N9B8Z□ | — | 5.9nH ±0.1nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N9C8Z□ | — | 5.9nH ±0.2nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N9D8Z□ | — | 5.9nH ±0.5nH | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN5N9G8Z□ | — | 5.9nH ±2% | 100MHz | 30 | 250MHz | 1770mA | 0.040Ω | 8.0GHz |
| LQW15AN6N0B8Z□ | — | 6.0nH ±0.1nH | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N0C8Z□ | — | 6.0nH ±0.2nH | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N0D8Z□ | — | 6.0nH ±0.5nH | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N0G8Z□ | — | 6.0nH ±2% | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N1B8Z□ | — | 6.1nH ±0.1nH | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N1C8Z□ | — | 6.1nH ±0.2nH | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N1D8Z□ | — | 6.1nH ±0.5nH | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N1G8Z□ | — | 6.1nH ±2% | 100MHz | 32 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N2B8Z□ | — | 6.2nH ±0.1nH | 100MHz | 33 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N2C8Z□ | — | 6.2nH ±0.2nH | 100MHz | 33 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N2D8Z□ | — | 6.2nH ±0.5nH | 100MHz | 33 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N2G8Z□ | — | 6.2nH ±2% | 100MHz | 33 | 250MHz | 1600mA | 0.056Ω | 8.0GHz |
| LQW15AN6N3G8Z□ | — | 6.3nH ±2% | 100MHz | 32 | 250MHz | 1600mA | 0.057Ω | 7.8GHz |
| LQW15AN6N3J8Z□ | — | 6.3nH ±5% | 100MHz | 32 | 250MHz | 1600mA | 0.057Ω | 7.8GHz |
| LQW15AN6N4G8Z□ | — | 6.4nH ±2% | 100MHz | 33 | 250MHz | 1380mA | 0.065Ω | 7.0GHz |
| LQW15AN6N4J8Z□ | — | 6.4nH ±5% | 100MHz | 33 | 250MHz | 1380mA | 0.065Ω | 7.0GHz |
| LQW15AN6N5G8Z□ | — | 6.5nH ±2% | 100MHz | 32 | 250MHz | 1380mA | 0.065Ω | 7.0GHz |
| LQW15AN6N5J8Z□ | — | 6.5nH ±5% | 100MHz | 32 | 250MHz | 1380mA | 0.065Ω | 7.0GHz |
| LQW15AN6N6G8Z□ | — | 6.6nH ±2% | 100MHz | 30 | 250MHz | 1280mA | 0.078Ω | 7.0GHz |
| LQW15AN6N6J8Z□ | — | 6.6nH ±5% | 100MHz | 30 | 250MHz | 1280mA | 0.078Ω | 7.0GHz |
| LQW15AN6N7G8Z□ | — | 6.7nH ±2% | 100MHz | 30 | 250MHz | 1280mA | 0.078Ω | 7.0GHz |
| LQW15AN6N7J8Z□ | — | 6.7nH ±5% | 100MHz | 30 | 250MHz | 1280mA | 0.078Ω | 7.0GHz |
| LQW15AN6N8G8Z□ | — | 6.8nH ±2% | 100MHz | 30 | 250MHz | 1450mA | 0.068Ω | 7.0GHz |
| LQW15AN6N8J8Z□ | — | 6.8nH ±5% | 100MHz | 30 | 250MHz | 1450mA | 0.068Ω | 7.0GHz |
| LQW15AN6N9G8Z□ | — | 6.9nH ±2% | 100MHz | 32 | 250MHz | 1420mA | 0.069Ω | 8.5GHz |
| LQW15AN6N9J8Z□ | — | 6.9nH ±5% | 100MHz | 32 | 250MHz | 1420mA | 0.069Ω | 8.5GHz |
| LQW15AN7N0G8Z□ | — | 7.0nH ±2% | 100MHz | 33 | 250MHz | 1420mA | 0.069Ω | 8.0GHz |
| LQW15AN7N0J8Z□ | — | 7.0nH ±5% | 100MHz | 33 | 250MHz | 1420mA | 0.069Ω | 8.0GHz |
| LQW15AN7N1G8Z□ | — | 7.1nH ±2% | 100MHz | 32 | 250MHz | 1420mA | 0.069Ω | 7.0GHz |
| LQW15AN7N1J8Z□ | — | 7.1nH ±5% | 100MHz | 32 | 250MHz | 1420mA | 0.069Ω | 7.0GHz |
| LQW15AN7N2G8Z□ | — | 7.2nH ±2% | 100MHz | 32 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N2J8Z□ | — | 7.2nH ±5% | 100MHz | 32 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Continued on the following page. ↗

Inductors for Power Lines

Inductors for General Circuits

RF Inductors

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN7N3G8Z□ | — | 7.3nH ±2% | 100MHz | 32 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N3J8Z□ | — | 7.3nH ±5% | 100MHz | 32 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N4G8Z□ | — | 7.4nH ±2% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N4J8Z□ | — | 7.4nH ±5% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N5G8Z□ | — | 7.5nH ±2% | 100MHz | 35 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N5J8Z□ | — | 7.5nH ±5% | 100MHz | 35 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N6G8Z□ | — | 7.6nH ±2% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N6J8Z□ | — | 7.6nH ±5% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N7G8Z□ | — | 7.7nH ±2% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N7J8Z□ | — | 7.7nH ±5% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N8G8Z□ | — | 7.8nH ±2% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N8J8Z□ | — | 7.8nH ±5% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N9G8Z□ | — | 7.9nH ±2% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN7N9J8Z□ | — | 7.9nH ±5% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN8N0G8Z□ | — | 8.0nH ±2% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN8N0J8Z□ | — | 8.0nH ±5% | 100MHz | 30 | 250MHz | 1700mA | 0.050Ω | 7.0GHz |
| LQW15AN8N1G8Z□ | — | 8.1nH ±2% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N1J8Z□ | — | 8.1nH ±5% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N2G8Z□ | — | 8.2nH ±2% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N2J8Z□ | — | 8.2nH ±5% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N3G8Z□ | — | 8.3nH ±2% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N3J8Z□ | — | 8.3nH ±5% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N4G8Z□ | — | 8.4nH ±2% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N4J8Z□ | — | 8.4nH ±5% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N5G8Z□ | — | 8.5nH ±2% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N5J8Z□ | — | 8.5nH ±5% | 100MHz | 32 | 250MHz | 1500mA | 0.069Ω | 6.5GHz |
| LQW15AN8N6G8Z□ | — | 8.6nH ±2% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N6J8Z□ | — | 8.6nH ±5% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N7G8Z□ | — | 8.7nH ±2% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N7J8Z□ | — | 8.7nH ±5% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N8G8Z□ | — | 8.8nH ±2% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N8J8Z□ | — | 8.8nH ±5% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N9G8Z□ | — | 8.9nH ±2% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN8N9J8Z□ | — | 8.9nH ±5% | 100MHz | 31 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN9N0G8Z□ | — | 9.0nH ±2% | 100MHz | 30 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN9N0J8Z□ | — | 9.0nH ±5% | 100MHz | 30 | 250MHz | 1420mA | 0.070Ω | 6.5GHz |
| LQW15AN9N1G8Z□ | — | 9.1nH ±2% | 100MHz | 32 | 250MHz | 1400mA | 0.080Ω | 6.5GHz |
| LQW15AN9N1J8Z□ | — | 9.1nH ±5% | 100MHz | 32 | 250MHz | 1400mA | 0.080Ω | 6.5GHz |
| LQW15AN9N2G8Z□ | — | 9.2nH ±2% | 100MHz | 32 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N2J8Z□ | — | 9.2nH ±5% | 100MHz | 32 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N3G8Z□ | — | 9.3nH ±2% | 100MHz | 34 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N3J8Z□ | — | 9.3nH ±5% | 100MHz | 34 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N4G8Z□ | — | 9.4nH ±2% | 100MHz | 33 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N4J8Z□ | — | 9.4nH ±5% | 100MHz | 33 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N5G8Z□ | — | 9.5nH ±2% | 100MHz | 32 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N5J8Z□ | — | 9.5nH ±5% | 100MHz | 32 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N6G8Z□ | — | 9.6nH ±2% | 100MHz | 33 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N6J8Z□ | — | 9.6nH ±5% | 100MHz | 33 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N7G8Z□ | — | 9.7nH ±2% | 100MHz | 33 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N7J8Z□ | — | 9.7nH ±5% | 100MHz | 33 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N8G8Z□ | — | 9.8nH ±2% | 100MHz | 34 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN9N8J8Z□ | — | 9.8nH ±5% | 100MHz | 34 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N9G8Z□ | — | 9.9nH ±2% | 100MHz | 32 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN9N9J8Z□ | — | 9.9nH ±5% | 100MHz | 32 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN10NG8Z□ | — | 10nH ±2% | 100MHz | 31 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN10NJ8Z□ | — | 10nH ±5% | 100MHz | 31 | 250MHz | 1400mA | 0.081Ω | 6.0GHz |
| LQW15AN11NG8Z□ | — | 11nH ±2% | 100MHz | 32 | 250MHz | 1400mA | 0.083Ω | 6.2GHz |
| LQW15AN11NJ8Z□ | — | 11nH ±5% | 100MHz | 32 | 250MHz | 1400mA | 0.083Ω | 6.2GHz |
| LQW15AN12NG8Z□ | — | 12nH ±2% | 100MHz | 30 | 250MHz | 1240mA | 0.093Ω | 5.2GHz |
| LQW15AN12NJ8Z□ | — | 12nH ±5% | 100MHz | 30 | 250MHz | 1240mA | 0.093Ω | 5.2GHz |
| LQW15AN13NG8Z□ | — | 13nH ±2% | 100MHz | 30 | 250MHz | 1240mA | 0.093Ω | 5.2GHz |
| LQW15AN13NJ8Z□ | — | 13nH ±5% | 100MHz | 30 | 250MHz | 1240mA | 0.093Ω | 5.2GHz |
| LQW15AN14NG8Z□ | — | 14nH ±2% | 100MHz | 31 | 250MHz | 1150mA | 0.111Ω | 5.2GHz |
| LQW15AN14NJ8Z□ | — | 14nH ±5% | 100MHz | 31 | 250MHz | 1150mA | 0.111Ω | 5.2GHz |
| LQW15AN15NG8Z□ | — | 15nH ±2% | 100MHz | 31 | 250MHz | 1150mA | 0.114Ω | 5.5GHz |
| LQW15AN15NJ8Z□ | — | 15nH ±5% | 100MHz | 31 | 250MHz | 1150mA | 0.114Ω | 5.5GHz |
| LQW15AN16NG8Z□ | — | 16nH ±2% | 100MHz | 31 | 250MHz | 1000mA | 0.126Ω | 5.0GHz |
| LQW15AN16NJ8Z□ | — | 16nH ±5% | 100MHz | 31 | 250MHz | 1000mA | 0.126Ω | 5.0GHz |
| LQW15AN17NG8Z□ | — | 17nH ±2% | 100MHz | 30 | 250MHz | 1000mA | 0.126Ω | 5.0GHz |
| LQW15AN17NJ8Z□ | — | 17nH ±5% | 100MHz | 30 | 250MHz | 1000mA | 0.126Ω | 5.0GHz |
| LQW15AN18NG8Z□ | — | 18nH ±2% | 100MHz | 30 | 250MHz | 1050mA | 0.130Ω | 5.2GHz |
| LQW15AN18NJ8Z□ | — | 18nH ±5% | 100MHz | 30 | 250MHz | 1050mA | 0.130Ω | 5.2GHz |
| LQW15AN19NG8Z□ | — | 19nH ±2% | 100MHz | 30 | 250MHz | 920mA | 0.156Ω | 5.0GHz |
| LQW15AN19NJ8Z□ | — | 19nH ±5% | 100MHz | 30 | 250MHz | 920mA | 0.156Ω | 5.0GHz |
| LQW15AN20NG8Z□ | — | 20nH ±2% | 100MHz | 30 | 250MHz | 800mA | 0.186Ω | 4.5GHz |
| LQW15AN20NJ8Z□ | — | 20nH ±5% | 100MHz | 30 | 250MHz | 800mA | 0.186Ω | 4.5GHz |
| LQW15AN21NG8Z□ | — | 21nH ±2% | 100MHz | 30 | 250MHz | 780mA | 0.202Ω | 4.5GHz |
| LQW15AN21NJ8Z□ | — | 21nH ±5% | 100MHz | 30 | 250MHz | 780mA | 0.202Ω | 4.5GHz |
| LQW15AN22NG8Z□ | — | 22nH ±2% | 100MHz | 30 | 250MHz | 780mA | 0.202Ω | 4.5GHz |
| LQW15AN22NJ8Z□ | — | 22nH ±5% | 100MHz | 30 | 250MHz | 780mA | 0.202Ω | 4.5GHz |
| LQW15AN23NG8Z□ | — | 23nH ±2% | 100MHz | 29 | 250MHz | 760mA | 0.201Ω | 4.5GHz |
| LQW15AN23NJ8Z□ | — | 23nH ±5% | 100MHz | 29 | 250MHz | 760mA | 0.201Ω | 4.5GHz |
| LQW15AN24NG8Z□ | — | 24nH ±2% | 100MHz | 31 | 250MHz | 770mA | 0.212Ω | 4.0GHz |
| LQW15AN24NJ8Z□ | — | 24nH ±5% | 100MHz | 31 | 250MHz | 770mA | 0.212Ω | 4.0GHz |
| LQW15AN25NG8Z□ | — | 25nH ±2% | 100MHz | 31 | 250MHz | 750mA | 0.221Ω | 4.1GHz |
| LQW15AN25NJ8Z□ | — | 25nH ±5% | 100MHz | 31 | 250MHz | 750mA | 0.221Ω | 4.1GHz |
| LQW15AN26NG8Z□ | — | 26nH ±2% | 100MHz | 29 | 250MHz | 720mA | 0.282Ω | 4.1GHz |
| LQW15AN26NJ8Z□ | — | 26nH ±5% | 100MHz | 29 | 250MHz | 720mA | 0.282Ω | 4.1GHz |
| LQW15AN27NG8Z□ | — | 27nH ±2% | 100MHz | 30 | 250MHz | 680mA | 0.288Ω | 4.0GHz |
| LQW15AN27NJ8Z□ | — | 27nH ±5% | 100MHz | 30 | 250MHz | 680mA | 0.288Ω | 4.0GHz |
| LQW15AN30NG8Z□ | — | 30nH ±2% | 100MHz | 30 | 250MHz | 660mA | 0.309Ω | 3.8GHz |
| LQW15AN30NJ8Z□ | — | 30nH ±5% | 100MHz | 30 | 250MHz | 660mA | 0.309Ω | 3.8GHz |
| LQW15AN33NG8Z□ | — | 33nH ±2% | 100MHz | 30 | 250MHz | 620mA | 0.336Ω | 3.6GHz |
| LQW15AN33NJ8Z□ | — | 33nH ±5% | 100MHz | 30 | 250MHz | 620mA | 0.336Ω | 3.6GHz |
| LQW15AN36NG8Z□ | — | 36nH ±2% | 100MHz | 30 | 250MHz | 540mA | 0.431Ω | 3.5GHz |
| LQW15AN36NJ8Z□ | — | 36nH ±5% | 100MHz | 30 | 250MHz | 540mA | 0.431Ω | 3.5GHz |
| LQW15AN39NG8Z□ | — | 39nH ±2% | 100MHz | 28 | 250MHz | 530mA | 0.456Ω | 3.4GHz |
| LQW15AN39NJ8Z□ | — | 39nH ±5% | 100MHz | 28 | 250MHz | 530mA | 0.456Ω | 3.4GHz |
| LQW15AN43NG8Z□ | — | 43nH ±2% | 100MHz | 30 | 250MHz | 515mA | 0.516Ω | 3.4GHz |
| LQW15AN43NJ8Z□ | — | 43nH ±5% | 100MHz | 30 | 250MHz | 515mA | 0.516Ω | 3.4GHz |
| LQW15AN47NG8Z□ | — | 47nH ±2% | 100MHz | 25 | 200MHz | 440mA | 0.648Ω | 3.2GHz |
| LQW15AN47NJ8Z□ | — | 47nH ±5% | 100MHz | 25 | 200MHz | 440mA | 0.648Ω | 3.2GHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Continued on the following page. ↗

Inductors for Power Lines

Inductors for General Circuits

RF Inductors

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW15AN51NG8Z□ | — | 51nH ±2% | 100MHz | 25 | 200MHz | 415mA | 0.696Ω | 2.9GHz |
| LQW15AN51NJ8Z□ | — | 51nH ±5% | 100MHz | 25 | 200MHz | 415mA | 0.696Ω | 2.9GHz |
| LQW15AN53NG8Z□ | — | 53nH ±2% | 100MHz | 25 | 200MHz | 415mA | 0.696Ω | 2.9GHz |
| LQW15AN53NJ8Z□ | — | 53nH ±5% | 100MHz | 25 | 200MHz | 415mA | 0.696Ω | 2.9GHz |
| LQW15AN56NG8Z□ | — | 56nH ±2% | 100MHz | 25 | 200MHz | 340mA | 0.996Ω | 2.9GHz |
| LQW15AN56NJ8Z□ | — | 56nH ±5% | 100MHz | 25 | 200MHz | 340mA | 0.996Ω | 2.9GHz |
| LQW15AN68NG8Z□ | — | 68nH ±2% | 100MHz | 25 | 200MHz | 320mA | 1.128Ω | 2.5GHz |
| LQW15AN68NJ8Z□ | — | 68nH ±5% | 100MHz | 25 | 200MHz | 320mA | 1.128Ω | 2.5GHz |
| LQW15AN75NG8Z□ | — | 75nH ±2% | 100MHz | 25 | 200MHz | 320mA | 1.224Ω | 2.4GHz |
| LQW15AN75NJ8Z□ | — | 75nH ±5% | 100MHz | 25 | 200MHz | 320mA | 1.224Ω | 2.4GHz |


Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15A_80 series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Inductance-Frequency Characteristics (Typ.)

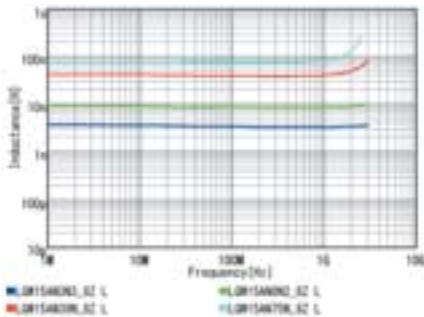

Q-Frequency Characteristics (Typ.)

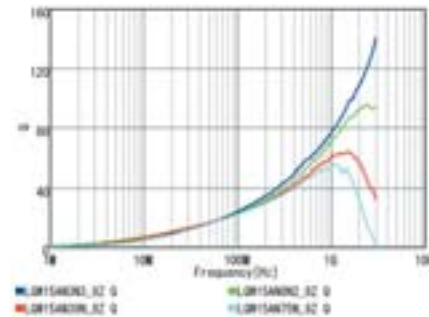


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

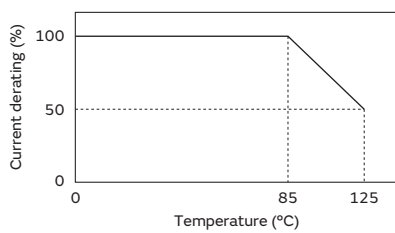

RF Inductors

LQW18AN_0Z Series 0603 (1608) inch (mm)

Appearance/Dimensions

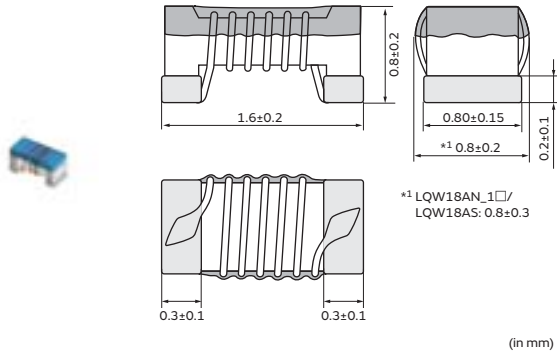

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| J | ø330mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AN2N2D0Z□ | — | 2.2nH ±0.5nH | 100MHz | 16 | 250MHz | 700mA | 0.042Ω | 6000MHz |
| LQW18AN3N6C0Z□ | — | 3.6nH ±0.2nH | 100MHz | 25 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN3N6D0Z□ | — | 3.6nH ±0.5nH | 100MHz | 25 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN3N9C0Z□ | — | 3.9nH ±0.2nH | 100MHz | 35 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN3N9D0Z□ | — | 3.9nH ±0.5nH | 100MHz | 35 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN4N3C0Z□ | — | 4.3nH ±0.2nH | 100MHz | 35 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN4N3D0Z□ | — | 4.3nH ±0.5nH | 100MHz | 35 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN4N7D0Z□ | — | 4.7nH ±0.5nH | 100MHz | 35 | 250MHz | 850mA | 0.059Ω | 6000MHz |
| LQW18AN5N6C0Z□ | — | 5.6nH ±0.2nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN5N6D0Z□ | — | 5.6nH ±0.5nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN6N2C0Z□ | — | 6.2nH ±0.2nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN6N2D0Z□ | — | 6.2nH ±0.5nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN6N8C0Z□ | — | 6.8nH ±0.2nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN6N8D0Z□ | — | 6.8nH ±0.5nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN7N5C0Z□ | — | 7.5nH ±0.2nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN7N5D0Z□ | — | 7.5nH ±0.5nH | 100MHz | 35 | 250MHz | 750mA | 0.082Ω | 6000MHz |
| LQW18AN8N2C0Z□ | — | 8.2nH ±0.2nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN8N2D0Z□ | — | 8.2nH ±0.5nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN8N7C0Z□ | — | 8.7nH ±0.2nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN8N7D0Z□ | — | 8.7nH ±0.5nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN9N1C0Z□ | — | 9.1nH ±0.2nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN9N1D0Z□ | — | 9.1nH ±0.5nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN9N5D0Z□ | — | 9.5nH ±0.5nH | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN10NG0Z□ | — | 10nH ±2% | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN10NJ0Z□ | — | 10nH ±5% | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN11NG0Z□ | — | 11nH ±2% | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN11NJ0Z□ | — | 11nH ±5% | 100MHz | 35 | 250MHz | 650mA | 0.11Ω | 6000MHz |
| LQW18AN12NG0Z□ | — | 12nH ±2% | 100MHz | 35 | 250MHz | 600mA | 0.13Ω | 6000MHz |
| LQW18AN12NJ0Z□ | — | 12nH ±5% | 100MHz | 35 | 250MHz | 600mA | 0.13Ω | 6000MHz |
| LQW18AN13NG0Z□ | — | 13nH ±2% | 100MHz | 35 | 250MHz | 600mA | 0.13Ω | 6000MHz |
| LQW18AN13NJ0Z□ | — | 13nH ±5% | 100MHz | 35 | 250MHz | 600mA | 0.13Ω | 6000MHz |
| LQW18AN15NG0Z□ | — | 15nH ±2% | 100MHz | 40 | 250MHz | 600mA | 0.13Ω | 6000MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AN15NJ0Z□ | — | 15nH ±5% | 100MHz | 40 | 250MHz | 600mA | 0.13Ω | 6000MHz |
| LQW18AN16NG0Z□ | — | 16nH ±2% | 100MHz | 40 | 250MHz | 550mA | 0.16Ω | 5500MHz |
| LQW18AN16NJ0Z□ | — | 16nH ±5% | 100MHz | 40 | 250MHz | 550mA | 0.16Ω | 5500MHz |
| LQW18AN18NG0Z□ | — | 18nH ±2% | 100MHz | 40 | 250MHz | 550mA | 0.16Ω | 5500MHz |
| LQW18AN18NJ0Z□ | — | 18nH ±5% | 100MHz | 40 | 250MHz | 550mA | 0.16Ω | 5500MHz |
| LQW18AN20NG0Z□ | — | 20nH ±2% | 100MHz | 40 | 250MHz | 550mA | 0.16Ω | 4900MHz |
| LQW18AN20NJ0Z□ | — | 20nH ±5% | 100MHz | 40 | 250MHz | 550mA | 0.16Ω | 4900MHz |
| LQW18AN22NG0Z□ | — | 22nH ±2% | 100MHz | 40 | 250MHz | 500mA | 0.17Ω | 4600MHz |
| LQW18AN22NJ0Z□ | — | 22nH ±5% | 100MHz | 40 | 250MHz | 500mA | 0.17Ω | 4600MHz |
| LQW18AN24NG0Z□ | — | 24nH ±2% | 100MHz | 40 | 250MHz | 500mA | 0.21Ω | 3800MHz |
| LQW18AN24NJ0Z□ | — | 24nH ±5% | 100MHz | 40 | 250MHz | 500mA | 0.21Ω | 3800MHz |
| LQW18AN27NG0Z□ | — | 27nH ±2% | 100MHz | 40 | 250MHz | 440mA | 0.21Ω | 3700MHz |
| LQW18AN27NJ0Z□ | — | 27nH ±5% | 100MHz | 40 | 250MHz | 440mA | 0.21Ω | 3700MHz |
| LQW18AN30NG0Z□ | — | 30nH ±2% | 100MHz | 40 | 250MHz | 420mA | 0.23Ω | 3300MHz |
| LQW18AN30NJ0Z□ | — | 30nH ±5% | 100MHz | 40 | 250MHz | 420mA | 0.23Ω | 3300MHz |
| LQW18AN33NG0Z□ | — | 33nH ±2% | 100MHz | 40 | 250MHz | 420mA | 0.23Ω | 3200MHz |
| LQW18AN33NJ0Z□ | — | 33nH ±5% | 100MHz | 40 | 250MHz | 420mA | 0.23Ω | 3200MHz |
| LQW18AN36NG0Z□ | — | 36nH ±2% | 100MHz | 40 | 250MHz | 400mA | 0.26Ω | 2900MHz |
| LQW18AN36NJ0Z□ | — | 36nH ±5% | 100MHz | 40 | 250MHz | 400mA | 0.26Ω | 2900MHz |
| LQW18AN39NG0Z□ | — | 39nH ±2% | 100MHz | 40 | 250MHz | 400mA | 0.26Ω | 2800MHz |
| LQW18AN39NJ0Z□ | — | 39nH ±5% | 100MHz | 40 | 250MHz | 400mA | 0.26Ω | 2800MHz |
| LQW18AN43NG0Z□ | — | 43nH ±2% | 100MHz | 40 | 200MHz | 380mA | 0.29Ω | 2700MHz |
| LQW18AN43NJ0Z□ | — | 43nH ±5% | 100MHz | 40 | 200MHz | 380mA | 0.29Ω | 2700MHz |
| LQW18AN47NG0Z□ | — | 47nH ±2% | 100MHz | 38 | 200MHz | 380mA | 0.29Ω | 2600MHz |
| LQW18AN47NJ0Z□ | — | 47nH ±5% | 100MHz | 38 | 200MHz | 380mA | 0.29Ω | 2600MHz |
| LQW18AN51NG0Z□ | — | 51nH ±2% | 100MHz | 38 | 200MHz | 370mA | 0.33Ω | 2500MHz |
| LQW18AN51NJ0Z□ | — | 51nH ±5% | 100MHz | 38 | 200MHz | 370mA | 0.33Ω | 2500MHz |
| LQW18AN56NG0Z□ | — | 56nH ±2% | 100MHz | 38 | 200MHz | 360mA | 0.35Ω | 2400MHz |
| LQW18AN56NJ0Z□ | — | 56nH ±5% | 100MHz | 38 | 200MHz | 360mA | 0.35Ω | 2400MHz |
| LQW18AN62NG0Z□ | — | 62nH ±2% | 100MHz | 38 | 200MHz | 280mA | 0.51Ω | 2300MHz |
| LQW18AN62NJ0Z□ | — | 62nH ±5% | 100MHz | 38 | 200MHz | 280mA | 0.51Ω | 2300MHz |
| LQW18AN68NG0Z□ | — | 68nH ±2% | 100MHz | 38 | 200MHz | 340mA | 0.38Ω | 2200MHz |
| LQW18AN68NJ0Z□ | — | 68nH ±5% | 100MHz | 38 | 200MHz | 340mA | 0.38Ω | 2200MHz |
| LQW18AN72NG0Z□ | — | 72nH ±2% | 100MHz | 34 | 150MHz | 270mA | 0.56Ω | 2100MHz |
| LQW18AN72NJ0Z□ | — | 72nH ±5% | 100MHz | 34 | 150MHz | 270mA | 0.56Ω | 2100MHz |
| LQW18AN75NG0Z□ | — | 75nH ±2% | 100MHz | 34 | 150MHz | 270mA | 0.56Ω | 2050MHz |
| LQW18AN75NJ0Z□ | — | 75nH ±5% | 100MHz | 34 | 150MHz | 270mA | 0.56Ω | 2050MHz |
| LQW18AN82NG0Z□ | — | 82nH ±2% | 100MHz | 34 | 150MHz | 250mA | 0.60Ω | 2000MHz |
| LQW18AN82NJ0Z□ | — | 82nH ±5% | 100MHz | 34 | 150MHz | 250mA | 0.60Ω | 2000MHz |
| LQW18AN91NG0Z□ | — | 91nH ±2% | 100MHz | 34 | 150MHz | 230mA | 0.64Ω | 1900MHz |
| LQW18AN91NJ0Z□ | — | 91nH ±5% | 100MHz | 34 | 150MHz | 230mA | 0.64Ω | 1900MHz |
| LQW18ANR10G0Z□ | — | 100nH ±2% | 100MHz | 34 | 150MHz | 220mA | 0.68Ω | 1800MHz |
| LQW18ANR10J0Z□ | — | 100nH ±5% | 100MHz | 34 | 150MHz | 220mA | 0.68Ω | 1800MHz |
| LQW18ANR11G0Z□ | — | 110nH ±2% | 100MHz | 32 | 150MHz | 200mA | 1.2Ω | 1700MHz |
| LQW18ANR11J0Z□ | — | 110nH ±5% | 100MHz | 32 | 150MHz | 200mA | 1.2Ω | 1700MHz |
| LQW18ANR12G0Z□ | — | 120nH ±2% | 100MHz | 32 | 150MHz | 180mA | 1.3Ω | 1600MHz |
| LQW18ANR12J0Z□ | — | 120nH ±5% | 100MHz | 32 | 150MHz | 180mA | 1.3Ω | 1600MHz |
| LQW18ANR13G0Z□ | — | 130nH ±2% | 100MHz | 32 | 150MHz | 170mA | 1.4Ω | 1450MHz |
| LQW18ANR13J0Z□ | — | 130nH ±5% | 100MHz | 32 | 150MHz | 170mA | 1.4Ω | 1450MHz |
| LQW18ANR15G0Z□ | — | 150nH ±2% | 100MHz | 32 | 150MHz | 160mA | 1.5Ω | 1400MHz |
| LQW18ANR15J0Z□ | — | 150nH ±5% | 100MHz | 32 | 150MHz | 160mA | 1.5Ω | 1400MHz |
| LQW18ANR16G0Z□ | — | 160nH ±2% | 100MHz | 32 | 150MHz | 150mA | 2.1Ω | 1350MHz |
| LQW18ANR16J0Z□ | — | 160nH ±5% | 100MHz | 32 | 150MHz | 150mA | 2.1Ω | 1350MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘


| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18ANR18G0Z□ | — | 180nH ±2% | 100MHz | 25 | 100MHz | 140mA | 2.2Ω | 1300MHz |
| LQW18ANR18J0Z□ | — | 180nH ±5% | 100MHz | 25 | 100MHz | 140mA | 2.2Ω | 1300MHz |
| LQW18ANR20G0Z□ | — | 200nH ±2% | 100MHz | 25 | 100MHz | 120mA | 2.4Ω | 1250MHz |
| LQW18ANR20J0Z□ | — | 200nH ±5% | 100MHz | 25 | 100MHz | 120mA | 2.4Ω | 1250MHz |
| LQW18ANR22G0Z□ | — | 220nH ±2% | 100MHz | 25 | 100MHz | 120mA | 2.5Ω | 1200MHz |
| LQW18ANR22J0Z□ | — | 220nH ±5% | 100MHz | 25 | 100MHz | 120mA | 2.5Ω | 1200MHz |
| LQW18ANR27G0Z□ | — | 270nH ±2% | 100MHz | 30 | 100MHz | 110mA | 3.4Ω | 960MHz |
| LQW18ANR27J0Z□ | — | 270nH ±5% | 100MHz | 30 | 100MHz | 110mA | 3.4Ω | 960MHz |
| LQW18ANR33G0Z□ | — | 330nH ±2% | 100MHz | 30 | 100MHz | 85mA | 5.5Ω | 800MHz |
| LQW18ANR33J0Z□ | — | 330nH ±5% | 100MHz | 30 | 100MHz | 85mA | 5.5Ω | 800MHz |
| LQW18ANR39G0Z□ | — | 390nH ±2% | 100MHz | 30 | 100MHz | 80mA | 6.2Ω | 800MHz |
| LQW18ANR39J0Z□ | — | 390nH ±5% | 100MHz | 30 | 100MHz | 80mA | 6.2Ω | 800MHz |
| LQW18ANR47G0Z□ | — | 470nH ±2% | 100MHz | 30 | 100MHz | 75mA | 7.0Ω | 700MHz |
| LQW18ANR47J0Z□ | — | 470nH ±5% | 100MHz | 30 | 100MHz | 75mA | 7.0Ω | 700MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

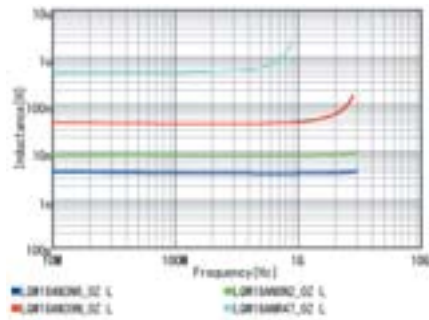


Q-Frequency Characteristics (Typ.)

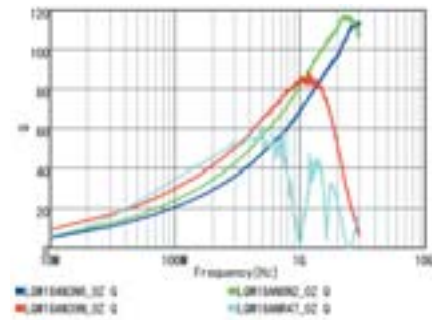

RF Inductors

LQW18AN_1Z Series 0603 (1608) inch (mm)

Appearance/Dimensions

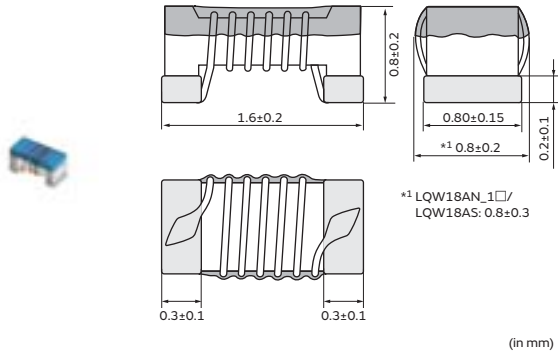

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| J | ø330mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)


| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AN2N2D1Z□ | — | 2.2nH ±0.5nH | 100MHz | 25 | 250MHz | 1400mA | 0.018Ω | 1800MHz |
| LQW18AN3N9C1Z□ | — | 3.9nH ±0.2nH | 100MHz | 38 | 250MHz | 1000mA | 0.032Ω | 1100MHz |
| LQW18AN3N9D1Z□ | — | 3.9nH ±0.5nH | 100MHz | 38 | 250MHz | 1000mA | 0.032Ω | 1100MHz |
| LQW18AN5N6D1Z□ | — | 5.6nH ±0.5nH | 100MHz | 38 | 250MHz | 900mA | 0.045Ω | 1000MHz |
| LQW18AN6N8C1Z□ | — | 6.8nH ±0.2nH | 100MHz | 38 | 250MHz | 900mA | 0.045Ω | 7000MHz |
| LQW18AN6N8D1Z□ | — | 6.8nH ±0.5nH | 100MHz | 38 | 250MHz | 900mA | 0.045Ω | 7000MHz |
| LQW18AN8N2D1Z□ | — | 8.2nH ±0.5nH | 100MHz | 38 | 250MHz | 800mA | 0.058Ω | 7000MHz |
| LQW18AN10NG1Z□ | — | 10nH ±2% | 100MHz | 38 | 250MHz | 800mA | 0.058Ω | 5000MHz |
| LQW18AN10NJ1Z□ | — | 10nH ±5% | 100MHz | 38 | 250MHz | 800mA | 0.058Ω | 5000MHz |
| LQW18AN12NG1Z□ | — | 12nH ±2% | 100MHz | 38 | 250MHz | 750mA | 0.071Ω | 5000MHz |
| LQW18AN12NJ1Z□ | — | 12nH ±5% | 100MHz | 38 | 250MHz | 750mA | 0.071Ω | 5000MHz |
| LQW18AN15NJ1Z□ | — | 15nH ±5% | 100MHz | 42 | 250MHz | 700mA | 0.085Ω | 4500MHz |
| LQW18AN18NG1Z□ | — | 18nH ±2% | 100MHz | 42 | 250MHz | 700mA | 0.085Ω | 3500MHz |
| LQW18AN18NJ1Z□ | — | 18nH ±5% | 100MHz | 42 | 250MHz | 700mA | 0.085Ω | 3500MHz |
| LQW18AN22NG1Z□ | — | 22nH ±2% | 100MHz | 42 | 250MHz | 640mA | 0.099Ω | 3200MHz |
| LQW18AN22NJ1Z□ | — | 22nH ±5% | 100MHz | 42 | 250MHz | 640mA | 0.099Ω | 3200MHz |
| LQW18AN27NG1Z□ | — | 27nH ±2% | 100MHz | 42 | 250MHz | 590mA | 0.116Ω | 2800MHz |
| LQW18AN27NJ1Z□ | — | 27nH ±5% | 100MHz | 42 | 250MHz | 590mA | 0.116Ω | 2800MHz |
| LQW18AN33NJ1Z□ | — | 33nH ±5% | 100MHz | 42 | 250MHz | 550mA | 0.132Ω | 2500MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

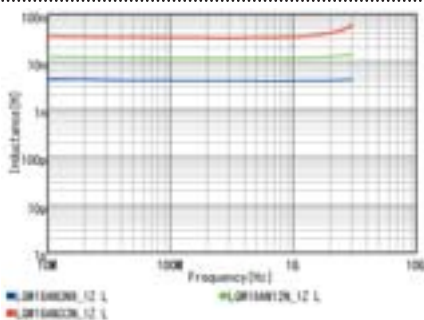


Q-Frequency Characteristics (Typ.)

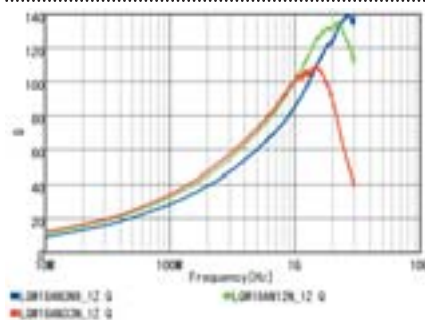

RF Inductors

LQW18AN_8Z Series 0603 (1608) inch (mm)

Appearance/Dimensions

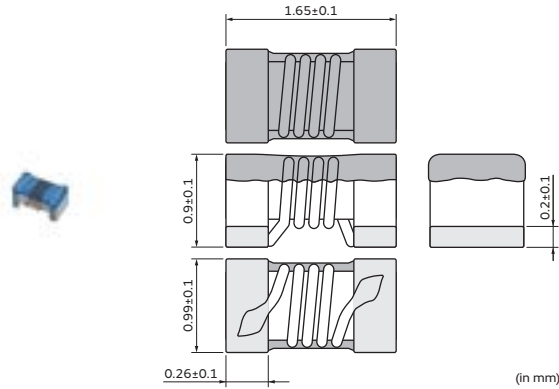

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| J | ø330mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AN2N2C8Z□ | — | 2.2nH ±0.2nH | 100MHz | 24 | 250MHz | 3200mA | 0.018Ω | 15000MHz |
| LQW18AN2N4C8Z□ | — | 2.4nH ±0.2nH | 100MHz | 18 | 250MHz | 2400mA | 0.026Ω | 15000MHz |
| LQW18AN3N0C8Z□ | — | 3.0nH ±0.2nH | 100MHz | 13 | 250MHz | 670mA | 0.170Ω | 15000MHz |
| LQW18AN3N9B8Z□ | — | 3.9nH ±0.1nH | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN3N9C8Z□ | — | 3.9nH ±0.2nH | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN3N9G8Z□ | — | 3.9nH ±2% | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N1B8Z□ | — | 4.1nH ±0.1nH | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N1C8Z□ | — | 4.1nH ±0.2nH | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N1G8Z□ | — | 4.1nH ±2% | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N2B8Z□ | — | 4.2nH ±0.1nH | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N2C8Z□ | — | 4.2nH ±0.2nH | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N2G8Z□ | — | 4.2nH ±2% | 100MHz | 30 | 250MHz | 2200mA | 0.028Ω | 10000MHz |
| LQW18AN4N3B8Z□ | — | 4.3nH ±0.1nH | 100MHz | 35 | 250MHz | 2100mA | 0.036Ω | 11600MHz |
| LQW18AN4N3C8Z□ | — | 4.3nH ±0.2nH | 100MHz | 35 | 250MHz | 2100mA | 0.036Ω | 11600MHz |
| LQW18AN4N3G8Z□ | — | 4.3nH ±2% | 100MHz | 35 | 250MHz | 2100mA | 0.036Ω | 11600MHz |
| LQW18AN4N7B8Z□ | — | 4.7nH ±0.1nH | 100MHz | 25 | 250MHz | 1500mA | 0.054Ω | 10400MHz |
| LQW18AN4N7C8Z□ | — | 4.7nH ±0.2nH | 100MHz | 25 | 250MHz | 1500mA | 0.054Ω | 10400MHz |
| LQW18AN4N7G8Z□ | — | 4.7nH ±2% | 100MHz | 25 | 250MHz | 1500mA | 0.054Ω | 10400MHz |
| LQW18AN4N9B8Z□ | — | 4.9nH ±0.1nH | 100MHz | 23 | 250MHz | 1200mA | 0.081Ω | 7300MHz |
| LQW18AN4N9C8Z□ | — | 4.9nH ±0.2nH | 100MHz | 23 | 250MHz | 1200mA | 0.081Ω | 7300MHz |
| LQW18AN4N9G8Z□ | — | 4.9nH ±2% | 100MHz | 23 | 250MHz | 1200mA | 0.081Ω | 7300MHz |
| LQW18AN5N6C8Z□ | — | 5.6nH ±0.2nH | 100MHz | 38 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN5N6G8Z□ | — | 5.6nH ±2% | 100MHz | 38 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN6N0C8Z□ | — | 6.0nH ±0.2nH | 100MHz | 40 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN6N0G8Z□ | — | 6.0nH ±2% | 100MHz | 40 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN6N5C8Z□ | — | 6.5nH ±0.2nH | 100MHz | 40 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN6N5G8Z□ | — | 6.5nH ±2% | 100MHz | 40 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN6N8C8Z□ | — | 6.8nH ±0.2nH | 100MHz | 40 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN6N8G8Z□ | — | 6.8nH ±2% | 100MHz | 40 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN7N2C8Z□ | — | 7.2nH ±0.2nH | 100MHz | 38 | 250MHz | 1900mA | 0.040Ω | 6650MHz |
| LQW18AN7N2G8Z□ | — | 7.2nH ±2% | 100MHz | 38 | 250MHz | 1900mA | 0.040Ω | 6650MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AN7N5C8Z□ | — | 7.5nH ±0.2nH | 100MHz | 35 | 250MHz | 1500mA | 0.048Ω | 7000MHz |
| LQW18AN7N5G8Z□ | — | 7.5nH ±2% | 100MHz | 35 | 250MHz | 1500mA | 0.048Ω | 7000MHz |
| LQW18AN8N2C8Z□ | — | 8.2nH ±0.2nH | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN8N2G8Z□ | — | 8.2nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN8N4C8Z□ | — | 8.4nH ±0.2nH | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN8N4G8Z□ | — | 8.4nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN8N7C8Z□ | — | 8.7nH ±0.2nH | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN8N7G8Z□ | — | 8.7nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN9N1C8Z□ | — | 9.1nH ±0.2nH | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN9N1G8Z□ | — | 9.1nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN9N5C8Z□ | — | 9.5nH ±0.2nH | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN9N5G8Z□ | — | 9.5nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN9N9C8Z□ | — | 9.9nH ±0.2nH | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN9N9G8Z□ | — | 9.9nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN10NG8Z□ | — | 10nH ±2% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN10NJ8Z□ | — | 10nH ±5% | 100MHz | 38 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN11NG8Z□ | — | 11nH ±2% | 100MHz | 40 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN11NJ8Z□ | — | 11nH ±5% | 100MHz | 40 | 250MHz | 1600mA | 0.052Ω | 4750MHz |
| LQW18AN12NG8Z□ | — | 12nH ±2% | 100MHz | 37 | 250MHz | 1500mA | 0.064Ω | 5000MHz |
| LQW18AN12NJ8Z□ | — | 12nH ±5% | 100MHz | 37 | 250MHz | 1500mA | 0.064Ω | 5000MHz |
| LQW18AN13NG8Z□ | — | 13nH ±2% | 100MHz | 37 | 250MHz | 1500mA | 0.064Ω | 5000MHz |
| LQW18AN13NJ8Z□ | — | 13nH ±5% | 100MHz | 37 | 250MHz | 1500mA | 0.064Ω | 5000MHz |
| LQW18AN15NG8Z□ | — | 15nH ±2% | 100MHz | 38 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN15NJ8Z□ | — | 15nH ±5% | 100MHz | 38 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN16NG8Z□ | — | 16nH ±2% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN16NJ8Z□ | — | 16nH ±5% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN17NG8Z□ | — | 17nH ±2% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN17NJ8Z□ | — | 17nH ±5% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN18NG8Z□ | — | 18nH ±2% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN18NJ8Z□ | — | 18nH ±5% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN19NG8Z□ | — | 19nH ±2% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN19NJ8Z□ | — | 19nH ±5% | 100MHz | 40 | 250MHz | 1400mA | 0.075Ω | 4600MHz |
| LQW18AN22NG8Z□ | — | 22nH ±2% | 100MHz | 40 | 250MHz | 1300mA | 0.086Ω | 3450MHz |
| LQW18AN22NJ8Z□ | — | 22nH ±5% | 100MHz | 40 | 250MHz | 1300mA | 0.086Ω | 3450MHz |
| LQW18AN23NG8Z□ | — | 23nH ±2% | 100MHz | 40 | 250MHz | 1300mA | 0.086Ω | 3450MHz |
| LQW18AN23NJ8Z□ | — | 23nH ±5% | 100MHz | 40 | 250MHz | 1300mA | 0.086Ω | 3450MHz |
| LQW18AN24NG8Z□ | — | 24nH ±2% | 100MHz | 40 | 250MHz | 1300mA | 0.086Ω | 3450MHz |
| LQW18AN24NJ8Z□ | — | 24nH ±5% | 100MHz | 40 | 250MHz | 1300mA | 0.086Ω | 3450MHz |
| LQW18AN25NG8Z□ | — | 25nH ±2% | 100MHz | 40 | 250MHz | 1200mA | 0.098Ω | 3600MHz |
| LQW18AN25NJ8Z□ | — | 25nH ±5% | 100MHz | 40 | 250MHz | 1200mA | 0.098Ω | 3600MHz |
| LQW18AN27NG8Z□ | — | 27nH ±2% | 100MHz | 40 | 250MHz | 1200mA | 0.098Ω | 3600MHz |
| LQW18AN27NJ8Z□ | — | 27nH ±5% | 100MHz | 40 | 250MHz | 1200mA | 0.098Ω | 3600MHz |
| LQW18AN28NG8Z□ | — | 28nH ±2% | 100MHz | 40 | 250MHz | 1200mA | 0.098Ω | 3600MHz |
| LQW18AN28NJ8Z□ | — | 28nH ±5% | 100MHz | 40 | 250MHz | 1200mA | 0.098Ω | 3600MHz |
| LQW18AN30NG8Z□ | — | 30nH ±2% | 100MHz | 40 | 250MHz | 1100mA | 0.12Ω | 2880MHz |
| LQW18AN30NJ8Z□ | — | 30nH ±5% | 100MHz | 40 | 250MHz | 1100mA | 0.12Ω | 2880MHz |
| LQW18AN31NG8Z□ | — | 31nH ±2% | 100MHz | 40 | 250MHz | 1100mA | 0.11Ω | 3150MHz |
| LQW18AN31NJ8Z□ | — | 31nH ±5% | 100MHz | 40 | 250MHz | 1100mA | 0.11Ω | 3150MHz |
| LQW18AN33NG8Z□ | — | 33nH ±2% | 100MHz | 40 | 250MHz | 1100mA | 0.11Ω | 3150MHz |
| LQW18AN33NJ8Z□ | — | 33nH ±5% | 100MHz | 40 | 250MHz | 1100mA | 0.11Ω | 3150MHz |
| LQW18AN34NG8Z□ | — | 34nH ±2% | 100MHz | 40 | 250MHz | 1050mA | 0.15Ω | 3000MHz |
| LQW18AN34NJ8Z□ | — | 34nH ±5% | 100MHz | 40 | 250MHz | 1050mA | 0.15Ω | 3000MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AN36NG8Z□ | — | 36nH ±2% | 100MHz | 37 | 250MHz | 910mA | 0.20Ω | 3000MHz |
| LQW18AN36NJ8Z□ | — | 36nH ±5% | 100MHz | 37 | 250MHz | 910mA | 0.20Ω | 3000MHz |
| LQW18AN37NG8Z□ | — | 37nH ±2% | 100MHz | 37 | 250MHz | 910mA | 0.20Ω | 3000MHz |
| LQW18AN37NJ8Z□ | — | 37nH ±5% | 100MHz | 37 | 250MHz | 910mA | 0.20Ω | 3000MHz |
| LQW18AN39NG8Z□ | — | 39nH ±2% | 100MHz | 40 | 250MHz | 1000mA | 0.16Ω | 3280MHz |
| LQW18AN39NJ8Z□ | — | 39nH ±5% | 100MHz | 40 | 250MHz | 1000mA | 0.16Ω | 3280MHz |
| LQW18AN41NG8Z□ | — | 41nH ±2% | 100MHz | 40 | 250MHz | 1000mA | 0.16Ω | 3280MHz |
| LQW18AN41NJ8Z□ | — | 41nH ±5% | 100MHz | 40 | 250MHz | 1000mA | 0.16Ω | 3280MHz |
| LQW18AN43NG8Z□ | — | 43nH ±2% | 100MHz | 40 | 250MHz | 840mA | 0.21Ω | 2780MHz |
| LQW18AN43NJ8Z□ | — | 43nH ±5% | 100MHz | 40 | 250MHz | 840mA | 0.21Ω | 2780MHz |
| LQW18AN44NG8Z□ | — | 44nH ±2% | 100MHz | 40 | 250MHz | 840mA | 0.21Ω | 2780MHz |
| LQW18AN44NJ8Z□ | — | 44nH ±5% | 100MHz | 40 | 250MHz | 840mA | 0.21Ω | 2780MHz |
| LQW18AN47NG8Z□ | — | 47nH ±2% | 100MHz | 32 | 200MHz | 830mA | 0.23Ω | 2700MHz |
| LQW18AN47NJ8Z□ | — | 47nH ±5% | 100MHz | 32 | 200MHz | 830mA | 0.23Ω | 2700MHz |
| LQW18AN48NG8Z□ | — | 48nH ±2% | 100MHz | 32 | 200MHz | 830mA | 0.23Ω | 2700MHz |
| LQW18AN48NJ8Z□ | — | 48nH ±5% | 100MHz | 32 | 200MHz | 830mA | 0.23Ω | 2700MHz |
| LQW18AN51NG8Z□ | — | 51nH ±2% | 100MHz | 32 | 200MHz | 830mA | 0.23Ω | 2700MHz |
| LQW18AN51NJ8Z□ | — | 51nH ±5% | 100MHz | 32 | 200MHz | 830mA | 0.23Ω | 2700MHz |
| LQW18AN52NG8Z□ | — | 52nH ±2% | 100MHz | 35 | 200MHz | 750mA | 0.27Ω | 2750MHz |
| LQW18AN52NJ8Z□ | — | 52nH ±5% | 100MHz | 35 | 200MHz | 750mA | 0.27Ω | 2750MHz |
| LQW18AN56NG8Z□ | — | 56nH ±2% | 100MHz | 38 | 200MHz | 770mA | 0.26Ω | 2600MHz |
| LQW18AN56NJ8Z□ | — | 56nH ±5% | 100MHz | 38 | 200MHz | 770mA | 0.26Ω | 2600MHz |
| LQW18AN58NG8Z□ | — | 58nH ±2% | 100MHz | 35 | 200MHz | 700mA | 0.30Ω | 2400MHz |
| LQW18AN58NJ8Z□ | — | 58nH ±5% | 100MHz | 35 | 200MHz | 700mA | 0.30Ω | 2400MHz |
| LQW18AN68NG8Z□ | — | 68nH ±2% | 100MHz | 37 | 200MHz | 630mA | 0.38Ω | 2380MHz |
| LQW18AN68NJ8Z□ | — | 68nH ±5% | 100MHz | 37 | 200MHz | 630mA | 0.38Ω | 2380MHz |
| LQW18AN69NG8Z□ | — | 69nH ±2% | 100MHz | 37 | 200MHz | 630mA | 0.38Ω | 2380MHz |
| LQW18AN69NJ8Z□ | — | 69nH ±5% | 100MHz | 37 | 200MHz | 630mA | 0.38Ω | 2380MHz |
| LQW18AN72NG8Z□ | — | 72nH ±2% | 100MHz | 34 | 150MHz | 560mA | 0.47Ω | 2330MHz |
| LQW18AN72NJ8Z□ | — | 72nH ±5% | 100MHz | 34 | 150MHz | 560mA | 0.47Ω | 2330MHz |
| LQW18AN73NG8Z□ | — | 73nH ±2% | 100MHz | 28 | 150MHz | 590mA | 0.41Ω | 2280MHz |
| LQW18AN73NJ8Z□ | — | 73nH ±5% | 100MHz | 28 | 150MHz | 590mA | 0.41Ω | 2280MHz |
| LQW18AN75NG8Z□ | — | 75nH ±2% | 100MHz | 28 | 150MHz | 590mA | 0.41Ω | 2280MHz |
| LQW18AN75NJ8Z□ | — | 75nH ±5% | 100MHz | 28 | 150MHz | 590mA | 0.41Ω | 2280MHz |
| LQW18AN78NG8Z□ | — | 78nH ±2% | 100MHz | 28 | 150MHz | 590mA | 0.41Ω | 2280MHz |
| LQW18AN78NJ8Z□ | — | 78nH ±5% | 100MHz | 28 | 150MHz | 590mA | 0.41Ω | 2280MHz |
| LQW18AN82NG8Z□ | — | 82nH ±2% | 100MHz | 34 | 150MHz | 550mA | 0.50Ω | 2230MHz |
| LQW18AN82NJ8Z□ | — | 82nH ±5% | 100MHz | 34 | 150MHz | 550mA | 0.50Ω | 2230MHz |
| LQW18AN83NG8Z□ | — | 83nH ±2% | 100MHz | 34 | 150MHz | 550mA | 0.50Ω | 2230MHz |
| LQW18AN83NJ8Z□ | — | 83nH ±5% | 100MHz | 34 | 150MHz | 550mA | 0.50Ω | 2230MHz |
| LQW18AN91NG8Z□ | — | 91nH ±2% | 100MHz | 33 | 150MHz | 520mA | 0.54Ω | 1900MHz |
| LQW18AN91NJ8Z□ | — | 91nH ±5% | 100MHz | 33 | 150MHz | 520mA | 0.54Ω | 1900MHz |
| LQW18AN94NG8Z□ | — | 94nH ±2% | 100MHz | 34 | 150MHz | 490mA | 0.63Ω | 1750MHz |
| LQW18AN94NJ8Z□ | — | 94nH ±5% | 100MHz | 34 | 150MHz | 490mA | 0.63Ω | 1750MHz |
| LQW18ANR10G8Z□ | — | 100nH ±2% | 100MHz | 34 | 150MHz | 490mA | 0.63Ω | 1750MHz |
| LQW18ANR10J8Z□ | — | 100nH ±5% | 100MHz | 34 | 150MHz | 490mA | 0.63Ω | 1750MHz |
| LQW18ANR11G8Z□ | — | 110nH ±2% | 100MHz | 32 | 150MHz | 450mA | 0.70Ω | 1730MHz |
| LQW18ANR11J8Z□ | — | 110nH ±5% | 100MHz | 32 | 150MHz | 450mA | 0.70Ω | 1730MHz |
| LQW18ANR12G8Z□ | — | 120nH ±2% | 100MHz | 32 | 150MHz | 450mA | 0.72Ω | 1650MHz |
| LQW18ANR12J8Z□ | — | 120nH ±5% | 100MHz | 32 | 150MHz | 450mA | 0.72Ω | 1650MHz |
| LQW18ANR15G8Z□ | — | 150nH ±2% | 100MHz | 28 | 150MHz | 420mA | 0.87Ω | 1580MHz |
| LQW18ANR15J8Z□ | — | 150nH ±5% | 100MHz | 28 | 150MHz | 420mA | 0.87Ω | 1580MHz |

Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.

Inductors for Power Lines

Inductors for General Circuits

RF Inductors

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18ANR18G8Z□ | — | 180nH ±2% | 100MHz | 25 | 100MHz | 310mA | 1.65Ω | 1380MHz |
| LQW18ANR18J8Z□ | — | 180nH ±5% | 100MHz | 25 | 100MHz | 310mA | 1.65Ω | 1380MHz |
| LQW18ANR20G8Z□ | — | 200nH ±2% | 100MHz | 25 | 100MHz | 290mA | 1.74Ω | 1350MHz |
| LQW18ANR20J8Z□ | — | 200nH ±5% | 100MHz | 25 | 100MHz | 290mA | 1.74Ω | 1350MHz |
| LQW18ANR21G8Z□ | — | 210nH ±2% | 100MHz | 27 | 100MHz | 280mA | 1.98Ω | 1330MHz |
| LQW18ANR21J8Z□ | — | 210nH ±5% | 100MHz | 27 | 100MHz | 280mA | 1.98Ω | 1330MHz |
| LQW18ANR22G8Z□ | — | 220nH ±2% | 100MHz | 25 | 100MHz | 280mA | 2.08Ω | 1330MHz |
| LQW18ANR22J8Z□ | — | 220nH ±5% | 100MHz | 25 | 100MHz | 280mA | 2.08Ω | 1330MHz |
| LQW18ANR25G8Z□ | — | 250nH ±2% | 100MHz | 24 | 100MHz | 250mA | 2.28Ω | 1330MHz |
| LQW18ANR25J8Z□ | — | 250nH ±5% | 100MHz | 24 | 100MHz | 250mA | 2.28Ω | 1330MHz |
| LQW18ANR27G8Z□ | — | 270nH ±2% | 100MHz | 24 | 100MHz | 260mA | 2.42Ω | 1250MHz |
| LQW18ANR27J8Z□ | — | 270nH ±5% | 100MHz | 24 | 100MHz | 260mA | 2.42Ω | 1250MHz |
| LQW18ANR30G8Z□ | — | 300nH ±2% | 100MHz | 25 | 100MHz | 220mA | 3.12Ω | 1200MHz |
| LQW18ANR30J8Z□ | — | 300nH ±5% | 100MHz | 25 | 100MHz | 220mA | 3.12Ω | 1200MHz |
| LQW18ANR33G8Z□ | — | 330nH ±2% | 100MHz | 25 | 100MHz | 190mA | 3.84Ω | 1100MHz |
| LQW18ANR33J8Z□ | — | 330nH ±5% | 100MHz | 25 | 100MHz | 190mA | 3.84Ω | 1100MHz |
| LQW18ANR36G8Z□ | — | 360nH ±2% | 100MHz | 25 | 100MHz | 190mA | 3.98Ω | 1050MHz |
| LQW18ANR36J8Z□ | — | 360nH ±5% | 100MHz | 25 | 100MHz | 190mA | 3.98Ω | 1050MHz |
| LQW18ANR39G8Z□ | — | 390nH ±2% | 100MHz | 25 | 100MHz | 190mA | 4.23Ω | 1100MHz |
| LQW18ANR39J8Z□ | — | 390nH ±5% | 100MHz | 25 | 100MHz | 190mA | 4.23Ω | 1100MHz |


Operating temp.range (Self-temp.rise not included): -55 to 125°C

Only for reflow soldering


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for this series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)." When rated current is applied to the products, the temperature rise caused by self-generated heat shall be limited to 40°C max.

Inductance-Frequency Characteristics (Typ.)

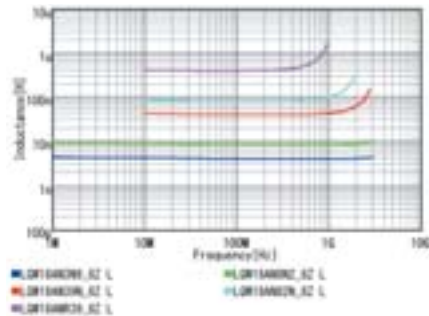

Q-Frequency Characteristics (Typ.)

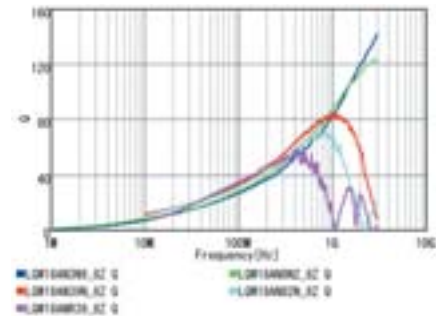


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

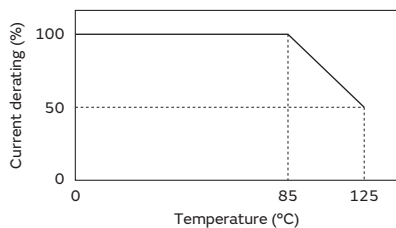

RF Inductors

LQW18AS_0Z Series 0603 (1608) inch (mm)

Appearance/Dimensions

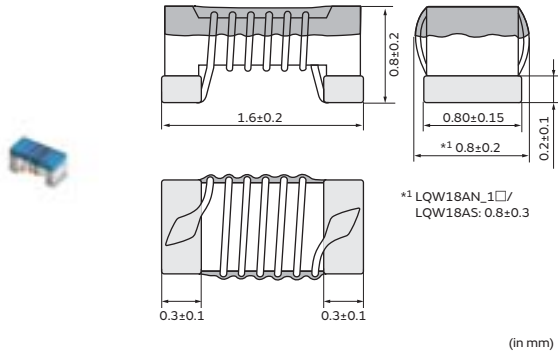

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| J | ø330mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AS1N6J0Z□ | — | 1.6nH ±5% | 250MHz | 24 | 250MHz | 700mA | 0.030Ω | 12500MHz |
| LQW18AS1N8J0Z□ | — | 1.8nH ±5% | 250MHz | 16 | 250MHz | 700mA | 0.045Ω | 12500MHz |
| LQW18AS3N3G0Z□ | — | 3.3nH ±2% | 250MHz | 35 | 250MHz | 700mA | 0.045Ω | 5900MHz |
| LQW18AS3N3J0Z□ | — | 3.3nH ±5% | 250MHz | 35 | 250MHz | 700mA | 0.045Ω | 5900MHz |
| LQW18AS3N6G0Z□ | — | 3.6nH ±2% | 250MHz | 22 | 250MHz | 700mA | 0.063Ω | 5900MHz |
| LQW18AS3N6J0Z□ | — | 3.6nH ±5% | 250MHz | 22 | 250MHz | 700mA | 0.063Ω | 5900MHz |
| LQW18AS3N9G0Z□ | — | 3.9nH ±2% | 250MHz | 22 | 250MHz | 700mA | 0.080Ω | 6900MHz |
| LQW18AS3N9J0Z□ | — | 3.9nH ±5% | 250MHz | 22 | 250MHz | 700mA | 0.080Ω | 6900MHz |
| LQW18AS4N3G0Z□ | — | 4.3nH ±2% | 250MHz | 22 | 250MHz | 700mA | 0.063Ω | 5900MHz |
| LQW18AS4N3J0Z□ | — | 4.3nH ±5% | 250MHz | 22 | 250MHz | 700mA | 0.063Ω | 5900MHz |
| LQW18AS4N7G0Z□ | — | 4.7nH ±2% | 250MHz | 20 | 250MHz | 700mA | 0.116Ω | 5800MHz |
| LQW18AS4N7J0Z□ | — | 4.7nH ±5% | 250MHz | 20 | 250MHz | 700mA | 0.116Ω | 5800MHz |
| LQW18AS5N1G0Z□ | — | 5.1nH ±2% | 250MHz | 20 | 250MHz | 700mA | 0.140Ω | 5700MHz |
| LQW18AS5N1J0Z□ | — | 5.1nH ±5% | 250MHz | 20 | 250MHz | 700mA | 0.140Ω | 5700MHz |
| LQW18AS5N6G0Z□ | — | 5.6nH ±2% | 250MHz | 26 | 250MHz | 700mA | 0.075Ω | 4760MHz |
| LQW18AS5N6J0Z□ | — | 5.6nH ±5% | 250MHz | 26 | 250MHz | 700mA | 0.075Ω | 4760MHz |
| LQW18AS6N8G0Z□ | — | 6.8nH ±2% | 250MHz | 27 | 250MHz | 700mA | 0.110Ω | 5800MHz |
| LQW18AS6N8J0Z□ | — | 6.8nH ±5% | 250MHz | 27 | 250MHz | 700mA | 0.110Ω | 5800MHz |
| LQW18AS7N5G0Z□ | — | 7.5nH ±2% | 250MHz | 28 | 250MHz | 700mA | 0.106Ω | 4800MHz |
| LQW18AS7N5J0Z□ | — | 7.5nH ±5% | 250MHz | 28 | 250MHz | 700mA | 0.106Ω | 4800MHz |
| LQW18AS8N2G0Z□ | — | 8.2nH ±2% | 250MHz | 30 | 250MHz | 700mA | 0.115Ω | 4200MHz |
| LQW18AS8N2J0Z□ | — | 8.2nH ±5% | 250MHz | 30 | 250MHz | 700mA | 0.115Ω | 4200MHz |
| LQW18AS8N7G0Z□ | — | 8.7nH ±2% | 250MHz | 28 | 250MHz | 700mA | 0.109Ω | 4600MHz |
| LQW18AS8N7J0Z□ | — | 8.7nH ±5% | 250MHz | 28 | 250MHz | 700mA | 0.109Ω | 4600MHz |
| LQW18AS9N5G0Z□ | — | 9.5nH ±2% | 250MHz | 28 | 250MHz | 700mA | 0.135Ω | 5400MHz |
| LQW18AS9N5J0Z□ | — | 9.5nH ±5% | 250MHz | 28 | 250MHz | 700mA | 0.135Ω | 5400MHz |
| LQW18AS10NG0Z□ | — | 10nH ±2% | 250MHz | 31 | 250MHz | 700mA | 0.130Ω | 4800MHz |
| LQW18AS10NJ0Z□ | — | 10nH ±5% | 250MHz | 31 | 250MHz | 700mA | 0.130Ω | 4800MHz |
| LQW18AS11NG0Z□ | — | 11nH ±2% | 250MHz | 30 | 250MHz | 700mA | 0.086Ω | 4000MHz |
| LQW18AS11NJ0Z□ | — | 11nH ±5% | 250MHz | 30 | 250MHz | 700mA | 0.086Ω | 4000MHz |
| LQW18AS12NG0Z□ | — | 12nH ±2% | 250MHz | 35 | 250MHz | 700mA | 0.130Ω | 4000MHz |
| LQW18AS12NJ0Z□ | — | 12nH ±5% | 250MHz | 35 | 250MHz | 700mA | 0.130Ω | 4000MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C

Only for reflow soldering

*S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18AS15NG0Z□ | — | 15nH ±2% | 250MHz | 35 | 250MHz | 700mA | 0.170Ω | 4000MHz |
| LQW18AS15NJ0Z□ | — | 15nH ±5% | 250MHz | 35 | 250MHz | 700mA | 0.170Ω | 4000MHz |
| LQW18AS16NG0Z□ | — | 16nH ±2% | 250MHz | 34 | 250MHz | 700mA | 0.104Ω | 3300MHz |
| LQW18AS16NJ0Z□ | — | 16nH ±5% | 250MHz | 34 | 250MHz | 700mA | 0.104Ω | 3300MHz |
| LQW18AS18NG0Z□ | — | 18nH ±2% | 250MHz | 35 | 250MHz | 700mA | 0.170Ω | 3100MHz |
| LQW18AS18NJ0Z□ | — | 18nH ±5% | 250MHz | 35 | 250MHz | 700mA | 0.170Ω | 3100MHz |
| LQW18AS22NG0Z□ | — | 22nH ±2% | 250MHz | 38 | 250MHz | 700mA | 0.190Ω | 3000MHz |
| LQW18AS22NJ0Z□ | — | 22nH ±5% | 250MHz | 38 | 250MHz | 700mA | 0.190Ω | 3000MHz |
| LQW18AS23NG0Z□ | — | 23nH ±2% | 250MHz | 38 | 250MHz | 700mA | 0.190Ω | 2850MHz |
| LQW18AS23NJ0Z□ | — | 23nH ±5% | 250MHz | 38 | 250MHz | 700mA | 0.190Ω | 2850MHz |
| LQW18AS24NG0Z□ | — | 24nH ±2% | 250MHz | 36 | 250MHz | 700mA | 0.135Ω | 2650MHz |
| LQW18AS24NJ0Z□ | — | 24nH ±5% | 250MHz | 36 | 250MHz | 700mA | 0.135Ω | 2650MHz |
| LQW18AS27NG0Z□ | — | 27nH ±2% | 250MHz | 40 | 250MHz | 600mA | 0.220Ω | 2800MHz |
| LQW18AS27NJ0Z□ | — | 27nH ±5% | 250MHz | 40 | 250MHz | 600mA | 0.220Ω | 2800MHz |
| LQW18AS30NG0Z□ | — | 30nH ±2% | 250MHz | 37 | 250MHz | 600mA | 0.144Ω | 2250MHz |
| LQW18AS30NJ0Z□ | — | 30nH ±5% | 250MHz | 37 | 250MHz | 600mA | 0.144Ω | 2250MHz |
| LQW18AS33NG0Z□ | — | 33nH ±2% | 250MHz | 40 | 250MHz | 600mA | 0.220Ω | 2300MHz |
| LQW18AS33NJ0Z□ | — | 33nH ±5% | 250MHz | 40 | 250MHz | 600mA | 0.220Ω | 2300MHz |
| LQW18AS36NG0Z□ | — | 36nH ±2% | 250MHz | 37 | 250MHz | 600mA | 0.250Ω | 2080MHz |
| LQW18AS36NJ0Z□ | — | 36nH ±5% | 250MHz | 37 | 250MHz | 600mA | 0.250Ω | 2080MHz |
| LQW18AS39NG0Z□ | — | 39nH ±2% | 250MHz | 40 | 250MHz | 600mA | 0.250Ω | 2200MHz |
| LQW18AS39NJ0Z□ | — | 39nH ±5% | 250MHz | 40 | 250MHz | 600mA | 0.250Ω | 2200MHz |
| LQW18AS43NG0Z□ | — | 43nH ±2% | 250MHz | 38 | 250MHz | 600mA | 0.280Ω | 2000MHz |
| LQW18AS43NJ0Z□ | — | 43nH ±5% | 250MHz | 38 | 250MHz | 600mA | 0.280Ω | 2000MHz |
| LQW18AS47NG0Z□ | — | 47nH ±2% | 200MHz | 38 | 200MHz | 600mA | 0.280Ω | 2000MHz |
| LQW18AS47NJ0Z□ | — | 47nH ±5% | 200MHz | 38 | 200MHz | 600mA | 0.280Ω | 2000MHz |
| LQW18AS51NG0Z□ | — | 51nH ±2% | 200MHz | 35 | 200MHz | 600mA | 0.270Ω | 1900MHz |
| LQW18AS51NJ0Z□ | — | 51nH ±5% | 200MHz | 35 | 200MHz | 600mA | 0.270Ω | 1900MHz |
| LQW18AS56NG0Z□ | — | 56nH ±2% | 200MHz | 38 | 200MHz | 600mA | 0.310Ω | 1900MHz |
| LQW18AS56NJ0Z□ | — | 56nH ±5% | 200MHz | 38 | 200MHz | 600mA | 0.310Ω | 1900MHz |
| LQW18AS68NG0Z□ | — | 68nH ±2% | 200MHz | 37 | 200MHz | 600mA | 0.340Ω | 1700MHz |
| LQW18AS68NJ0Z□ | — | 68nH ±5% | 200MHz | 37 | 200MHz | 600mA | 0.340Ω | 1700MHz |
| LQW18AS72NG0Z□ | — | 72nH ±2% | 150MHz | 34 | 150MHz | 400mA | 0.490Ω | 1700MHz |
| LQW18AS72NJ0Z□ | — | 72nH ±5% | 150MHz | 34 | 150MHz | 400mA | 0.490Ω | 1700MHz |
| LQW18AS82NG0Z□ | — | 82nH ±2% | 150MHz | 34 | 150MHz | 400mA | 0.540Ω | 1700MHz |
| LQW18AS82NJ0Z□ | — | 82nH ±5% | 150MHz | 34 | 150MHz | 400mA | 0.540Ω | 1700MHz |
| LQW18ASR10G0Z□ | — | 100nH ±2% | 150MHz | 34 | 150MHz | 400mA | 0.580Ω | 1400MHz |
| LQW18ASR10J0Z□ | — | 100nH ±5% | 150MHz | 34 | 150MHz | 400mA | 0.580Ω | 1400MHz |
| LQW18ASR11G0Z□ | — | 110nH ±2% | 150MHz | 32 | 150MHz | 300mA | 0.610Ω | 1350MHz |
| LQW18ASR11J0Z□ | — | 110nH ±5% | 150MHz | 32 | 150MHz | 300mA | 0.610Ω | 1350MHz |
| LQW18ASR12G0Z□ | — | 120nH ±2% | 150MHz | 32 | 150MHz | 300mA | 0.650Ω | 1300MHz |
| LQW18ASR12J0Z□ | — | 120nH ±5% | 150MHz | 32 | 150MHz | 300mA | 0.650Ω | 1300MHz |
| LQW18ASR15G0Z□ | — | 150nH ±2% | 150MHz | 28 | 150MHz | 280mA | 0.920Ω | 990MHz |
| LQW18ASR15J0Z□ | — | 150nH ±5% | 150MHz | 28 | 150MHz | 280mA | 0.920Ω | 990MHz |
| LQW18ASR18G0Z□ | — | 180nH ±2% | 100MHz | 25 | 100MHz | 240mA | 1.250Ω | 990MHz |
| LQW18ASR18J0Z□ | — | 180nH ±5% | 100MHz | 25 | 100MHz | 240mA | 1.250Ω | 990MHz |
| LQW18ASR20G0Z□ | — | 200nH ±2% | 100MHz | 25 | 100MHz | 200mA | 1.980Ω | 900MHz |
| LQW18ASR20J0Z□ | — | 200nH ±5% | 100MHz | 25 | 100MHz | 200mA | 1.980Ω | 900MHz |
| LQW18ASR21G0Z□ | — | 210nH ±2% | 100MHz | 27 | 100MHz | 200mA | 2.060Ω | 895MHz |
| LQW18ASR21J0Z□ | — | 210nH ±5% | 100MHz | 27 | 100MHz | 200mA | 2.060Ω | 895MHz |
| LQW18ASR22G0Z□ | — | 220nH ±2% | 100MHz | 25 | 100MHz | 200mA | 2.100Ω | 900MHz |
| LQW18ASR22J0Z□ | — | 220nH ±5% | 100MHz | 25 | 100MHz | 200mA | 2.100Ω | 900MHz |
| LQW18ASR25G0Z□ | — | 250nH ±2% | 100MHz | 25 | 100MHz | 120mA | 3.550Ω | 822MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C
 Only for reflow soldering
 *S.R.F: Self Resonant Frequency

Continued on the following page. ↗

Continued from the preceding page. ↘


| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | Max. of DC Resistance | S.R.F.* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|-----------------------|----------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQW18ASR25J0Z□ | — | 250nH ±5% | 100MHz | 25 | 100MHz | 120mA | 3.550Ω | 822MHz |
| LQW18ASR27G0Z□ | — | 270nH ±2% | 100MHz | 24 | 100MHz | 170mA | 2.300Ω | 900MHz |
| LQW18ASR27J0Z□ | — | 270nH ±5% | 100MHz | 24 | 100MHz | 170mA | 2.300Ω | 900MHz |
| LQW18ASR33G0Z□ | — | 330nH ±2% | 100MHz | 25 | 100MHz | 100mA | 3.890Ω | 900MHz |
| LQW18ASR33J0Z□ | — | 330nH ±5% | 100MHz | 25 | 100MHz | 100mA | 3.890Ω | 900MHz |
| LQW18ASR39G0Z□ | — | 390nH ±2% | 100MHz | 25 | 100MHz | 100mA | 4.350Ω | 900MHz |
| LQW18ASR39J0Z□ | — | 390nH ±5% | 100MHz | 25 | 100MHz | 100mA | 4.350Ω | 900MHz |

Operating temp.range (Self-temp.rise included): -40 to 125°C


Only for reflow soldering

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

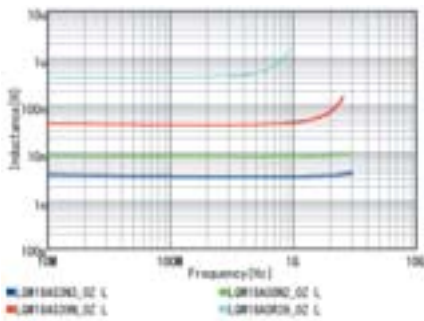


Q-Frequency Characteristics (Typ.)

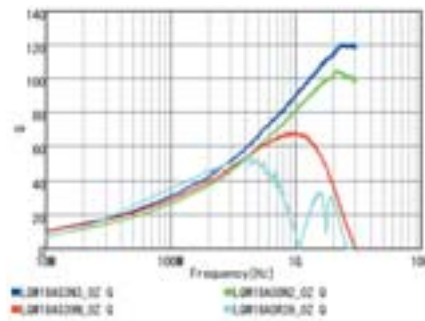

RF Inductors

LQW15CN_0Z Series 0402 (1005) inch (mm)

Appearance/Dimensions

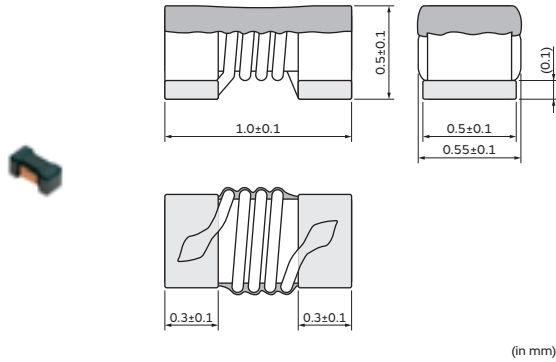

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQW15CN18NJ0Z□ | — | 18nH ±5% | 100MHz | 1400mA | 0.046Ω | 3000MHz |
| LQW15CN33NJ0Z□ | — | 33nH ±5% | 100MHz | 1300mA | 0.065Ω | 1800MHz |
| LQW15CN48NJ0Z□ | — | 48nH ±5% | 100MHz | 1100mA | 0.078Ω | 1400MHz |
| LQW15CN70NJ0Z□ | — | 70nH ±5% | 100MHz | 820mA | 0.12Ω | 1300MHz |
| LQW15CN96NJ0Z□ | — | 96nH ±5% | 100MHz | 730mA | 0.16Ω | 1100MHz |
| LQW15CNR13J0Z□ | — | 130nH ±5% | 100MHz | 640mA | 0.23Ω | 1000MHz |
| LQW15CNR16J0Z□ | — | 160nH ±5% | 100MHz | 480mA | 0.33Ω | 900MHz |
| LQW15CNR20J0Z□ | — | 200nH ±5% | 100MHz | 390mA | 0.47Ω | 800MHz |

Operating temp.range (Self-temp.rise not included): -40 to 125°C


Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15C series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Inductance-Frequency Characteristics (Typ.)

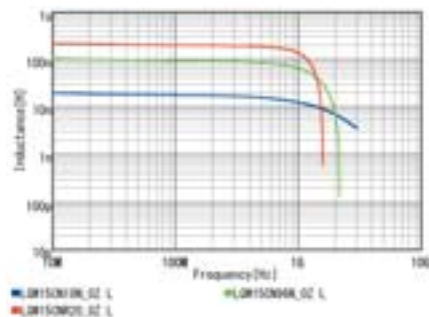

Q-Frequency Characteristics (Typ.)

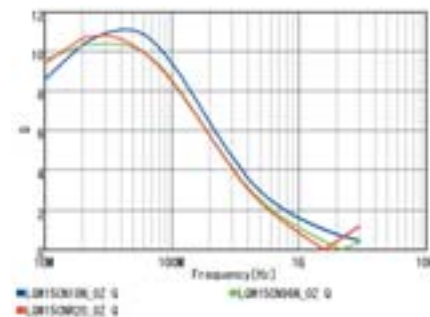

Continued on the following page. ↗


Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

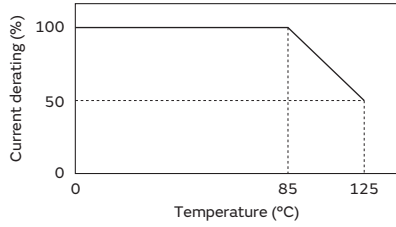

RF Inductors

LQW15CN_1Z Series 0402 (1005) inch (mm)

Appearance/Dimensions

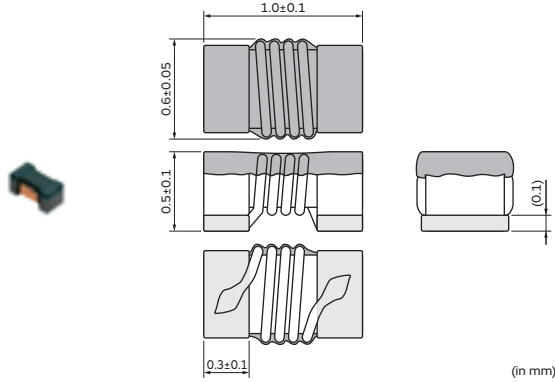

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQW15CN20NJ1Z□ | — | 20nH ±5% | 100MHz | 2200mA | 0.028Ω | 3000MHz |
| LQW15CN20NK1Z□ | — | 20nH ±10% | 100MHz | 2200mA | 0.028Ω | 3000MHz |
| LQW15CN34NJ1Z□ | — | 34nH ±5% | 100MHz | 1800mA | 0.036Ω | 2500MHz |
| LQW15CN34NK1Z□ | — | 34nH ±10% | 100MHz | 1800mA | 0.036Ω | 2500MHz |
| LQW15CN53NJ1Z□ | — | 53nH ±5% | 100MHz | 1300mA | 0.060Ω | 2000MHz |
| LQW15CN53NK1Z□ | — | 53nH ±10% | 100MHz | 1300mA | 0.060Ω | 2000MHz |
| LQW15CN77NJ1Z□ | — | 77nH ±5% | 100MHz | 1100mA | 0.090Ω | 2000MHz |
| LQW15CN77NK1Z□ | — | 77nH ±10% | 100MHz | 1100mA | 0.090Ω | 2000MHz |
| LQW15CNR11J1Z□ | — | 106nH ±5% | 100MHz | 850mA | 0.144Ω | 1500MHz |
| LQW15CNR11K1Z□ | — | 106nH ±10% | 100MHz | 850mA | 0.144Ω | 1500MHz |
| LQW15CNR14J1Z□ | — | 140nH ±5% | 100MHz | 650mA | 0.216Ω | 1000MHz |
| LQW15CNR14K1Z□ | — | 140nH ±10% | 100MHz | 650mA | 0.216Ω | 1000MHz |
| LQW15CNR18J1Z□ | — | 180nH ±5% | 100MHz | 560mA | 0.312Ω | 1000MHz |
| LQW15CNR18K1Z□ | — | 180nH ±10% | 100MHz | 560mA | 0.312Ω | 1000MHz |
| LQW15CNR22J1Z□ | — | 220nH ±5% | 100MHz | 450mA | 0.47Ω | 1400MHz |
| LQW15CNR22K1Z□ | — | 220nH ±10% | 100MHz | 450mA | 0.47Ω | 1400MHz |
| LQW15CNR27J1Z□ | — | 270nH ±5% | 100MHz | 420mA | 0.52Ω | 830MHz |
| LQW15CNR27K1Z□ | — | 270nH ±10% | 100MHz | 420mA | 0.52Ω | 830MHz |
| LQW15CNR33J1Z□ | — | 330nH ±5% | 100MHz | 390mA | 0.56Ω | 520MHz |
| LQW15CNR33K1Z□ | — | 330nH ±10% | 100MHz | 390mA | 0.56Ω | 520MHz |
| LQW15CNR39J1Z□ | — | 390nH ±5% | 100MHz | 370mA | 0.62Ω | 450MHz |
| LQW15CNR39K1Z□ | — | 390nH ±10% | 100MHz | 370mA | 0.62Ω | 450MHz |
| LQW15CNR42J1Z□ | — | 420nH ±5% | 10MHz | 370mA | 0.62Ω | 400MHz |
| LQW15CNR42K1Z□ | — | 420nH ±10% | 10MHz | 370mA | 0.62Ω | 400MHz |
| LQW15CNR47J1Z□ | — | 470nH ±5% | 10MHz | 350mA | 0.66Ω | 380MHz |
| LQW15CNR47K1Z□ | — | 470nH ±10% | 10MHz | 350mA | 0.66Ω | 380MHz |
| LQW15CNR56J1Z□ | — | 560nH ±5% | 10MHz | 300mA | 0.71Ω | 300MHz |
| LQW15CNR56K1Z□ | — | 560nH ±10% | 10MHz | 300mA | 0.71Ω | 300MHz |

Operating temp.range (Self-temp.rise not included): -40 to 125°C

Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW15C series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."


Continued on the following page. ↗

Continued from the preceding page. ↘

Inductance-Frequency Characteristics (Typ.)

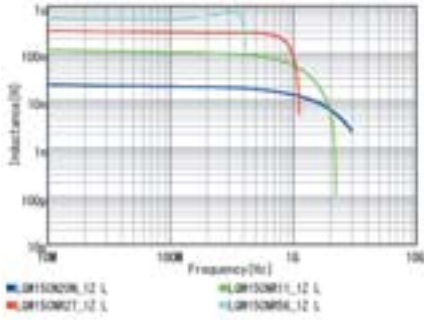

Q-Frequency Characteristics (Typ.)

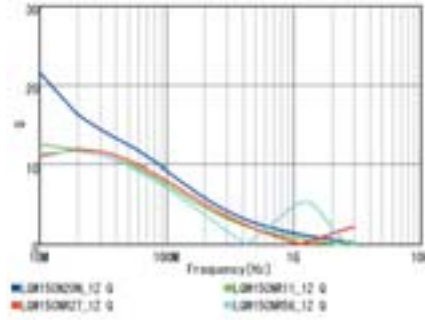


Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

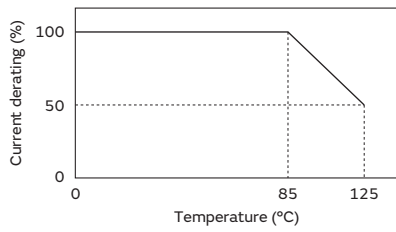

RF Inductors

LQW18CN_0Z Series 0603 (1608) inch (mm)

Appearance/Dimensions

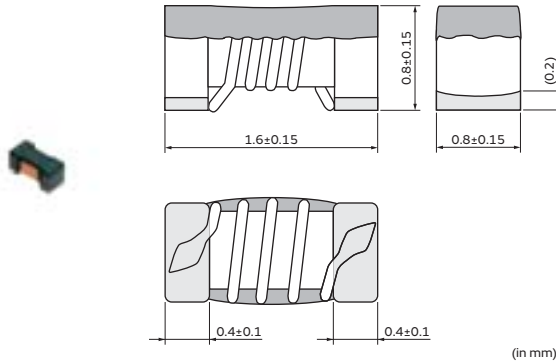

Packaging

| Code | Packaging | Minimum Quantity |
|------|---------------------|------------------|
| D | ø180mm Paper Taping | 4000 |
| J | ø330mm Paper Taping | 10000 |
| B | Packing in Bulk | 500 |

Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Rated Current | Max. of DC Resistance | S.R.F* (min.) |
|----------------|-------------------|--------------|---------------------------|---------------|-----------------------|---------------|
| Infotainment | Powertrain/Safety | | | | | |
| LQW18CN4N9D0Z□ | — | 4.9nH ±0.5nH | 10MHz | 2600mA | 0.015Ω | 2300MHz |
| LQW18CN15NJ0Z□ | — | 15nH ±5% | 10MHz | 2200mA | 0.025Ω | 2000MHz |
| LQW18CN33NJ0Z□ | — | 33nH ±5% | 10MHz | 1700mA | 0.035Ω | 1800MHz |
| LQW18CN55NJ0Z□ | — | 55nH ±5% | 10MHz | 1500mA | 0.045Ω | 1600MHz |
| LQW18CN85NJ0Z□ | — | 85nH ±5% | 10MHz | 1400mA | 0.060Ω | 1380MHz |
| LQW18CNR10K0Z□ | — | 100nH ±10% | 10MHz | 1000mA | 0.10Ω | 1260MHz |
| LQW18CNR12J0Z□ | — | 120nH ±5% | 10MHz | 1100mA | 0.085Ω | 1200MHz |
| LQW18CNR16J0Z□ | — | 160nH ±5% | 10MHz | 1000mA | 0.10Ω | 900MHz |
| LQW18CNR21J0Z□ | — | 210nH ±5% | 10MHz | 800mA | 0.15Ω | 720MHz |
| LQW18CNR27J0Z□ | — | 270nH ±5% | 10MHz | 750mA | 0.16Ω | 660MHz |
| LQW18CNR33J0Z□ | — | 330nH ±5% | 10MHz | 630mA | 0.25Ω | 600MHz |
| LQW18CNR39J0Z□ | — | 390nH ±5% | 10MHz | 620mA | 0.28Ω | 570MHz |
| LQW18CNR47J0Z□ | — | 470nH ±5% | 10MHz | 500mA | 0.45Ω | 555MHz |
| LQW18CNR56J0Z□ | — | 560nH ±5% | 10MHz | 450mA | 0.48Ω | 540MHz |
| LQW18CNR65J0Z□ | — | 650nH ±5% | 10MHz | 430mA | 0.52Ω | 510MHz |

Operating temp.range (Self-temp.rise not included): -40 to 125°C


Class of Magnetic Shield: No Shield

Only for reflow soldering


*S.R.F: Self Resonant Frequency

In operating temperatures exceeding +85°C, derating of current is necessary for the LQW18CN_0Z series. Please apply the derating curve shown in the chart according to the operating temperature. Please consider "Notice (Rating)."

Inductance-Frequency Characteristics (Typ.)

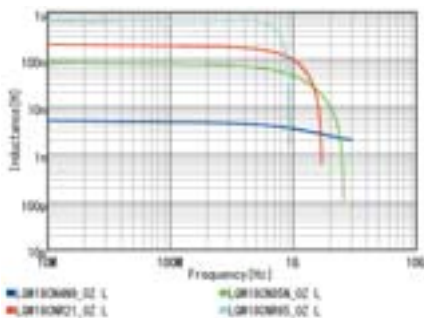

Q-Frequency Characteristics (Typ.)

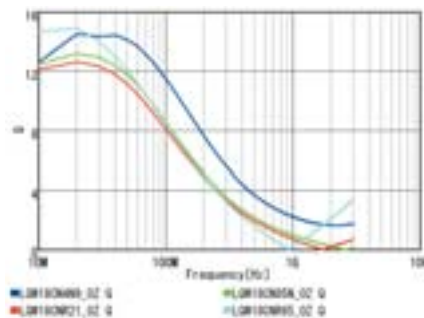

Continued on the following page. ↗


Continued from the preceding page. ↘

Notice (Rating)

In operating temperatures exceeding +85°C, derating of current is necessary for this series.

Please apply the derating curve shown in the chart according to the operating temperature.


Derating of Rated Current

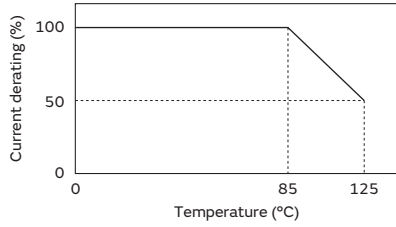

RF Inductors

LQH31HZ_03 Series 1206 (3216) inch (mm)

Appearance/Dimensions

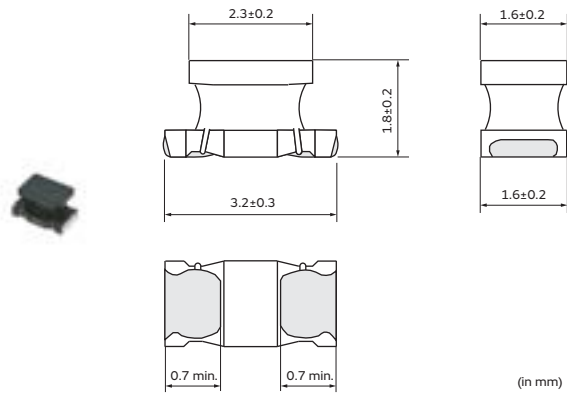

Packaging

| Code | Packaging | Minimum Quantity |
|------|------------------------|------------------|
| K | ø330mm Embossed Taping | 7500 |
| L | ø180mm Embossed Taping | 2000 |


Rated Value (□: packaging code)

| Part Number | | Inductance | Inductance Test Frequency | Q (min.) | Q Test Frequency | Rated Current | DC Resistance | S.R.F* (min.) |
|----------------|-------------------|------------|---------------------------|----------|------------------|---------------|---------------|---------------|
| Infotainment | Powertrain/Safety | | | | | | | |
| LQH31HZ54NK03□ | — | 54nH ±10% | 1MHz | 50 | 100MHz | 920mA | 0.035Ω±30% | 800MHz |
| LQH31HZ95NK03□ | — | 95nH ±10% | 1MHz | 60 | 100MHz | 790mA | 0.047Ω±30% | 650MHz |
| LQH31HZR14J03□ | — | 145nH ±5% | 1MHz | 60 | 100MHz | 700mA | 0.061Ω±30% | 500MHz |
| LQH31HZR14K03□ | — | 145nH ±10% | 1MHz | 60 | 100MHz | 700mA | 0.061Ω±30% | 500MHz |
| LQH31HZR21J03□ | — | 215nH ±5% | 1MHz | 60 | 100MHz | 520mA | 0.11Ω±30% | 430MHz |
| LQH31HZR21K03□ | — | 215nH ±10% | 1MHz | 60 | 100MHz | 520mA | 0.11Ω±30% | 430MHz |
| LQH31HZR29J03□ | — | 290nH ±5% | 1MHz | 60 | 100MHz | 420mA | 0.17Ω±30% | 360MHz |
| LQH31HZR29K03□ | — | 290nH ±10% | 1MHz | 60 | 100MHz | 420mA | 0.17Ω±30% | 360MHz |
| LQH31HZR39J03□ | — | 390nH ±5% | 1MHz | 60 | 100MHz | 330mA | 0.26Ω±30% | 300MHz |
| LQH31HZR39K03□ | — | 390nH ±10% | 1MHz | 60 | 100MHz | 330mA | 0.26Ω±30% | 300MHz |
| LQH31HZR50J03□ | — | 500nH ±5% | 1MHz | 60 | 100MHz | 260mA | 0.44Ω±30% | 270MHz |
| LQH31HZR50K03□ | — | 500nH ±10% | 1MHz | 60 | 100MHz | 260mA | 0.44Ω±30% | 270MHz |
| LQH31HZR61J03□ | — | 610nH ±5% | 1MHz | 60 | 100MHz | 250mA | 0.48Ω±30% | 240MHz |
| LQH31HZR61K03□ | — | 610nH ±10% | 1MHz | 60 | 100MHz | 250mA | 0.48Ω±30% | 240MHz |
| LQH31HZR75J03□ | — | 750nH ±5% | 1MHz | 60 | 100MHz | 190mA | 0.79Ω±30% | 220MHz |
| LQH31HZR75K03□ | — | 750nH ±10% | 1MHz | 60 | 100MHz | 190mA | 0.79Ω±30% | 220MHz |
| LQH31HZR88J03□ | — | 880nH ±5% | 1MHz | 60 | 100MHz | 180mA | 0.86Ω±30% | 200MHz |
| LQH31HZR88K03□ | — | 880nH ±10% | 1MHz | 60 | 100MHz | 180mA | 0.86Ω±30% | 200MHz |


Operating temp.range (Self-temp.rise not included): -40 to 85°C

*S.R.F: Self Resonant Frequency

Inductance-Frequency Characteristics (Typ.)

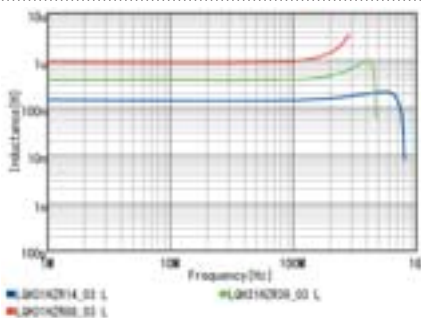

Q-Frequency Characteristics (Typ.)

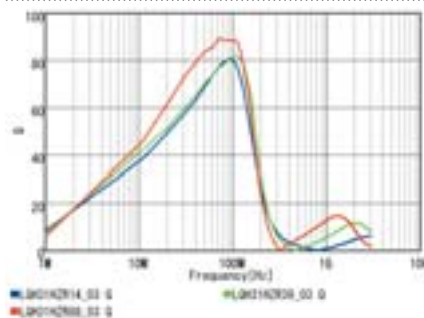

RF Inductors ⚠Caution/Notice

⚠Caution

Rating

1. About the Rated Current

Do not use products beyond the rated current as this may create excessive heat and deteriorate the insulation resistance.

For the usage of powertrain and safety be sure to provide an appropriate fail-safe function on your product to prevent a second damage that may be caused by the abnormal function or the failure of our product.

2. About Excessive Surge Current

Surge current (pulse current or rush current) greater than the specified rated current applied to the product may cause a critical failure, such as an open circuit, burnout caused by excessive temperature rise.

Please contact us in advance in case of applying the surge current.

Notice

Storage and Operating Condition

<Operating Environment>

Do not use products in chemical atmosphere such as chlorine gas, acid or sulfide gas.

<Storage Requirements>

1. Storage Period

LQG series should be used within 6 months; the other products should be used within 12 months.

Check solderability if this period is exceeded.

2. Storage Conditions

(1) Store products in a warehouse in compliance with the following conditions:

Temperature: -10 to +40 degrees C.

Humidity: 15 to 85% (relative humidity)

Do not subject products to rapid changes in temperature and humidity.

Do not store them in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas.

This will prevent electrode oxidation, which causes poor solderability and possible corrosion of inductors.

(2) Do not store products in bulk packaging to prevent collision among inductors, which causes core chipping and wire breakage.

(3) Store products on pallets to protect from humidity, dust, etc.

(4) Avoid heat shock, vibration, direct sunlight, etc.

(5) Products should be stored under the airtight packaged condition. (LQG Series)

Handling

This item is designed to have sufficient strength, but handle with care to avoid chipping or breaking its ceramic structure.

LQW_A/C series

- To prevent breaking the wire, avoid touching with sharp material, such as tweezers or the bristles of a cleaning brush, to the wire wound portion.
- To prevent breaking the core, avoid applying excessive mechanical shock to products mounted on the board.
- In some mounting machines, when picking up components, a support pin pushes the components up from the bottom of the base tape. In this case, please remove the support pin. The support pin may damage the components and break the wire.
- In rare cases, the laser recognition cannot recognize this component. Please contact us when you use laser recognition. (There is no problem with the permeation and reflection type.) (LQW15A Series only)

<Transportation>

Do not apply excessive vibration or mechanical shock to products.

<Resin Coating>

When coating products with resin, the relatively high resin curing stress may change inductance values. For exterior coating, select resin carefully so that electrical and mechanical performance of the product is not affected. Prior to use, please evaluate reliability with the product mounted in your application set.

Continued on the following page. ↗

RF Inductors ⚠Caution/Notice

Continued from the preceding page. ↘

(LQW series)

An open circuit issue may occur by mechanical stress caused by the resin, amount/cured shape of resin, or operating conditions, etc. Some resins containing impurities or chloride may possibly generate chlorine by hydrolysis under some operating conditions, causing corrosion of the inductor wire and leading to an open circuit.


(LQP series)

When products are coated with resin, please contact us in advance.

<Handling of a Substrate>

After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting the substrate when cropping the substrate, inserting and removing a connector from the substrate, or tightening a screw to the substrate.

Excessive mechanical stress may cause cracking in the Product.



Substrate restriction (LQP Series)

- Don't mount on FPC (Flexible printed circuits)
 - When components are mounted on substrate of under 6-layers, please contact us in advance.
- To mount components on FPC or substrate of under 6-layers may cause of cracking issue by stress.

- (1) There is a possibility of chip cracking caused by PCB expansion/contraction with heat, because stress on a chip is different depending on PCB material and structure.

When the thermal expansion coefficient greatly differs between the board used for mounting and the chip, it will cause cracking of the chip due to the thermal expansion and contraction.

The chip is assumed to be mounted on the PCB of glass-epoxy material, and we don't test with other PCB material which has different thermal expansion coefficient from Glass-epoxy.

When other PCB materials are considered, please be sure to evaluate by yourself.

- (2) After mounting products on a substrate, do not apply any stress to the product caused by bending or twisting to the substrate when cropping the substrate, inserting and removing a connector from the substrate or tightening screw to the substrate.

Excessive mechanical stress may cause cracking in the product.


In case of the mounting on flexible PCB, there is a possibility of chip cracking caused by mechanical stress even from small bending or twisting.

When the flexible PCB is considered, please be sure to evaluate by yourself.

Measuring Method

Measuring Method of Inductance/Q

1. Residual elements and stray elements of test fixtures can be described by F-parameter as shown in the following:

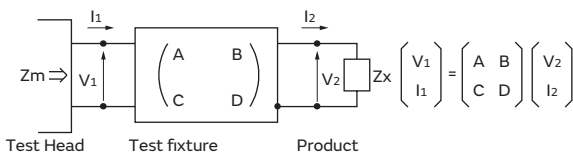

2. The impedance of chip Inductors (chip coils) Z_x and measured value Z_m can be described by input/output current/voltage.

$$Z_m = \frac{V_1}{I_1}, \quad Z_x = \frac{V_2}{I_2}$$

3. Thus, the relation between Z_x and Z_m is shown in the following:

$$Z_x = \alpha \frac{Z_m - \beta}{1 - Z_m \Gamma} \quad \text{where, } \alpha = D / A = 1$$

$$\beta = B / D = Z_{sm} - (1 - Y_{om} Z_{sm}) Z_{ss}$$

$$\Gamma = C / A = Y_{om}$$

Z_{sm} : measured impedance of short chip
 Z_{ss} : residual impedance of short chip*
 Y_{om} : measured admittance when opening the fixture

*Residual inductance of short chip

| Residual Inductance | Series |
|---------------------|-------------------|
| 0nH | LQG15H, LQG18HH |
| 0.480nH | LQP03TN |
| 0.556nH | LQG15W, LQW15A/C |
| 0.771nH | LQH31H, LQW18AN/C |

4. L_x and Q_x should be calculated with the following equation.

$$L_x = \frac{\text{Im}(Z_x)}{2\pi f}, \quad Q_x = \frac{\text{Im}(Z_x)}{\text{Re}(Z_x)}$$

L_x : Inductance of chip Inductors (chip coils)
 Q_x : Q of chip Inductors (chip coils)
 f : Measuring frequency

RF Inductors Soldering and Mounting

1. Standard Land Pattern Dimensions

A high Q value is achieved when the PCB electrode land pattern is designed so that it does not project beyond the chip Inductors (chip coils) electrode.



| Series | Standard Land Dimensions | | | | |
|---|--------------------------|---------------------------------|---------|---------|---------|
| LQG15H LQG18H LQG15W LQH31H LQP03 LQW15A/C LQW18A | | Part Number | a | b | c |
| | | LQG15H | 0.4 | 1.4-1.5 | 0.5-0.6 |
| | | LQG18H | 0.6-0.8 | 1.8-2.2 | 0.6-0.8 |
| | | LQH31H | 1.0 | 4.5 | 1.5 |
| | | LQP03 | 0.2-0.3 | 0.8-0.9 | 0.2-0.3 |
| | | LQG15W, LQW15A (Except for _8Z) | 0.5 | 1.2 | 0.65 |
| | | LQW15A_8Z | 0.6 | 1.42 | 0.66 |
| | | LQW15C_0Z | 0.4 | 1.4 | 0.6 |
| | | LQW15C_1Z | 0.4 | 1.4 | 0.66 |
| | | LQW18A (Except for _8Z) | 0.6-0.8 | 1.9-2.0 | 0.7-1.0 |
| | | LQW18A_8Z | 0.86 | 2.0 | 1.15 |
| | | LQW18C | 0.7 | 2.2 | 1.0 |

Attention should be paid to potential magnetic coupling effects when using the Inductors (coils) as a resonator.

2. Standard Soldering Conditions


(1) Soldering method

Chip Inductors (Chip coils) can be flow or reflow soldered.
 Please contact Murata regarding other soldering methods.
 As for LQG, LQP, LQW series, please use reflow soldering.
 Solder: Use Sn-3.0Ag-0.5Cu solder.

Flux: Use rosin-based flux, but not strongly acidic flux (with chlorine content exceeding 0.2wt%).
 Do not use water-soluble flux.
 The flux used for LQW series should use the rosin-based flux that includes middle activator equivalent to 0.06wt% to 0.1wt% chlorine.
 For additional mounting methods, please contact Murata.

(2) Soldering profile

- Reflow Soldering profile (Sn-3.0Ag-0.5Cu solder)

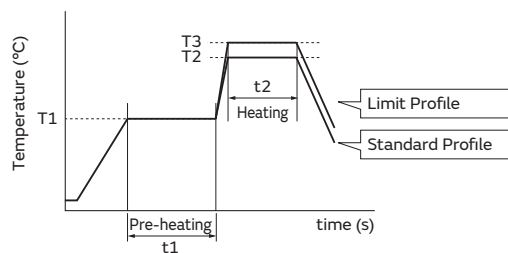


| Series | Pre-heating | | Standard Profile | | | Limit Profile | | |
|--------|-------------|------------|------------------|------------|---------------|---------------|------------|---------------|
| | Temp. (T1) | Time. (t1) | Heating | | Cycle of flow | Heating | | Cycle of flow |
| | | | Temp. (T2) | Time. (t2) | | Temp. (T3) | Time. (t2) | |
| LQH31H | 150°C | 60s min. | 250°C | 4 to 6s | 2 times max. | 265±3°C | 5s max. | 2 times max. |

Continued on the following page. ↗

RF Inductors Soldering and Mounting

Continued from the preceding page. ↘

●Reflow Soldering profile (Sn-3.0Ag-0.5Cu solder)

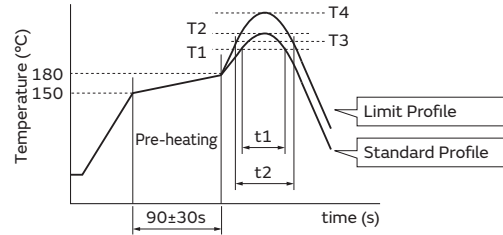

| Series | Standard Profile | | | | Limit Profile | | | |
|---|------------------|------------|-----------------------|-----------------|---------------|------------|-----------------------|-----------------|
| | Heating | | Peak temperature (T2) | Cycle of reflow | Heating | | Peak temperature (T4) | Cycle of reflow |
| | Temp. (T1) | Time. (t1) | | | Temp. (T3) | Time. (t2) | | |
| LQG15H/W, 18H LQH31H LQP03 LQW15A/C, 18A/C | 220°C | 30 to 60s | 245±3°C | 2 times max. | 230°C | 60s max. | 260°C/10s | 2 times max. |

(3) Reworking with Soldering Iron

Preheating at 150°C for 1 minute is required. Do not directly touch the products with the tip of the soldering iron in order to prevent the crack on the products due to the thermal shock.

Soldering iron power output: 80W max.

Temperature of soldering iron tip: 350°C

Diameter of soldering iron end: 3.0mm max.


Soldering time: within 3 s

Please keep the fix time with the soldering iron within 2 times.

3. Mounting Instructions

(1) Land Pattern Dimensions

Large lands reduce Q of the mounted chip. Also, large protruding land areas (bordered by lines having dimensions 'c' and 'd' shown) cause floating and electrode leaching.

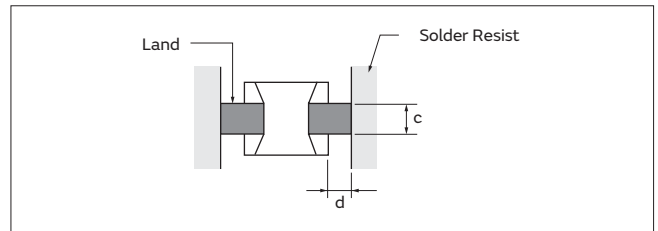



(2) Land Pattern Designing (LQW series)

Please follow the recommended patterns.

Otherwise, their performance, which includes electrical performance or solderability, may be affected, or result in "position shift" in the soldering process.

(3) PCB Warping

PCB should be designed so that products are not subjected to the mechanical stress caused by warping the board.

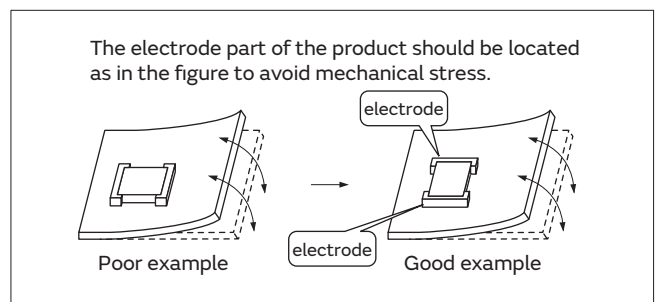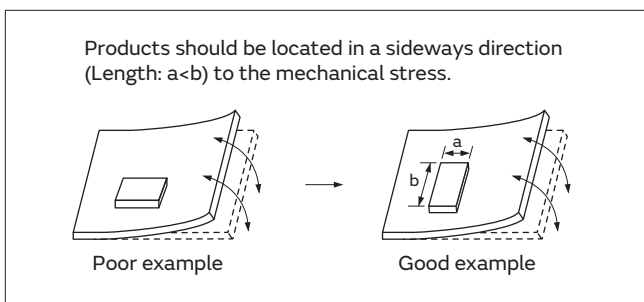

Continued on the following page. ↗

RF Inductors Soldering and Mounting

Continued from the preceding page. ↘

(4) Amount of Solder Paste



Excessive solder causes electrode corrosion, while insufficient solder causes low electrode bonding strength. Adjust the amount of solder paste as shown on the right so that solder is applied.

Guideline of solder paste thickness

- LQW15C: 50 to 100 μ m
- LQP03TN: 60 to 100 μ m
- LQG, LQW15A/LQW18A/C: 100 to 150 μ m
- LQH31H: 200 to 300 μ m

LQW15A Series:

Too much solder may cause slant or rotation of the chip at the time of solder melting. Please reduce the amount of solder by using a smaller solder area than the land pattern, as shown in the figure at right.

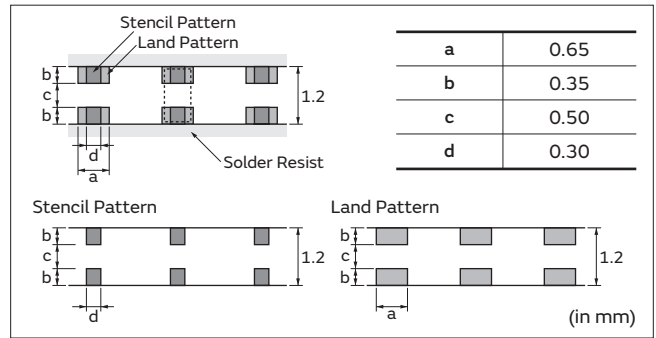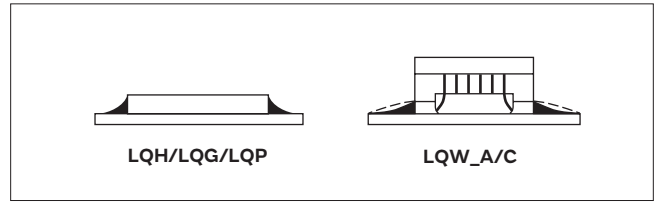

4. Cleaning

The following conditions should be observed when cleaning chip inductors (chip coils):

- (1) Cleaning Temperature: 60°C max. (40°C max. for alcohol cleaning agents)
- (2) Ultrasonic
 - Output: 20W/l max.
 - Duration: 5 minutes max.
 - Frequency: 28 to 40kHz
 - Care should be taken not to cause resonance of the PCB and mounted products.
- (3) Cleaning agent

The following cleaning agents have been tested on individual components. Evaluation in complete assembly should be done prior to production.


 - (a) Alcohol cleaning agents
 - Isopropyl alcohol (IPA)
 - (b) Aqueous cleaning agents
 - Pine Alpha ST-100S

- (4) Ensure that flux residue is completely removed. Component should be thoroughly dried after aqueous agents have been removed with deionized water.

For additional cleaning methods, please contact Murata.

RF Inductors Packaging

Minimum Quantity and 8mm Width Taping Dimensions (1)

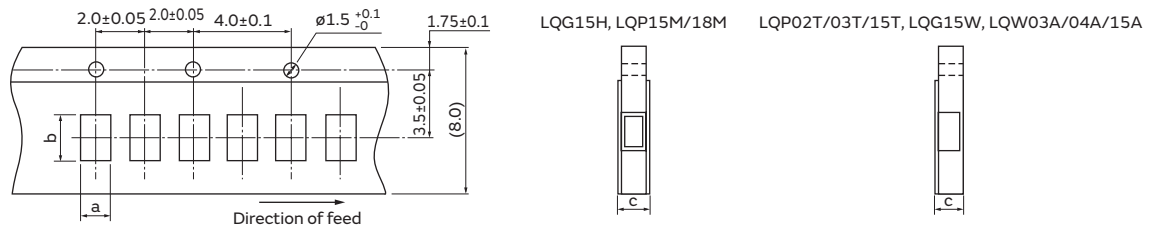


Paper Tape

| Part Number | Dimensions | | Total Thickness of Tape | Packaging Code (Minimum Qty. [pcs.]) | | |
|--------------|----------------|-----------|-------------------------|--------------------------------------|-------------|-------------|
| | a | b | | c | ø180mm reel | ø330mm reel |
| LQG15H | 0.62 | 1.12 | 0.8 max. | D (10000) | J (50000) | B (1000) |
| LQG15W | 0.69 | 1.18 | 0.85 max. | D (10000) | J (40000) | B (100) |
| LQP03T *1 | 0.35 | 0.65/0.67 | 0.55 max. | D (15000) | J (50000) | B (500) |
| LQW15A_OZ *2 | 0.64/0.66/0.69 | 1.18 | 0.8 max. | D (10000) | - | B (500) |
| LQW15A_1Z *3 | 0.66/0.69 | 1.18 | 0.8 max. | D (10000) | - | B (500) |
| LQW15A_8Z | 0.75 | 1.18 | 0.8 max. | D (10000) | - | B (500) |
| LQW15C_OZ *4 | 0.64/0.66 | 1.18 | 0.8 max. | D (10000) | - | B (500) |
| LQW15C_1Z | 0.69 | 1.18 | 0.8 max. | D (10000) | - | B (500) |

- *1 0.67 (LQP03TN_Z2; 0.6-62nH)
 0.65 (LQP03TN_Z2; 68-120nH)
- *2 0.69 (1.5nH, 2.4-2.8nH, 3.9-4.8nH, 5.8-6.8nH, 8.2-9.9nH, 11nH, 12nH, 15nH)
 0.66 (1.6-1.8nH, 2.9nH, 3.0nH, 3.1nH, 3.2nH, 4.9-5.1nH, 6.9-7.5nH, 10nH, 13nH, 16-23nH, 100nH, 120nH)
 0.64 (24-91nH)
- *3 0.69 (1.3nH, 1.4nH)
 0.66 (2.2-8.4nH)
- *4 0.64 (70nH-200nH)
 0.66 (18nH-48nH)

(in mm)

Minimum Quantity and 8mm Width Taping Dimensions (2)

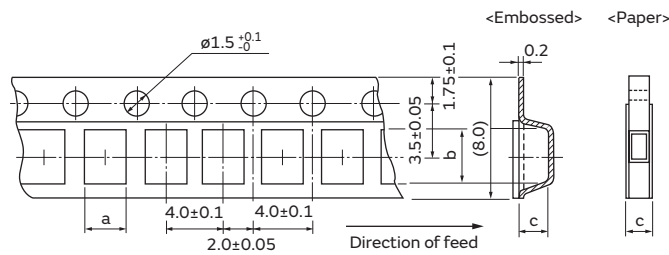

Paper Tape

| Part Number | Dimensions | | Total Thickness of Tape | Packaging Code (Minimum Qty. [pcs.]) | | |
|---------------|------------|------|-------------------------|--------------------------------------|-------------|-------------|
| | a | b | | c | ø180mm reel | ø330mm reel |
| LQG18H | 1.05 | 1.85 | 1.1 max. | D (4000) | J (10000) | B (1000) |
| LQW18A_OZ/18C | 1.0 | 1.8 | 1.1 max. | D (4000) | J (10000) | B (500) |
| LQW18A_1Z | 1.1 | 1.9 | 1.1 max. | D (4000) | J (10000) | B (500) |
| LQW18A_8Z | 1.15 | 1.9 | 1.1 max. | D (4000) | J (10000) | B (500) |
| LQW18AS_OZ | 1.06 | 1.86 | 1.1 max. | D (4000) | J (10000) | B (500) |

Embossed Tape

| Part Number | Dimensions | | Total Thickness of Tape | Packaging Code (Minimum Qty. [pcs.]) | | |
|-------------|------------|-----|-------------------------|--------------------------------------|-------------|-------------|
| | a | b | | c | ø180mm reel | ø330mm reel |
| LQH31 | 1.9 | 3.6 | 2.0 | L (2000) | K (7500) | - |

(in mm)

Part Number Quick Reference

EMI Suppression Filters (for DC)

Chip Ferrite Bead

| | |
|--|-----|
| BLE18PS | 106 |
| BLE32PN | 107 |
| BLM03AG | 18 |
| BLM03AX | 16 |
| BLM03BB | 20 |
| BLM03BC | 20 |
| BLM03BD | 20 |
| BLM03EB | 26 |
| BLM03HB | 23 |
| BLM03HD | 23 |
| BLM03HG | 23 |
| BLM03PG | 15 |
| BLM03PX | 13 |
| BLM15AG | 34 |
| BLM15AX | 32 |
| BLM15BA | 38 |
| BLM15BB | 38 |
| BLM15BC | 38 |
| BLM15BD | 38 |
| BLM15BX | 36 |
| BLM15EG | 47 |
| BLM15GA | 49 |
| BLM15GG | 49 |
| BLM15HB | 42 |
| BLM15HD | 42 |
| BLM15HG | 42 |
| BLM15HG (150°C available) | 45 |
| BLM15PD | 30 |
| BLM15PG | 30 |
| BLM15PX | 28 |
| BLM18AG | 61 |
| BLM18AG (150°C available) | 65 |
| BLM18AG (for conductive glue mounting) | 63 |

| | |
|---------------------------|-----|
| BLM18BA | 67 |
| BLM18BB | 67 |
| BLM18BD | 67 |
| BLM18BD (150°C available) | 72 |
| BLM18EG | 79 |
| BLM18G | 82 |
| BLM18HB | 75 |
| BLM18HD | 75 |
| BLM18HE | 75 |
| BLM18HG | 75 |
| BLM18KG | 55 |
| BLM18KG (150°C available) | 58 |
| BLM18PG | 50 |
| BLM18SG | 52 |
| BLM18SN | 54 |
| BLM21AG | 88 |
| BLM21AG (150°C available) | 90 |
| BLM21BB | 92 |
| BLM21BD | 92 |
| BLM21PG | 83 |
| BLM21PG (150°C available) | 85 |
| BLM21SN | 87 |
| BLM31AJ | 103 |
| BLM31KN | 98 |
| BLM31KN (150°C available) | 100 |
| BLM31PG | 96 |
| BLM31SN | 102 |
| BLM41PG | 104 |

Chip EMIFIL®

| | |
|------------|-----|
| NFE31ZT | 118 |
| NFE61HT | 119 |
| NFL18ZT | 120 |
| NFZ18SM_10 | 121 |

| | |
|------------|-----|
| NFZ32BW_10 | 123 |
| NFZ32BW_11 | 126 |
| NFZ5BBW_10 | 129 |

Chip Common Mode Choke Coil

| | |
|----------|-----|
| DLM11S | 143 |
| DLW21S | 144 |
| DLW31S | 146 |
| DLW32S | 147 |
| DLW43M | 148 |
| DLW43S | 149 |
| DLW5AT | 151 |
| DLW5BS | 154 |
| DLW5BT | 155 |
| PLT10H | 159 |
| PLT5BP | 157 |
| UCMH0907 | 161 |

Block Type EMIFIL®

| | |
|--------|-----|
| BNX02□ | 176 |
|--------|-----|

Lead Type

| | |
|---------|-----|
| BLL18AG | 185 |
| BNX012 | 191 |
| DSS1 | 187 |
| VFC2 | 190 |

Microchip Transformer (Balun)

| | |
|--------|-----|
| DXW21B | 203 |
|--------|-----|

Chip Inductors

Inductors for Power Lines

| | |
|--------------|-----|
| DFE201612P_D | 214 |
| DFE252012P_D | 216 |
| DFEG10040D | 222 |
| DFEG12060D | 226 |
| DFEG7030D | 218 |
| DFEH10040D | 224 |
| DFEH12060D | 228 |
| DFEH7030D | 220 |
| LQH2HPZ_DR | 232 |
| LQH2HPZ_GR | 234 |
| LQH2HPZ_JR | 236 |
| LQH2MPZ_GR | 230 |
| LQH32CH_23 | 238 |
| LQH32CH_33 | 239 |
| LQH32CH_53 | 240 |
| LQH32DZ_23 | 241 |
| LQH32DZ_53 | 242 |
| LQH32PH_N0 | 243 |
| LQH32PH_NC | 245 |
| LQH32PZ_N0 | 243 |
| LQH32PZ_NC | 245 |
| LQH3NPZ_GR | 247 |
| LQH3NPZ_JR | 249 |
| LQH3NPZ_ME | 251 |
| LQH43PH_26 | 255 |
| LQH43PZ_26 | 255 |
| LQH44PZ_GR | 253 |

| | |
|-----------------------|-----|
| LQH5BPZ_T0 | 257 |
| LQM18PZ_CH | 283 |
| LQM18PZ_DH | 285 |
| LQM18PZ_FH | 286 |
| LQM21PH_GC | 291 |
| LQM21PZ_CO | 287 |
| LQM21PZ_GO | 289 |
| LQM21PZ_GC | 291 |
| LQM21PZ_GR | 293 |
| LQM2HPZ_E0 | 298 |
| LQM2HPZ_GO | 299 |
| LQM2HPZ_GC | 301 |
| LQM2HPZ_GS | 302 |
| LQM2HPZ_JO | 303 |
| LQM2MPZ_GO | 295 |
| LQM2MPZ_JH | 297 |
| MBH10145C | 275 |
| MBH12282C | 277 |
| MBH12575C | 281 |
| MBH6045C High Current | 259 |
| MBH6045C Low Rdc | 261 |
| MBH7045C High Current | 267 |
| MBH7045C Low Rdc | 269 |
| MDH10060C | 273 |
| MDH12577C | 279 |
| MDH6045C High Current | 263 |
| MDH6045C Low Rdc | 265 |
| MDH7045C | 271 |

Inductors for General Circuits

| | |
|------------|-----|
| 5CCEG | 325 |
| FSDVA | 326 |
| HEAW | 324 |
| HEAWS | 323 |
| LQH32NH_23 | 318 |
| LQH32NZ_23 | 318 |
| LQH43NZ_03 | 320 |

RF Inductors

| | |
|------------|-----|
| LQG15HH_02 | 338 |
| LQG15HZ_02 | 338 |
| LQG15WH_02 | 341 |
| LQG15WZ_02 | 341 |
| LQG18HH_00 | 347 |
| LQH31HZ_03 | 385 |
| LQP03TN_Z2 | 349 |
| LQW15AN_OZ | 353 |
| LQW15AN_1Z | 359 |
| LQW15AN_8Z | 361 |
| LQW15CN_OZ | 379 |
| LQW15CN_1Z | 381 |
| LQW18AN_OZ | 368 |
| LQW18AN_1Z | 371 |
| LQW18AN_8Z | 372 |
| LQW18AS_OZ | 376 |
| LQW18CN_OZ | 383 |

Global Locations

For details please visit www.murata.com



⚠ Note

1 Export Control

For customers outside Japan:

No Murata products should be used or sold, through any channels, for use in the design, development, production, utilization, maintenance or operation of, or otherwise contribution to (1) any weapons (Weapons of Mass Destruction [nuclear, chemical or biological weapons or missiles] or conventional weapons) or (2) goods or systems specially designed or intended for military end-use or utilization by military end-users.

For customers in Japan:

For products which are controlled items subject to the "Foreign Exchange and Foreign Trade Law" of Japan, the export license specified by the law is required for export.

2 Please contact our sales representatives or product engineers before using the products in this catalog for the applications listed below, which require especially high reliability for the prevention of defects which might directly damage a third party's life, body or property, or when one of our products is intended for use in applications other than those specified in this catalog.

- ① Aircraft equipment
- ② Aerospace equipment
- ③ Undersea equipment
- ④ Power plant equipment
- ⑤ Medical equipment
- ⑥ Transportation equipment (vehicles, trains, ships, etc.)
- ⑦ Traffic signal equipment
- ⑧ Disaster prevention / crime prevention equipment
- ⑨ Data-processing equipment
- ⑩ Application of similar complexity and/or reliability requirements to the applications listed above

3 Product specifications in this catalog are as of November 2017. They are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. If there are any questions, please contact our sales representatives or product engineers.

4 Please read rating and ⚠CAUTION (for storage, operating, rating, soldering, mounting and handling) in this catalog to prevent smoking and/or burning, etc.

5 This catalog has only typical specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.

6 Please note that unless otherwise specified, we shall assume no responsibility whatsoever for any conflict or dispute that may occur in connection with the effect of our and/or a third party's intellectual property rights and other related rights in consideration of your use of our products and/or information described or contained in our catalogs. In this connection, no representation shall be made to the effect that any third parties are authorized to use the rights mentioned above under licenses without our consent.

7 No ozone depleting substances (ODS) under the Montreal Protocol are used in our manufacturing process.

Murata Manufacturing Co., Ltd.

www.murata.com

muRata
INNOVATOR IN ELECTRONICS

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Murata:

[BLM21AG102SH1D](#) [BLM21AG121SH1D](#) [BLM21AG151SH1D](#) [BLM21AG221SH1D](#) [BLM21AG331SH1D](#)
[BLM21AG350SH1D](#) [BLM21AG471SH1D](#) [BLM21AG601SH1D](#) [BLM21AH601SH1D](#) [BLM21BB050SH1D](#)
[BLM21BB121SH1D](#) [BLM21BB151SH1D](#) [BLM21BB201SH1D](#) [BLM21BB221SH1D](#) [BLM21BB331SH1D](#)
[BLM21BB471SH1D](#) [BLM21BB600SH1D](#) [BLM21BB750SH1D](#) [BLM21BD102SH1D](#) [BLM21BD121SH1D](#)
[BLM21BD151SH1D](#) [BLM21BD152SH1D](#) [BLM21BD182SH1D](#) [BLM21BD221SH1D](#) [BLM21BD222SH1L](#)
[BLM21BD222TH1D](#) [BLM21BD272SH1L](#) [BLM21BD331SH1D](#) [BLM21BD421SH1D](#) [BLM21BD471SH1D](#)
[BLM21BD601SH1D](#) [BLM21BD751SH1D](#) [BLM21PG220SH1D](#) [BLM21PG221SH1D](#) [BLM21PG300SH1D](#)
[BLM21PG331SH1D](#) [BLM21PG600SH1D](#) [BLM31BE601FH1L](#) [BLM41AF151SH1L](#) [BLM41AF800SH1L](#)
[BLM41PF800SH1L](#) [BLM41PG101SH1L](#) [BLM41PG102SH1L](#) [BLM41PG181SH1L](#) [BLM41PG471SH1L](#)
[BLM41PG600SH1L](#) [BLM41PG750SH1L](#) [LQP03TN0N6B00D](#) [LQP03TN0N6C00D](#) [LQP03TN0N7B00D](#)
[LQP03TN0N8B00D](#) [LQP03TN0N8C00D](#) [LQP03TN0N9B00D](#) [LQP03TN10NH00D](#) [LQP03TN10NJ00D](#)
[LQP03TN12NH00D](#) [LQP03TN12NJ00D](#) [LQP03TN15NJ00D](#) [LQP03TN18NH00D](#) [LQP03TN18NJ00D](#)
[LQP03TN1N0B00D](#) [LQP03TN1N0C00D](#) [LQP03TN1N1B00D](#) [LQP03TN1N2B00D](#) [LQP03TN1N2C00D](#)
[LQP03TN1N3B00D](#) [LQP03TN1N5B00D](#) [LQP03TN1N5C00D](#) [LQP03TN1N6B00D](#) [LQP03TN1N8B00D](#)
[LQP03TN1N8C00D](#) [LQP03TN22NH00D](#) [LQP03TN22NJ00D](#) [LQP03TN27NH00D](#) [LQP03TN27NJ00D](#)
[LQP03TN2N0B00D](#) [LQP03TN2N2B00D](#) [LQP03TN2N2C00D](#) [LQP03TN2N4B00D](#) [LQP03TN2N7B00D](#)
[LQP03TN2N7C00D](#) [LQP03TN3N0B00D](#) [LQP03TN3N3B00D](#) [LQP03TN3N3C00D](#) [LQP03TN3N6B00D](#)
[LQP03TN3N9B00D](#) [LQP03TN3N9C00D](#) [LQP03TN4N3H00D](#) [LQP03TN4N7H00D](#) [LQP03TN4N7J00D](#)
[LQP03TN5N1H00D](#) [LQP03TN5N6H00D](#) [LQP03TN5N6J00D](#) [LQP03TN6N2H00D](#) [LQP03TN6N8H00D](#)
[LQP03TN6N8J00D](#) [LQP03TN7N5H00D](#) [LQP03TN8N2H00D](#) [LQP03TN8N2J00D](#) [LQP03TN9N1H00D](#)