


9 Core 28 AWG Multiconductors Foiled Shielded

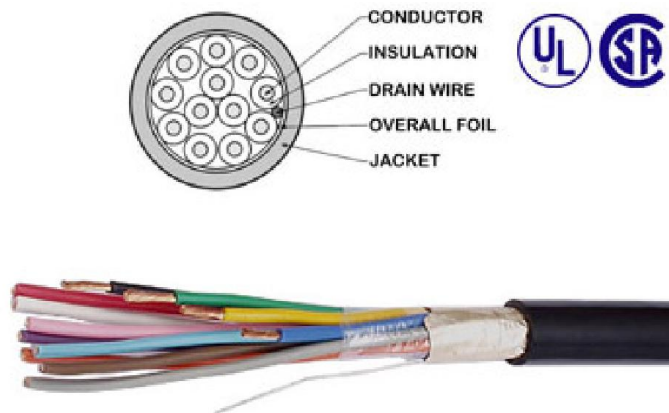

Part number : IF15009

Brand : HOSIWELL

Description

Product Description 28 AWG, 1.50 sqmm. DCR 10.8 Ω /km Standard: UL type CL2, CL3, CSA type AWM FT4 No./mm.: 52/0.18 AWG: 16 No.of cores: 2 Insulation thickness: 0.57 Jacket material: PVC Nominal OD. (mm): 7.9 Jacket color: Black

Specification

UL subject 13 type CL2, CL3 NEC articles 725-38 (b) (1) 105°C, 300, 600 Volt Conductor: Fine stranded concentric bare copper Insulation: 105°C PVC optional PE, XLPE, PP Shield: 100% coverage, aluminium polyester foil shield Drain Wire: 7 strands tinned copper Jacket: Black sunlight resistant PVC Application: For process control and instrumentation. Passes UL type CL2, CL3 vertical tray flame test. Installed in cable trays, raceways, conduit or aerial.