

ULTRA MINIATURE SMD VC/TCXO



2.5 X 2.0 X 0.8mm

ASVTX-12/ASTX-12



ESD Sensitive



RoHS/RoHS II compliant

Moisture Sensitivity Level (MSL) –1

FEATURES:

- Ultra miniature and low height 0.8mm
- Low current consumption 2.5mA
- Vc function corresponds to PLL circuits
- Suitable for RoHS reflow profile
- Low phase noise

APPLICATIONS:

- Cellular and cordless phones
- Standard OSC for exact equipment
- Mobile communication equipment
- Portable radio equipment
- Personal Digital Assistants (PDAs)
- Portable music players

STANDARD SPECIFICATIONS:

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	10		52	MHz	
Standard Frequencies	13, 16.368, 16.369, 19.2, 26, 38.4, 40, 52			MHz	
Operating Temperature	-30		+85	°C	See option (Table 1)
Storage Temperature	-40		+85	°C	
Frequency Stability $\Delta f/f_0$ vs Tolerance (@+25°C)	-2.0		+2.0	ppm	+25°C, Vcon=1.4V After 2 time reflow
Temperature (ref. to +25°C)	-2.0		+2.0		See option (Table 1)
Supply Voltage Change (Vdd±5%)	-0.2		+0.2		
Load Change (Z _L ±10%)	-0.2		+0.2		
Control Voltage (Vcon) (ASVTX-12 only)	+0.4		+2.4	V	Option A
	+0.4		+2.4		Option B
	+0.4		+2.4		Option C
	+0.3		+1.5		Option D
	+0.4		+2.4		Option E
Supply Voltage (Vcc)	+2.85	+3.0	+3.15	V	Option A
	+2.66	+2.8	+2.94		Option B
	+2.375	+2.5	+2.625		Option C
	+1.71	+1.8	+1.89		Option D
	+3.135	+3.3	+3.465		Option E
Aging (first year @+25±2°C)	-1.0		+1.0	ppm	
Supply Current (Icc)			2.0	mA	13MHz ≤ Fo < 26MHz
			2.5	mA	26MHz ≤ Fo ≤ 52MHz
Startup Time			2.0	ms	
Frequency Tuning Range (ASVTX-12 only)	±5.0		±9.5	ppm	
Vcon Input Impedance (ASVTX-12 only)	500			kΩ	
Frequency Tuning Transition	Positive				
Output Voltage	0.8			Vp-p	
Harmonics			-5.0	dBc	
Load	10kΩ//10pF				
Waveform	Clipped Sine Wave				
Phase Noise @ 19.2MHz					
100Hz offset from the carrier		-115	-100	dB/Hz	
1kHz offset from the carrier		-135	-125		
10kHz offset from the carrier		-150	-140		

ULTRA MINIATURE SMD VC/TCXO



2.5 X 2.0 X 0.8mm

ASVTX-12/ASTX-12



ESD Sensitive



RoHS/RoHS II compliant

OPTIONS & PART IDENTIFICATION: (left blank if standard)

ASVTX-12 or ASTX-12 - - MHz - -

Vdd (V)
A: 3.0V±5%
B: 2.8V±5%
C: 2.5V±5%
D: 1.8V±5%
E: 3.3V±5%

Frequency in MHz
Please specify the frequency in MHz.
e.g. 19.200MHz
26.000MHz



Packaging
T: 1,000pcs/reel

Table 1: Frequency Stability vs Operating Temperature

	±0.5ppm	±1.0ppm	±1.5ppm	±2.0ppm	±2.5ppm
0°C ~ +55°C	D05	D10	D15	D20	D25
-10°C ~ +60°C	E05	E10	E15	E20	E25
0°C ~ +70°C	F05	F10	F15	F20	F25
-20°C ~ +70°C	G05	G10	G15	G20	G25
-30°C ~ +85°C	H05*	H10	H15	STD (Blank)	H25
-40°C ~ +85°C	I05*	I10*	I15	I20	I25

*Please contact Abracon for availability

RECOMMENDED TEST CIRCUIT

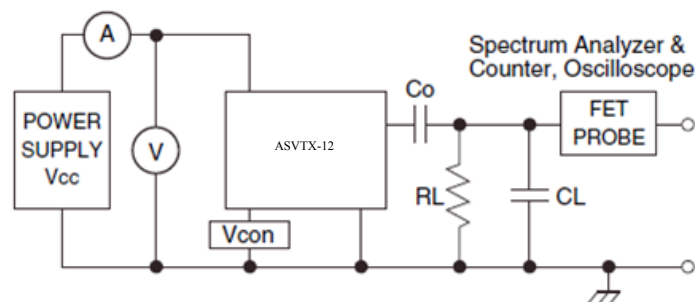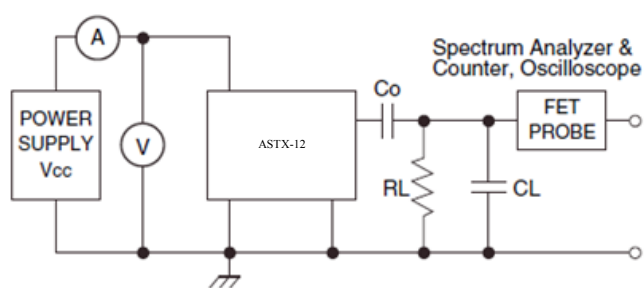

RL=10kΩ±10% CL=10pF±10%
• CL include Probe Capacitance
Co: DC Cut Capacitance

ULTRA MINIATURE SMD VC/TCXO



2.5 X 2.0 X 0.8mm

ASVTX-12/ASTX-12




ESD Sensitive




RoHS/RoHS II compliant

MECHANICAL DIMENSIONS:

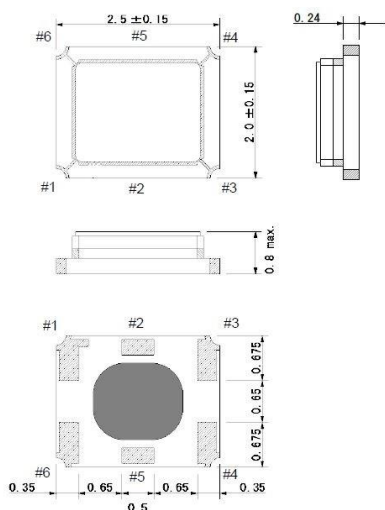

Recommended Land Pattern



	Pin Configuration
#1pin	GND
#3pin	GND
#4pin	OUTPUT
#6pin	Vcc
#2/5pin	N.C.

	Pin Configuration
#1pin	Vcon
#3pin	GND
#4pin	OUTPUT
#6pin	Vcc
#2/5pin	N.C.

ASTX-12 TCXO

ASVTX-12 VCTCXO

Note1:



It is recommended that a by-pass capacitor of 0.01uF value be placed between pin #6 and pin #3 and an AC-coupling capacitor of the same value be placed in series with pin#4 for optimal performance.

For ASTX, please connect pin #1 and #3 to GND.


Note2:

Pin#2 and Pin#5 should be left floating (No Connect = N.C.)

Dimensions: mm



Recommended Land Pattern

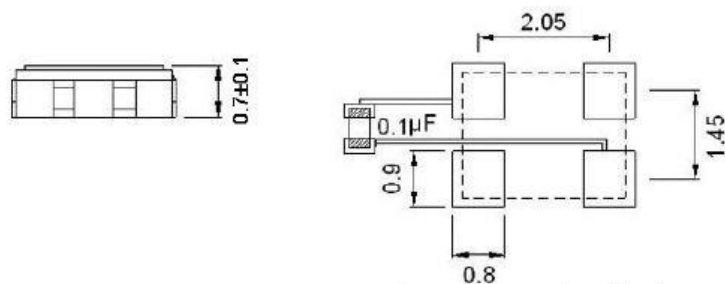

PIN	FUNCTION	
	ASVTX	ASTX
1	Vcon	GND
2	GND	
3	OUTPUT	
4	Vcc	

Note:

It is recommended that a by-pass capacitor of 0.1uF value be placed between pin #2 and pin #4 and an AC-coupling capacitor of the same value be placed in series with pin#3 for optimal performance.

Dimensions: mm

ULTRA MINIATURE SMD VC/TCXO



2.5 X 2.0 X 0.8mm

ASVTX-12/ASTX-12




ESD Sensitive



RoHS/RoHS II compliant




REFLOW PROFILE

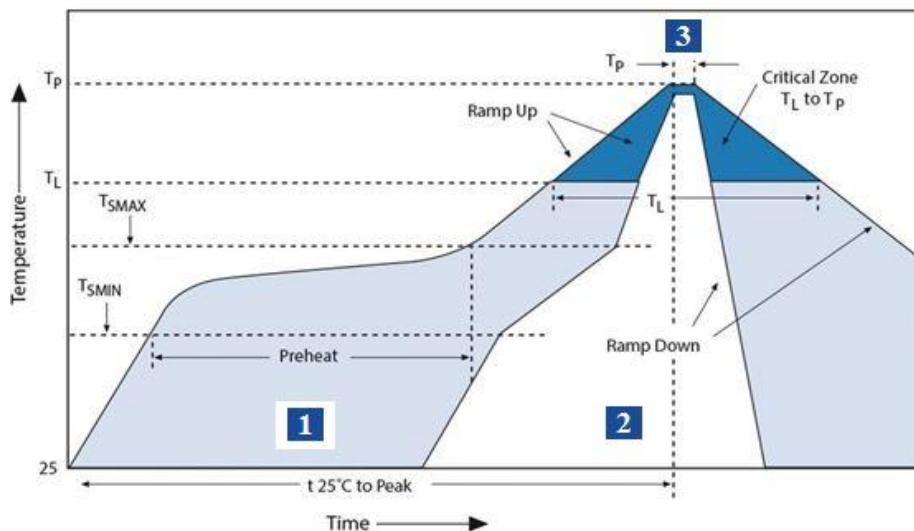

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ $180^{\circ}C \pm 10^{\circ}C$	120 sec. MAX
2	Reflow	T_L $230^{\circ}C$	40 sec. MAX
3	Peak heat	T_P $260^{\circ}C$	10 sec. MAX

TAPE & REEL:

T: 1,000pcs/Reel

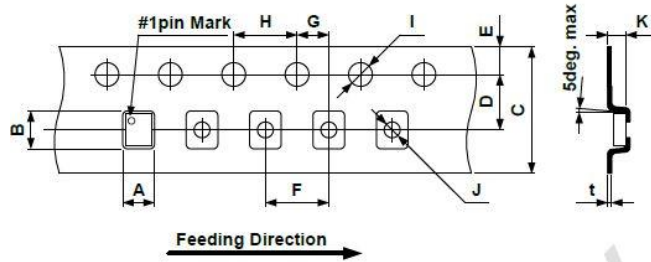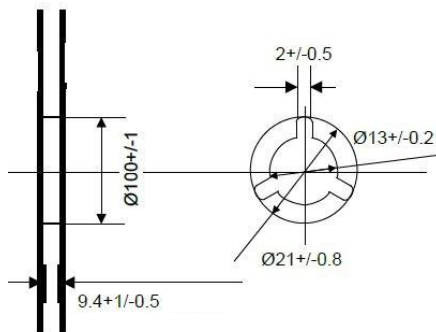

A	B	C	D	E
2.4±/0.1	2.9±/0.1	8.0+0.3/-0.2	3.5±/0.05	1.75±/0.1
F	G	H	I	J
4.0±/0.1	2.0±/0.05	4.0±/0.1	φ1.5+0.1/-0	φ1.1+0.1/-0
K	t			
1.15±/0.05	0.25±/0.05			

Dimensions: mm

ATTENTION: Abracon LLC products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ABRACON:

[ASVTX-12-A-16.368MHZ-I15-T3](#) [ASVTX-12-A-16.369MHZ-I15-T3](#) [ASVTX-12-A-19.200MHZ-I15-T3](#) [ASVTX-12-A-26.000MHZ-I15-T3](#) [ASVTX-12-A-38.400MHZ-I15-T3](#) [ASVTX-12-A-40.000MHZ-I15-T3](#) [ASVTX-12-A-16.368MHZ-H10-T](#)
[ASVTX-12-A-16.368MHZ-I15-T](#) [ASVTX-12-A-16.369MHZ-H10-T](#) [ASVTX-12-A-16.369MHZ-I15-T](#) [ASVTX-12-A-19.200MHZ-H10-T](#) [ASVTX-12-A-19.200MHZ-I15-T](#) [ASVTX-12-A-26.000MHZ-H10-T](#) [ASVTX-12-A-26.000MHZ-I15-T](#)
[ASVTX-12-A-38.400MHZ-H10-T](#) [ASVTX-12-A-38.400MHZ-I15-T](#) [ASVTX-12-A-40.000MHZ-H10-T](#) [ASVTX-12-A-40.000MHZ-I15-T](#) [ASTX-12-D-50.000MHZ-I25-T](#) [ASVTX-12-D-40.000MHz-T](#) [ASVTX-12-C-40.000MHz-T](#) [ASVTX-12-A-40.000MHz-T](#) [ASVTX-12-B-40.000MHz-T](#) [ASTX-12-C-19.200MHz-I15-T](#) [ASTX-12-D-16.369MHz-I05-T](#) [ASTX-12-D-16.386MHz-I05-T](#) [ASVTX-12-C-19.200MHz-I15-T](#) [ASVTX-12-D-16.369MHz-I05-T](#) [ASVTX-12-D-16.386MHz-I05-T](#)
[ASVTX-12-D-19.200MHz-I05-T](#)