



REV 版本 A	DESCRIPTION 描述 First issue	DATE 日期 OCT-16-2008
-------------	-------------------------------	------------------------

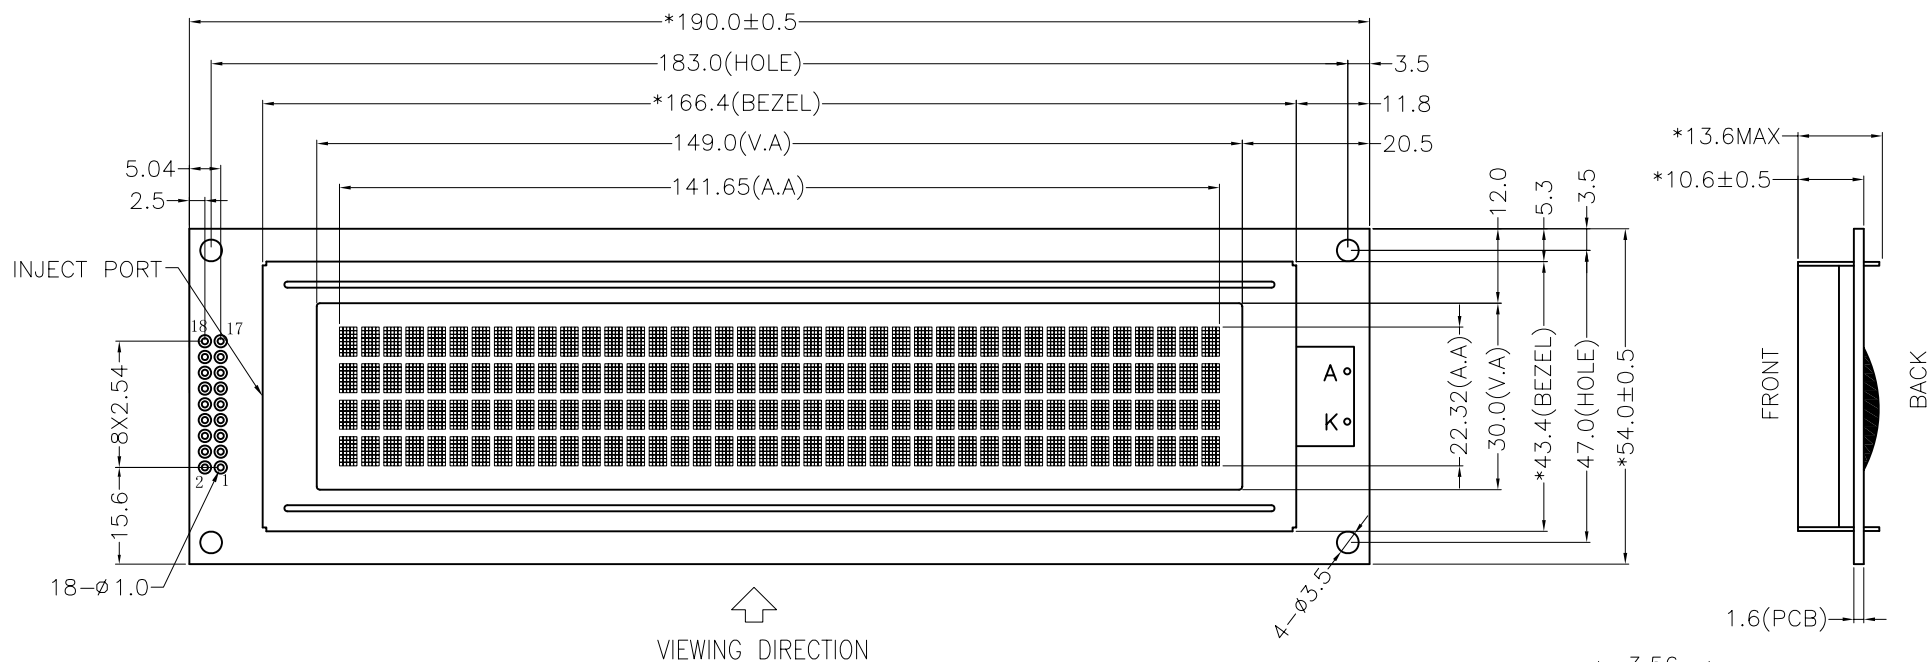

PIN	1	2	3	4	5	6	7	8	9
CONNECTION	VSS	VDD	V0	RS	R/W	E1	E2	DB0	DB1
PIN	10	11	12	13	14	15	16	17	18
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	NC	LEDA	LEDK



Specification:

- Driving: Duty:1/16, Bias:1/5, VLCD:4.5V, VDD:5.0V
- Viewing angle: 6 O'clock
- Display mode: STN/Positive/Transmissive/Y-G
- Operating temp.: -20°C~+70°C  
Storage temp.: -30°C~+80°C
- IC: CS0066(or compatible)
- Backlight: Bottom, Yellow-green
- Dimensions with mark "\*" are important, with mark "()" are referenced
- All the raw materials are RoHS compliant

<b>深圳秋田微电子有限公司</b> SHENZHEN AV-DISPLAY CO.,LTD.		SCALE: 比例 FIT 适应图面
		SHEET: 页次 1 OF 1
PART NO: 零件编码 C/D 结构图		GENERAL TOL: 未注公差 ±0.3
PROJECTION: 三角法	MODULE NUMBER: 模组型号 ABC040004A00-YIY-R-02	UNIT 单位 mm
ABC040004A00-YIY-R-02		APPROVALS: 签字
DO NOT SCALE THIS DRAWING.		DATE 日期
		APP: 日期
		CHK: 日期
		DWN: 日期