


# Surface Mount Frequency Mixer

## RMS-11X+

### Level 7 (LO Power + 7dBm) 5 to 1900 MHz



CASE STYLE: TT240


#### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

#### Pin Connections

LO	1
RF	5
IF	4
GROUND	2,3,6


#### Outline Drawing

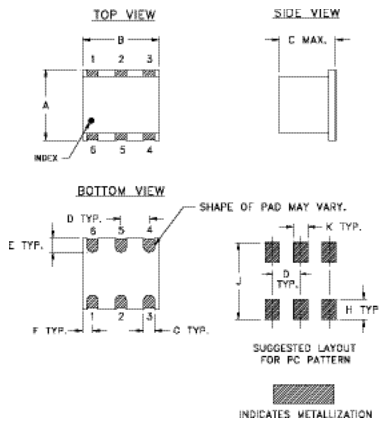

#### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.250	.31	.20	.100	.050	.055
6.35	7.87	5.08	2.54	1.27	1.40
G	H	J	K	wt	
.040	.070	.270	.050	grams	
1.02	1.78	6.86	1.27	0.50	

#### Demo Board MCL P/N: TB-03 Suggested PCB Layout (PL-052)

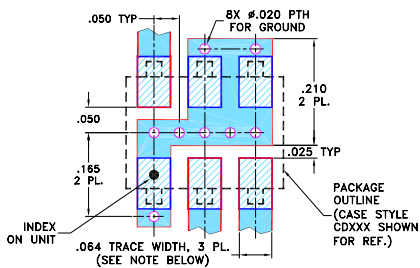

- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

#### Features

- excellent L-R isolation, 35 dB typ.
- conversion loss, 7.1 dB typ.
- small size, 0.25"x0.31"x0.2"

#### Applications

- PCN
- satellite distribution
- GPS

#### Electrical Specifications

FREQUENCY (MHz)	CONVERSION LOSS (dB)	LO-RF ISOLATION (dB)			LO-IF ISOLATION (dB)			IP3 at center band (dBm)										
		L	M	U	L	M	U											
5-1900	5-1000	7.1	.10	8.2	9.8	58	45	35	20	27	18	56	45	37	20	27	20	10


1 dB COMP.: +1 dBm typ.  
For phase detection, DC output positive with in-phase RF & LO.







L = low range [ $f_1$  to  $10 f_1$ ]  
M = mid range [ $10 f_1$  to  $f_1/2$ ]  
U = upper range [ $f_1/2$  to  $f_1$ ]

#### Typical Performance Data

Frequency (MHz)	Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)	
						RF
5.00	35.00	6.69	57.72	66.80	1.21	2.98
10.01	40.01	6.67	57.22	64.98	1.22	2.83
50.04	80.04	6.66	51.74	53.60	1.23	2.78
103.56	73.56	6.72	46.56	47.68	1.23	2.75
189.86	159.86	6.79	42.32	43.39	1.26	2.72
241.95	211.95	6.90	40.60	41.62	1.31	2.59
308.34	278.34	7.00	38.96	39.89	1.32	2.59
392.94	362.94	7.11	37.54	38.49	1.37	2.56
500.75	470.75	7.20	35.72	37.03	1.44	2.60
638.14	608.14	6.65	34.40	36.08	1.52	2.53
720.38	690.38	7.33	33.17	35.36	1.54	2.52
918.04	888.04	7.35	31.46	34.64	1.53	2.61
950.00	920.00	7.26	30.90	34.39	1.54	2.63
1036.36	1006.36	7.24	30.00	34.46	1.52	2.68
1200.00	1170.00	7.58	30.35	34.77	1.40	2.79
1320.71	1290.71	7.59	32.03	34.21	1.34	2.90
1500.00	1470.00	7.67	35.10	33.40	1.26	2.89
1800.00	1770.00	8.36	38.63	32.68	1.42	3.62
1850.00	1820.00	8.56	36.54	32.31	1.47	3.73
1900.00	1870.00	8.80	34.84	32.78	2.04	3.94

#### Electrical Schematic

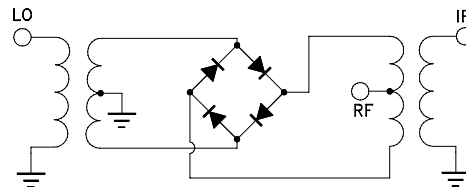

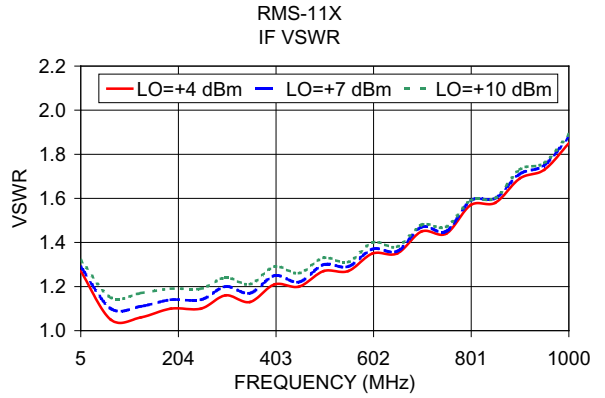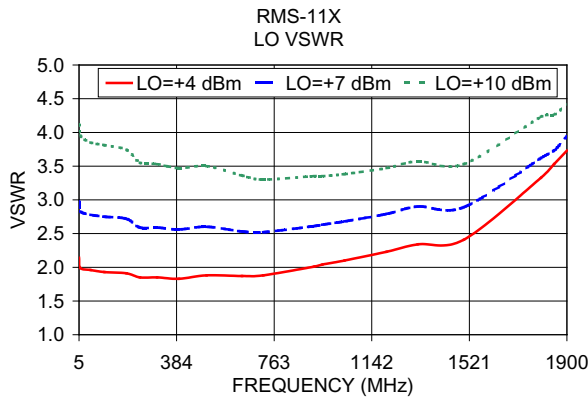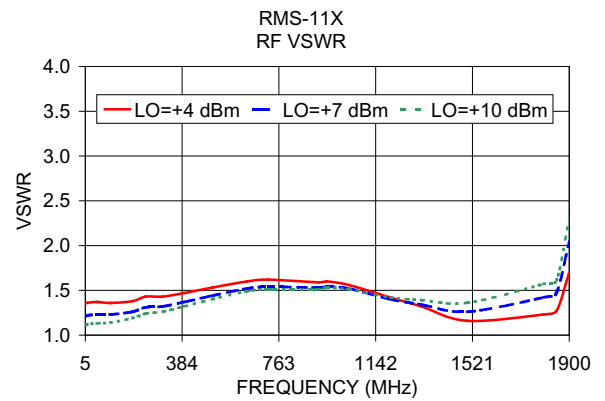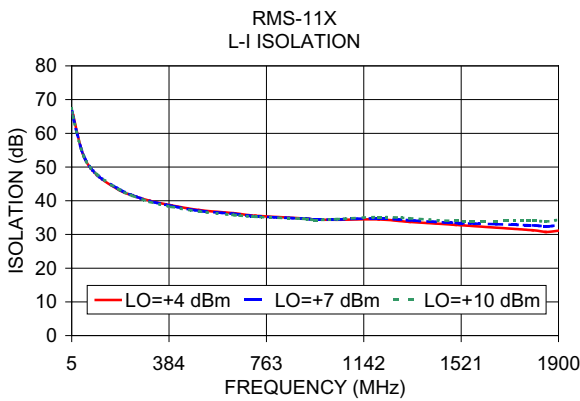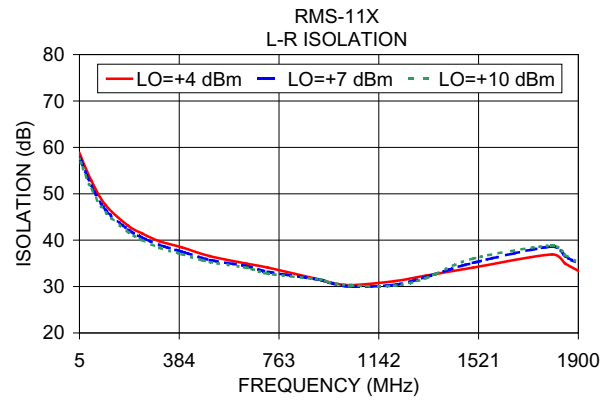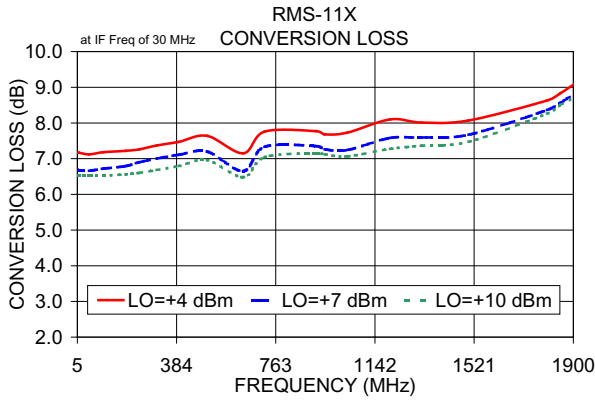

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

