
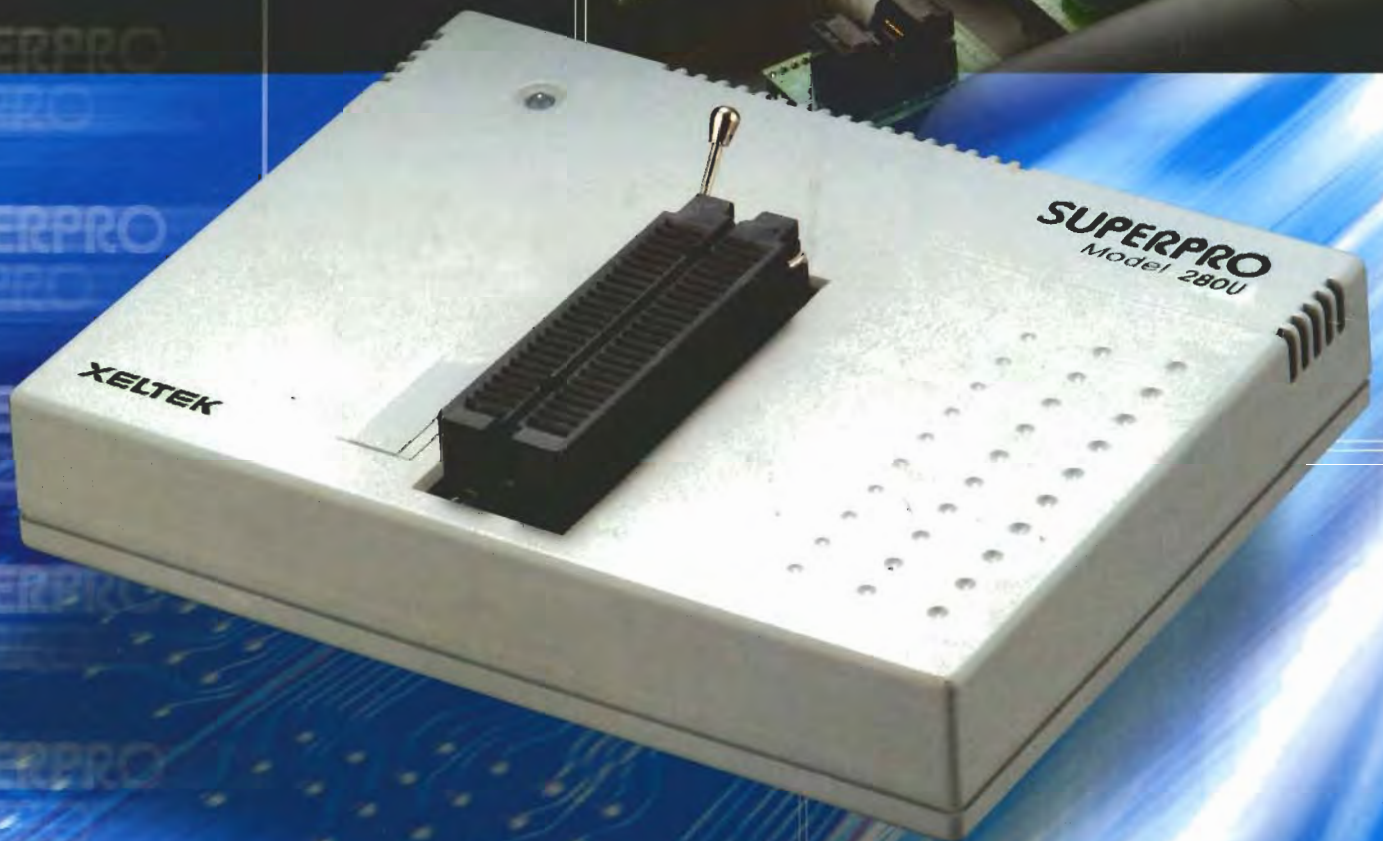


SUPERPRO[®]/280U

USB Interfaced Ultra-high Speed Low Cost Universal Device Programmer

- ◆ 48 Pins Popular Pin-drivers
- ◆ Supports 20,000+ Devices including 1.5V devices
- ◆ High Programming Quality
- ◆ PC Hosted(USB)
- ◆ Powerful and Intelligent software

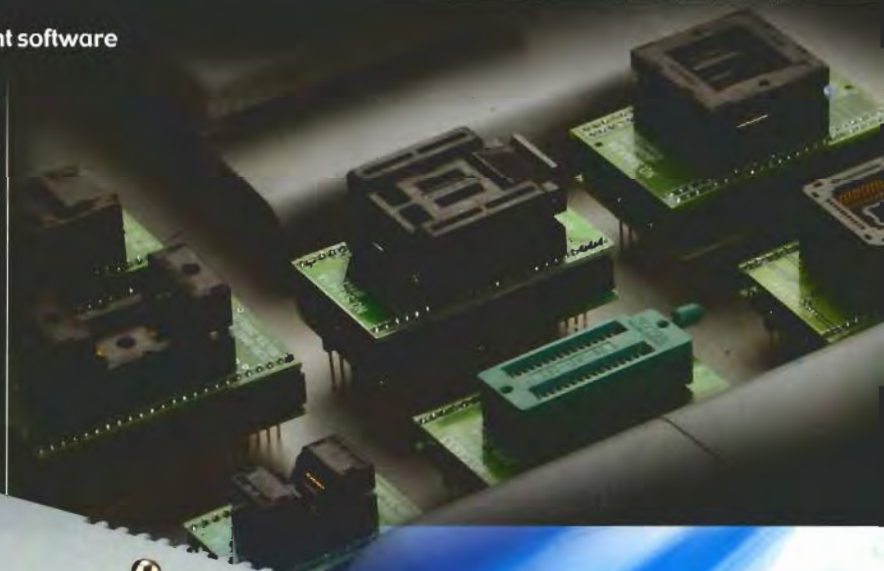

SUPERPRO[®] /280U

USB Interfaced Ultra-high Speed Low Cost Universal Device Programmer

FEATURES

- * Programs high-density Flash memory devices at near theoretical minimum programming times
- * Standard 48 pin popular pin-drivers. Down to 1.5V low voltage devices are supported directly thanks to the DAC controlled I/O levels.
- * Advanced hardware features minimized Bounce noise. Only IC manufacturers approved algorithms are adopted. High yield rates are guaranteed for all devices including low voltage, critical and second-hand devices. $\pm 5\%$ and $\pm 10\%$ Vcc Verification promises programming reliability.
- * Supports 20,000+ devices from up to 139 IC manufacturers including MEMORY, MCU, PLD.
- * Free software update.
- * Pin continuity and wrong chip insertion check prevent chips from accidental damage.
- * Over-current and over-voltage protection for safety of the chip and programmer hardware.
- * WINDOWS 98/ME/NT/2000/XP compatibility.
- * New user-friendly and powerful software with many new functions for ease of use. Project function simplifies processes such as device selection, file loading, device configuration setting, program option and batch file setting into one touch step. History of device selection and file loading simplifies user operation. Batch command combines device operations like program, verify, security into a single command at any sequence. Auto-Start batch command begins to program a chip automatically as soon as the chip is inserted. Serial numbers can be generated and programmed into devices automatically in anyway customer specified. The correct device type will be suggested according to the actual ID read when a mistake type is selected. With help of the open API user can even change the buffer content from chip to chip. Recognizes file formats and detects large file offset automatically.



SPECIFICATIONS

Devices Supported:

EPROM, Paged EPROM, Parallel and Serial EEPROM, FPGA Configuration Serial PROM, FLASH Memory, NVRAM, PLD, Firmware HUB, Microcontroller, MCU, Standard Logic.

Socket Adapter Supported:

DIP, SDIP, PLCC, JLCC, SOIC, QFP, TQFP, PQFP, VQFP, TSOP, TSOPII, SOP, PSOP, TSSOP, SON, EBGA, FBGA, VFBGA, μ BGA, CSP, SCSP etc.

- * PC Interface: USB
- * Items Included: Main unit, AC Power Adapter, Software (CD-ROM), User's Guide, USB Cable
- * Optional Accessories: Socket Adapters
- * Electrical Specifications: Input AC 90V-250V/50-60Hz, Power Consumption(Max): 40W
- * Physical Specifications: Packing Dimensions 325mm X 310mm X 83mm, Gross Weight 1.7Kg

XELTEK

Xeltek Inc.
1296 Kifer Rd.
Unit 605
Sunnyvale CA 94086
Tel) +1 408 530 8080
Fax) +1 408 539 0096
www.xeltek.com

www.xeltek.com