



## SINGLE PHASE BRIDGE RECTIFIER

**KBPC6005 THRU KBPC610  
BR605 THRU BR610**


**VOLTAGE RANGE**      **50 to 1000 Volts**  
**CURRENT**              **6.0 Ampere**

### FEATURES

- Low cost
- This series in UL recognized under component index, file number E127707
- High forward surge current capacity
- Ideal for printed circuit board
- High isolation voltage from case to leads
- High temperature soldering guaranteed: 260°C / 10 seconds, at 5 lbs. (2.3kg) tension.

### MECHANICAL DATA

- Technology: Cell with vacuum soldered
- Case: Molded plastic body
- Terminal: Lead solderable per MIL-STD-202E method 208C
- Polarity: Polarity symbols marked on case
- Mounting: Thru hole for #10 screw, 5 in-lbs torque max.
- Weight: 0.13 ounce, 3.66 gram

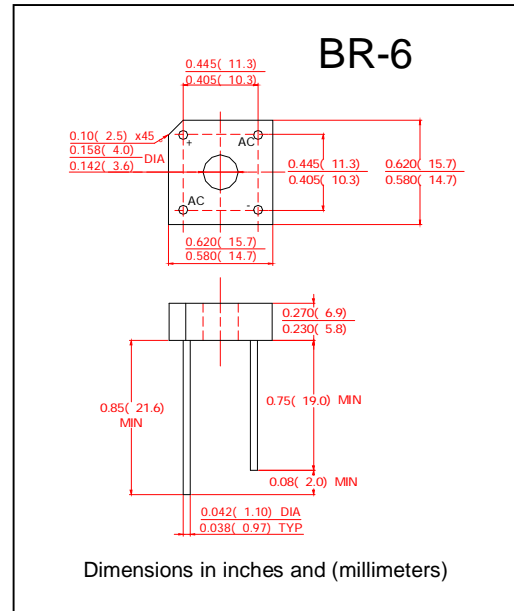

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	KBPC6005 BR605	KBPC601 BR61	KBPC602 BR62	KBPC604 BR64	KBPC606 BR66	KBPC608 BR68	KBPC610 BR610	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Output Current, at	$I_{(AV)}$	$T_C = 50^\circ\text{C}$ (Note 1)	6.0						Amps
		$T_A = 25^\circ\text{C}$ (Note 2)	3.0						
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	125						Amps	
Rating for Fusing ( $t < 8.3\text{mS}$ )	$I^2t$	64						$\text{A}^2\text{s}$	
Maximum Instantaneous Forward Voltage drop per Bridge element at 3.0 A	$V_F$	1.0						Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage per element	$I_R$	$T_A = 25^\circ\text{C}$	5.0						$\mu\text{A}$
		$T_A = 100^\circ\text{C}$	1.0						mA
Isolation Voltage from case to lug	$V_{ISO}$	2500						Volts	
Typical Thermal Resistance (Note 1 )	$R_{\theta Jc}$	8.0						$^\circ\text{C}/\text{W}$	
Operating Temperature Rang	$T_J$	-55 to +150						$^\circ\text{C}$	
Storage Temperature Rang	$T_{STG}$	-55 to +150						$^\circ\text{C}$	

#### Notes:

1. Unit mounted on 6.0" x 5.5" x 0.11" thick (15×14×0.3cm) AL plate
2. Unit mounted on P.C. Board 0.375" (9.5mm) lead length with 0.47"×0.47" (12×12mm) copper pads.



## SINGLE PHASE BRIDGE RECTIFIER

**KBPC6005 THRU KBPC610  
BR605 THRU BR610**

<b>VOLTAGE RANGE</b>	<b>50 to 1000 Volts</b>
<b>CURRENT</b>	<b>6.0 Ampere</b>

### RATINGS AND CHARACTERISTIC CURVES KBPC6005 THRU KBPC610

