



**SCHOTTKY BARRIER RECTIFIERS**

REVERSE VOLTAGE - 20 to 200 Volts  
FORWARD CURRENT - 5.0 Amperes


**FEATURES**

- Metal-Semiconductor junction with guard ring
- Epitaxial construction
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0
- For use in low voltage,high frequency inverters,free wheeling,and polarity protection applications

**MECHANICAL DATA**

- Case : JEDEC SMA molded plastic
- Polarity : Color band denotes cathode
- Weight : 0.231 grams
- Mounting position : Any

**SMC**



SMC		
DIM.	MIN.	MAX.
A	6.60	7.11
B	5.59	6.22
C	2.75	3.15
D	0.15	0.31
E	7.75	8.13
F	0.05	0.20
G	2.00	2.62
H	0.76	1.52

All Dimensions in millimeter

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

PARAMETER	SYMBOL	B520	B530	B540	B550	B560	B580	B5100	B5150	B5200	UNIT	
Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	50	60	80	100	150	200	V	
Maximum RMS voltage	$V_{RMS}$	14	21	28	35	42	56	70	105	140	V	
Maximum DC blocking voltage	$V_{DC}$	20	30	40	50	60	80	100	150	200	V	
Maximum average forward rectified current	$I_F$	5.0									A	
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	100.0									A	
Maximum Instantaneous Forward Voltage @ 5.0A	$V_F$	0.50			0.70		0.85	0.87	0.90		V	
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	$I_R$	0.5					0.2					mA
		10.0					5.0					
Typical Junction Capacitance	$C_J$	300			210		170	150	110		pF	
Typical Thermal Resistance	$R_{\theta JA}$	60									°C/W	
Operating Temperature Range	$T_J$	-55 to +125									°C	
Storage Temperature Range	$T_{STG}$	-55 to +150									°C	



FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

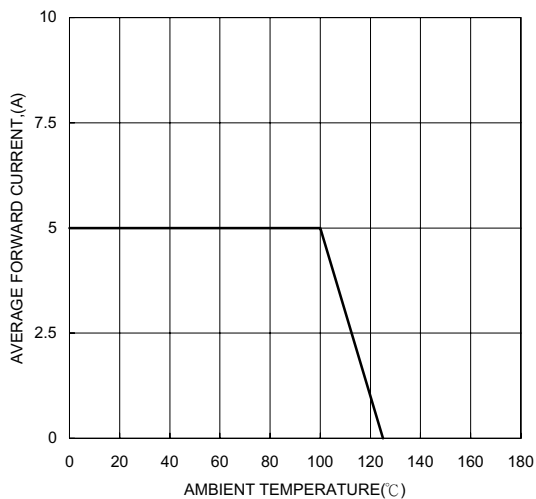


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

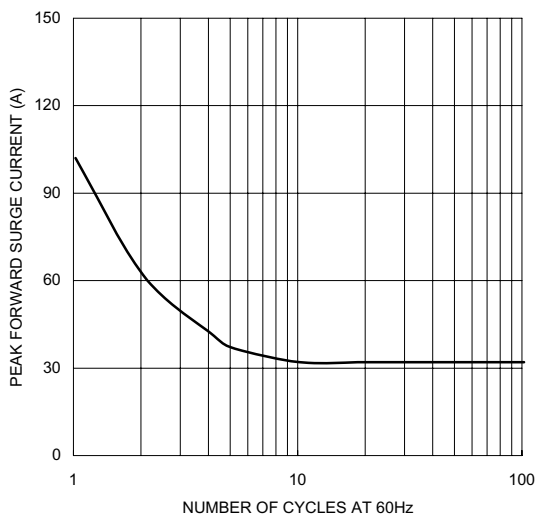


FIG. 5-TYPICAL JUNCTION CAPACITANCE

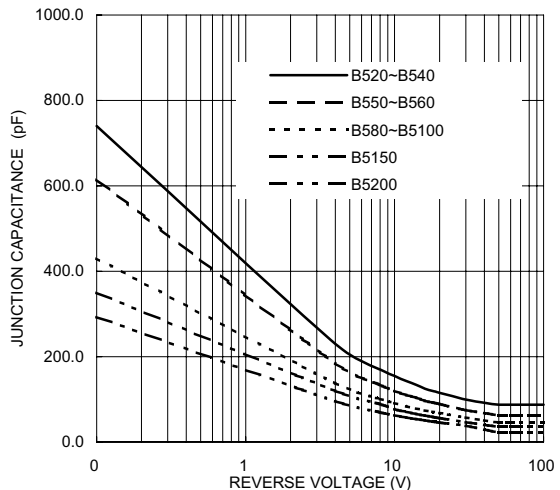


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

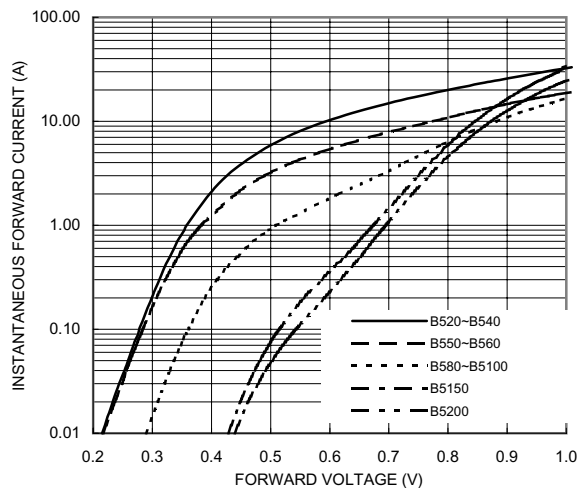


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

